Learn iPhone and iPad game apps development using iOS 6 SDK



# iOS 6 Games Development

**Lucas Jordan** 



**Apress**®

For your convenience Apress has placed some of the front matter material after the index. Please use the Bookmarks and Contents at a Glance links to access them.



# **Contents at a Glance**

About the Author	XV
About the Technical Reviewer	xvii
Acknowledgments	xix
Chapter 1: A Simple First Game	1
Chapter 2: Setting up Your Game Project	11
Chapter 3: Explore the Game Application Life Cycle	<mark>37</mark>
Chapter 4: Quickly Build an Input-Driven Game	<mark>67</mark>
Chapter 5: Quickly Build a Frame-by-Frame Game	<mark>97</mark>
■Chapter 6: Create Your Characters: Game Engine, Image Actors, and Behaviors	131
Chapter 7: Build Your Game: Vector Actors and Particles	159
Chapter 8: Building Your Game: Understanding Gestures and Movements	185
Chapter 9: Game Center and Social Media	<mark>22</mark> 1
Chapter 10: Monetizing via the Apple App Store	<mark>243</mark>
Chanter 11: Add Sound to Your Game	259

Chapter 12: A Completed Game: Belt Commander	<mark>27</mark> 3
Chapter 13: Physics!	305
Appendix A: Designing and Creating Graphics	<mark>32</mark>
ndex	341

Chapter

# A Simple First Game

In this book you are going to learn a lot about working with iOS. The goal, of course, is to be able to build a game that runs on iOS. To do that, you must learn about a lot of different elements that a full game will incorporate, such as basic UI widgets, audio, complex touch input, Game Center, in-app purchases, and of course graphics. This book will explore these concepts and many others. Think of it as a guide to the building blocks that you will need to make a compelling game that is specific to iOS and Apple's mobile devices. All iOS applications have one thing in common—the application Xcode—so it makes sense to start with that.

In this first chapter, we are going to build a very simple game of Rock, Paper, Scissors. We will use the Storyboard feature of Xcode to create an application with two views and the navigation between them.

Included with this book are sample Xcode projects; all of the code examples are taken directly from these projects. In this way, you can follow along with each one in Xcode. I used version 4.5 of Xcode when creating the projects for this book. The project that accompanies this chapter is called Sample 1; you can easily build it for yourself by following the steps outlined in this chapter.

The project is a very simple game in which we use Storyboard to create two scenes. The first scene is the starting view, and the second scene is where the user can play the Rock, Paper, Scissors game. The second scene is where you will add a UIView and specify the class as RockPaperScissorView. The source code for the class RockPaperScissorView can be found in the project Sample 1.

We will walk through each of these steps, but first let's take a quick look at our game, shown in Figure 1-1.

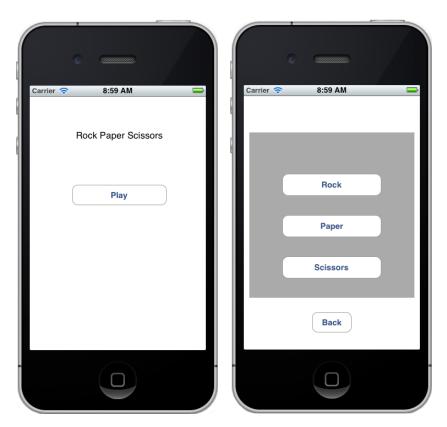


Figure 1-1. The two views of our first game: Sample 1

On the left of Figure 1-1 we see the starting view. It just has a simple title and a Play button. When the user clicks the Play button, he is transitioned to the second view, shown on the right of the figure. In this view, the user can play Rock, Paper, Scissors. If the user wishes to return to the starting view, or home screen, he can press the Back button. This simple game is composed of a Storyboard layout in Xcode and a custom class that implements the game.

Let's take a look at how I created this game and at some ways you can customize a project.

# **Creating a Project in Xcode: Sample 1**

Creating this game involves only a few steps, which we'll walk through as an introduction to Xcode.

Start by launching Xcode. From the File menu, select New Project. You will see a screen showing the types of projects you can create with Xcode (See Figure 1-2).

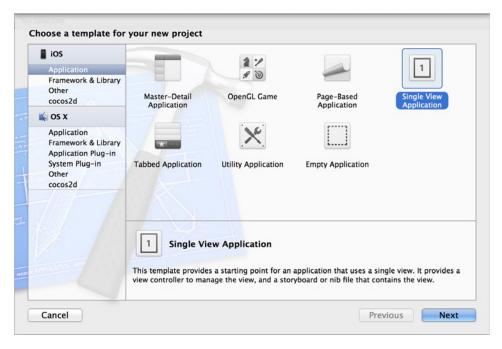


Figure 1-2. Project templates in Xcode

For this project, select the template Single View Application. Click Next, and you will be prompted to name the project, as shown in Figure 1-3.

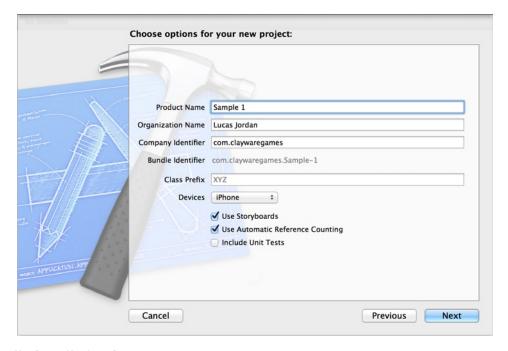


Figure 1-3. Naming an Xcode project

Name your project whatever you want. The name you give your project will be the name of the root folder that contains it. You also want make sure Use Storyboard and Use Automatic Reference Counting are selected.

This time we will be making an application just for the iPhone, but from the Device Family pull-down menu you could also select iPad or Universal. After you click Next, you will be prompted to pick a place to save your project. The project can be saved anywhere on your computer.

Before moving on, let's take a moment to understand a little about how an Xcode project is organized.

#### **A Project's File Structure**

1-4 shows the files created by Xcode.

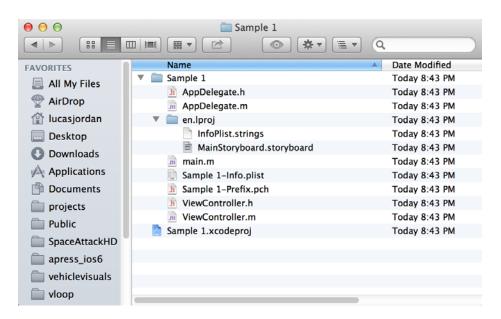


Figure 1-4. Files created by Xcode

In Figure 1-4, we see a Finder window showing the file structure created. I selected that I wanted the project saved on my desktop, so Xcode created a root folder name Sample 1 that contains the Sample 1.xcodeproj file. The xcodeproj file is the file that describes the project to Xcode, and all resources are by default relative to that file. Once you have saved your project, Xcode will open your new project automatically. Then you can start customizing it as you like.

# **Customizing Your Project**

We have looked at how to create a project. Now you are going to learn a little about working with Xcode to customize your project before moving on to adding a new UIView that implements the game.

#### **Arranging Xcode Views to Make Life Easier**

Once you have a new project created, you can start customizing it. You should have Xcode open with your new project at this point. Go ahead and click the MainStoryboard.storyboard file found on the left so your project looks like Figure 1-5.

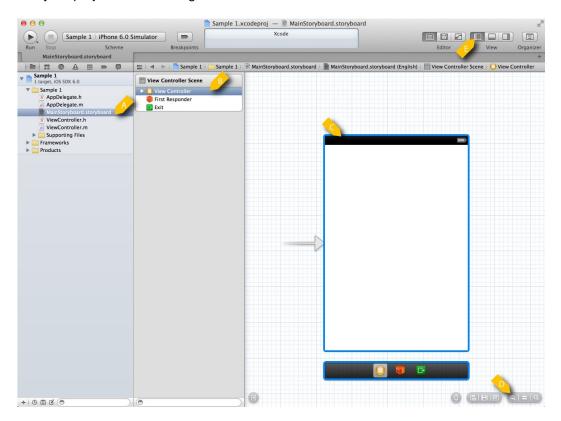


Figure 1-5. MainStoryboard.storyboard before customization

In Figure 1-5, we see the file MainStoryboard.storyboard selected (item A). This file is used to describe multiple views and the navigation relationships between them. It shows the selected storyboard file and describes the content of the right side of the screen. In item B, we see an item called View Controller. This is the controller for the view described in item C. The items at D are used to zoom in and out of a storyboard view, and are critical to successfully navigating your way around. Additionally, the buttons in item E are used to control which of the main panels are visible in Xcode. Go ahead and play around with those buttons.

Next. let's look at how to add a new view.

#### **Adding a New View**

Once you have had a chance to play a little with the different view setups available in Xcode, you can move on and add a new view to your project. Arrange Xcode so the right-most panel is visible, and hide the left-most panel if you want. Xcode should look something like Figure 1-6.

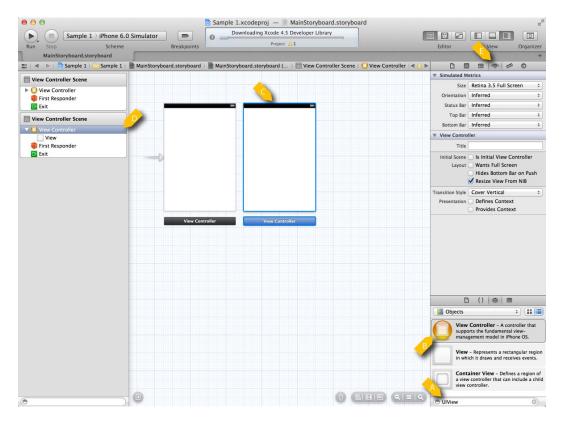


Figure 1-6. Storyboard with second view

In Figure 1-6, we see that we have added a second view to the storyboard. Like any good Apple desktop application, most of the work is done by dragging and dropping. To add the second view, we enter the word "UIView" into the bottom-right text field, at item A. This filters the list so we can drag the icon labeled item B on the work area in the center. Click on the new view so it is selected (see item C), which we can see correlates to the selected icon in item D. Item E shows the properties for the selected item.

Now that we have a new view in the project, we want to set up a way to navigate between our views.

#### **Simple Navigation**

We now want to create some buttons that enable us to navigate from one view to the other. The first step is to add the buttons, and the second is to configure the navigation. Figure 1-7 shows these views being wired up for navigation.

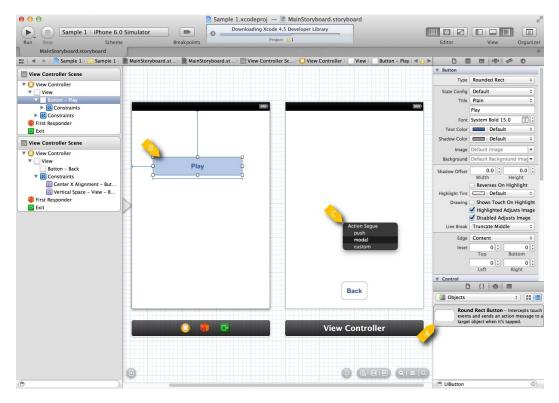


Figure 1-7. Storyboard with navigation

In Figure 1-7, we see that we have dragged a UIButton from the library item A onto each of the views. We gave the UIButton on the left the label Play, and the UIButton on the right the label Back. To make the Play button navigate to the view on the right, we right-drag from the Play button (item B) to the view on the right and release at item C. When we do this, a context dialog pops up, allowing us to select which type of transition we want. I selected Model. We can repeat the process for the Back button: right-drag it to the view on the left and select the transition you want for the return trip. You can run the application at this point and navigate between these two views. In order to make it a game, though, we need to include the Rock, Paper, Scissors view and buttons.

#### **Adding the Rock, Paper, Scissors View**

To add the Rock, Paper, Scissors view, we need to include a class from the sample code in the project you are building. The easiest way to do this is to open the sample project and drag the

files RockPaperScissorsView.h and RockPaperScissorsView.m from the sample project to your new project. Figure 1-8 shows the dialog that pops up when you drag files into an Xcode project.

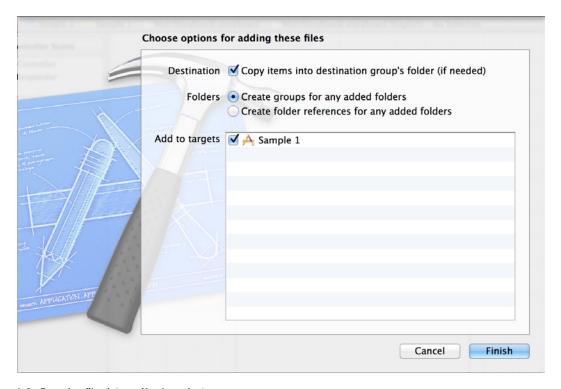


Figure 1-8. Dragging files into an Xcode project

In Figure 1-8, we see the dialog confirming that we want to drag new files into an Xcode project. Be sure the Destination box is checked. Otherwise, Xcode will not copy the files to the location of the target project. It is good practice to keep all project resources in the root folder of a project. Xcode is flexible enough to not require that you do this, but I have been burned too many times by this flexibility. Anyway, now that we have the required class in our project, let's wire up our interface to include it.

## **Customizing a UIView**

The last step in preparing a simple application is to create a new UIView in our interface that is of the class RockPaperScissorsView. Figure 1-9 shows how this is done.

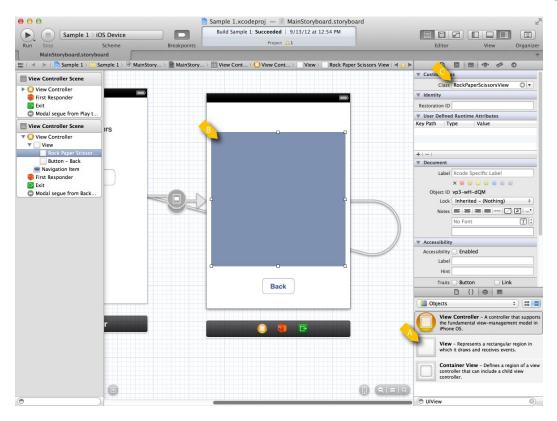


Figure 1-9. A customized UIView

In Figure 1-9, we see a UIView added to the view on the right. We did this by dragging the icon from item A onto the storyboard in item B. After adjusting the size of the new UIView, we set its class to be RockPaperScissorsView, as shown in item C. At this point, we are technically done. We have created our first game! Obviously, we have not looked at the implementation of RockPaperScissorsView, which is discussed on the next chapter.

The rest of this book will use Sample 1 as a starting place. You will learn many new techniques for customizing a simple app to make a truly complete game.

# Summary

In this chapter, we have taken a quick tour through Xcode, learning how to create a project with it and build a simple navigation using Storyboard. The chapters that follow will add to the basic lessons given here to show you how to build a complete game.

# Setting up Your Game Project

Like all software projects, iOS game development benefits from starting on good footing. In this chapter, we will discuss setting up a new Xcode project that is a suitable starting point for many games. This will include creating a project that can be used for the deployment on the iPhone and the iPad, handling both landscape and portrait orientations.

We look at how an iOS application is initialized and where we can start customizing behavior to match our expectations of how the application should perform. We will also explore how user interface (UI) elements are created and modified in an iOS application, paying special attention to managing different devices and orientations.

The game we create in this chapter will be very much like the simple example from Chapter 1—in fact, it will play exactly the same. But we will be building a foundation for future chapters while practicing some key techniques, such as working with UIViewControllers and Interface Builder.

We will explore how an iOS application is put together, and explain the key classes. We'll also create new UI elements and learn how to customize them with Interface Builder, and we will explore using the MVC pattern to create flexible, reusable code elements. At the end of this chapter, we will have created the Rock, Paper, Scissors application shown in Figure 2-1.



Figure 2-1. An application design to work on the iPhone and iPad in all orientations

Figure 2-1 shows the application running on an iPhone and iPad simulator. This is a so-called universal application: it can run on both devices and would be presented in the App Store as such. Unless there are specific business reasons for writing an app that only works on the iPhone or the iPad, it makes a lot of sense to make your app universal. It will save you time down the road, even if you only intend to release your app on one of the devices to start.

Our sample application is so simple that it may be difficult to see the differences between the four states presented in Figure 2-1. On the upper left, where the iPhone is in portrait orientation, the position of the gray area is laid out differently from the iPhone in landscape at the bottom left. The layout of the text is also different. The same goes for the application when it is running on the iPad in landscape vs. portrait. Let's get going and understand how we can set up a project to accommodate these different devices and orientations.

# **Creating Your Game Project**

To get things started with our sample game, we first have to create a new project in Xcode.

Create a new project by selecting File ➤ New ➤ New Project.... This will open a wizard that allows you to select which type of project you want, as shown in Figure 2-2.


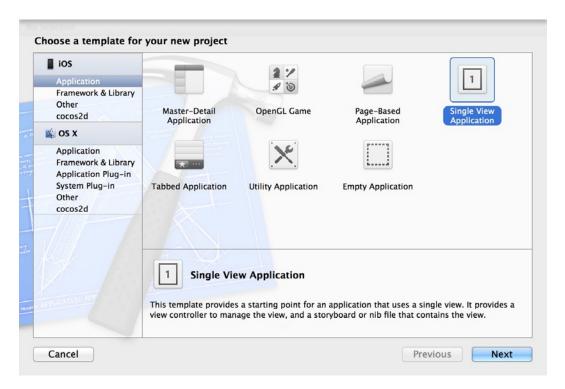


Figure 2-2. Creating a new Single View Application

On the left side of Figure 2-2, we have selected Application from the iOS section. On the right are the available project types for creating iOS applications. The choices presented here help developers by giving them a reasonable starting place for their applications. This is particularly helpful for developers new to iOS, because these templates get you started for a number of common application navigation styles. We are going to pick a Single View Application, because we require only a very minimal starting point, and the Single View Application provides good support for universal applications. After clicking Next, we see the options shown in Figure 2-3.

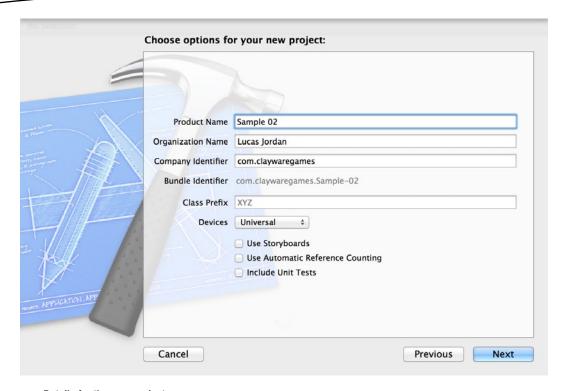

Details for the new project

The first thing we will do is name our product. You can pick anything you want. The company identifier will be used during the app submission process to identify it. You can put any value you want as the company identifier, but it is common practice to use a reverse domain name. As can be seen in Figure 2-3, the bundle identifier is a composite of the product name and the company identifier. The bundle identifier can be changed later—the wizard is simply showing what the default will be. When you submit your game to the App Store, the bundle identifier is used to indicate which application you are uploading.s

By selecting Universal from the Device list, you are telling Xcode to create a project that is ready to run on both the iPhone and the iPad. For this example, we will not be using Storyboard or Automatic Reference Counting. Similarly, we won't be creating any unit test, so the Include Unit Tests option should be unchecked as well. Clicking Next prompts you to save the project. Xcode will create a new folder in the selected directory, so you don't have to manually create a folder if you don't want to. When the new project is saved, you will see something similar to Figure 2-4.

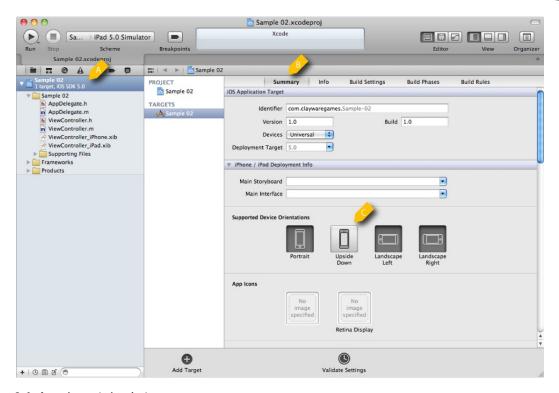


Figure 2-4. A newly created project

On the left side of Figure 2-4, there is a tree containing the elements of the project with the root-most element selected (A). On the right, the Summary tab is selected (B). From the Summary tab, we want to select the supported device orientations (C). To support both orientations on each device, click the Upside Down button. Scroll down and make sure that all of the orientations for the iPad are depressed as well. Figure 2-5 shows the correct settings. Now that the project is created, it is time to start customizing it to fit our needs.



Figure 2-5. Supporting all device orientations

# **Customizing a Universal Application**

In order to understand the customizations we will make to this project, it is good to know where we start. The empty project is runnable as is, although it is obviously not very interesting. Take a moment and run the application. It will look something like the app running in Figure 2-6. Next, we will be removing the status bar and exploring the best place to start adding custom code to our project.



Figure 2-6. A fresh universal iOS application

In Figure 2-6, we see a new universal app running on the iPhone simulator. To run the application on the iPad simulator, select iPad Simulator from the Scheme pull-down menu to the right of the Stop button in Xcode. As we can see, the app is empty; there is only a gray background. Another thing to note is that the status bar at the top of the application is displayed. Although there are plenty of good reasons to include the status bar in an application, many game developers may wish to remove the status bar in order to create a more immersive experience. To remove the status bar, click on the root element in the Project Navigator (the tree on the left in Xcode). Select the target and then click the Info tab on the right. Figure 2-7 shows the correct view.

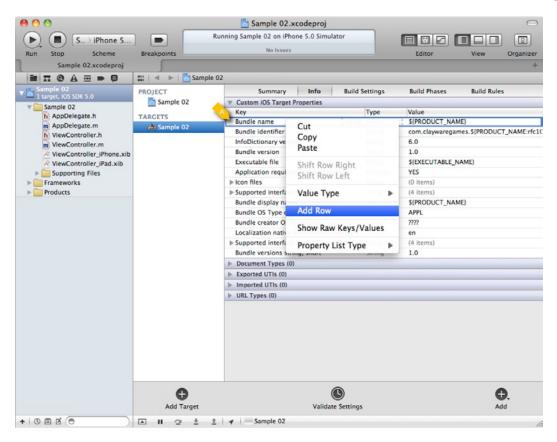


Figure 2-7. Configuring the status bar

Once you see the view shown in Figure 2-7, right-click on the top-most element (A) and select Add Row. This will add a new element to the list of items. You will want to set the key value to "Status bar is initially hidden" and the value to "Yes." What you are doing here is editing the plist file found under the group Supporting Files. Xcode is simply providing you with a nice interface for editing this configuration file.

**Tip** Navigate to the file ending with info.plist under the group Supporting Files. Right-click on it and select Open As ➤ Source Code. This will show you the contents of the plist file source. Note that the key values are actually stored as constants and not as the human readable text used in the Info editor.

When we run the application again, the status bar is removed, as shown in Figure 2-8.



Figure 2-8. The default application without the status bar

Now that we have explored a simple way to start customizing our application, it is time to investigate just how an iOS application is put together, so we can make smart decisions about adding our own functionality.

## **How an iOS Application Initializes**

As we know, iOS applications are written largely in Objective C, which is a superset of C. Xcode does a good job of hiding the details of how an application is built, but under the covers, we know it is using LLVM and other common Unix tools to do the real work. Because we know that our project is ultimately a C application, we would expect the starting point for our application to be a C main function. In fact, if you look under the Supporting Files group, you will find the main.m, as shown in Listing 2-1.

#### Listing 2-1. main.m

```
#import <UIKit/UIKit.h>

#import "AppDelegate.h"

int main(int argc, char *argv[])
{
    @autoreleasepool {
        return UIApplicationMain(argc, argv, nil, NSStringFromClass([AppDelegate class]));
    }
}
```

The main function in Listing 2-1 is a C function, but you will notice that the body of the function is clearly Objective C syntax. An @autoreleasepool wraps a call to UIApplicationMain. The @autoreleasepool sets up the memory management context for this application; we don't really need to worry about that. The function UIApplicationMain does a lot of handy stuff for you: it initializes your application by looking at your info.plist file, sets up an event loop, and generally gets things going in the right way. In fact, I have never had any reason to modify this function because iOS provides a concise place to start adding your startup code. The best place to start adding initialization code is the task application:didFinishLaunchingWithOptions: found in the implementation file of your app delegate class. In this example, the app delegate class is called AppDelegate. Listing 2-2 shows the implementation of the application:didFinishLaunchingWithOptions: task from AppDelegate.m.

#### Listing 2-2. application:didFinishLaunchingWithOptions:

```
- (BOOL)application:(UIApplication *)application
didFinishLaunchingWithOptions:(NSDictionary *)launchOptions
{
    self.window = [[[UIWindow alloc] initWithFrame:[[UIScreen mainScreen] bounds]] autorelease];
    // Override point for customization after application launch.
    if ([[UIDevice currentDevice] userInterfaceIdiom] == UIUserInterfaceIdiomPhone) {
        self.viewController = [[[ViewController_iPhone alloc]
    initWithNibName:@"ViewController_iPhone" bundle:nil] autorelease];
    } else {
        self.viewController = [[[ViewController_iPad alloc]
    initWithNibName:@"ViewController_iPad" bundle:nil] autorelease];
    }
    self.window.rootViewController = self.viewController;
    [self.window makeKeyAndVisible];
    return YES;
}
```

When an application is fully initialized and ready to start running the code that comprises it, the task application:didFinishLaunchingWithOptions: is called, as seen in Listing 2-2. This task, besides having an incredibly long name, takes an instance of UIApplication and NSDictionary as arguments. The UIApplication is an object that represents the state of the running application. The instance of AppDelegate that receives this message is the delegate to the UIApplication object. This means that we modify the application's behavior by implementing tasks in AppDelegate. The protocol

UIApplicationDelegate, which AppDelegate implements, defines the tasks that will be called on the application's behalf.

If we take a look at the implementation of application:didFinishLaunchingWithOptions:, we start by creating a new UIWindow with a size equal to the size of the screen. Once the UIWindow is instantiated, we need to create a UIViewController that will manage the UI of our application. A new Xcode project, like the one we created, starts out with a single ViewController class to manage our UI. We are going to create device-specific subclasses of our ViewController, so that we have a place to put device-specific code. We will look at the process of creating these subclasses shortly. To make sure that we instantiate the correct ViewController subclass, we need to add the bold code in Listing 2-2.

Once our ViewController is created, we set it as the rootViewController of window and call

. The window object is an instance of UIWindow and is the root graphical

makeKeyAndVisible essentially displays the window. Any

window object.

makeKeyAndVisible. This might include reading an app-specific

iOS development and the associated libraries make heavy use of the Model View Controller (MVC) pattern. In general, MVC is a strategy for separating the presentation (View), data (Model), and business logic (Controller). In specific terms, the model is simply data, like a Person class or an Address. The view is responsible for rendering the data to the screen. In iOS development, that means a subclass of UIView. iOS provides a special class to act as the controller for a UIView, which is aptly named UIViewController.

UIViewController has two key characteristics: it is often associated with an XIB file, and it has a property called "view" that is of type UIView. By creating a subclass of UIViewController, we can also make an XIB file with the same name as the class. By default, when you instantiate a UIViewController subclass, it will load a XIB with the same name. The root UIView in the XIB will be wired up as the view property of UIViewController.

Besides providing a clean separation between the UI layout and the logic that drives it, iOS provides a number of UIViewController subclasses that expect to work with other UIViewControllers instead of UIViews. An example of this is the UINavigationController that implements the type of navigation found in the Settings app. In code, when you want to advance to the next view, you pass a UIViewController and not a UIView, though it is the view property of the UIViewController that is displayed on the screen.

Admittedly, for our example application in this chapter, it does not make a lot of difference if we use a UIViewController. In Chapter 1, we extended UIView when we created the RockPaperScissorsView class and it worked fine. However, understanding how UIViewControllers and their views work together will make life easier in Chapter 3, where we explore a game's application life cycle.

Using the RockPaperScissorsView from Chapter 1, let's take a look at how this functionality would appear if it were implemented as a UIViewController. Listing 2-3 shows the file RockPaperScissorsController.h.

#### Listing 2-3. RockPaperScissorsController.h

```
@interface RockPaperScissorsController : UIViewController {
    UIView* buttonView;
    UIButton* rockButton;
    UIButton* paperButton;
    UIButton* scissersButton;

    UIView* resultView;
    UILabel* resultLabel;
    UIButton* continueButton;

    BOOL isSetup;
}
-(void)setup:(CGSize)size;
-(void)userSelected:(id)sender;
-(void)continueGame:(id)sender;
-(NSString*)getLostTo:(NSString*)selection;
-(NSString*)getWonTo:(NSString*)selection;
@end
```

In Listing 2-3, we see the class RockPaperScissorsController extends UIViewController. Among other things, this means that RockPaperScissorsController has a property called "view" that will be the root UIView for this controller. Like RockPaperScissorsView, we will have other UIViews that are subviews of the root view, such as the buttons for selecting your choice. Although these buttons could conceivably have their own UIViewControllers, there comes a point when it makes sense to allow a UIViewController to manage all of the UIViews with which it is concerned. There are very few changes required on the implementation side of things to complete this transition from UIView to UIViewController. Basically, wherever we used the keyword "self," we simply say self.view instead. Listing 2-4 shows the required changes.

#### Listing 2-4. RockPaperScissorsController.m (Partial)

```
-(void)setup:(CGSize)size{
   if (!isSetup){
        isSetup = true;
        srand(time(NULL));

        buttonView = [[UIView alloc] initWithFrame:CGRectMake(0, 0, size.width, size.height)];
        [buttonView setBackgroundColor:[UIColor lightGrayColor]];
        [self.view addSubview:buttonView];
```

```
float sixtyPercent = size.width * .6;
        float twentyPercent = size.width * .2;
        float twentFivePercent = size.height/4;
        float thirtyThreePercent = size.height/3;
        rockButton = [UIButton buttonWithType:UIButtonTypeRoundedRect];
        [rockButton setFrame:CGRectMake(twentyPercent, twentFivePercent, sixtyPercent, 40)];
        [rockButton setTitle:@"Rock" forState:UIControlStateNormal];
        [rockButton addTarget:self action:@selector(userSelected:)
forControlEvents:UIControlEventTouchUpInside];
        paperButton = [UIButton buttonWithType:UIButtonTypeRoundedRect];
        [paperButton setFrame:CGRectMake(twentyPercent, twentFivePercent*2, sixtyPercent, 40)];
        [paperButton setTitle:@"Paper" forState:UIControlStateNormal];
        [paperButton addTarget:self action:@selector(userSelected:)
        scissersButton = [UIButton buttonWithType:UIButtonTypeRoundedRect];
        [scissersButton setFrame:CGRectMake(twentyPercent, twentFivePercent*3, sixtyPercent, 40)];
        [scissersButton setTitle:@"Scissers" forState:UIControlStateNormal];
        [scissersButton addTarget:self action:@selector(userSelected:)
        [buttonView addSubview:rockButton];
        [buttonView addSubview:paperButton];
        [buttonView addSubview:scissersButton];
        resultView = [[UIView alloc] initWithFrame:CGRectMake(0, 0, size.width, size.height)];
        [resultView setBackgroundColor:[UIColor lightGrayColor]];
       resultLabel = [[UILabel new] initWithFrame:CGRectMake(twentyPercent, thirtyThreePercent,
sixtyPercent, 40)];
        [resultLabel setAdjustsFontSizeToFitWidth:YES];
        [resultView addSubview:resultLabel];
        continueButton = [UIButton buttonWithType:UIButtonTypeRoundedRect];
        [continueButton setFrame:CGRectMake(twentyPercent, thirtyThreePercent*2, sixtyPercent, 40)];
        [continueButton setTitle:@"Continue" forState:UIControlStateNormal];
        [continueButton addTarget:self action:@selector(continueGame:)
forControlEvents:UIControlEventTouchUpInside];
        [resultView addSubview:continueButton];
   }
```

```
-(void)userSelected:(id)sender{
        int result = random()%3;
        UIButton* selectedButton = (UIButton*)sender;
        NSString* selection = [[selectedButton titleLabel] text];
        NSString* resultText;
        if (result == 0){//lost
                NSString* computerSelection = [self getLostTo:selection];
                resultText = [@"Lost, iOS selected " stringByAppendingString: computerSelection];
        } else if (result == 1) {//tie
                resultText = [@"Tie, iOS selected " stringByAppendingString: selection];
        } else {//win
                NSString* computerSelection = [self getWonTo:selection];
                resultText = [@"Won, iOS selected " stringByAppendingString: computerSelection];
        }
        [resultLabel setText:resultText];
        [buttonView removeFromSuperview];
        [self.view addSubview:resultView];
-(void)continueGame:(id)sender{
        [resultView removeFromSuperview];
        [self.view addSubview:buttonView];
}
```

The bold sections of Listing 2-4 indicate where we have made the required changes. We will use this UIViewController version of Rock, Paper, Scissors toward the end of this chapter, after we have set up the rest of our UI.

#### **Customizing Behavior Based on Device Type**

As mentioned, the project we are using is an example of a universal application, configured to run on both the iPhone and the iPad. Because it is likely that an application will want to do different things when running on different devices, we will create subclasses of our ViewController specific to each device type.

To create these subclasses, from the file menu, select New file. You will be presented with a dialog like the one shown in Figure 2-9.



New file dialog

allow us to name our new class and pick a specific subclass, as shown in Figure 2-10.

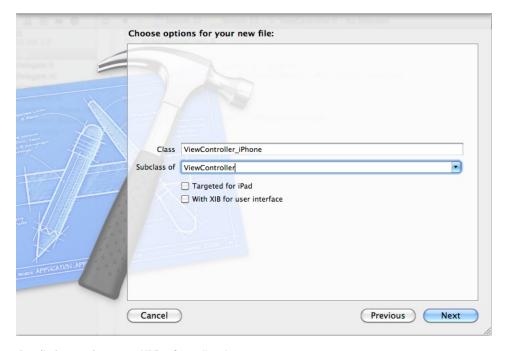


Figure 2-10. Details for creating a new UIViewController class

The name of the class should be ViewController\_iPhone, and it should be a subclass of ViewController. Remember that the class ViewController is a UIViewController, so ViewController\_iPhone will be a UIViewController as well. In this example, we don't want to have either check box checked, since we already have a XIB file to use with this class. We want to repeat the process and create an iPad version of our UIViewController. When you create that class, name it UIViewController\_iPad and leave both check boxes unchecked. When you are done, your project should look like Figure 2-11.



Figure 2-11. Device-specific UIViewController subclasses added

In Figure 2-11, we see our project and the new UIViewController subclasses we just created. To keep things organized, I find it handy to put the device-specific classes in their own group.

Now we have XIB files and UIViewController classes for each type of device, iPhone and iPad. If we want to code that as shared behavior, we will add it to the class ViewController. If we want to add code that is specific to a particular device, we would add it to either ViewController\_iPad or ViewController\_iPhone. Now we can move forward and start implementing our application. Let's look at the UI elements first.

# **Graphically Designing Your UI in a Universal Way**

When building an app for both the iPhone and iPad, we must consider the differences in screen size for each device. Because the two devices do not share an aspect ratio, we should really create a layout for each device. In this section, we will cover how to create a layout for each device type, as well as create classes that will be used depending on which device the application is running on.

Xcode provides a convenient and powerful tool for laying out the graphical elements of an application. Historically, that was done with the application Interface Builder, which was a stand-alone application. In recent versions of Xcode, the functionality of Interface Builder has been rolled into Xcode to provide a seamless development environment. Although Interface Builder is no longer its own application, I will continue to use the term to refer to the UI layout tools within Xcode. This will help us distinguish

**Note** When searching for help on the Internet regarding Interface Builder, keep in mind that XIB files used to be called NIB files. Much of the information available uses this old term, but it is still valid. The same is true of Interface Builder; articles on the old version still give valuable insight into the new version.

#### A First Look at Interface Builder

Under the iPhone group in the Project Explorer is a file called ViewController\_iPhone.xib. This file contains the starting visual components used in this project when the application is running on an iPhone. Similarly, there is a file called ViewController\_iPad.xib found under the iPad group, which is used when the application is running on an iPad. Let's focus on the iPhone version for now to see what this file is and how it works. Click ViewController\_iPhone.xib and you should see something like Figure 2-12.

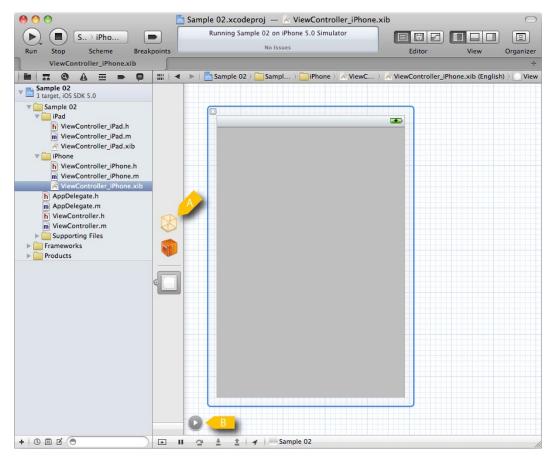


Figure 2-12. Interface Builder ready to edit ViewController\_iPhone.xib

In Figure 2-12, just to the right of the Project Explorer, is a view with four icons (A). These icons represent the root items in the XIB file. For more detail about the objects, click the little arrow at the bottom of the view (B). This will change the display so it matches the left-most view in Figure 2-13. As the label indicates, the items under Object are the objects defined within this XIB file. The items under Placeholders describe relationships to objects not defined in this file. In practice, the item File's Owner is a reference to the object that loads this XIB file; this is most often a subclass of UIViewController, but more on that later.

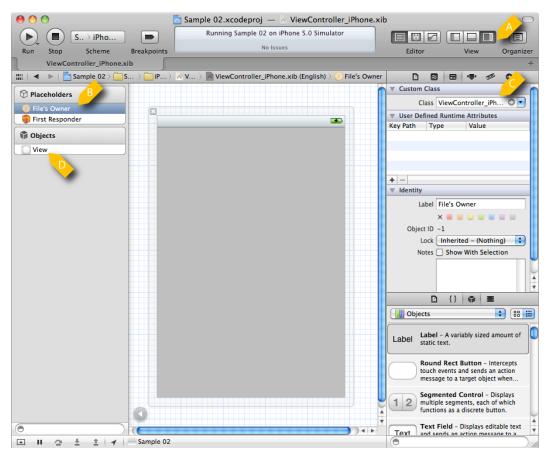


Figure 2-13. Xcode configured for UI work

The other important feature of Figure 2-13 is the area on the right. It shows a graphic representation of the UI components. On the header of Xcode, there are three buttons above the label View (A). When working with Interface Builder, I find it helpful to deselect the left button and select the right button. This will expose a view that shows the properties of the selected items under Objects. When you are done configuring Xcode's UI, you should see something like Figure 2-13.

Under the Objects section of Figure 2-10, there is a single item named View (D). This View is a UIView and will be the root view when the application is running. In the center of Figure 2-10, you can see how this view will look.

Under the section Placeholders, we see two items. We don't have to concern ourselves with the First Responder at this point. We do, however, want to select File's Owner (B) and make a modification to it. The File's Owner item is a reference to the object that loads this XIB file. In our case, it will be an instance of ViewController\_iPhone, as shown in Listing 2-2. To let Interface Builder know that we intend to use a specific subclass of UIViewController, we enter the class name we want to use on the right side, at item (C). In this way, Interface Builder will expose the IBOutlets of the class ViewController\_iPhone. We will explore more about IBOutlets shortly.

**Tip** Technically speaking, an XIB file contains information that is used to create an instance of a particular class. In practice, I find myself simply thinking, "the XIB file contains an object," which is not technically correct. Regardless of this inaccuracy, the terminology police have not arrested me—yet.

Now, we have covered what XIB files are and how the objects defined within them relate to objects at runtime. The next step is to add content to our XIB files—specifically, UIViews for landscape and portrait orientations.

#### Adding UI Elements to an XIB File

We have looked at the basic elements in an XIB file. We know there is a File's Owner object reference that represents the UIViewController loading the XIB file. We also know that we have a root UIView for the XIB file. We are going to add additional UIViews to our XIB file and look at how we customize the application not only to support the different devices but also to have different layouts based on orientation. Figure 2-14 shows the iPhone's XIB file with a few items added to it.

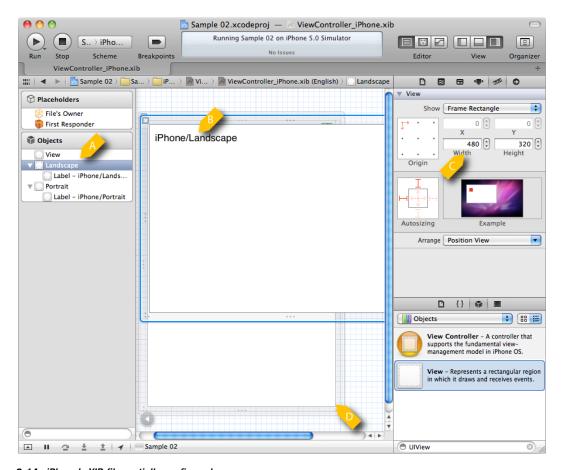


Figure 2-14. iPhone's XIB file partially configured

In Figure 2-14, we see the XIB file with an additional UIView objects added. To add a new component, you simply drag it from the lower right box, either to the Objects list or directly onto the scene in the middle. In this case, we added two UIView objects named Landscape and Portrait as siblings to the UIView named View (A). Collectively, we will refer to these two UIView objects as the orientation views. On each of these new UIView objects we added a UILabel by dragging it from the library at the lower right into the visual representation in the middle of the screen (B). The text for each label will identify which view we are currently displaying. To make sure our layout is correct, the size of the Landscape and Portrait UIView objects is set in the properties panel to the right (C). In the center of the screen, you can see the Landscape UIView displayed over the Portrait UIView (D).

The next step is to add a new UIView to each orientation view. This new UIView will describe where our Rock, Paper, Scissors game will be displayed. Figure 2-15 shows this new UIView added to the Portrait orientation view.

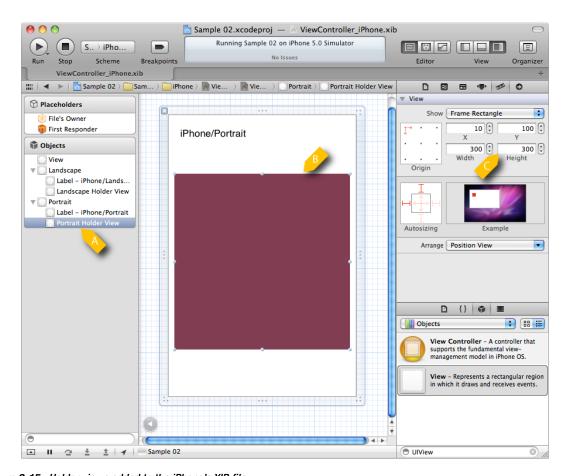


Figure 2-15. Holder views added to the iPhone's XIB file

In Figure 2-15, we see that we have added two new UIView objects to the XIB file. The first one is called Portrait Holder View (A), and the second is called Landscape Holder View. In the center of the screen (B), we see that Portrait Holder View is 300x300 (C) points in size and a darker color (red). Landscape Holder View is a subview of Landscape (not shown).

#### Add a UIViewController to a XIB

There is one last item we need to add to the XIB file before we are done adding items. We need to add a UIViewController that is responsible for the subviews that will be displayed in the holder views we just added. The UIViewController we are going to add will be of the class RockPaperScissorsController, as defined earlier in this chapter. Figure 2-16 shows the XIB file with a new UIViewController added.

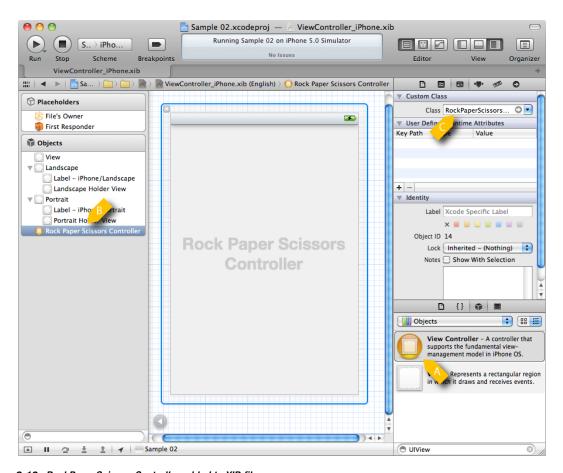


Figure 2-16. RockPaperScissorsController added to XIB file

In Figure 2-16, we see that a View Controller was dragged from the library (A) to the Objects section (B) and was set to be the class RockPaperScissorsController (C). In this way, when this XIB file is instantiated, an instance of RockPaperScissorsController will be created as well. This raises the question: how do we access the items within a XIB file programmatically? The answer lies in creating IBOutlets, as the next section discusses.

#### **Creating New IBOutlets from Interface Builder**

An IBOutlet is a connection between an item defined in a XIB file and a variable declared in a class. To specify a field as an IBOutlet, you simply put the keyword before the declaration of a field in a classes header file. Another way to create an IBOutlet is to create it through Interface Builder. Figure 2-17 shows how to create an IBOutlet in Interface Builder.

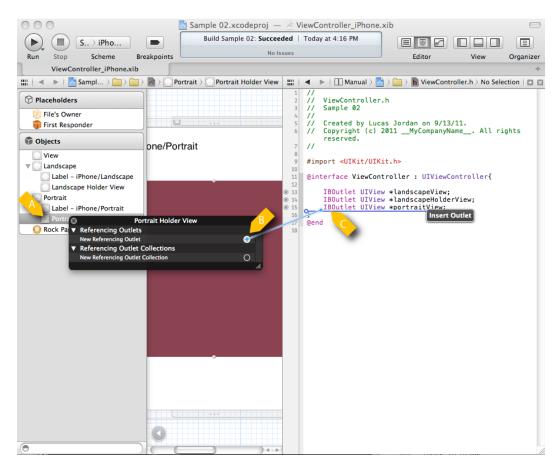


Figure 2-17. Creating an IBOutlet in Interface Builder

In Figure 2-17, we see the steps to create an IBOutlet in Interface Builder. The first thing to notice is that the view on the right is split between Interface Builder and a code window. To enable this split view, press command+option+return. To create the IBOutlet, start by right-clicking on the object you want to create an IBOutlet for (A)—in this case, the Portrait Holder view. From the dialog that pops up, drag your mouse from the little circle to the right of New Referencing Outlet (B) to the place in the code where you want the IBOutlet created (C). As can be seen in Figure 2-17, a number of IBOutlet references are already created. Note that the header file where these IBOutlet references are created is ViewController.h. We use this file ViewController\_iPhone, and ViewController\_iPad will inherit them. Lets take a look at the complete version of ViewControler.h in Listing 2-5.

#### Listing 2-5. ViewController.h

```
#import <UIKit/UIKit.h>
#import "RockPaperScissorsController.h"

@interface ViewController : UIViewController{
    IBOutlet UIView *landscapeView;
    IBOutlet UIView *landscapeHolderView;
    IBOutlet UIView *portraitView;
    IBOutlet UIView *portraitHolderView;
    IBOutlet RockPaperScissorsController *rockPaperScissorsController;
}

@end
```

In Listing 2-5, we see that we have reference to five IBOutlet references. These will give us programmatic access to these items at runtime. When Interface Builder created these references, it also created some cleanup code in the implementation of ViewController. Listing 2-6 shows this automatically generated code.

#### Listing 2-6. ViewController.m (partial)

```
- (void)viewDidUnload
    [landscapeView release];
    landscapeView = nil;
    [landscapeHolderView release];
    landscapeHolderView = nil;
    [portraitView release];
    portraitView = nil;
    [portraitHolderView release];
    portraitHolderView = nil;
    [rockPaperScissorsController release];
    rockPaperScissorsController = nil;
    [super viewDidUnload];
    // Release any retained subviews of the main view.
    // e.g. self.myOutlet = nil;
}
///...
- (void)dealloc {
    [landscapeView release];
    [landscapeHolderView release];
    [portraitView release];
    [portraitHolderView release];
    [rockPaperScissorsController release];
    [super dealloc];
}
```

In Listing 2-6, we see code generated by Interface Builder for each IBOutlet created. In the task viewDidUnload, we see that each view is released and set to nil. Similarly, in the task dealloc, we see that each view is released. In the next section, we are going to review how we respond to orientation change; this same code will be responsible for getting the different views we have been working with onto the screen.

# **Responding to Changes in Orientation**

The last thing we have to do is add some logic that changes which UIView is displayed based on the orientation of the device. The class UIViewController specifies a task that is called after the device rotates. This task is called didRotateFromInterfaceOrientation: and it is passed a constant

UIDevice.

GameController.m (shouldAutorotateToInterfaceOrientation:)

In Listing 2-7, we see that this task has passed the variable fromInterfaceOrientation, indicating the old orientation of the device. We don't really care about the old orientation in our application, so we find the current (post-rotation) orientation by getting the current device from the class UIDevice and then reading the property orientation. Once we get the orientation, we call setOrientation:, which is also defined in Listing 2-7.

The task setOrientation: will update UI to use which ever orientation is passed in. If the device is now in landscape orientation, we remove the portraitView from its super-view, meaning that we take it off the screen. We then add the view landscapeView to the root-most view. We call setup on rockpaperScissorsController to give it a chance to lay out its subviews, if it has not already done so. Lastly, we add rockPaperScissorsController's view property to landscapeHolder as a subview.

The reason we want our layout logic in a separate task is that we also want to call this task when the view controller first loads, so the UI is correctly set up when the game starts. This lets us put all of our orientation logic in one place.

The first time, the state of these objects will be different. For example, the first time this task is called, neither the portraitView nor the landscapeView is attached to the scene, so the call to removeFromSubview will be a nonoperation, without error. When this task is called on subsequent rotations, rockPaperScissorsController's view will be attached to the scene; however, when a view is added as a subview, it is automatically removed from its parent view, if it has one.

The fact that removeFromSuperview and addSubview: have these reasonable default behaviors makes life pretty easy when it comes to manipulating views. It cuts down on error-prone cleanup code. Listing 2-8 shows how we call setOrientation: when the application first starts.

#### Listing 2-8. ViewController.m (viewDidLoad)

```
- (void)viewDidLoad
{
    [super viewDidLoad];
    UIDevice* device = [UIDevice currentDevice];
    [self setOrientation: [device orientation]];
}
```

In Listing 2-8, the task viewDidLoad is called as the ViewController is done initializing and is displayed on our screen. Here, we simply get the current device's orientation and pass that value to setOrientation:, ensuring the UI is oriented correctly when the application starts.

If you run the project, you will see the app running on both the iPad and the iPhone, changing its layout based on orientation.

# **Summary**

In this chapter, we looked at how to create an Xcode project suitable for developing a universal application. We explored the initialization process of an iOS application, and saw where to start modifying the project to create the application we want. We looked at how XIB files and classes interact, and at how iOS exploits MVC with the UIViewController class. We created an application that seamlessly supports running on an iPhone or an iPad in all orientations, setting the stage for game development.

# Explore the Game Application Life Cycle

There is more to a game than just the fun parts. Almost all of the games on the market, and definitely the big titles, involve multiple views and a reasonably complex life cycle. This chapter explores how to turn a simple game into a complete application. We will look at how a typical game organizes the different views that constitute it, including a Loading view, a Welcome view, a High Score view, and of course the game itself.


Beyond user navigation, an application also has a life cycle. On iOS, that life cycle includes responding to the application being terminated, recovering from being in the background, or starting up for the first time. When an application moves through its life cycle, it will want to preserve elements of the user data, like high scores and the state of the game. Paying attention to these little details will make your game look polished instead of amateurish and annoying.

While the game presented here is not very exciting, and the art is admittedly amateurish, you will be able to take the basic outline presented here and drop your own game into it. You should update your art, though!

# **Understanding the Views in a Game**

The game presented in this chapter is called Coin Sorter. It is a simple puzzle game in which the player sorts coins into rows and columns. The player has ten turns to make as many matching rows or columns as possible. The fun part of this game is just about as simple as an iOS game can get. The playable part of this game consists of just two classes, CoinsController and CoinsGame. As the names of these two classes suggest, CoinsController is responsible for rendering the game to the screen and interpreting player actions. CoinsGame is responsible for storing the state of the game and providing a few utility methods for manipulating that state. The details of how these two classes work is explored fully in Chapter 4. In this chapter, we are going to look at all of the surrounding code that supports these two classes to create a complete application.

Most games comprise several views—not just the view where the main action of the game takes place. These views often include a Welcome view, a High Score view, and maybe a few others. The sample code that accompanies this chapter is designed to outline how these supporting views are managed. Figure 3-1 is a flowchart of the views used in this game.

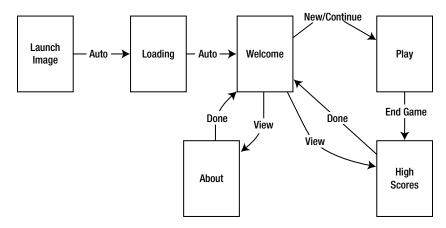

CoinSorter application flow

3-1, each rectangle is a view in the game. The arrows indicate the transitions between

app delegate. See Appendix A for the details of configuring this image. When the application has fully loaded, we display the Loading view. This view stays on the screen for a few seconds while the application pre-loads some images. Once the images are loaded, we show the user the Welcome view.

The Welcome view in Figure 3-1 offers the player a number of options. They can continue an old game, start a new game, view the high scores, or view information about the game. If the user plays the game, they are directed to the Play view, where the main action of this application takes place. When they are done with a game, the user is shown the High Scores view. When they are done reviewing the high scores, they are sent back to the Welcome view, enabling them to again select from the available options.

The application flow presented in Figure 3-1 is by no means the only option, but it presents a common pattern. Extending or modifying this example should be simple once you understand what each view does and how the state of the application is managed.

**Note** Although laying out this type of workflow with the Storyboard feature of Xcode might be appealing, supporting multiple orientations and multiple devices makes using Storyboard impractical. Ideally, Storyboard will improve in future versions of Xcode and become the only tool used to manage application life cycles.

# **Exploring the Role Each View Plays**

Each view in the application serves a different purpose. By understanding what each view does, you will understand why this example is organized the way that it is. Let's start by looking at Figure 3-2, showing the Launch Image and the Loading view.


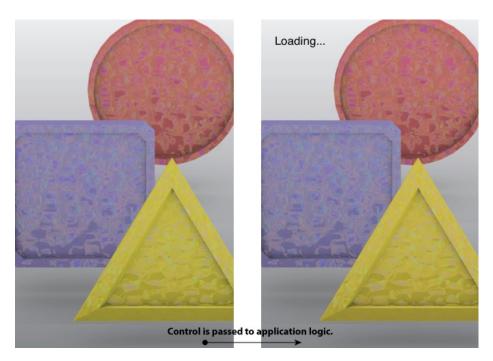


Figure 3-2. Launch Image and Loading view

In Figure 3-2, we see the Launch Image on the left, which appears when control of the initialization process is passed to the app delegate. We see the Loading view on the right of Figure 3-2. In this case, the Loading view has a UIImageView with the same image used as the Launch image. This is not required, but it is a nice way to provide a seamless visual experience for the user. In a more complex application, you might want to display a progress bar as images are loading. For an application this simple, you don't really need a loading screen, because the number and size of the images used are small. In our case, we simply add a UILabel with the text "Loading . . . " to the Loading view. Once the initial resources of an application are loaded, the Welcome view is presented, as shown in Figure 3-3.

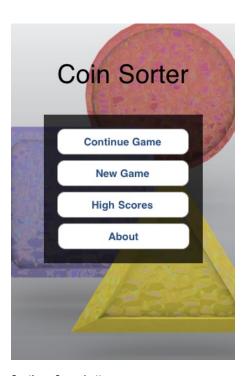

Welcome view showing the Continue Game button

The Welcome view shown in Figure 3-3 presents four buttons to the player. The first button allows the player to continue the previous game. The New Game button starts a new game. The buttons High Scores and About allow the player to review past high scores and view the About screen. The Welcome view is the home screen for the player. Looking at Figure 3-1, we see that all future actions will inevitably lead the player back to this view. If the player chooses to continue an earlier game or start a new game, the Play view is presented, as shown in Figure 3-4.


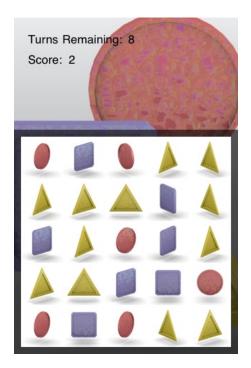


Figure 3-4. Play view—a game in progress

The Play view is where the game play actually happens. In Figure 3-4, the top of the screen displays the number of remaining turns, as well as the current score. The square region with the geometric shapes is where the game takes place. Each triangle, square, and circle represents a different type of coin. The object of the game is to create columns and rows of like coins. The only way to rearrange the coins is by selecting two to trade places. When a row or column of like coins is created, the player's score is incremented and new coins appear to replace those in the matching column or row. The player can only swap coins ten times before the game is over, but with careful planning, a player can create multiple matches per swap. When the game is over, the High Score view is shown, highlighting any new high score the player may have achieved. Figure 3-5 shows the High Score view.

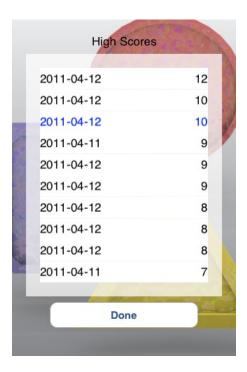

The High Score view

In Figure 3-5, you can see the High Score view; it highlights the score of the last game played, which is the third score from the top (it is slightly lighter than the others in the black and white image). The high scores presented in this view are saved between application sessions. Later in this chapter, we will explore how the High Score data are saved. When the user is done inspecting their past and current successes, they can select the Done button to be directed back to the Welcome view. From the Welcome view, they can click the About button and view some information about the game, as shown in Figure 3-6.



Figure 3-6. The Welcome view

The Welcome view presented in Figure 3-6 is very much a placeholder. You would want to replace the "Lorem ipsem . . . " with a description of your game.

In the Chapter 2, we explored how to configure an XIB file containing the various UI elements in the game. With this game, we follow a very similar pattern.

# **Understanding the Project's Structure**

Even a simple game can have a surprising number of artifacts in the Xcode project. Exploring what these items are helps you understand where each piece of the application is defined and how they fit together. Figure 3-7 shows the Project Explorer in Xcode, which lists a number of the files used in this project.



Figure 3-7. Project files for the Project Sample 03

The project files shown in Figure 3-7 follows the same pattern as the project from Chapter 2. There are the shared classes under the group Sample 03, while device-specific classes are stored under the groups iPhone and iPad. The class Sample\_03AppDelegate contains the initialization code for the application and code for saving the user state when a player exits the application. The XIB files are also wired up very much like the XIB files from Chapter 2: the XIB files starting with MainWindow each contain a GameController of the appropriate subclass. The class GameController contains all of the logic for managing the state of the application, while the XIB files for each subclass contain the UI elements suitable for each device.

The class CoinsController describes the fun part of the game and the class CoinGame is a model class that describes which type of coins are where, and also the current score and remaining turns. By archiving an object of the class CoinGame, we can save the state of the current game when the application quits.

The class HighscoreController manages the High Score view and displays the data found in the class Highscores. The class Highscores contains an array of Score objects, where each Score object

represents a score and the date that score was achieved. By serializing an instance of Highscores, we can preserve a user's high scores between play sessions.

The meat of the view configuration is defined in the two GameController XIB files. Let's take a look at those.

# **Configuring an Application for Multiple Views**

While this application works equally well on the iPhone and the iPad, let's just look at the iPhone version of the GameController XIB file, shown in Figure 3-8.

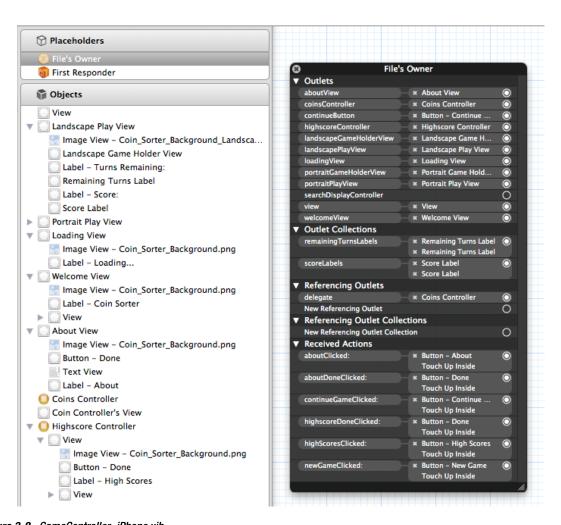


Figure 3-8. GameController\_iPhone.xib

In Figure 3-8, we see the details of the file GameController\_iPhone.xib on the left. On the right, we see the IBOutlets and IBActions defined in the file GameController.h.

## **Reviewing GameController\_iPhone.xib**

Under the Objects section on the left, we see a number of UIViews. The Landscape Play view and the Portrait Play view are shown when the game is being played, which is the only time this application supports both orientations. For simplicity, the rest of the views are for portrait orientation only.

When the application initializes, we know that the first view the user sees is the Loading view. After that, the user is directed to the Welcome view. In Figure 3-8, we can see that both of these views

UIViewControllers in the XIB. These two
UIViewController because the each contributes a reasonable amount of
UIViewController classes. As a
UIViewController in other applications.

3-8, we see the connections defined in the class GameController. We can also

### Listing 3-1. GameController.h

```
#import <UIKit/UIKit.h>
#import "CoinsController.h"
#import "CoinsGame.h"
#import "HighscoreController.h"
@interface GameController : UIViewController<CoinsControllerDelegate>{
    IBOutlet UIView *landscapePlayView;
    IBOutlet UIView *landscapeGameHolderView;
    IBOutlet UIView *portraitPlayView;
    IBOutlet UIView *portraitGameHolderView;
    IBOutlet UIView *loadingView;
    IBOutlet UIView *welcomeView;
    IBOutlet UIButton *continueButton;
    IBOutlet UIView *aboutView;
    IBOutlet CoinsController *coinsController;
    IBOutletCollection(UILabel) NSArray *remainingTurnsLabels;
    IBOutletCollection(UILabel) NSArray *scoreLabels;
```

```
IBOutlet HighscoreController *highscoreController;

CoinsGame* previousGame;
BOOL isPlayingGame;
}
-(void)setPreviousGame:(CoinsGame*)aCoinsGame;
-(CoinsGame*)currentGame;
-(IBAction)continueGameClicked:(id)sender;
-(IBAction)newGameClicked:(id)sender;
-(IBAction)highScoresClicked:(id)sender;
-(IBAction)aboutClicked:(id)sender;
-(IBAction)aboutDoneClicked:(id)sender;
-(IBAction)highscoreDoneClicked:(id)sender;
-(void)loadImages;
-(void)showPlayView: (UIInterfaceOrientation)interfaceOrientation;
@end
```

In Listing 3-1, we import three other classes defined in this project, including the default import statement for UIKit. The rest of the IBOutlet statements are basic declarations, allowing a number of different views to be accessed. The IBOutletCollection definitions represent a new type of connection for us. An IBOutletCollection acts very much like an IBOutlet, except it allows you to connect multiple items to a single NSArray. In our case, we have two labels for displaying the score: landscape and portrait. Instead of having an IBOutlet (and variable) for each of these, we can simply use an IBOutletCollection, so the NSArray scoreLabels will contain both of these labels at runtime. When it is time to update the UI with a new score, we simply update the text of all of the UILabels in the array scoreLabels. We follow the same pattern for the labels that display the remaining turns, where each is stored in the NSArray remainingTurnsLabels.

## **Bringing the Views onto the Screen**

That completes our overview of how the different views are defined. Now let's take a look at how each of these views is brought onto the screen, starting with the Loading view.

We know that the Main view for the class GameController is displayed when the application loads, just as it did in Chapter 2. However, the Main view for GameController is empty—it is effectively the root component for our application. When we change views in the application, we will be adding and removing views from this root view. Listing 3-2 shows the viewDidLoad task from GameController, where we add the first view we want the user to see.

#### Listing 3-2. GameController.m (viewDidLoad)

```
- (void)viewDidLoad
{     [super viewDidLoad];
     [self.view addSubview:loadingView];
     [self performSelectorInBackground:@selector(loadImages) withObject:nil];
}
```

The viewDidLoad tasks, as shown in Listing 3-2, is called when an instance of GameController is loaded from an XIB file. Because an instance of GameController is in each MainWindow XIB file, this happens as soon as the application starts. After calling the super implementation of viewDidLoad, which is required, we add the UIView loadingView to the main view of the GameController class. The task addSubview: displays the new sub-view at the location and size as defined by the sub-views frame property. Because loadingView is defined in the XIB file, its frame is defined there.

After we get the Loading view on the screen, we want to load any initial resources so we can prevent an untimed pause later in the application life cycle. It is not technically required in this app to load the images asynchronously, but if we wanted to display a progress bar, this would be required. In order to perform a task asynchronously, we simply call performSelectorInBackground:withObject: and pass in the task loadImages. The task loadImage will then be run in the background; it is shown in Listing 3-3.

## GameController.m (loadImage)

```
//sleeping so we can see the loading view. In a production app, don't sleep :)
[NSThread sleepForTimeInterval:1.0];

[coinsController loadImages];
[loadingView removeFromSuperview];
[self.view addSubview:welcomeView];
```

loadImage task calls sleepForTimeInterval and causes the current thread to sleep for a second. This is done to make sure you can actually see the loading view in the sample code; delete anything like this in production code. After the sleep, call loadImages on coinsController. The details of CoinsController's implementation of loadImages is described in Chapter 4—all you need to know now is that it loads all of the images used to display the coins. When we are done loading, we remove the loadingView and add the welcomeView.

The Welcome view is really where the application starts for the user. From there, the user can access the interesting parts of the application.

# **Changing Views in Response to User Actions**

Once the Welcome view is displayed, the user is presented with a number of buttons (this view is shown in Figure 3-3). The top button, Continue Game, is only present if the user was partially through a game when they exited the application. Each button causes the user to navigate to a new view. This is done by first establishing a task that will be called when the user touches a button. In Listing 3-1, we see a number of tasks declared in the GameController.h file. The ones starting with IBAction are tasks that are called when a button is touched. Once the tasks are declared in the header file, you can wire up each button to each task. Figure 3-9 shows the first step in wiring up a button.


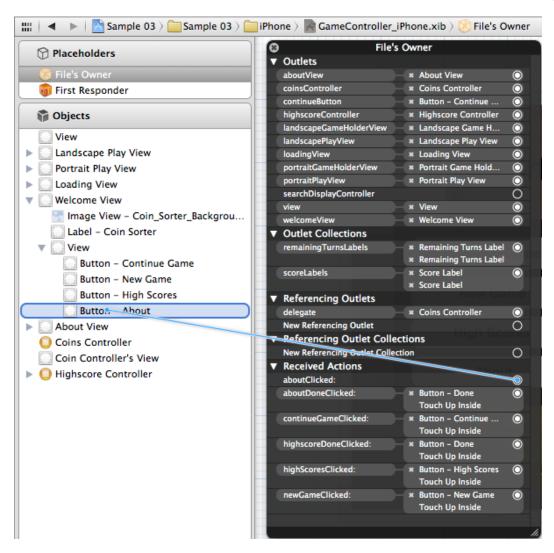


Figure 3-9. Wiring the aboutClicked: action to the About button

In Figure 3-9, we see the Connections menu of File Owner exposed by right-clicking on File Owner. By dragging from the circle to the right of aboutClicked: to the correct button on the left, you can select the action that triggers the task aboutClicked:. When you let go of the button, a second pop-up menu is presented, allowing you to select the specific user action. Figure 3-10 shows the selection of the action Touch Up Inside, which is typically the desired action for a button.

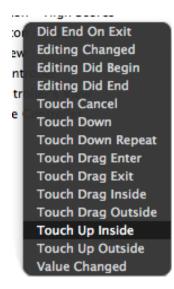

Selecting the action Touch Up Inside

GameController.m.

#### GameController.m (IBAction tasks)

```
- (IBAction)continueGameClicked:(id)sender {
    [UIView beginAnimations:nil context:@"flipTransitionToBack"];
    [UIView setAnimationDuration:1.2];
    [UIView setAnimationTransition:UIViewAnimationTransitionFlipFromRight
forView:self.view cache:YES];
    [welcomeView removeFromSuperview];
   UIInterfaceOrientation interfaceOrientation=[self interfaceOrientation];
    [self showPlayView:interfaceOrientation];
    [coinsController continueGame:previousGame];
    [UIView commitAnimations];
    isPlayingGame = YES;
}
- (IBAction)newGameClicked:(id)sender {
    [UIView beginAnimations:nil context:@"flipTransitionToBack"];
    [UIView setAnimationDuration:1.2];
    [UIView setAnimationTransition:UIViewAnimationTransitionFlipFromRight
forView:self.view cache:YES];
```

```
[welcomeView removeFromSuperview];
    UIInterfaceOrientation interfaceOrientation = [self interfaceOrientation];
    [self showPlayView:interfaceOrientation];
    [coinsController newGame];
    [UIView commitAnimations];
    isPlayingGame = YES;
}
- (IBAction)highScoresClicked:(id)sender {
    [UIView beginAnimations:nil context:@"flipTransitionToBack"];
    [UIView setAnimationDuration:1.2];
    [UIView setAnimationTransition:UIViewAnimationTransitionFlipFromRight forView:self.view cache:YES];
    [welcomeView removeFromSuperview];
    [self.view addSubview:highscoreController.view];
    [UIView commitAnimations];
}
- (IBAction)aboutClicked:(id)sender {
    [UIView beginAnimations:nil context:@"flipTransitionToBack"];
    [UIView setAnimationDuration:1.2];
    [UIView setAnimationTransition:UIViewAnimationTransitionFlipFromRight forView:self.view cache:YES];
    [welcomeView removeFromSuperview];
    [self.view addSubview: aboutView];
    [UIView commitAnimations];
}
```

Listing 3-4 displays all of the tasks used to control which view we show, chosen from the Welcome view. The first three lines of each task sets up the animation that will be used to transition from one view to another. The last line that calls UIView's commitAnimations task indicates that we have specified all of the UI changes we want animated, and that the animation should be shown to the user. The type of animation is controlled by setting the context string on UIView's beginAnimations:context: task. In order actually change which view will be displayed, we simply have welcomeView remove itself from its parent by calling removeFromSuperview. Then we add the desired view to self.view by calling the task addSubview:.

For the High Score view and the About view, we want the user to navigate back to the Welcome view. Listing 3-5 shows these action tasks.

## Listing 3-5. GameController.m (Navigate Back to the Welcome View)

```
- (IBAction)aboutDoneClicked:(id)sender {
    [UIView beginAnimations:nil context:@"flipTransitionToBack"];
    [UIView setAnimationDuration:1.2];
    [UIView setAnimationTransition:UIViewAnimationTransitionFlipFromLeft forView:self.view cache:YES];
    [aboutView removeFromSuperview];
    [self.view addSubview: welcomeView];

    [UIView commitAnimations];

- (IBAction)highscoreDoneClicked:(id)sender {
    [UIView beginAnimations:nil context:@"flipTransitionToBack"];
    [UIView setAnimationDuration:1.2];
    [UIView setAnimationTransition:UIViewAnimationTransitionFlipFromLeft forView:self.view cache:YES];
    [highscoreController.view removeFromSuperview];
    [self.view addSubview: welcomeView];
    [UIView commitAnimations];
```

real difference is that we remove the About and High Score views and then add the Welcome view. This is a reversal of the tasks in Listing 3-4.

When the user navigates to the Play view, they stay on that view until their game is done. This application is set up to automatically change views in this case. The next section explains how GameController interacts with the CoinsController, not only to know when to transition the user to the High Score view but also when to update the remaining turns and score labels.

## **Using a Delegate to Communicate Application State**

A common pattern for one object to communicate with another in iOS development is the delegate pattern. A delegate is simply any object that conforms to some predefined protocol that another object knows about. For example, say we have class A and it has a property called delegate that must conform to the protocol P. We can assign an instance of class B to the delegate property of A, if class B conforms to the protocol P. The delegate pattern is very much like the listener pattern found in other languages, like Java.

## **Declaring CoinsControllerDelegate**

In order for our CoinsController class to communicate its state with the class GameController, we create a protocol that describes this relationship. Listing 3-6 shows the declaration of the protocol CoinsControllerDelegate found in the file CoinsController.h.

#### Listing 3-6. CoinsControllerDelegate (from CoinsController.h)

@protocol CoinsControllerDelegate<NSObject>

- $-(void) game Did Start: (Coins Controller*) a Coins Controller \ with: (Coins Game*) game; \\$
- -(void)scoreIncreases:(CoinsController\*)aCoinsController with:(int)newScore;
- -(void)turnsRemainingDecreased:(CoinsController\*)aCoinsController with:(int)turnsRemaining;
- -(void)gameOver:(CoinsController\*)aCoinsController with:(CoinsGame\*)game;

@end

As can be seen in Listing 3-6, a protocol is a pretty simple thing. The name of the protocol comes after the <code>@protocol</code>. The <NSObject> specifies what types of objects can conform to this protocol. Between the <code>@protocol</code> and the <code>@end</code>, a number of tasks are declared. These are the messages that are going to be sent to the delegate object, so the delegate object should implement each of these tasks. The delegate field is declared in the interface section of the <code>CoinsController</code> like this:

```
IBOutlet id < Coins Controller Delegate > delegate;
```

We also define a property for this field, with the property declaration:

```
@property (nonatomic, retain) id <CoinsControllerDelegate> delegate;
```

There are two things to notice about the declaration of the delegate property. First, we can assign any object as the delegate. Because it is type id, we will get a compiler warning if the assigned object is known not to conform to the protocol CoinsControllerDelegate. The second thing to notice is that we defined it as an IBOutlet, which allows us to actually set the relationship between the GameController object and the CoinsController object in Interface Builder. This is not required, but it can be a handy addition if you are planning on writing code consumed by other developers.

Looking at the declaration of the class GameController, we can see that it conforms to the protocol CoinsControllerDelegate, as such:

```
@interface GameController : UIViewController<CoinsControllerDelegate>{
```

## **Implementing the Defined Tasks**

Simply stating that a class conforms to a protocol is just the first step. The conforming class should also implement each task defined in the protocol. Listing 3-7 shows the implementation of the CoinsControllerDelegate protocol in the GameController.m file.

#### Listing 3-7. GameController.m (CoinsControllerDelegate Tasks)

```
//CoinsControllerDelegate tasks
-(void)gameDidStart:(CoinsController*)aCoinsController with:(CoinsGame*)game{
   for (UILabel* label in scoreLabels){
```

```
[label setText:[NSString stringWithFormat:@"%d", [game score]]];
    for (UILabel* label in remainingTurnsLabels){
        [label setText:[NSString stringWithFormat:@"%d", [game remaingTurns]]];
    }
}
-(void)scoreIncreases:(CoinsController*)aCoinsController with:(int)newScore{
    for (UILabel* label in scoreLabels){
        [label setText:[NSString stringWithFormat:@"%d", newScore]];
    }
-(void)turnsRemainingDecreased:(CoinsController*)aCoinsController with:(int)turnsRemaining{
    for (UILabel* label in remainingTurnsLabels){
        [label setText:[NSString stringWithFormat:@"%d", turnsRemaining]];
    }
    [continueButton setHidden:YES];
    Score* score = [Score score:[game score] At:[NSDate date]];
    [highscoreController addScore:score];
   UIWindow* window = [[[UIApplication sharedApplication] windows] objectAtIndex:0];
   window.rootViewController = nil;
   window.rootViewController = self;
    [UIView beginAnimations:nil context:@"flipTransitionToBack"];
    [UIView setAnimationDuration:1.2];
    [UIView setAnimationTransition:UIViewAnimationTransitionFlipFromRight forView:self.view cache:YES];
    [coinsController.view removeFromSuperview];
    [self.view addSubview:highscoreController.view];
    [UIView commitAnimations];
}
```

Each implementation of the tasks defined by the CoinsControllerDelegate protocol for the class GameController is shown in Listing 3-7. When a CoinsController starts a new game, it calls gameDidStart:with: on the delegate object. In our case, we want to make sure the remaining turns label and the score label reflect the starting values of the game. These could be just about anything, because we don't know if we are starting a new game or continuing an old game. Similarly, these labels are updated whenever the tasks scoreIncreases:with: and turnsRemainingDecreased:with: are called.

Lastly, in Listing 3-7, the tasks gameOver:with: is called when the game is over. In this task, we record the high score and switch to the High Score view. Because we allow the game to be played in landscape or portrait orientation, the phone might be in landscape when the game is over. If that is the case, we want to make sure the interface orientation is correct, so the High Score view is displayed correctly. One way to do this is to simply reset our UIWindow's rootViewController property. This causes shouldAutorotateToInterfaceOrientation: to be called and makes sure our views are shown in the correct orientation.

# **HighscoreController: A Simple, Reusable Component**

The HighscoreController class is responsible for managing a view for displaying high scores as well as persisting those high scores. The HighscoreController is a pretty simple class—the header file for the class is shown in Listing 3-8.

Listing 3-8. HighscoreController.h

```
#define KEY_HIGHSCORES @"KEY_HIGHSCORES"

#import <UIKit/UIKit.h>
#import "Highscores.h"
#import "Score.h"

@interface HighscoreController : UIViewController {
    IBOutlet UIView* highscoresView;
    Highscores* highscores;
}
-(void)saveHighscores;
-(void)layoutScores:(Score*)latestScore;
-(void)addScore:(Score*)newScore;
@end
```

As can be seen in Listing 3-8, HighscoreController has two fields. The first field, highscoresView, is an IBoutlet. This is the UIView that will be used to lay out the actual scores on the screen. The UIView highscoresView is assumed to be a sub-view of the view property that comes with the class UIViewController. It does not have to be a direct sub-view—it just has to appear somewhere in the view hierarchy. This is a slightly different pattern from other UIViewControllers we have seen. It was done this way so an instance of HighscoreController could be added to both the iPhone and iPad XIB files, and the layout of the Views could be controlled in there. Inspect the iPhone XIB file and you will see that the layout for the High Score view is defined directly within the HighscoreController.

The field highscores is of type Highscores. This is a simple class that contains an array of Score objects. We will take a closer look at the classes Highscores and Score after looking at the implementation of the three tasks defined in HighscoreController.

## **HighscoreController Implementation and Layout**

Once an application has the views for HighscoreController wired up, the most important task is the addScore: task. This task is called when a game is over and the application should update the High Score view, as well as make sure the high score information is stored. Listing 3-9 shows the implementation of addScore:.

### Listing 3-9. HighscoreController.m (addScore:)

```
-(void)addScore:(Score*)newScore{
    [highscores addScore:newScore];
    [self saveHighscores];
    [self layoutScores: newScore];
}
```

In Listing 3-9, we see that the addScore: task takes a new Score as an argument. The newScore object is passed onto the addScore: task of the object highscores, where it is either discarded if it is not high enough to be a high score or inserted into the array of ten Scores stored in highscores. We also see that the task in Listing 3-9 calls a saveHighscores task and then updates the layout of the views by calling layoutScores:. Let's take a look at how the views are updated before we look at saving the high scores. Listing 3-10 shows the implementation of layoutScores:.

Listing 3-10. HighscoreController.m (layoutScores:)

```
-(void)layoutScores:(Score*)latestScore{
    for (UIView* subview in [highscoresView subviews]){
        [subview removeFromSuperview];
    CGRect hvFrame = [highscoresView frame];
    float oneTenthHeight = hvFrame.size.height/10.0;
    float halfWidth = hvFrame.size.width/2.0;
    NSDateFormatter *dateFormat = [[NSDateFormatter alloc] init];
    [dateFormat setDateFormat:@"yyyy-MM-dd"];
    int index = 0;
    for (Score* score in [highscores theScores]){
        CGRect dateFrame = CGRectMake(0, index*oneTenthHeight, halfWidth, oneTenthHeight);
        UILabel* dateLabel = [[UILabel alloc] initWithFrame:dateFrame];
        [dateLabel setText: [dateFormat stringFromDate:[score date]]];
        [dateLabel setTextAlignment:UITextAlignmentLeft];
        [highscoresView addSubview:dateLabel];
        CGRect scoreFrame = CGRectMake(halfWidth, index*oneTenthHeight, halfWidth, oneTenthHeight);
        UILabel* scoreLabel = [[UILabel alloc] initWithFrame:scoreFrame];
        [scoreLabel setText:[NSString stringWithFormat:@"%d", [score score]]];
        [scoreLabel setTextAlignment:UITextAlignmentRight];
        [highscoresView addSubview:scoreLabel];
        if (latestScore != nil && latestScore == score){
            [dateLabel setTextColor:[UIColor blueColor]];
            [scoreLabel setTextColor:[UIColor blueColor]];
        } else {
            [dateLabel setTextColor:[UIColor blackColor]];
            [scoreLabel setTextColor:[UIColor blackColor]];
        }
        index++;
    }
}
```

The task layoutScores: from Listing 3-10 takes a Score object as an argument. This Score object represents the most recent score the player has achieved. This allows HighscoreController to mark the newest score in blue; the other scores will be drawn in black. The first loop in layoutScores: simply removes all sub-views from the UIView highscoreView. The next three lines inspect the size of highscoreView and pre-compute some size values that will be used later.

The second loop in layoutScores: iterates through all of the Score objects contained in the highscores object. For each Score, two UILabels are created. The first UILabel, called dateLabel is created with the CGRect dateFrame, which defines the region where the UILabel should be drawn. Basically, dateFrame specifies the left half of a row on highscoreView. The text for dateLabel is set based on the date property of the Score object. Similarly, this process is repeated for the UILabel scoreLabel; however, it will display the score the user achieved and will be placed on the right.

Lastly, we check to see if the score we are displaying is the object latestScore. If it is, we adjust the colors of the UILabels to blue.

If we take a look back at Listing 3-9, we see that the high scores are saved before we update the views by calling the task saveHighscores, as shown in Listing 3-11.

Listing 3-11. HighscoreController.m (saveHighscores)

```
-(void)saveHighscores{
    NSUserDefaults* defaults = [NSUserDefaults standardUserDefaults];

    NSData* highscoresData = [NSKeyedArchiver archivedDataWithRootObject: highscores];
    [defaults setObject:highscoresData forKey: KEY_HIGHSCORES];
    [defaults synchronize];
}
```

The saveHighscores task, shown in Listing 3-11, is responsible for archiving the highscores object and writing it somewhere permanent. The strategy here is to stick the highscores object into the user's preferences for this application. This way, the high scores will be preserved if the user deletes the app after a sync with iTunes. To know the user's preferences, we call standardUserDefaults on the class NSUserDefaults. Objects of type NSUserDefaults are basically maps for storing key value pairs. The keys are NSStrings and the values must be a property list. This includes NSData, NSString, NSNumber, NSDate, NSArray, and NSDictionary—basically the core iOS objects types. We want to store an object of type Highscores, which is not included in this list. In order accomplish this, we must create an NSData object from the data stored in the highscores object.

To archive an object to an NSData object, we use the class NSKeyedArchiver and pass the highscores object to the tasks archivedDataWithRootObject:. As the name implies, archivedDataWithRootObject is designed to archive a graph of objects. In our case, the root object is highscores and we know it contains a number of Score objects. So it looks like we are on the right track. In order for an object to be archived by an NSKeyedArchiver, it must conform to the protocol NSCoding. The final step is to call synchronize on defaults; this makes sure our changes are saved.

## **The Highscores Class**

Instances of the class Highscores store a sorted list of Score objects and handle the details of adding Score object to the list. Let's take a look at the header file for the class Highscores and see how this all works, as shown in Listing 3-12.

```
Listing 3-12. Highscores.h
```

```
#import <Foundation/Foundation.h>
#import "Score.h"

@interface Highscores : NSObject <NSCoding> {
     NSMutableArray* theScores;
}
@property (nonatomic, retain) NSMutableArray* theScores;
-(id)initWithDefaults;
-(void)addScore:(Score*)newScore;
```

Highscores. As we can see, Highscores does in fact NSCoding. We also see that it contains an NSMutableArray called theScores,
Highscore with Scores and one for adding a new Scores object. Listing 3-13 shows how this class is

Highscores.m

```
@synthesize theScores;
-(id)initWithDefaults{
    self = [super init];
    if (self != nil){
        theScores = [NSMutableArray new];
        for (int i = 0; i < 10; i++){
            [self addScore:[Score score:1 At:[NSDate date]]];
    }
    return self;
-(void)addScore:(Score*)newScore{
    [theScores addObject:newScore];
    [theScores sortUsingSelector:@selector(compare:)];
    while ([theScores count] > 10){
        [theScores removeObjectAtIndex:10];
    }
}
- (void)encodeWithCoder:(NSCoder *)encoder{
    [encoder encodeObject:theScores forKey:@"theScores"];
}
```

```
- (id)initWithCoder:(NSCoder *)decoder{
    theScores = [[decoder decodeObjectForKey:@"theScores"] retain];
    return self;
}
-(void)dealloc{
    for (Score* score in theScores){
        [score release];
    }
    [theScores release];
    [super dealloc];
}
@end
```

The implementation of the class Highscores shown in Listing 3-13 is pretty compact. The task initWithDefaults initializes the NSMutableArray theScore and then fills theScores with ten new Score objects. The task addScore: adds a new Score object to the theScores, sorts it by the score achieved by the player, and then removes any extra Scores. This may result in the Score newScore not actually being in the NSMutableArray theScores. However, it is implemented in this way so the caller does not have to consider the fact that the theScore might not be high enough to be considered an actual high score. The last two tasks, encodeWithCoder: and initWithCoder:, are from the protocol NSCoding. These tasks describe how a Highscores object is archived and unarchived. Note that the object passed to both of these arguments is of the same type: NSCoder. The class NSCoder provides tasks for encoding and decoding values. NSCoder is very much like other iOS classes in that it presents a map-like interface for reading and writing data. In the task encodeWithCoder:, we use the NSCoder task encodeObject:forKey: to write theScore object to the encoder. We pass in a key value NSString that we will use in initWithCoder: to read the theScores back out when we unarchive this class. Also note that the object that is returned from the decode0b jectForKey: task is retained. This is done to make sure the object returned is not reclaimed at some unspecified time.

When an NSMutableArray is encoded with an NSCoder, it knows to encode the elements in the array, but those elements must know how to be encoded. Because theScores is an NSMutableArray filled with Score objects, we have to tell the class Score how to encode and decode itself for this process to work.

## **The Score Class**

Score objects represent a date and score value. We have seen how the class Highscores manages a list of Score objects. Let's take a quick look at this simple class. Listing 3-14 shows the header of the Score class.

```
#import <Foundation/Foundation.h>
@interface Score : NSObject <NSCoding>{
    NSDate* date;
    int score;
}
```

```
@property (nonatomic, retain) NSDate* date;
@property (nonatomic) int score;
+(id)score:(int)aScore At:(NSDate*)aDate;
@end
```

As shown in Listing 3-14, we see that it defines two properties, date and score. There is also a utility constructor for quickly creating a Score object with these two properties filled in. As mentioned, the class Score must conform to the NSCoding protocol in order for our archiving process to work. Listing 3-15 shows the implementation of the Score class.

Listing 3-15. Score.m

```
Score* highscore = [[Score alloc] init];
    [highscore setScore:aScore];
    [highscore setDate:aDate];
    return highscore;
- (void)encodeWithCoder:(NSCoder *)encoder{
    [encoder encodeObject:date forKey:@"date"];
    [encoder encodeInt:score forKey:@"score"];
- (id)initWithCoder:(NSCoder *)decoder{
    date = [[decoder decodeObjectForKey:@"date"] retain];
    score = [decoder decodeIntForKey:@"score"];
   return self;
- (NSComparisonResult)compare:(id)otherObject {
    Score* otherScore = (Score*)otherObject;
    if (score > [otherScore score]){
        return NSOrderedAscending;
    } else if (score < [otherScore score]){</pre>
        return NSOrderedDescending;
    } else {
        return NSOrderedSame;
    }
@end
```

Listing 3-15 shows us a couple of things. We see that the implementation of score:At: simply creates a new Score object and populates the properties. The task compare: is used by Highscores to sort the Score objects (see the task addScore from Listing 3-13). We also see the now familiar task for archiving and unarchiving: encodeWithCoder: and initWithCoder:. In the case of the Score class, we store the NSDate date, with the object methods of NSCoder. For the int score, we have to use

special tasks, because an int is not an object. NSCoder provides a special task for primitive types. In our case, we use decodeInt:ForKey: and encodeInt:ForKey:. There exists analog task for the other primitive types, like BOOL, float, double, and so on.

We have looked at the implementation required by a class we wish to archive (and unarchive), but we have not looked at how we actually unarchive an object from the user's preferences. Listing 3-16 shows how this is done in the class HighscoreController.

## Listing 3-16. HighscoreController (viewDidLoad)

```
- (void)viewDidLoad
{
    [super viewDidLoad];
    [highscores release];

    NSData* highscoresData = [[NSUserDefaults standardUserDefaults] dataForKey:KEY_HIGHSCORES];

    if (highscoresData == nil){
        highscores = [[[Highscores alloc] initWithDefaults] retain];
        [self saveHighscores];
    } else {
        highscores = [[NSKeyedUnarchiver unarchiveObjectWithData: highscoresData] retain];
    }
    [self layoutScores:nil];
}
```


The viewDidLoad task from Listing 3-16 is called when a HighscoreController's view is loaded. In this task, we want to prepare the HighscoreController for use. This means making sure highscores is in a usable and accurate state, and we want to lay out the current set of high scores in case this view is displayed before a new Score is added. In order to retrieve the current high scores, we read a NSData object from the NSUserDefaults object returned by the call to standardUserDefaults. If the NSData object is nil, which will happen the first time you run the application, we initialize a new Highscores object and immediately save it. If the NSData object is not nil, we unarchive it with a call to NSKeyedUnarchiver's task unarchiveObjectWithData and retain the results.

We have looked at how an object can be archived and unarchived in this section. We will now use the same principles to show how we can archive and unarchive our game state.

# **Preserving Game State**

With the advent of background execution on iOS devices, the importance of preserving game or application state is a bit reduced. But a fully functional and user-friendly application should be able to gracefully handle restoring state if the application is terminated. The steps required to preserve state are really not that different from storing other types of data. This is a critical feature of many applications.

The first thing we need to understand is when we should be trying to restore state or archive state. Figure 3-11 is a flowchart describing our sample application's life cycle in terms of initialization.

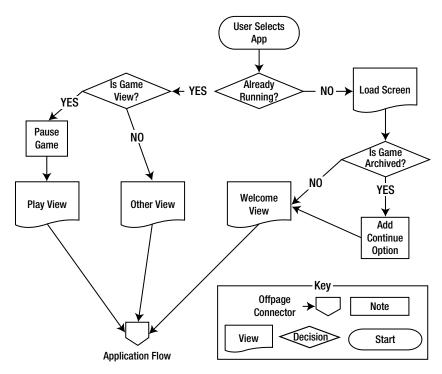

Initialization life cycle of our example application

In Figure 3-11, we see that all applications start by the user's clicking on the application icon. From there, one of two things happen: either the application, if already running in the background, will be brought to the foreground; or the application will start fresh. If the application was already running, it will show up on the screen exactly as the user left it; no code is required on our part to reestablish state. In an action game, you might want to pause the game when the application is brought to the foreground; this will give the user a chance to reorient before play resumes. Either way, we return to the application flow presented in Figure 3-1.

If the application was not already running, we show the load screen as normal, and then we check to see if the game state was archived. If yes, we want to unarchive the game state and show the Continue button. We then continue with the flow presented in Figure 3-1. To support the case where we need to unarchive the game state, we obviously need to archive it at some point. Let's start by looking at the archive logic, and then looking at the unarchive logic.

# **Archiving and Unarchiving Game State**

In our sample application, we store the state of our game in a class called CoinsGame. We are going to save some of the implementation details of this class for the next chapter, but because we know it is being archived and unarchived, we know it probably conforms to the NSCoding protocol. And indeed it does—Listing 3-17 shows the implementation of the two NSCoding tasks.

## Listing 3-17. CoinsGame.m (encodeWithCoder: and initWithCoder:)

```
- (void)encodeWithCoder:(NSCoder *)encoder{
    [encoder encodeObject:coins forKey:@"coins"];
    [encoder encodeInt:remaingTurns forKey:@"remaingTurns"];
    [encoder encodeInt:score forKey:@"score"];
    [encoder encodeInt:colCount forKey:@"colCount"];
    [encoder encodeInt:rowCount forKey:@"rowCount"];
}
- (id)initWithCoder:(NSCoder *)decoder{
    coins = [[decoder decodeObjectForKey:@"coins"] retain];
    remaingTurns = [decoder decodeIntForKey:@"remaingTurns"];
    score = [decoder decodeIntForKey:@"score"];
    colCount = [decoder decodeIntForKey:@"colCount"];
    rowCount = [decoder decodeIntForKey:@"rowCount"];
    return self;
}
```

In Listing 3-17, we see the task used by CoinsGame to support archiving and unarchiving. In each task, a number of properties are encoded or decoded—nothing too surprising there, presumably. An object can be archived at any point in the application life cycle, but there are special tasks that are called when an application is either closing or terminating. These are the following:

```
(void)applicationWillTerminate:(UIApplication *)application(void)applicationDidEnterBackground:(UIApplication *)application
```

The task applicationWillTerminate: is called just before the application is terminated. Its cousin task applicationDidEnterBackground: is similar, but it is called when the application is sent to the background. If your application supports background execution (the default in new projects), the task applicationWillTerminate: will not be called; you must put your archiving logic in applicationDidEnterBackground:. This is the case because a user can exit an application in the background at any point; so it makes sense to have the bookkeeping taken care of beforehand, while the application is fully active. There are a number of other life cycle tasks available to app delegates. When you create a new project in Xcode, these tasks are automatically added to your app delegate class with nice documentation.

# **Implementing Life Cycle Tasks**

Because our application supports background execution, we put the archiving logic into the applicationDidEnterBackground: task, as shown in Listing 3-18.

## Listing 3-18. Sample\_03AppDelegate.m (applicationDidEnterBackground:)

```
- (void)applicationDidEnterBackground:(UIApplication *)application
{
    NSString* gameArchivePath = [self gameArchivePath];
    [NSKeyedArchiver archiveRootObject:[gameController currentGame] toFile: gameArchivePath];
}
```

To archive our game state, Listing 3-18 shows that we again use the NSKeyedArchiver class to archive our CoinsGame object, but this time we archive it to a file. The variable gameArchivePath is the path to the file we are going to use as our archive. We get this path by calling the task gameArchivePath, as shown in Listing 3-19.

## Sample\_03AppDelegate.m (gameArchivePath)

```
NSArray* paths = NSSearchPathForDirectoriesInDomains(NSDocumentDirectory, NSUserDomainMask, YES);
NSString* documentDirPath = [paths objectAtIndex:0];
return [documentDirPath stringByAppendingPathComponent:@"GameArchive"];
```

gameArchivePath task from Listing 3-19 shows that we use the function and pass the NSDocumentDirectory, masked with the . The YES at the end indicates that we want the tilde that is used to indicate the

a root directory to which files can be read and written. By getting the zero items out of the path's NSArray, we get access to that directory. We simply specify the name of the file we want to use passing an NSString to the stringByAppendingPathComponent task of documentDirPath.

We obviously need the path to the archive file when we unarchive the CoinsGame object as well. Listing 3-20 shows where we unarchive this object.

#### Listing 3-20. Sample\_03AppDelegate.m(application: didFinishLaunchingWithOptions:)

```
- (BOOL)application:(UIApplication *)application
didFinishLaunchingWithOptions:(NSDictionary *)launchOptions
{
    NSString* gameArchivePath = [self gameArchivePath];
    CoinsGame* existingGame;
    @try {
        existingGame = [[NSKeyedUnarchiver unarchiveObjectWithFile:gameArchivePath] retain];
    }
    @catch (NSException *exception) {
        existingGame = nil;
    }
    [gameController setPreviousGame:existingGame];
    [existingGame release];
```

```
[self.window makeKeyAndVisible];
return YES;
}
```

In Listing 3-20, we are looking at the task that is called when our application is fully loaded and ready to go. You will recall the last two lines from the previous chapter: they put the UIWindow on the screen and return that everything is okay. The earlier part of the task is concerned with unarchiving our game state. Using the gameArcivePath, we call unarchiveObjectFromFile on the class NSKeyedUnarchiver. This returns our previously archived CoinsGame object, if it exists. If this is the first time the application was run, existingGame will be nil. Additionally, if an exception occurred, we set existingGame to nil as well, because we know that calling setPreviousGame on gameController can handle a nil value. To complete the cycle, let's take a look at GameController and see what it does with this unarchived CoinsGame, as shown in Listing 3-21.

Listing 3-21. GameController.m(setPreviousGame:)

```
-(void)setPreviousGame:(CoinsGame*)aCoinsGame{
    previousGame = [aCoinsGame retain];

    if (previousGame != nil && [previousGame remaingTurns]>0){
        [continueButton setHidden:NO];
    } else {
        [continueButton setHidden:YES];
    }
}
```

In Listing 3-21, we see that the passed in CoinsGame is saved as the local field previousGame and retained. If previousGame is not nil and there are turns remaining, we display the button continueButton; otherwise, we hide it. Once the user is shown the Welcome view, they will be able to continue playing the game where they left off.

# **Summary**


In this chapter, we explored supporting elements required by a complete game. These included establishing a flow of an application and managing the views that constitute this flow. We looked at a way to coordinate the game behaviors, such as a change in score, or the end of a game with the rest of the application using the delegate pattern. We also looked at two ways of persisting data: through the user settings or by storing an object on disk. Both techniques use the same archiving and unarchiving techniques provided by the protocol NSCoding.

Chapter 4

# Quickly Build an Input-Driven Game

All games are driven by user input, but depending on how the game behaves between user actions, a game may be one of two types. One type is the action game, in which the events on the screen unfold whether or not the user provides any input. Action games are explored in Chapter 5. In this chapter, we are going to look at games that wait for the user to make a choice. Games of this type include puzzle games and strategy games. In this chapter, we refer to them as input-driven games.

Although the coolness factor of input-driven games is definitely less than that of action games, many successful games of this type are on the market. From Minesweeper to Sudoku to Angry Birds, these types of games have captured large audiences, and so it is important to understand how this type of game is implemented. Figure 4-1 shows the typical life cycle of an input-driven game.

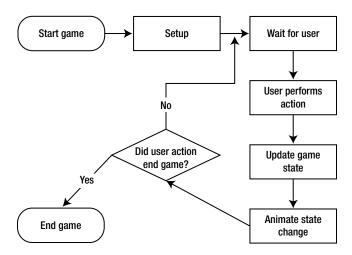

**Figure 4-1.** Coin Sorter—a simple input-driven game

In Figure 4-1, after any initial setup, the application waits for a user to take some action. When the user does something, the game state is updated, and animations are created to reflect the user's action. The animation created by this user action can be simple, such as highlighting a selection, or complex, like an entire physics simulation. After the animation is completed, the application tests to see whether the end of the game has been reached. If it has not, the application once again waits for user input.

In this chapter, you will explore how to create a game that follows the process outlined in Figure 4-1. You will also look at the details of getting content onto the screen and creating animations.

# **Exploring How to Get Content on the Screen**

In the preceding chapter, we assembled views to create a complete application. We used Interface

UIView and how

The UIView class works a lot like the base UI component class in other programming environments. Each UIView defines a region of the screen and has a number of children, or subviews, which are drawn relative to their parent. Figure 4-2 shows an example layout of UIView instances.

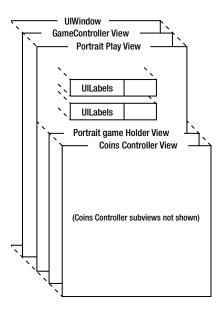


Figure 4-2. Nested UIView instances

In Figure 4-2, you can see in the back the root UIWindow for our sample application. When the user is seeing the game view, the UIWindow has a single subview, which is the view property associated with the GameController class. The GameController places the Portrait Play view as a subview of its view when the user clicks the New Game button. The Portrait Play view has five subviews, as defined in the XIB file. Four of these subviews are UILabels for displaying and tracking the user's score and remaining turns. The fifth UIView is the Portrait Game Holder view, which is responsible for defining the region where the view from the CoinsController is placed. The view from the CoinsController has several subviews, which make up the interactive part of the game. You will be looking at those views in more detail later, but for now, understand that those views are added to the scene in exactly the same way as the rest of the views.

Another thing to notice about Figure 4-2 is that not all of the views are placed in the same position relative to their parent. For example, the Portrait Play view is placed at the upper left of the GameController view, while the Portrait Game Holder view is placed about halfway down its parent, the Portrait Play view. The property frame of the subview dictates where it is placed relative to its parent. Figure 4-3 shows this in more detail.

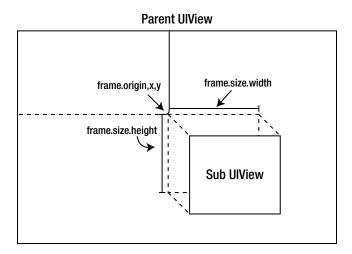


Figure 4-3. The frame of a UIView

As shown in Figure 4-3, the frame of a UIView describes not only the location of a subview, but also the size of the view. Generally speaking, the frame is said to describe the region of a subview. The property frame is a struct of type CGRect and is composed of two other structs, origin and size. The field origin is of type CGPoint and describes the location of the upper-left corner of the subview in terms of points. The field size is of type CGSize and describes the number of points the subview is wide and high.

# **Core Graphics Type Definitions**

Core Graphics defines a number of types, structs, and functions. These include the previously mentioned CGRect, CGpoint, and CGSize. Listing 4-1 shows the definitions of these three structs.

## Listing 4-1. CGGeometry.h (CGRect, CGPoint, and CGSize)

```
/* Points. */
struct CGPoint {
    CGFloat x;
    CGFloat y;
};
typedef struct CGPoint CGPoint;

/* Sizes. */
struct CGSize {
    CGFloat width;
    CGFloat height;

{
    CGPoint origin;
    CGSize size;
```

its parent. These structs are defined in the file CGGeometry.h, which is part of the Core Graphics framework, a standard part of any iOS project. Notice that x, y, width, and height values are defined as CGFloat. The unit for these values is points, not pixels. The difference is subtle at first, but the idea here is that the coordinates and sizes you are specifying with these values is meant to be resolution independent. Further discussion of points vs. pixels can be found in Appendix A.

**Tip** The letters CG in the names of structs such as CGRect refer to the Core Graphics framework. So a CGRect is referred to as a Core Graphics Rect when you want to be precise.

To create any of the base geometric types from Listing 4-1, an inline utility function is defined in CGGeometry.h, as seen in Listing 4-2.

#### Listing 4-2. CGGeometry.h (CGPointMake, CGSizeMake, and CGRectMake)

```
/*** Definitions of inline functions. ***/
CG_INLINE CGPoint
CGPointMake(CGFloat x, CGFloat y)
{
    CGPoint p; p.x = x; p.y = y; return p;
}
```

```
CG_INLINE CGSize
CGSizeMake(CGFloat width, CGFloat height)
{
   CGSize size; size.width = width; size.height = height; return size;
}

CG_INLINE CGRect
CGRectMake(CGFloat x, CGFloat y, CGFloat width, CGFloat height)
{
   CGRect rect;
   rect.origin.x = x; rect.origin.y = y;
   rect.size.width = width; rect.size.height = height;
   return rect;
}
```

Listing 4-2 shows the utility functions that can be used to create new geometry values. Only the definition is shown, because the declaration of these functions is trivial. The type CGFloat is defined simply as float. Presumably, this could be changed to support a different architecture. Also, CG\_INLINE is simply defined as static inline, indicating that the compiler may inject a compiled version into the calling code.

# **Using Core Graphics Types**

The types and functions defined by Core Graphics are pretty straightforward. Let's look at an example to illustrate their use. Listing 4-3 shows one UIView being added to another at a specific region.

Listing 4-3. Example of Adding a Subview and Specifying the Frame

```
UIView* parentView = [[UIView alloc] initWithFrame:CGRectMake(0, 0, 480, 320)];
UIView* subView = [UIView new];

CGRect frame = CGRectMake(200, 100, 30, 40);
[subView setFrame:frame];

[parentView addSubview:subView];
```

In Listing 4-3, we create two UIViews in two different ways. The UIView parentView is created in the more standard of the two ways, by calling alloc and then calling initWithFrame: and passing in a new CGRect to specify its location and size. Another perfectly valid way to create a UIView is by simply calling new and then setting the frame property, as we do for subView. The last thing done in this code snippet is to add subView to parentView by calling addSubview:. The result would be something like Figure 4-3 shown earlier.

Now that you understand the basics of the UIView subclasses and how they are nested and placed, you can take a look at a few basic animations. This will give you the understanding required to explore our simple game.

# **Understanding Animations**

There are two key components to creating an event-driven game. The first is creating animations, and the second is managing the game state. There are several ways to create animations in an iOS application. In the preceding chapter, we implemented animations to transition from view to view. In this section, we will review how that was done and show a similar example to flesh out your understanding. At the end of this chapter, you will take a look at yet a third technique that explores the backing classes used by the first two examples.

## The Static Animation Tasks of UIView

UIView has static tasks designed to simplify the creation of basic animations. These same

4-4 shows the canned animation that occurs when the user switches from



Figure 4-4. Flip animation

Starting at the upper left of Figure 4-4, the High Score view flips from left to right until it becomes just a sliver. The animation continues, revealing the Welcome view in a smooth, visually appealing transition. This is just one of the many built-in animations in iOS. Users have learned that this standard transition indicates a change in context. To understand how this animation was triggered, let's start by looking at the steps preformed in Chapter 3 to switch from the High Score view to the Welcome view. These steps are shown in Listing 4-4.

Listing 4-4. GameController.m (highscoreDoneClicked:)

```
- (IBAction)highscoreDoneClicked:(id)sender {
    [UIView beginAnimations:@"AnimationId" context:@"flipTransitionToBack"];
    [UIView setAnimationDuration:1.0];
    [UIView setAnimationTransition:UIViewAnimationTransitionFlipFromLeft
forView:self.view cache:YES];

    [highscoreController.view removeFromSuperview];
    [self.view addSubview: welcomeView];

    [UIView commitAnimations];
}
```

Listing 4-4 shows the task called when the user touches the Done button in the High Score view. The first line of this task calls the static task beginAnimations:context:. This task is sort of like starting a database transaction, in that it is creating an animation object, and any change that occurs to UIView instances before commitAnimations is called is part of this animation. The first NSString passed to beginAnimations:context: is an identifier for the backing animation object. The second NSString is similar to the first in that it is used to give additional context about when the animation was created. These two strings could be nil in this example, because we don't really care much about this animation after we define it. In the next example, we will take advantage of these strings to define code to be run when the animation is done.

After the call to beginAnimations:context:, the duration of the animation is defined by calling setAnimationDuration:. The value passed in is the number of seconds the animation should run. The call to setAnimationTransition:forView:cache: indicates that we want to use one of the canned animations that comes with iOS. The animation we have selected is UIViewAnimationFlipFromLeftForView. Because this is a transition animation, we specify the view self.view, which is the super view whose content is changing.

After the animation is set up, the next thing we do (as shown in Listing 4-4) is make the changes to our scene that we want animated. Because this task is responsible for switching the displayed view from the High Score view to the Welcome view, we simply remove the view highscoreController. view from its super view (self.vew) and add the welcomeView to self.view. Finally, we commit the animation, causing it to be displayed to the user.

We can use these static tasks of UIView to create other animations, not just the ones provided by iOS. Let's update the transition from the Welcome screen to the High Score screen so one fades into the other, as seen in Figure 4-5.



Figure 4-5. Fade transition animation

In this fade transition, the Welcome view is replaced with the High Score view. This is accomplished by changing the opacity of each view over a period of time. During this animation, both views are part of the scene. At the end, we want to remove the Welcome view, to stay consistent with how we are managing views in the game. The code that creates this transition is shown in Listing 4-5.

#### Listing 4-5. GameController.m (highScoresClicked:)

```
- (IBAction)highScoresClicked:(id)sender {
    //Make high score view 100% clear and add it on top of the welcome view.
    [highscoreController.view setAlpha:0.0];
    [self.view addSubview:highscoreController.view];

    //set up animation
    [UIView beginAnimations:nil context:@"fadeInHighScoreView"];
    [UIView setAnimationDuration:1.0];
    [UIView setAnimationDelegate:self];
    [UIView setAnimationDidStopSelector:@selector(animationDidStop:finished:context:)];
```

```
//make changes
[welcomeView setAlpha:0.0];
[highscoreController.view setAlpha:1.0];

[UIView commitAnimations];
}
```

The task shown in Listing 4-5 is called when the user touches the Highscores button in the Home view. To create the fade effect, we utilize the static animation task from the class UIView, but first we have to set up a few things. We start by setting the alpha property of the view associated with the highscoreController to 0.0, or completely translucent. We then add the High Score view to the root view. This places it onto the already present welcomeView, but because it is clear, we see only the Welcome screen.

The animation is set up by calling the task beginAnimations:context:, and the duration is set with the task setAnimationDuration:. The next step is to set a delegate for the animation that is being created. We also want to set which task should be called when the animation is complete by calling setAnimationDidStopSelector:. After the animation is set up, we simply set the alpha property of welcomeView to 0.0 and set the High Score view's alpha to 1.0. This indicates that at the end of the animation, we want the Welcome view to be transparent and the High Score view to be fully opaque. We then indicate that we have set our finished state by calling commitAnimations.

We set self to be the delegate for the animation and set up the task animationDidStop:finished: context: to be called when we want the animation to be over. We did this so we could do a little cleanup at the end of the animation and ensure that our application is in the correct state. Listing 4-6 shows the implementation of this callback method.

#### Listing 4-6. GameController.m (animationDidStop:finished:context:)

```
- (void)animationDidStop:(NSString *)animationID finished:(NSNumber *)finished
context:(void *)context{
   if ([@"fadeInHighScoreView" isEqual:context]){
        [welcomeView removeFromSuperview];
        [welcomeView setAlpha:1.0];
   }
}
```

The task in Listing 4-6 is called at the end of the fade animation. In this task, we want to remove welcomeView from the scene and reset its alpha to 1.0. We remove it, because that is the expected state for the other transitions. Setting the alpha back to 1.0 ensures that welcomeView is visible when it is added back into the scene.

You have seen how a view is added to a super view by using the property frame. You have also learned how to create animations that affect the properties of a UIView by exploring the fade transition. We are going to combine these concepts to show you how to animate the coins within the game, but first you have to take look at how we set up the related classes so that this all makes sense.

# **Building the Game Coin Sorter**

Thus far we have looked at some of the finer points of getting content onto the screen. In previous chapters, we explored the role of the controller classes and how they manage the relationship between data and the view. The last step in creating the game Coin Sorter is combining these concepts. This section will walk through the life cycle of the CoinController class, touching on the basic concepts we have explored. Figure 4-6 shows just the area of the screen controlled by the class CoinController.

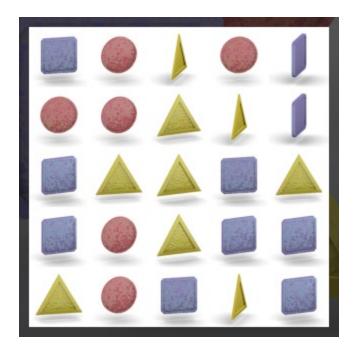


Figure 4-6. CoinController's view

In this five-by-five grid of coins, the user can select two coins to trade places. The goal is to create rows or columns of like coins to create a matching set. When a match is created, the coins are animated on the screen, and the user's score is increased. The user has 10 turns to make as many matches as possible. Figure 4-7 shows the life cycle of the game.

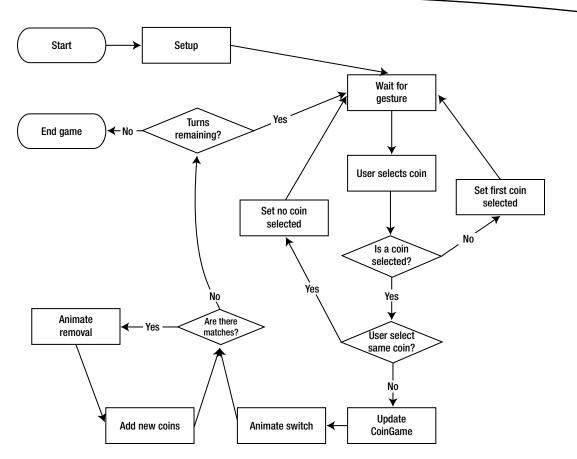


Figure 4-7. Coin Sorter life cycle

Figure 4-7 shows the flow of the application for a single game. After setup, the application waits for the user to select a coin. If a first coin is not selected, the application simply keeps track that the coin was selected and goes back to waiting for the user. When the user selects a coin a second time, the application checks whether the coin just selected is the same coin as the first one selected. If so, the application unselects the coin. This allows the user to change his mind. If the user selects a different coin, the game state updates by modifying the CoinGame object, and animations are created, showing the two coins trading places. When the coin-swapping animation is done, the application checks whether any matches exist. If so, it animates their removal and updates CoinGame with new coins to replace those just removed. Because adding new coins could create additional matches, the application checks again for matches. This process could theoretically go on forever, but in practice it does not. Eventually, there will be no matches to remove.

When there are no matches, the application checks whether the user has any turns remaining. If the user does, it goes back to waiting for the user's input. If the user does not, the game is over.

## **Implementing Game State**

The logic presented in Figure 4-7 is implemented in the class CoinsController. To help you understand how the class CoinsController creates the Coin Sorter game, let's take a look at the header file. There you can get an overview of the class, shown in Listing 4-7.

<NSObject>

```
#import <UIKit/UIKit.h>
#import "CoinsGame.h"

@class CoinsController;
```

```
CoinsGame* coinsGame;
   UIView* coinsView;
   NSMutableArray* imageSequences;
    BOOL isFirstCoinSelected;
   Coord firstSelectedCoin;
   Coord secondSelectedCoin;
    BOOL acceptingInput;
   UIImageView* coinViewA;
   UIImageView* coinViewB;
    NSMutableArray* matchingRows;
   NSMutableArray* matchingCols;
    IBOutlet id < CoinsControllerDelegate > delegate;
@property (nonatomic, retain) CoinsGame* coinsGame;
@property (nonatomic, retain) id<CoinsControllerDelegate>delegate;
+(NSArray*)fillImageArray:(int)coin;
-(void)loadImages;
-(void)newGame;
-(void)continueGame:(CoinsGame*)aCoinsGame;
-(void)createAndLayoutImages;
-(void)tapGesture:(UIGestureRecognizer *)gestureRecognizer;
-(Coord)coordFromLocation:(CGPoint) location;
-(void)doSwitch:(Coord)coordA With:(Coord)coordB;
```

```
-(void)checkMatches;
-(void)updateCoinViews;
-(void)spinCoinAt:(Coord)coord;
-(void)stopCoinAt:(Coord)coord;
-(void)doEndGame;
@end
```

This header file for the class CoinsController describes the class as well as the delegate protocol CoinsControllerDelegate, discussed in Chapter 3. The field CoinsGame is used to store the state of the game. This object can be archived to save the game state or it can be passed to an instance of CoinsController to resume a game. The UIView coinsView is the white play area. The BOOL isFirstCoinSelected is used to keep track of whether the user has already selected a coin. The two Coord structs record which coins are selected. We will take a look at the Coord struct shortly. The BOOL acceptingInput is used to block user input when animations are happening.

The two UIImageView fields, coinViewA and coinViewB, along with the NSMutableArray variables matchingRows and matchingCols are used during animations to keep track of what is being animated. The last field is the delegate for this class and must implement the protocol CoinsControllerDelegate.

## **Initialization and Setup**

The life of a CoinController object starts when the task viewDidLoad is called. This is called automatically because we have an instance of CoinController in our XIB files. Listing 4-8 shows this task.

#### Listing 4-8. CoinController.m (viewDidLoad)

```
- (void)viewDidLoad
{
    [super viewDidLoad];
    [self.view setBackgroundColor:[UIColor clearColor]];

    CGRect viewFrame = [self.view frame];

    //border is 3.125%
    float border = viewFrame.size.width*.03125;
    float coinsViewWidth = viewFrame.size.width-border*2;
    CGRect coinsFrame = CGRectMake(border, border, coinsViewWidth, coinsViewWidth);

    coinsView = [[UIView alloc] initWithFrame: coinsFrame];
    [coinsView setBackgroundColor:[UIColor whiteColor]];
    [coinsView setClipsToBounds:YES];

    [self.view addSubview:coinsView];
```

```
UITapGestureRecognizer* tapRecognizer = [[UITapGestureRecognizer alloc]
initWithTarget:self action:@selector(tapGesture:)];
  [tapRecognizer setNumberOfTapsRequired:1];
  [tapRecognizer setNumberOfTouchesRequired:1];
  [coinsView addGestureRecognizer:tapRecognizer];
}
```

In the viewDidLoad task, we have several small items to attend to. First, we call the super implementation of viewDidLoad. This is not strictly necessary but is just good practice. If we ever wanted to change the super class of CoinsController, we might spend a lot of time figuring out why things are not initializing correctly.

viewDidLoad is to set up some UIView instances to do what we want. 4-6, we see that there is a partially transparent border around the white area

UIView called coinsView, which is the parent view for the views that coinsView based on the frame of the parent view. On the coinsViewWidth turns out to be 300 points; on the iPad, coinsViewWidth is coinsView to white, we set the property clipToBounds

viewDidLoad is to register a gesture recognizer to the coinsView. In this case, we want to know anytime the user taps on the coinsView, so we use a UITapGestureRecognizer called tapRecognizer. When tapRecognizer is initialized, we set self as the target and specify the task tapGesture: as the task to be called when tapRecognizer detects the tap gesture. By setting the number of required taps and the number of required touches, we make sure we pick up the correct gestures that the user makes. Adding tapRecognizer to coinsView finishes setting up our gesture recognizer. More information about how gestures work on iOS can be found in Chapter 8.

## **Starting a New Game**

After viewDidLoad is called, the CoinsController will be used either to play a new game or to continue an old game. Let's take a look at the task newGame first, as shown in Listing 4-9.

#### Listing 4-9. CoinsController.m (newGame)

```
-(void)newGame{
   for (UIView* view in [coinsView subviews]){
      [view removeFromSuperview];
   }
   [coinsGame release];
   coinsGame = [[CoinsGame alloc] initRandomWithRows:5 Cols:5];
```

```
[self createAndLayoutImages];
[delegate gameDidStart:self with: coinsGame];
acceptingInput = YES;
}
```

The task newGame is called when the New Game button is clicked on the Welcome screen. The first thing to do is remove the old subviews from coinsView. (There may not be any subviews to remove if the user just launched the application.) The object coinsGame is released before being set to a new instance prepopulated with random coin values. The next step is to call createAndLayoutImages, which will place the coins on the screen. This task is called by both continueGame: and newGame, so we will look at it after looking at continueGame:. The last thing to do is inform any delegate that a new game has started and set acceptingInput to YES.

## **Continuing a Game**

If a game was in progress when a user last quit, that user may wish to continue the game from where it left off. This is done by clicking the Continue button in the Welcome view. When that button is pressed, the task continueGame is called, which is pretty similar to newGame. Listing 4-10 shows continueGame:.

#### Listing 4-10. CoinsController.m (continueGame:)

```
-(void)continueGame:(CoinsGame*)aCoinsGame{
    for (UIView* view in [coinsView subviews]){
        [view removeFromSuperview];
    }

    [coinsGame release];
    coinsGame = aCoinsGame;

    [self createAndLayoutImages];
    [delegate gameDidStart:self with: coinsGame];
    acceptingInput = YES;
}
```

The task continueGame: takes a CoinsGame object as an argument called aCoinsGame. After clearing away the old subviews of coinsView, we set coinsGame to the passed-in aCoinsGame object. A call to createAndLayoutImages is made, to add the coins to the scene. We call the delegate task gameDidStart:coinsGame: so the delegate has a chance to update the UILabel objects that track the current score and remaining turn. Finally, we set acceptingInput to YES.

## **Initializing the UIViews for Each Coin**

As mentioned, the task createAndLayoutImages is called by both newGame and continueGame:. This task is responsible for the initial setup of the game, primarily creating a UIImageView for each coin in the game. This task is shown in Listing 4-11.

#### Listing 4-11. CoinsController.m (createAndLayoutImages)

```
-(void)createAndLayoutImages{
    int rowCount = [coinsGame rowCount];
    int colCount = [coinsGame colCount];

    CGRect coinsFrame = [coinsView frame];
    float width = coinsFrame.size.width/colCount;
    float height = coinsFrame.size.height/rowCount;

for (int r=0;r<rowCount;r++){
        for (int c=0;c<colCount;c++){

            UIImageView* imageView = [[UIImageView alloc] init];
            CGRect frame = NnCGRectMake(c*width, r*height, width, height);
            [imageView setFrame:frame];

            [coinsView addSubview: imageView];
            [self spinCoinAt:CoordMake(r, c)];
        }
}</pre>
```

frame of coinsView is stored in the variable coinsFrame for easy reference, and width and height of each coin view is calculated. The two for loops create an imageView, set its frame, and add it to coinsView for each row and column. In the nested loops, spinCoinAt: is called, which creates the spinning coin effect. Note that the argument being passed to spinCoinAt: is the result of the function CoordMake. We will take a look at this function and the class CoinsGame after looking at spinCoinAt:, shown in Listing 4-12.

#### Listing 4-12. CoinsController.m (spinCoinAt:)

```
-(void)spinCoinAt:(Coord)coord{
    UIImageView* coinView = [[coinsView subviews] objectAtIndex:[coinsGame indexForCoord:coord]];

    NSNumber* coin = [coinsGame coinForCoord:coord];
    NSArray* images = [imageSequences objectAtIndex:[coin intValue]];
    [coinView setAnimationImages: images];
    NSTimeInterval interval = (random()%4)/10.0+.6;
    [coinView setAnimationDuration: interval];
    [coinView startAnimating];
}
```

You can see that spinCoinAt: takes an argument of type Coord. This is defined in CoinsGame.h and is a struct that represents a coin at a particular row and column. In the first line of this task, the struct Coord is used to find the index of the UIView that represents this particular coin. This works because there is exactly one UIImageView for each coin. (This was set up in Listing 4-11.) After the correct UIImageView is found, we get the value of the coin from the coinsGame object. The NSNumber coin represents the type of coin for this particular set of coordinates—either a triangle, square, or circle. Using the intValue of the coin, we pull out an NSArray from imageSequences called images.

The NSArray image stores all of the images that make up the spinning coin animation. By calling setAnimationImages: on the UIImageView coinView, we indicate that we want this UIIMageView to cycle though each UIIMage in images to produce the animation effect. Setting the animation duration to a random value and calling startAnimating creates the spinning effect. At this point in the setup, the application will look very much like Figure 4-6 shown earlier. We are ready to start accepting user input. Before we look at that, we should take a closer look at the class CoinsGame so you can understand how we are representing these 25 coins and their types.

### The Model

You have now looked at the setup code, which used UIViews and UIImageViews to create a scene on the screen that represents the game. You know that the game is composed of 25 coins in a five-by-five grid. Now we should take a look at the class that is responsible for managing this data, so let's look at CoinsGame.h, shown Listing 4-13.

#### Listing 4-13. CoinsGame.h

```
#import <Foundation/Foundation.h>
#define COIN TRIANGLE O
#define COIN SQUARE 1
#define COIN CIRCLE 2
struct Coord {
    int row;
    int col;
typedef struct Coord Coord;
CG INLINE Coord
CoordMake(int r, int c)
{
    Coord coord;
    coord.row = r;
    coord.col = c;
    return coord;
}
CG INLINE BOOL
CoordEqual(Coord a, Coord b)
{
    return a.col == b.col && a.row == b.row;
}
@interface CoinsGame : NSObject<NSCoding>{
    NSMutableArray* coins;
    int remaingTurns;
    int score;
    int colCount;
    int rowCount;
}
```

```
@property (nonatomic, retain) NSMutableArray* coins;
@property (nonatomic) int remaingTurns;
@property (nonatomic) int score;
@property (nonatomic) int colCount;
@property (nonatomic) int rowCount;
-(id)initRandomWithRows:(int)rows Cols:(int)cols;
-(NSNumber*)coinForCoord:(Coord)coord;
-(int)indexForCoord:(Coord)coord;
-(void)swap:(Coord)coordA With:(Coord)coordB;
-(NSMutableArray*)findMatchingRows;
```

CoinsGame. At the very top of the class, we define
COIN\_TRIANGLE, COIN\_SQUARE, and COIN\_CIRCLE. These values represent the three
Coord that is used to store a
Coord was used earlier in Listing 4-12 to identify a specific coin.
Coord. The first, called CoordMake, is used to create
Coord with the corresponding row and column values. The second, called CoordEqual, is used to
Coords are referring to the same coin.

The interface declaration for the class CoinsGame, shown in Listing 4-13, conforms to the protocol NSCoding, so we know we can archive and unarchive instances of this class. We also see that an NSMutableArray called coins is defined. The coins object is used to store the NSNumber values that represent the coins at each coordinate. In addition, ints are used to keep track of the number of remaining turns, the score, and the number of rows and columns used in this game.

There are various tasks defined for the class CoinsGame, and hopefully some of these make sense already. We know we will need a way to swap two coins, so the use of the swap:With: task should make sense. There are also two tasks, findMatchingRows and findMatchingCols, which are used to determine whether any matches exist. The tasks randomizeRows and randomizeCols are used to set new coin values after a match has been found. Notice that findMatchingRows returns an NSMutableArray and that randomizeRows takes an NSMutableArray. The idea here is that after a match is found and the animations are all done, we can use the same NSMutableArray that represented the match to indicate which coins should be randomized.

Listing 4-13 also has two tasks that take a Coord as an argument. The first one, coinForCoord:, takes a Coord and returns NSNumber, indicating the coin type for that coordinate. The second task, indexForCoord, is used to translate a Coord into int suitable as an index into an array. This task is used to find the coin NSNumber in coinForCoord, and it is also used by CoinsController to find the correct UIImageView for a coin.

Let's take a look at the implementation of some of the tasks, because they will be called by CoinsController at different points. We'll start with initRandomWithRow:Col:, shown in Listing 4-14.

#### Listing 4-14. CoinsGame.m (initRandomWithRows:Cols:)

```
-(id)initRandomWithR.ows:(int)rows Cols:(int)cols{
    self = [super init];
    if (self != nil){
        coins = [NSMutableArray new];
        colCount = cols;
        rowCount = rows;
        int numberOfCoins = colCount*rowCount;
        for (int i=0;i<numberOfCoins;i++){</pre>
            int result = arc4random()%3;
            [coins addObject:[NSNumber numberWithInt:result]];
        }
        //Ensure we don't start with any matching rows and cols.
        NSMutableArray* matchingRows = [self findMatchingRows];
        NSMutableArray* matchingCols = [self findMatchingCols];
        while ([matchingCols count] > 0 || [matchingRows count] > 0){
            [self randomizeRows: matchingRows];
            [self randomizeCols: matchingCols];
            matchingRows = [self findMatchingRows];
            matchingCols = [self findMatchingCols];
        }
        remaingTurns = 10;
        score = 0;
    }
   return self;
}
```

In Listing 4-14, we see the initializer task used to create a new CoinsGame object with randomized coins. After creating a new NSMutableArray and setting it to the variable coins and populate it with the total number of coins we will have in the game. The value of the result will be 0, 1, or 2. After we set up the first set of random values, we have to make sure we don't start the game with any matches. This is done by first finding any matched by calling findMatchingRows and findMatchingCols and seeing whether they contain anything. If they do, we randomize those matches until no more matches are found. Finally, we set the number of remaining turns to 10 and make sure the score starts out at 0. Continuing our exploration of the class CoinsGame, let's look at coinForCoord:, shown in Listing 4-15.

#### Listing 4-15. CoinsGame.m (coinForCoord:)

```
-(NSNumber*)coinForCoord:(Coord)coord{
  int index = [self indexForCoord:coord];
  return [coins objectAtIndex:index];
}
```

}

The task coinForCoord: takes a Coord and returns the type of coin at that location. Finding the NSNumber object at the given index in the NSMutableArray coins does this. The index is determined by calling indexForCoord:, shown in Listing 4-16.

#### Listing 4-16. CoinsGame.m (indexForCoord:)

```
-(int)indexForCoord:(Coord)coord{
    return coord.row*colCount + coord.col;
}
```

The task indexForCoord: takes a Coord struct. This simple task multiplies the number of columns in the game by the row value of coord and adds the col value.

CoinsGame.m that should be explored to help you understand what is doing during different parts of its life cycle. Let's continue by looking at the task, shown in Listing 4-17.

#### CoinsGame.m (swap:With:)

```
int indexA = [self indexForCoord:coordA];
int indexB = [self indexForCoord:coordB];

NSNumber* coinA = [coins objectAtIndex:indexA];
NSNumber* coinB = [coins objectAtIndex:indexB];

[coins replaceObjectAtIndex:indexA withObject:coinB];
[coins replaceObjectAtIndex:indexB withObject:coinA];
```

The task swap:With: takes two Coords, coordA and coordB. This task switches the type of coins at these two coordinates by finding the index of each coordinate, the current value of that index in coins, and switching them. We know that after coins are swapped, CoinsController will have to look for any matches. This is done with the tasks findMatchingRows and findMatchingCols. Listing 4-18 shows findMatchingRows.

#### Listing 4-18. CoinsGame.m (findMatchingRows)

```
-(NSMutableArray*)findMatchingRows{
    NSMutableArray* matchingRows = [NSMutableArray new];

for (int r=0;r<rowCount;r++){
    NSNumber* coin0 = [self coinForCoord:CoordMake(r, 0)];
    BOOL mismatch = false;

for (int c=1;c<colCount;c++){
    NSNumber* coinN = [self coinForCoord:CoordMake(r,c)];
    if (![coin0 isEqual:coinN]){</pre>
```

The task findMatchingRows creates a new NSMutableArray called matchingRows to store any results. Matching rows are found by looking at each row in turn and inspecting the coin at each column. This is done by storing the coin at column 0 as the variable coin0 and then by comparing coin0 to each coin in the other columns. If a coin is found that does not match coin0, we know that there is no match, and mismatch is set to true. If no mismatches are found, we add the value r to the NSMutableArray matchingRows, which is the result of this task. The implementation for findMatchingCols is trivially different and is omitted for brevity.

We also know that after matching rows are found, CoinsController will have to randomize any matches to prepare for the next turn the user takes. This is done with the tasks randomizeRows: and randomizeCols:. The task randomizeRows: is shown in Listing 4-19.

#### Listing 4-19. CoinsGame.m (randomizeRows:)

The task randomizeRows takes an NSMutableArray filled with NSNumbers. Each NSNumber is a row. By iterating over each row, we set a new random value for every coin in that row. The implementation of randomzeCols: is similar; we simply randomize each coin for the columns passed in.

Now that you have an understanding of the class CoinsGame, you can take a further look at CoinsController and see how this class used the data stored in CoinsGame to interpret user input, manage the views representing the coins, and create animations based on game state.

## **Interpreting User Input**

When the user touches one of the coins, we want to mark it as selected. Looking back at Listing 4-8, we know that a UITapGestureRecognizer was created and added to the UIView coinsView. This UITapGestureRecognizer calls the task tapGesture: whenever it registers a tap gesture. Let's look at the first part of tapGesture: in Listing 4-20.

#### Listing 4-20. CoinsController.m (tapGesture:, partial)

```
- (void)tapGesture:(UIGestureRecognizer *)gestureRecognizer{

if ([coinsGame remaingTurns]>0 && acceptingInput){
    UITapGestureRecognizer* tapRegognizer = (UITapGestureRecognizer*)gestureRecognizer;
    CGPoint location = [tapRegognizer locationInView:coinsView];
    Coord coinCoord = [self coordFromLocation:location];

if (!isFirstCoinSelected){//first of the pair
    isFirstCoinSelected = true;
    firstSelectedCoin = coinCoord;
    [self stopCoinAt: firstSelectedCoin];
} else {
    ///shown in Listing 4-24
}
```

UIGestureRecognizer that triggered this event as an argument. We will

acceptingInput false during animations in order to prevent the user from selecting coins midtransition, gestureRecognizer to

UITapGestureRecognizer called tapRecognizer, we get the location of the tap by calling and passing in coinsView. The location of the tap is returned as a CGPoint called location. In order to know which coin was tapped, we convert location to Coord by calling coordFromLocation, shown in Listing 4-21.

#### Listing 4-21. CoinsController.m (coordFromLocation:)

```
-(Coord)coordFromLocation:(CGPoint) location{
    CGRect coinsFrame = [coinsView frame];
    Coord result;
    result.col = location.x / coinsFrame.size.width * [coinsGame colCount];
    result.row = location.y / coinsFrame.size.height * [coinsGame rowCount];
    return result;
}
```

The task coordFromLocation: takes a CGpoint and converts it into a Coord that will tell us which coin the user tapped. To find the coin, the x value of the location is divided by the width of the coinsView and then multiplied by the number of columns. The row is calculated in a similar way.

In Listing 4-20, after we determine which coin was tapped and store the result as the variable coinCoord, we check whether the coin was previously selected. If not, we set isFirstCoinSelected to true, record which coin was selected, and call stopCoinAt:, shown in Listing 4-22.

#### Listing 4-22. CoinsController.m (stopCoinAt:)

```
-(void)stopCoinAt:(Coord)coord{
    UIImageView* coinView = [[coinsView subviews] objectAtIndex:[coinsGame indexForCoord:coord]];
    NSNumber* coin = [coinsGame coinForCoord:coord];

UIImage* image = imageForCoin([coin intValue]);
    [coinView stopAnimating];
    [coinView setImage: image];
}
```

The task stopCoinAt: takes the coordinate of the coin to stop spinning. This is done by first finding the appropriate UIImageView representing the coin to be stopped, called coinView. We stop the spinning animation by calling stopAnimation:, but we don't want to just stop it, we want to display the face of the coin. We can find the correct image to use by first calling coinForCoord in coinsGame to figure out the type of coin it is and then calling imageForCoin to return the UIImage we want to use. We simply call setImage on coinView and pass in the UIImage named image. The function imageForCoin simply returns a UIImage based on the int that is passed in, as shown in Listing 4-23.

#### Listing 4-23. CoinsController.m (imageForCoin(int))

```
UIImage* imageForCoin(int coin){
   if (coin == COIN_TRIANGLE){
      return [UIImage imageNamed:@"coin_triangle0001"];
   } else if (coin == COIN_SQUARE){
      return [UIImage imageNamed:@"coin_square0001"];
   } else if (coin == COIN_CIRCLE){
      return [UIImage imageNamed:@"coin_circle0001"];
   }
   return nil;
}
```

In Listing 4-24, we see the code that is executed when a coin was previously selected.

#### Listing 4-24. CoinsController.m (tapGesture:, continued)

If the user selects the same coin, we simply set that coin spinning again and set isFirstCoinSelected to false. However, if the user selects a different coin, it is time to switch the coins. The first thing we do is set acceptingInput to false, so the user doesn't interrupt us as the animations are happening. We also want to decrement the number of remaining turns and inform the delegate that this has happened. We set isFirstCoinSelected to false, because the next time this method is called, there should be no coin selected. After recording the coordinate of the second coin in the variable secondSelectedCoin, we stop the selected coin and call doSwitch:With:, passing in the first and second selected coins. The task doSwitch is shown in in Listing 4-25 in the following section and is responsible for creating the animations of the coins trading places.

This brings us to a discussion of how animations are created without using the static UIView tasks described earlier

UIView that helped create animations. These tasks

UIView tasks.

4-8 shows the animation of the coins trading places.

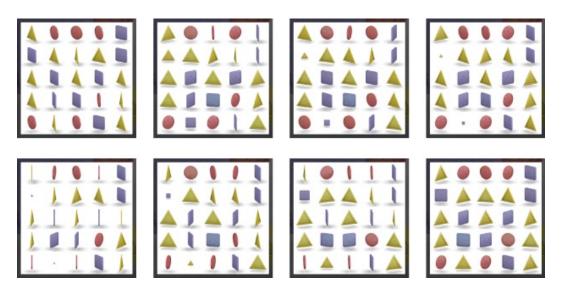


Figure 4-8. Coins switching locations

The coin in the first column and second row (a square) is being switched with the coin in the second column and the last row (a triangle). Each coin shrinks until it is too small to see. Then the type of coin switches before growing back to normal size. This is implemented in the task doSwitch:With:, shown in Listing 4-25.

#### Listing 4-25. CoinsController.m (doSwitch:With:)

```
-(void)doSwitch:(Coord)coordA With:(Coord)coordB {
    [coinsGame swap:coordA With:coordB];
    coinViewA = [[coinsView subviews] objectAtIndex:[coinsGame indexForCoord:coordA]];
    coinViewB = [[coinsView subviews] objectAtIndex:[coinsGame indexForCoord:coordB]];
   for (UIView* coinView in [NSArray arrayWithObjects:coinViewA, coinViewB, nil]){
       CABasicAnimation* animScaleDown = [CABasicAnimation animationWithKeyPath:@"transform.
scale"];
        [animScaleDown setValue:@"animScaleDown" forKey:@"name"];
        animScaleDown.fromValue = [NSNumber numberWithFloat:1.0f];
        animScaleDown.toValue = [NSNumber numberWithFloat:0.0f];
        animScaleDown.duration = 1.0;
        animScaleDown.timingFunction = [CAMediaTimingFunction
functionWithName:kCAMediaTimingFunctionEaseIn];
       CABasicAnimation* animScaleUp = [CABasicAnimation animationWithKeyPath:@"transform.scale"];
        [animScaleUp setValue:@"animScaleUp" forKey:@"name"];
        animScaleUp.fromValue = [NSNumber numberWithFloat:0.0f];
        animScaleUp.toValue = [NSNumber numberWithFloat:1.0f];
        animScaleUp.duration = 1.0;
        animScaleUp.beginTime = CACurrentMediaTime() + 1.0;
        animScaleUp.timingFunction = [CAMediaTimingFunction
functionWithName:kCAMediaTimingFunctionEaseOut];
        if (coinViewA == coinView){
            [animScaleDown setDelegate:self];
            [animScaleUp setDelegate:self];
        }
        [coinView.layer addAnimation:animScaleDown forKey:@"animScaleDown"];
        [coinView.layer addAnimation:animScaleUp forKey:@"animScaleUp"];
   }
}
```

The task doSwitch:With: is responsible for updating the model and creating the animations. To update the model, we simply call swap:With: on coinsGame. To create the animations, we have to work with a class called CABasicAnimation. A CABasicAnimation object describes a change in a CALayer. A CALayer is an object that represents the visual content of a UIView.

Up until this point, we have said that a UIView provides the content on the screen, and that is still true, but a UIView uses the Core Animation layer to implement how it is drawn. As such, each UIView has a layer property of type CALayer. You need to understand this in order to understand how CABasicAnimation works. Looking at Listing 4-25, you can see that a CABasicAnimation is created by specifying a path. In our case, the path is transform.scale. This is a path into the CALayer object associated with the UIView we wish to animate.

For each UIView, coinViewA and coinViewB, we will be creating two CABasicAnimation objects. When we create the CABasicAnimation object animScaleDown, we specify that this CABasicAnimation will be manipulating the value of scale on the property transform. We specify the starting value of the scale by setting the fromValue of animScaleDown, and we specify the ending value by setting the toValue. The value duration indicates how many seconds we want this animation to take. By specifying the timingFunction, we control the rate at which this animation will take place. In this case, we indicate kCAMediaTimingFunctionEaseIn, which tells the CABasicAnimation to start out slow and then speed up.

The CABasicAnimation animScaleUp is similar to animScaleDown. The big difference is that the fromValue and toValue are opposite. We also set the value for beginTime to 1 second in the future. The idea here is that we want the animation animScaleDown to run for a second, making the coin get small enough to vanish, and then we want the animation animScaleUp to run when animScaleDown is done, scaling the coin back up. The trick will be to swap the images used by the delegate to

animScaleDown, if we are working with coinViewA, because we need to be notified self as

delegate to animScaleUp. The animations that have had their delegates set will call the task when they are done, as shown in Listing 4-26.

#### CoinsController (animationDidStop:finished:)

```
- (void)animationDidStop:(CAAnimation *)theAnimation finished:(BOOL)flag{
    if ([[theAnimation valueForKey:@"name"] isEqual:@"animScaleDown"]){

        UIImage* imageA = [coinViewA image];
        [coinViewA setImage:[coinViewB image]];
        [coinViewB setImage:imageA];

    } else if ([[theAnimation valueForKey:@"name"] isEqual:@"animScaleUp"]){
        [self checkMatches];
        [self spinCoinAt:firstSelectedCoin];
        [self spinCoinAt:secondSelectedCoin];

    } else if ([[theAnimation valueForKey:@"name"] isEqual:@"animateOffScreen"]){
        [coinsGame randomizeRows: matchingRows];
        [coinsGame randomizeCols: matchingCols];
        [self updateCoinViews];
}
```

Here we can see the task animationDidStop:finished:. Notice that three animations call this task. The first two if statements are for handling the animations described in Listing 4-25. When the animScaleDown animation is done, we swap the UIImages used by UIImageViews to represent the two selected coins.

When the animation animScaleUp is done, we want to check whether there are any matches. Calling checkMatches does this. We also want to start the recently selected coins spinning again. The implementation of checkMatches is shown in Listing 4-27.

#### Listing 4-27. CoinsController.m (checkMatches)

```
-(void)checkMatches{
   matchingRows = [coinsGame findMatchingRows];
   matchingCols = [coinsGame findMatchingCols];
    int rowCount = [coinsGame rowCount];
    int colCount = [coinsGame colCount];
    BOOL isDelegateSet = NO;
    if ([matchingRows count] > 0){
        for (NSNumber* row in matchingRows){
            for (int c = 0;c<colCount;c++){</pre>
                CABasicAnimation* animateOffScreen = [CABasicAnimation
animationWithKeyPath:@"position.x"];
                [animateOffScreen setValue:@"animateOffScreen" forKey:@"name"];
                animateOffScreen.byValue = [NSNumber numberWithFloat:coinsView.frame.size.width];
                animateOffScreen.duration = 2.0;
                animateOffScreen.timingFunction = [CAMediaTimingFunction
functionWithName:kCAMediaTimingFunctionEaseIn];
                Coord coord = CoordMake([row intValue], c);
                int index = [coinsGame indexForCoord:coord];
                UIImageView* coinView = [[coinsView subviews] objectAtIndex: index];
                if (c == 0){
                    [animateOffScreen setDelegate:self];
                    isDelegateSet = YES;
                }
                [coinView.layer addAnimation:animateOffScreen forKey:@"animateOffScreenX"];
            }
        }
    }
    if ([matchingCols count] > 0){
        for (NSNumber* col in matchingCols){
            for (int r = 0; r < rowCount; r++)
                CABasicAnimation* animateOffScreen = [CABasicAnimation
animationWithKeyPath:@"position.y"];
                [animateOffScreen setValue:@"animateOffScreen" forKey:@"name"];
                animateOffScreen.byValue = [NSNumber numberWithFloat:coinsView.frame.size.height];
                animateOffScreen.duration = 2.0;
                animateOffScreen.timingFunction = [CAMediaTimingFunction
functionWithName:kCAMediaTimingFunctionEaseIn];
```

```
Coord coord = CoordMake(r, [col intValue]);
            int index = [coinsGame indexForCoord:coord];
            UIImageView* coinView = [[coinsView subviews] objectAtIndex: index];
            if (!isDelegateSet && r == 0){
                [animateOffScreen setDelegate:self];
            [coinView.layer addAnimation:animateOffScreen forKey:@"animateOffScreenY"];
        }
    }
}
int totalMatches = [matchingCols count] + [matchingRows count];
if (totalMatches > 0){
    [coinsGame setScore:[coinsGame score] + totalMatches];
    [delegate scoreIncreases:self with:[coinsGame score]];
} else {
    if ([coinsGame remaingTurns] <= 0){</pre>
        //delay calling gameOver on the delegate so the coin's
        [NSTimer scheduledTimerWithTimeInterval:1 target:self
    } else {
        //all matches are done animating and we have turns left.
        acceptingInput = YES;
    }
}
```

We find all matching rows and columns by calling findMatchingRows and findMatchinCols on coinsGame. After we have these arrays of matches, we want to animate all of the coins involved in a match of the screen. If there are matchingRows, we create a new CABasicAnimation for each coin that modifies the position value of x of the underlying CALayer object. Instead of setting the exact starting and ending values of x, we can simply specify the byValue, which we make the width of the coinsView. By specifying the byValue, we can use this animation for all coins in the row, because this animation will simply infer that the fromValue is the starting x value for each coin view, and the toValue with be fromValue+byValue.

After the animations for matching rows and columns are created, we check to see how many matches in total were created on this turn. If this value is bigger than zero, we update the score of the coinsGame object and inform the delegate that the score has changed. If no matches are found, we check whether the game is over. If it is over, we use the NSTimer class to call doEndGame in 1 second. This delay is for aesthetic reasons; it is nice to have a little pause before the high scores are shown. If it is not the end of the game, we simply start accepting input again. Listing 4-28 shows the task doEndGame, which simply informs the delegate that the game is over.

#### Listing 4-28. CoinsController.m (doEndGame)

```
-(void)doEndGame{
    [delegate gameOver:self with: coinsGame];
}
```

The animations created earlier in Listing 4-27 will call the task animationDidStop:finished: when they are done, in the same way the scaling animations did. We use this callback to randomize the matches and call updateCoinViews, shown in Listing 4-29.

#### Listing 4-29. CoinsController.m (updateCoinViews)

```
-(void)updateCoinViews{
    int rowCount = [coinsGame rowCount];
    int colCount = [coinsGame colCount];

    for (NSNumber* row in matchingRows){
        for (int c = 0;c<colCount;c++){
            Coord coord = CoordMake([row intValue], c);
            [self spinCoinAt:coord];
        }
    }
    for (NSNumber* col in matchingCols){
        for (int r = 0;r<rowCount;r++){
            Coord coord = CoordMake(r, [col intValue]);
            [self spinCoinAt:coord];
        }
    }
    [self checkMatches];
}</pre>
```

The task updateCoinView is called when the UIImageViews that represent the coins are fully offscreen. This task goes though each set of rows and columns from the previously matched sets and starts the coins spinning again in their original locations, but with images that match the new values. Finally, checkMatches is called again, to handle any cases of the new random values creating new matches.

# **Summary**

In this chapter, we explored how to create an input-driven game. This included understanding the management of a game state, the basics of user input, and the use of core animation to create animations. Game state is managed by creating a class to hold the data required to re-create the game in a display-agnostic way. To allow the user to interact with the game, basic gesture recognizers must be added to the correct views. A controller class interprets each user gesture in a game-specific context and produces animations that reflect a change in the game state.

# Quickly Build a Frame-by-Frame Game

We have already looked at a simple game where the action is solely driven by user input. In this chapter, we will be looking at games that animate continuously, regardless of whether the user provides input. Action games are typical examples of such games. We are not going to make a full game in this chapter, but will implement part of one. Figure 5-1 shows one of the scenes we will create.



Figure 5-1. A frame-by-frame space game

In Figure 5-1, we see a spaceship dodging some asteroids. You will learn how to animate the different items in the scene, move the ship based on user input, and detect the collisions between the ship and asteroids.

There are many different technologies that have been used over the years to create these types of games. These different technologies concern themselves with how content is drawn on the screen. An example is OpenGL, which provides low-level access to a display. The classes provided by UIKit (UIView and the like) are perfectly suited for these types of games as well. Regardless of which technology is used to update the screen, these types of games generally work in the same way, by creating the loop shown in Figure 5-2.




Figure 5-2. Typical frame-by-frame application loop

In Figure 5-2, we see that, after the application is set up, a loop is created that is responsible for processing user events, updating the game state, updating the scene on the screen, and, finally, checking if the game is over. When creating an application on iOS that functions this way, we don't have to explicitly create a loop—the application is already running a loop very similar to the one described in Figure 5-1. Let's take a closer look at how we set up an iOS application to accomplish frame-by-frame animations.

# **Setting Up Your First Frame-by-Frame Animation**

The sample code accompanying this chapter is a collection of three examples. Each example builds on the last to illustrate different concepts. When you run the sample code you will see a screen similar to Figure 5-3.

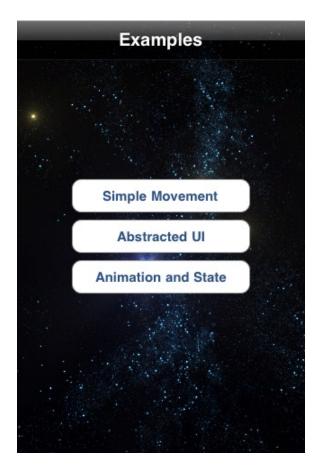


Figure 5-3. Examples menu

In Figure 5-3, we see the buttons for each of our three examples. Clicking each button will animate the screen and display the example. Let's start at the top with Simple Movement.

# **Simple Movement**

Simple Movement sets up the application to continuously update the position of a spaceship. The spaceship will move to any point the user taps, as shown in Figure 5-4.

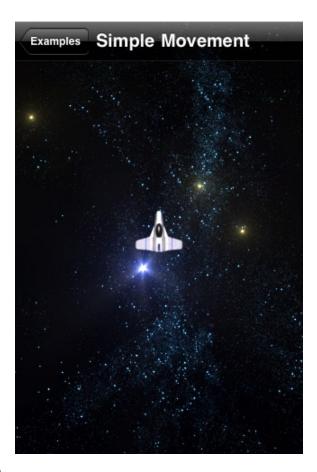


Figure 5-4. Simple Movement

In Figure 5-4, we see a spaceship from a top-down perspective with a star field in the background. When the user touches any point on the screen, the ship will animate to that point. This type of animation could easily be accomplished using the type of animations presented in the previous chapter, but this will not provide us with a good starting point. In terms of views, what you are seeing in Figure 5-4, ignoring the top navigation bar, is a UIView with two UIImageView subviews. One of the UIImageViews is the background star field and the other is the spaceship. The basic idea here is that we can periodically update the location of the UIImageView of the spaceship to create an animation. Like our other examples, the logic for managing the state of these different UIViews is located in a UIViewController subclass. For this example, the class is called ExampleO1Controller and its header files are shown in Listing 5-1.

Listing 5-1. Example 01 Controller.h

```
#import <UIKit/UIKit.h>
#import <QuartzCore/CADisplayLink.h>
#import "Viper01.h"
```

```
@interface Example01Controller : UIViewController {
         CADisplayLink* displayLink;
         Viper01* viper;
}
-(void)updateScene;
-(void)viewTapped:(UIGestureRecognizer*)aGestureRecognizer;
@end
```

We see in Listing 5-1 that the class extends UIViewController and has two fields. The first field is called displayLink and is of type CADisplayLink that is imported from the QuartzCore framework. The second field is called viper and is of type Viper01. It is used to represent the spaceship. There are also two tasks defined: the first is called updateScene and will be used to update the UIViews that make up the scene. The second is called viewTapped, and it is used to manage user input. Let's take a look at the Viper01 header file in Listing 5-2 and see how we are representing the spaceship.

#### Listing 5-2. Viper01.h

```
#import <Foundation/Foundation.h>
@interface ViperO1 : UIImageView {
}
@property float speed;
@property CGPoint moveToPoint;
-(void)updateLocation;
@end
```

In Listing 5-2, we see that Viper01 extends UIImageView and has two properties. The speed property describes how fast the viper will move, and the moveToPoint property keeps track of which point on the screen the spaceship is moving. The task updateLocation does the work of incrementally updating the location of the spaceship.

## **Implementing the Classes**

Now that we have seen the definitions of the classes we will be using in this example, let's take a look at the implementation, starting with the viewDidLoad task of ExampleO1Controller class shown in Listing 5-3.

#### Listing 5-3. Example01Controller.m (viewDidLoad)

```
- (void)viewDidLoad
{
    [super viewDidLoad];
    [self setTitle:@"Simple Movement"];

    UITapGestureRecognizer* tapRecognizer = [[UITapGestureRecognizer alloc]
initWithTarget:self action:@selector(viewTapped:)];
    [self.view addGestureRecognizer:tapRecognizer];
```

```
viper = [Viper01 new];

CGRect frame = [self.view frame];

viper.center = CGPointMake(frame.size.width/2.0, frame.size.height/2.0);
[self.view addSubview:viper];
[viper setMoveToPoint:viper.center];

displayLink = [CADisplayLink displayLinkWithTarget:self selector:@selector(updateScene)];
    [displayLink addToRunLoop:[NSRunLoop currentRunLoop] forMode:NSDefaultRunLoopMode];
}
```

In Listing 5-3, after setting the title, we create a UITapGestureRecognizer and add it to the root associated with this UIViewController. Adding the UITapGestureRecognizer to the UIView will viewTapped: to be called when the user taps the screen, giving us a chance to update

Viper01 and place it in the center of the root UIView. moveToPoint property of viper to the center of the screen, so the viper starts out

CADisplayLink and updateScene. Once we call addToRunLoop, updateScene will be called every time CADisplayLink and NSRunLoop and updateScene, as shown in Listing 5-4.

#### Listing 5-4. Example01Controller.m (updateScene)

```
-(void)updateScene{
    [viper updateLocation];
}
```

In Listing 5-4, in the task updateScene, we simply call updateLocation on the object viper. In future examples we will do more in the task updateScene, but for now let's just look at how we implement moving the one ship.

## **Moving the Spaceship**

Each time updateScene is called, we have to update the location of the spaceship. This is accomplished with a little geometry to figure out the new location of the ship for each frame of the animation. Let's just look at updateLocation and understand how that task moves the spaceship. See Listing 5-5.

#### Listing 5-5. Viper01.m (updateLocation)

```
-(void)updateLocation{
    CGPoint c = [self center];
```


```
float dx = (moveToPoint.x - c.x);
    float dy = (moveToPoint.y - c.y);
    float theta = atan(dy/dx);
    float dxf = cos(theta) * self.speed;
    float dyf = sin(theta) * self.speed;
    if (dx < 0){
        dxf * = -1:
        dyf * = -1;
    }
    c.x += dxf;
    c.y += dyf;
    if (abs(moveToPoint.x - c.x) < speed && abs(moveToPoint.y - c.y) < speed){</pre>
        c.x = moveToPoint.x;
        c.y = moveToPoint.y;
    }
    [self setCenter:c];
}
```

In Listing 5-5, we see the updateLocation task of the class Viper01. This task is responsible for moving the spaceship one frame's worth of movement toward the point moveToPoint. Because the class Viper01 extends UIImageView, we can move it by simply setting the standard properties used to specify its location relative to its parent. We could use the frame property, but there is a property called center that is a shorthand way of manipulating a UIView's frame.

We start calculating the spaceship's new center location by first getting a copy of its current center and storing that in the variable c. Next, we calculate the difference between the current location and the location we are moving to for both the X and Y axis, storing the values in dx and dy. After looking up the formula in our high school geometry books, we calculate the angle that describes the direction we are moving, by dividing dy by dx and passing the result to the atan (arc tangent) function, storing the result as theta.

We want to move the spaceship speed a number of points in the direction of theta. To calculate what that means in terms X and Y points, we have to do a little geometry. To calculate the number of X points we will be moving, we take the cosine of theta and multiply it by speed, storing the value in dxf. Similarly, to calculate the number of Y points we have to move in this frame, we take the sine of theta and multiple by speed, storing the result in dyf. To finalize these values, we check to see if dx is negative; if it is, we switch the signs of dxf and dyf.

Once dxf and dyf are calculated, we add those values to the x and y parts of the variable c. The last thing we are going to do is set the center property with the new value stored in c. However, if we are less than speed points from the moveToPoint, we will overshoot it. We don't want to overshoot the point because, come next frame, we will overshoot again in the opposite direction, causing the spaceship to jitter on the screen. To fix this, we simply set the X and Y values to be identical to moveToPoint's X and Y values if we are close to it. Figure 5-5 shows some of the geometry involved.

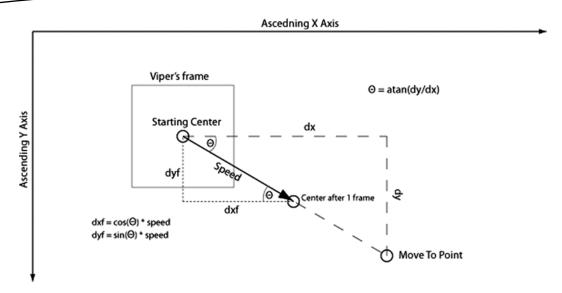

Geometric relations involved in the updateLocation task

5-5, we see the X and the Y axis with the origin on the upper left and the positive Y axis

theta is calculated based on the values of , dy, and the location of the move to point. The black arrow is of length speed and shows where dxf and dyf are calculated based on the angle.

## **Responding to a User Tap**

We now know we can make the ship move, one frame at a time. But we have not looked at how we tell the ship where to move. Recall that we registered a UITapGestureRecognizer on the root UIView of ExampleO1Controlller. This UITapGestureRecognizer is configured to call the task viewTapped:. This is shown in Listing 5-6.

#### Listing 5-6. Example01Controller.m (viewTapped:)

```
-(void)viewTapped:(UIGestureRecognizer*)aGestureRecognizer{
    UITapGestureRecognizer* tapRecognizer = (UITapGestureRecognizer*)aGestureRecognizer;
    CGPoint tapPoint = [tapRecognizer locationInView:self.view];
    [viper setMoveToPoint: tapPoint];
}
```

In Listing 5-6, the first thing we do in viewTapped: is to cast the passed in UIGestureRecognizer to UITapGestureRecognizer. We then find the point where the tap occurred in the root view by calling locationInView:. Once we have the point where the tap occurred, we simply set the moveToPoint property on the viper object. Notice that we did not have to interrupt any existing animation—we simply update the state of the viper object and, when its updateLocation task is called again, it will start moving toward this new point. This is a very simple example, but I hope it illustrates an advantage that frame-by-frame animations have over the predefined animations we looked at in the last chapter.

We have looked at how this simple animation is set up and how it is driven by repeated calls to updateScene from Listing 5-4. We should take a little time and understand the classes responsible for making these repeated calls.


# Understanding CADisplayLink and NSRunLoop

In general, to create a smooth-looking animation, a picture has to be updated at least 25 times a second to avoid the eyes seeing each individual frame. That means our game must find a way to call updateScene at 25 times a second to achieve a smooth animation. This could be done by creating an NSTimer that calls updateScene at any rate we choose. If we do that, however, our code that updates the scene will not necessarily be in sync with the hardware's native refresh rate of the screen. The framework Core Animation provides a class specifically designed for creating the type of animation we are trying to create: CADisplayLink.

In Listing 5-3, we created a CADisplayLink, specifying that it should call updateScene whenever the screen is ready to redraw. We then added the CADisplayLink to the same run loop that called viewDidLoad by calling currentRunLoop on the class NSRunLoop. The class NSRunLoop manages a thread to produce the kind of loop shown in Figure 5-1. An NSRunLoop is responsible for processing input from the user and from the CADisplayLink and scheduling when the corresponding task in ExampleO1Controller should be called. We don't have to understand too much about how NSRunLoop works; we just have to understand that the tasks viewTapped: and updateScene will be called by the same thread so we don't have to worry about multi-threaded complexity.

As mentioned, CADisplayLink—working with our main threads NSRunLoop—causes the task updateScene to be called once for each time the screen redraws. The property duration of CADisplayLink reports, in seconds, the time between each screen redraw. A little investigation shows that this property reports a slightly different value each time updateScene is called, but hovers around the value 0.0166648757. This value is just shy of 60 frames per second, so we are well above the required 25 frames per second.

In more complex applications, it is entirely likely that the state of the game cannot be updated in 1.5 milliseconds; there may simply be too much bookkeeping. If this is the case, you can set the frameInterval property of CADisplayLink to value greater than one. This will cause CADisplayLink to skip screen redraws. Figure 5-6 shows four different scenarios that can occur when using the CADisplayLink.

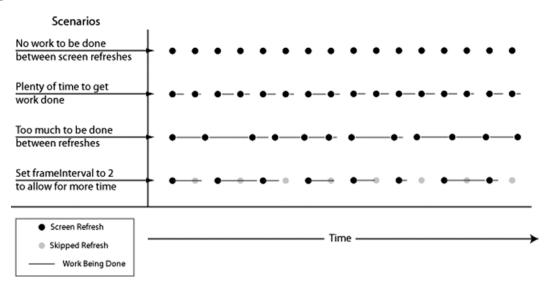

Screen refresh scenarios

5-6, we see four scenarios listed on the left. To the right of each scenario are a number of

off to the right of each dot. The length of each line is shorter than the distance between each dot, indicating that the work is done in the time between screen refreshes. The third scenario shows the case where there is too much work to get done between screen refreshes, but the programmer did not account for this. Each time the work exceeds the normal amount of time between screen refreshes, the drawing of the next screen is delayed. Because the amount of time it takes to update a game between frames varies, the rate at which the screen is refreshed becomes irregular. When the screen refresh is irregular, the animation looks choppy and is perceived poorly by the user. To avoid this, we configure CADisplayLink to only trigger an update every other frame by setting frameInterval to 2. This doubles the amount of time we have to get our work done, allowing for a smooth animation.

This strategy can seem counterintuitive to some developers because, in the fourth scenario, there can be long stretches of time when no work is being done. In fact, for a given stretch of time, scenario 3 gets more frames rendered than scenario 4. The fact is that the choppy updates are almost always more annoying to a user than a game that does not move as fast. Also keep in mind that the native refresh rate for iOS devices is 60 frames a second, so if every other frame is skipped, the animation rate is still 30 frames per second. That's plenty to create a convincing animation.

We have looked at a simple frame-by-frame animation, and you should now understand the basic principles. The next two examples will build on this pattern to create animations with more than one thing on the screen, as well as do a little refactoring to start making a framework suitable for complex games.

# **Abstracting the Ul**

In the previous example, we looked at the basics of creating a frame-by-frame animation. We looked how we can use the class CADisplayLink in conjunction with the existing event loop to call a task where we can implement our animation. We animated a single image around the screen based on user input. That was a very simple example. I left out a number of practical considerations so we could focus on the basic idea of creating animations in this way. In this section, we will do a little refactoring in order to better support more complicated games. Figure 5-7 shows the example we will be building.



Figure 5-7. Abstracted UI

In Figure 5-7, we see some differences from the first example. The first thing to note is that the play area of the game does not take up the full screen. The slider at the bottom of the screen changes the size of the play area without changing how the game plays. There is also a second item on the screen, an asteroid. Asteroids are created every 10 seconds and start at the top of the screen, moving straight down. If an asteroid collides with the spaceship, the spaceship resets to the center of the screen and the asteroid is removed. The object of this simple game is to avoid the incoming asteroids.

One of the goals of this section is to explain how the game logic can be separated from how the game is drawn on the screen. In the first example, we simply extended UIImageView and added our logic about the spaceship. This worked well enough, but there are lots of good reasons for separating the logic of the game from the how it is displayed. For starters, if you want to run this game on an iPad instead of an iPhone, you probably want to make the play area bigger. Also, to support things like zooming into the game or showing a mini map, it makes sense to have the location of each item in the game stored in a display-agnostic way. Down the road, you may decide you want to port your game to another platform. Having a clean separation of game logic from display logic will save you a lot of work in such a case.

To support this abstraction between the game logic and the display logic we introduce a new class called Actor02. Normally this class would simply be called Actor. The 02 in the name simply indicates it is part of the second example in this chapter. The following section explains what an

sprite can also

## **Example2Controller Overview**

In our example, we will define the class Actor02 and show how we can subclass Actor02 to create our game items, the spaceship and the asteroids. Listing 5-7 shows the header file for the class Actor02.

```
Listing 5-7. Actor02.h
```

```
#import <Foundation/Foundation.h>
@class ExampleO2Controller;
long nextId;
@interface ActorO2 : NSObject {

}
@property (nonatomic, retain) NSNumber* actorId;
@property (nonatomic) CGPoint center;
@property (nonatomic) float speed;
@property (nonatomic) float radius;
@property (nonatomic, retain) NSString* imageName;

-(id)initAt:(CGPoint)aPoint WithRadius:(float)aRadius AndImage:(NSString*)anImageName;
-(void)step:(ExampleO2Controller*)controller;
-(BOOL)overlapsWith: (ActorO2*) actor;
```

@end

In Listing 5-7, we see the header file for the class Actor02. There are five properties that represent the basic attributes required for this example. The property actorId is used to identify the actor; we will see how we use this to map each Actor02 to an UIImageView. The property center tells us the location of each Actor02. The property speed indicates how fast this actor moves. The property radius represents the size of this actor. Finally, the property imageName describes how this actor should be drawn on the screen.

The type of the property center is CGPoint. Strictly speaking, we will not be directly using this CGPoint to set the location of a UIView or other Core Graphics component. But CGPoint is a simple way to wrap an X and Y value, and we are already familiar with it. For this example, it makes little difference if we use CGPoint or a struct of our creation to represent a point. However, if you wanted to make sure your code was not dependent on Core Graphics in any way, you would want to define your own type for representing a point.

Also of note in Listing 5-7 is that an Actor02 does not have a width or height, just a radius. This is done to simplify the example, and also because many games require only a single dimension to describe the size of an actor. If you build your own game framework, you may choose to have your actors include a width and height—it really depends on the game. Certainly if you look at prebuilt game engines you will find that their base type has all sorts of features you may or may not use. It may make a lot of sense to use a game engine, but here we are trading complexity for understanding.

# **A Simple Actor**

Listing 5-7 shows that the Actor02 has three tasks defined. Listing 5-8 shows the implementation of these tasks.

```
Listing 5-8. Actor02.m
#import "Actor02.h"
@implementation Actor02
@synthesize actorId;
@synthesize center;
@synthesize speed;
@synthesize radius;
@synthesize imageName;
-(id)initAt:(CGPoint)aPoint WithRadius:(float)aRadius AndImage:(NSString*)anImageName{
    self = [super init];
    if (self != nil){
        [self setActorId:[NSNumber numberWithLong:nextId++]];
        [self setCenter:aPoint];
        [self setRadius:aRadius];
        [self setImageName:anImageName];
    return self;
-(void)step:(ExampleO2Controller*)controller{
    //implemented by subclasses.
}
```

```
-(BOOL)overlapsWith: (Actor02*) actor {
        float xdist = abs(self.center.x - actor.center.x);
        float ydist = abs(self.center.y - actor.center.y);
      float distance = sqrtf(xdist*xdist+ydist*ydist);
      return distance < self.radius + actor.radius;
}
@end</pre>
```

In Listing 5-8, we see the implementation of the class Actor02. The task initAt:WithRadius:AndImage: is used to initialize an Actor02 with some basic information. This task also assigns a random actorId value by using the value nextId and incrementing it. Because nextId is of type long, you will have to create an incredible number of actors before you get two actors with the same ID.

step: takes an instance of ExampleO2Controller and is used incrementally to update the ActorO2. Subclasses will provide an implementation to this task to provide

overlapsWith:, is used to check to see if this Actor02 overlaps with another Actor02.

Viper02 and see how it is different from Viper01. The header for Viper02 is

### Listing 5-9. Viper02.h

```
@class Example02Controller;
@interface Viper02 : Actor02 {
}
@property CGPoint moveToPoint;
+(id)viper:(Example02Controller*)controller;
-(void)doCollision:(Actor02*)actor In:(Example02Controller*)controller;
@end
```

In Listing 5-9, we see that the header for Viper02 is not much different from Viper01, as shown in Listing 5-2. Viper02 extends the class Actor02 instead of UIImageView. We have the property moveToPoint, which is the same, but the property speed is absent because that is inherited from Actor02. We have a new constructor to simplify the creation of a Viper02 and a new task called doCollision: In: that is used to handle the new functionality of colliding with an asteroid. Listing 5-10 shows the implementation of the class Viper02.

```
Listing 5-10. Viper02.m
```

```
#import "ViperO2.h"
#import "ExampleO2Controller.h"
```

```
@implementation ViperO2
@synthesize moveToPoint;
+(id)viper:(ExampleO2Controller*)controller{
    CGSize gameAreaSize = [controller gameAreaSize];
    CGPoint center = CGPointMake(gameAreaSize.width/2, gameAreaSize.height/2);
    Viper02* viper = [[Viper02 alloc] initAt:center WithRadius:16 AndImage:@"viper"];
    [viper setMoveToPoint:center];
    [viper setSpeed:.8];
    return [viper autorelease];
}
-(void)step:(ExampleO2Controller*)controller{
    CGPoint c = [self center];
    float dx = (moveToPoint.x - c.x);
    float dy = (moveToPoint.y - c.y);
    float theta = atan(dy/dx);
    float dxf = cos(theta) * self.speed;
    float dyf = sin(theta) * self.speed;
    if (dx < 0){
        dxf * = -1;
        dyf * = -1;
    }
    c.x += dxf;
    c.y += dyf;
    if (abs(moveToPoint.x - c.x) < self.speed && abs(moveToPoint.y - c.y) < self.speed){</pre>
        c.x = moveToPoint.x;
        c.y = moveToPoint.y;
    }
    [self setCenter:c];
}
-(void)doCollision:(Actor02*)actor In:(Example02Controller*)controller{
    CGSize gameAreaSize = [controller gameAreaSize];
    CGPoint centerOfGame = CGPointMake(gameAreaSize.width/2, gameAreaSize.height/2);
    self.center = centerOfGame;
    self.moveToPoint = centerOfGame;
    [controller removeActor:actor];
}
@end
```

In Listing 5-10, we see that the constructor task viper: creates a new Viper02 object and uses the super-task initAt:WithRadius:AndImage to set up the basic properties of the object. Also, the property moveToPoint is set to be its current location and the speed is set to .8.

The task step: is the task that is called once per frame of the animation. The implementation of this task is identical to the implementation of the task updateLocation: from the class Actor01, as shown in Listing 5-5.

The last task in Listing 5-10 is the task doCollision:In:, which is called when this Viper02 is overlapping with an Asteroid02. This task resets the Viper02 back to the starting location at the center of the game area and removes the offending Asteroid02 from the game.

Viper02, you may not see exactly how this is different from the Viper01.

Asteroid02, we will see how these actor classes
Asteroid02 is

## Asteroid02.h

```
NSMutableArray* imageNameVariations;
@interface Asteroid02 : Actor02 {
}
+(NSMutableArray*)imageNameVariations;
+(id)asteroid:(Example02Controller*)controller;
@end
```

In Listing 5-11, the header file for the class Asteroid02 shows that it extends Actor02 and has two static tasks. There is also an array called imageNameVariations. The array, in combination with the task imageNameVariations, allows us to create Asteroid02 with similar, but different graphics. Let's take a look at the implementation of this class and see what that means, as shown in Listing 5-12.

#### Listing 5-12. Asteroid02.m

```
float radius = arc4random()%8+8;
    float x = radius + arc4random()%(int)(gameAreaSize.width+radius*2);
   CGPoint center = CGPointMake(x, -radius);
   NSString* imageName = [[Asteroid02 imageNameVariations] objectAtIndex:arc4random()%3];
   AsteroidO2* asteroid = [[AsteroidO2 alloc] initAt:center WithRadius:radius AndImage: imageName];
   float speed = (arc4random()\%10)/10.0 + .1;
    [asteroid setSpeed: speed];
   return asteroid;
+(NSMutableArray*)imageNameVariations{
    if (imageNameVariations == nil){
        imageNameVariations = [NSMutableArray new];
        [imageNameVariations addObject:@"AsteroidA"];
        [imageNameVariations addObject:@"AsteroidB"];
        [imageNameVariations addObject:@"AsteroidC"];
    }
   return imageNameVariations;
}
-(void)step:(Example02Controller*)controller{
   CGPoint newCenter = self.center;
    newCenter.y += self.speed;
    self.center = newCenter;
    if (newCenter.y - self.radius > controller.gameAreaSize.height){
        [controller removeActor: self];
    }
}
@end
```

In Listing 5-12, the constructor task asteroid: creates a new Asteroid02 object and sets up its starting state. For variety, each asteroid is assigned a random radius and a random X location. The starting Y location is set to negative radius, so the asteroid starts just off the top of the game area. Each Asteroid02 is also assigned a random speed.

The task step: implements the motion of the Asteroid02—it simply increases the Y value of the property center by speed until it reaches the bottom of the game area, where it removes itself from the game.

As mentioned, we want the graphic used to represent the Asteroid02 to have some variety as well. To implement this, we have the task imageNameVariations that lazily populates the global NSMutableArray imageNameVariations. In the task asteroid:, a random string is pulled from this array and set as the Asteroids. Figure 5-8 shows the image files used in this example.



Figure 5-8. Images used for actors

In Figure 5-8, we see the images used for the actors in this example. Each of these images is specified by the property imageName of class Actor02. In the case of the asteroids, we provide three Asteroid02 object.

Example02Controller. Like other UIViewController classes, is responsible for displaying data on the screen—in our case, the different Example02Controller will be to create and update a number of UIImageViews, one 5-9 shows how the iPhone version of this class is set up in Interface Builder.

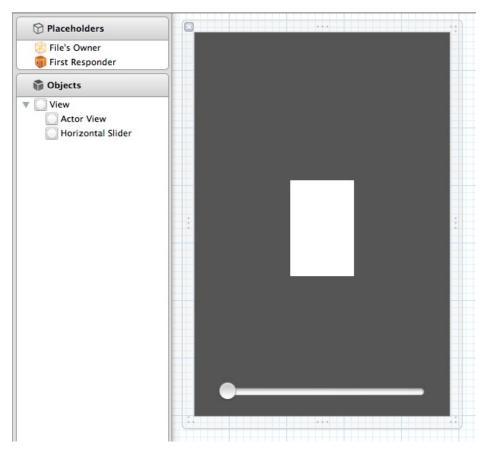


Figure 5-9. Example02Controller\_iPhone.xib in Interface Builder

In Figure 5-9, we see on the left that the root view for this UIViewController has two sub-views. The first is called Actor view and is the white region in the middle of the gray region on the right. This is the view where the game will take place—all actors will be represented as UIImageViews that are sub-views of Actor view. The other component is the UISlider at the bottom of the gray area. This is used to control the size of the Actor view, allowing us to demonstrate that we have indeed abstracted the representation of the game from the game itself. The header to the class Example02Controller will give us an overview of how this is achieved, and is shown in Listing 5-13.

## Listing 5-13. Example02Controller.h

```
#import <UIKit/UIKit.h>
#import <QuartzCore/CADisplayLink.h>
#import "Viper02.h"
#import "Actor02.h"
#import "Asteroid02.h"
@interface Example02Controller : UIViewController {
    IBOutlet UIView *actorView;
```

```
CADisplayLink* displayLink;

//Managing Actors
NSMutableArray* actors;
NSMutableDictionary* actorViews;
NSMutableArray* toBeRemoved;

//Game Logic
Viper02* viper;
long stepNumber;
}
@property (nonatomic) CGSize gameAreaSize;
```

UIView actorView and that it is an IBoutlet wired up from the XIB file 5-9. At the bottom of the file, we see the task sliderValueChanged:, which is called when the slider from Figure 5-9 is moved. We also see the familiar displayLink object of type CADisplayLink that will be used to configure redrawing the screen. The NSMutableArray actors is used to store all current actors in the game, which are added and removed with the tasks addActor:. The NSMutableArray toBeRemoved is used to hold actors that are marked to be removed with the task removeActor:. The task doRemove is called at the end each call to updateScene to do the actual removal of each actor. The NSMutableDictionary actorViews is used to map each actor to each UIImageView that represents it. The variable viper of type ViperO2 is a references to our spaceship, and the last variable, stepNumber, keeps track of how many frames of the game we have stepped through. Like most UIViewController classes, understanding how it works starts by looking at the viewDidLoad task shown in Listing 5-14.

Listing 5-14. Example02Controller.m (viewDidLoad)

```
- (void)viewDidLoad
{
    [super viewDidLoad];
    [self setGameAreaSize:CGSizeMake(160, 240)];
    actors = [NSMutableArray new];
    actorViews = [NSMutableDictionary new];
    toBeRemoved = [NSMutableArray new];

    ActorO2* background = [[ActorO2 alloc] initAt:CGPointMake(80, 120) WithRadius:120
AndImage:@"star_field_iphone"];
    [self addActor: background];
```

```
viper = [Viper02 viper:self];
// [viper setMoveToPoint:viper.center];
[self addActor:viper];

stepNumber = 0;

UITapGestureRecognizer* tapRecognizer = [[UITapGestureRecognizer alloc] initWithTarget:self action:@selector(tapGesture:)];
[tapRecognizer setNumberOfTapsRequired:1];
[tapRecognizer setNumberOfTouchesRequired:1];
[actorView addGestureRecognizer:tapRecognizer];

displayLink = [CADisplayLink displayLinkWithTarget:self selector:@selector(updateScene)];
[displayLink addToRunLoop:[NSRunLoop currentRunLoop] forMode:NSDefaultRunLoopMode];
}
```

In Listing 5-14, after calling the super-implementation of viewDidLoad, we set the property gameAreaSize. In the first example, we used the coordinate space of a UIView to describe the location of our spaceship. In this example, we have to specify the size of play area independent of any UIView. Note, however, that the size 160 x 240 is exactly one quarter of the number of points of an iPhone. Even though we want to separate the coordinate system of our game from the coordinate system of the UIView hierarchy, the fact is that an iPhone has a screen ration of 2:3, and any game we want to play on that device should consider that.

After specifying the gameAreaSize, we initialize actors and actorViews. Then we add our first actor. To add the star field behind the other actors, we can add new ActorO2 to the scene, specifying the star\_field\_iphone image. Because the base ActorO2 class does not specify any behavior, this actor will simply sit in the background, providing the nice stars. The advantage to using an actor for the background is that it will scale and stretch along with the other actors. The disadvantage is that it will be treated like the other actors in the game and consume a little computation time.

After adding the background, we create our Viper02, set it to the variable viper, and add it to the scene. We store a reference to it so we can access it easily when the user touches the screen. This is an operation we know we are going to do a lot, so there is no point searching though all of the actors each time to find the correct one. For any given game, some thought will have to be put into which actors are referenced in special ways. There is a balance among ease of programming, speed of execution, and memory usage that must be considered. Unfortunately, there are no hard-and-fast rules about what additional data structures should be created. I try to do as little optimization as possible on my first pass through a game (or application) and wait until the game is more complete to figure out the hot spots in an application. Optimizations early in the development process can complicate feature development; however, optimization at the end of development can be a lot more complicated and might never get done. The two steps in Listing 5-14 are to add a UITapGestureRecognizer to the actorView and to set up the CADisplayLink. These steps are done in exactly the same way as they were done in the first example.

Before we look at how the scene is updated, let's take a look at the tasks addActor: and removeActor: so we can complete our understanding of how actors are added and removed from the scene. Listing 5-15 shows these two tasks.

## Listing 5-15. Example02Controller.m (addActor: and removeActor:)

```
-(void)removeActor:(Actor02*)actor{
    [toBeRemoved addObject:actor];
}
-(void)doRemove{
    for (Actor02* actor in toBeRemoved){
        UIImageView* imageView=[actorViews objectForKey:[actor actorId]];
        [actorViews removeObjectForKey:actor];

        [imageView removeFromSuperview];

        [actors removeObject:actor];
}
[toBeRemoved removeAllObjects];
```

addActor simply adds the actor to the NSMutableArray actors. If you

removeActor simply adds the actor to the NSMutableArray toBeRemoved, so it can be doRemove finds the UIImageView used to draw it on the screen and UIView actorViews. The UIImageView is also removed from the scene by calling . The object actor is also removed from the NSMutableArray actors. Now that updateScene

## Listing 5-16. Example02Controller.m (updateScene)

```
-(void)updateScene{
    if (stepNumber % (60*10) == 0){
        [self addActor:[Asteroid02 asteroid:self]];
   for (Actor02* actor in actors){
        [actor step:self];
   for (Actor02* actor in actors){
        if ([actor isKindOfClass:[AsteroidO2 class]]){
            if ([viper overlapsWith:actor]){
                [viper doCollision:actor In:self];
                break;
        }
    }
    for (Actor02* actor in actors){
        [self updateActorView:actor];
    [self doRemove];
    stepNumber++;
}
```

In Listing 5-16, we see the task updateScene, the heartbeat of the game, it gets called about 60 times a second and is where we advance the game along. The first thing we do is check to see if we want to add a new asteroid to the game. This is done by taking stepNumber and moding it by 600 and seeing if the value is zero. In effect, this adds a new Asteroid02 to the scene every 10 seconds, since the game is running at about 60 frames a second.

After testing if a new asteroid should be added, we iterate through all of the actors in the game and call step: on them. This gives each actor a chance to advance its state based on its particular behavior. The background will do nothing, the asteroids will move downward, and the spaceship will move toward its moveToPoint. After updating the location of each actor, we want to test to see if there was a collision. This is done by again iterating through all of the actors, finding the ones that are asteroids, and checking for a collision state. For this simple example, iterating over all of the actors to find a collision is okay. However, in a more complex application, it is probably important to improve this algorithm (such as it is). Improvements can include keeping track of all asteroids in their own array and possibly sorting them by location.

# **Updating the UIView for Each Actor**

We have tested if there were any collisions, and now we have to figure out the new location of each actor's UIImageView. This is done in the updateActorView: task, as shown in Listing 5-17.

Listing 5-17. Example02Controller.m (updateActorView:)

```
-(void)updateActorView:(ActorO2*)actor{
    UIImageView* imageView = [actorViews objectForKey:[actor actorId]];
    if (imageView == nil){
       UIImageView* imageView = [[UIImageView alloc] initWithImage:[UIImage
imageNamed:[actor imageName]]];
        [actorViews setObject:imageView forKey:[actor actorId]];
        [imageView setFrame:CGRectMake(0, 0, 0, 0)];
        [actorView addSubview:imageView];
    }
   float xFactor = actorView.frame.size.width/self.gameAreaSize.width;
   float yFactor = actorView.frame.size.height/self.gameAreaSize.height;
    float x = (actor.center.x-actor.radius)*xFactor;
    float y = (actor.center.y-actor.radius)*yFactor;
    float width = actor.radius*xFactor*2;
    float height = actor.radius*yFactor*2;
   CGRect frame = CGRectMake(x, y, width, height);
    [imageView setFrame:frame];
}
```

In Listing 5-17, the first thing we do is find which UIImageView is representing the actor that was passed in. We find it by looking up the UIImageView in the NSMutableArray actorViews, using the actor's actorId as the key. If we don't find a UIImageView, then this actor must have just been added, so we have to create it.

Creating the UIImageView is as simple as creating a UIImage based on the imageName of the actor and creating a new UIImageView with it. We then put the UIImageView into the NSMutableDictionary actorViews, again using the actor's ID as the key. Lastly, we add the new UIImageView to actorView. We set the frame of the new UIImageView to a size zero frame to prevent some redraw issues. The frame will be updated shortly anyway.

## **Placing UllmageView in the Screen**

After creating the UIImageView (if required), we have to figure out where on the screen it should be drawn. The first step is to figure out the relationship between the size of the game area and the actual size of actorView on the screen. We can simply divide the width of the actorView by the width of the game area to establish our xFactor. We do the same operation with the heights to figure yFactor. Once we have these ratios, we can calculate the frame of the UIImageView. Once frame of the UIImageView, we set it. Figure 5-10

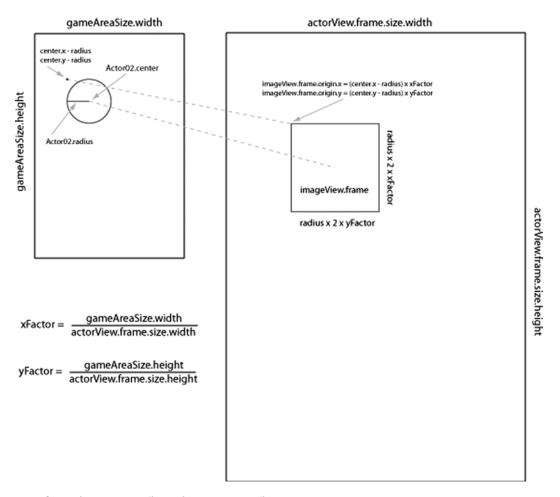


Figure 5-10. Converting game coordinates into screen coordinates

In Figure 5-10, on the left we see the game area and on the right is the CGRect that describes the actorView's frame. The circle on the left is an Actor02 that needs to be converted into CGRect on actorView. We start by figuring out the origin of the GCFrame by first finding the upper-left point of the Actor02. We find the X value of the upper-left point by subtracting the radius of the Actor02 from the Actor02's center X value. To find the Y value, we subtract the radius from the Actor02's center Y value. To convert these points into the coordinate space of actorView, we simply multiple by the X value of the upper left point by xFactor and multiple the Y value by yFactor. The values xFactor and yFactor are the ratios between the gameAreaSizes width and height and the actorView's frame's width and height. To find the size of actorView's frame, we simply multiply the radius by xFactor and yFactor to find the width and height.

When the user touches the UIView actorView, we have to do this process in reverse: convert the point on the actorView to a point with our game space. This conversion happens in the task tapGesture:, as shown in Listing 5-18.

## Listing 5-18. Example02Controller.h (tapGuesture:)

```
- (void)tapGesture:(UIGestureRecognizer *)gestureRecognizer{
    UITapGestureRecognizer* tapRecognizer = (UITapGestureRecognizer*)gestureRecognizer;

    CGPoint pointOnView = [tapRecognizer locationInView:actorView];

    float xFactor = actorView.frame.size.width/self.gameAreaSize.width;
    float yFactor = actorView.frame.size.height/self.gameAreaSize.height;

    CGPoint pointInGame = CGPointMake(pointOnView.x/xFactor, pointOnView.y/yFactor);

    [viper setMoveToPoint:pointInGame];
}
```

In Listing 5-18, we find where the user touched by calling locationInView: on tapRecognizer and passing in actorView and storing the result in pointOnView. After recalculating xFactor and yFactor values, we simply divide pointOnView's X and Y values by xFactor and yFactor, giving us pointInGame. Using this value we simply, set the moveToPoint property of viper with pointInGame.

To wrap up this example, let's take a look at the code that changes the size of actorView, as shown in Listing 5-19.

## Listing 5-19. Example02Controller.m (sliderValueChanged:)

```
- (IBAction)sliderValueChanged:(id)sender {
   UISlider* slider = (UISlider*)sender;
   float newWidth = [slider value];
   float newHeight = gameAreaSize.height/gameAreaSize.width*newWidth;

   CGRect parentFrame = [[actorView superview] frame];
   float newX = (parentFrame.size.width-newWidth)/2.0;
   float newY = (parentFrame.size.height-newHeight)/2.0;

   CGRect newFrame = CGRectMake(newX, newY, newWidth, newHeight);
   [actorView setFrame:newFrame];
}
```

The task sliderValueChanged: in Listing 5-19 is called when the user adjusts the slider at the bottom of the screen. The slider is configured to have a value between 80 and 320, which we use as the value as newWidth. We calculate the newHeight based on the newWidth, preserving our aspect ratio. Once we have the new width and height for actorView, we find the X and Y values that will keep actorView centered. Once we have all of the value values for the actorView's new frame, we simply set it.

# **Actor State and Animations**

Now that we have a basic set of animations, it is time to add a little life to the actors. We are going to expand on the last examples and add two effects. The first is to make the asteroids look like they are tumbling through space. The second is to make the spaceship rotate before moving. Both of these techniques will update the image used to represent each actor to create the visual effect. We will

5-10 shows this next example in action.

5-11 we see the spaceship thrusting toward some point at the upper left. There are four



5-12 shows the images used to create the animation.

Figure 5-11. Adding animations and state to actors



Figure 5-12. Images that make up the animation for asteroid variant B

In Figure 5-12, we see 31 images of asteroids. If the images are showed in succession, moving from the top left to the bottom right, it will appear as if the asteroid is rolling. The animation is a loop, so the first image can be shown after the last, creating a smooth animation. To understand how we implement this animation, let's take a look at the header file for the update class Actor03, as shown in Listing 5-20.

#### Listing 5-20. Actor03.h

@end

```
#import <Foundation/Foundation.h>
@class Example03Controller;
long nextId;
@interface Actor03 : NSObject {

}
@property (nonatomic, retain) NSNumber* actorId;
@property (nonatomic) CGPoint center;
@property float rotation;
@property (nonatomic) float speed;
@property (nonatomic) float radius;
@property (nonatomic, retain) NSString* imageName;
@property (nonatomic) BOOL needsImageUpdated;

-(id)initAt:(CGPoint)aPoint WithRadius:(float)aRadius AndImage:(NSString*)anImageName;
-(void)step:(Example03Controller*)controller;
-(BOOL)overlapsWith: (Actor03*) actor;
```

In Listing 5-20, we see a number of small changes. We have added two new properties: rotation and needsImageUpdate. The rotation property does not refer to the rotation of the asteroid; the rotation property will be used by the updated Viper03 class to indicate what direction it is facing. The property needsImageUpdated is a property that indicates that a new UIImage used should be used for this actor. By setting this value to YES, we cause each asteroid to ask for a new image while it is being animated. Let's take a look at the changes in the Asteroid03 class that take advantage of this property—see Listing 5-21.

Listing 5-21. Asteroid03.h and Asteroid03.m (partial)

//From Asteroid.h

}

}

#define NUMBER OF IMAGES 31

```
return [[imageVariant stringByAppendingString:@"_"]

if ([controller stepNumber]%2 == 0){
    self.imageNumber = imageNumber+1;
    if (self.imageNumber > NUMBER_OF_IMAGES) {
        self.imageNumber = 1;
    }
    self.needsImageUpdated = YES;
} else {
    self.needsImageUpdated = NO;
}

CGPoint newCenter = self.center;
newCenter.y += self.speed;
self.center = newCenter;

if (newCenter.y - self.radius > controller.gameAreaSize.height){
    [controller removeActor: self];
```

In Listing 5-12, we added two new properties to the asteroid class: imageNumber and imageVariant. The property imageNumber keeps track of the current image that should be displayed. Like the previous example, there are three types of asteroids: A, B, and C. The property imageVariant records which one of these sequences of images should be used.

In Listing 5-12, we can see that we added a new task called imageName. This task overrides the synthetic task as defined by Actor03. In this way, we alter the name of the image that is returned. We take the imageVariant and append the image number to it, creating a string that is of the form "Asteroid B 0004" if the asteroid is of the B variety and if imageNumber is equal to 4.

Looking at the task step in Listing 5-12, we see that we added a new section at the beginning that updates which image should be displayed. Every other frame, we increase the value of imageNumber by one, resetting back to one when it exceeds the constant NUMBER\_OF\_IMAGES. Each time we change imageNumber, we want to set needsImageUpdated to YES; otherwise we set it to NO. Let's take a look at the task updateActorView: and see how ExampleO3Controller uses this information to make sure the correct image is displayed. See Listing 5-22.

Listing 5-22. Example03Controller.m (updateActorView:)


```
-(void)updateActorView:(Actor03*)actor{
    UIImageView* imageView = [actorViews objectForKey:[actor actorId]];
    if (imageView == nil){
        UIImageView* imageView = [[UIImageView alloc] initWithImage:[UIImage
imageNamed:[actor imageName]]];
        [actorViews setObject:imageView forKey:[actor actorId]];
        [imageView setFrame:CGRectMake(0, 0, 0, 0)];
        [actorView addSubview:imageView];
    } else {
        if ([actor needsImageUpdated]){
            [imageView setImage:[UIImage imageNamed:[actor imageName]]];
        }
    }
    float xFactor = actorView.frame.size.width/self.gameAreaSize.width;
    float yFactor = actorView.frame.size.height/self.gameAreaSize.height;
    float x = (actor.center.x-actor.radius)*xFactor;
    float y = (actor.center.y-actor.radius)*yFactor;
    float width = actor.radius*xFactor*2;
    float height = actor.radius*yFactor*2;
   CGRect frame = CGRectMake(x, y, width, height);
    imageView.transform = CGAffineTransformIdentity;
    [imageView setFrame:frame];
    imageView.transform = CGAffineTransformRotate(imageView.transform, [actor rotation]);
}
```

In Listing 5-22, we update the image of the imageView if the property needsImageUpdated is set to YES by simply calling imageName on the actor again. That's all it takes to make the asteroids appear to roll through space.

# The Rotating Effect

Now that we have a way to indicate that the image of an actor should be updated, we can use that same feature to give some life to the spaceship. At the bottom of Listing 5-22, we can see that the transformation of the imageView is first modified to an identify transformation, then its frame is set, and finally the transform is modified again, applying the rotation.

The addition of the rotation logic in Listing 5-22 allows us to create a spaceship that rotates toward its moveToPoint before traveling to it. Figure 5-13 shows the sprites we are going to use while the ship is in different states.

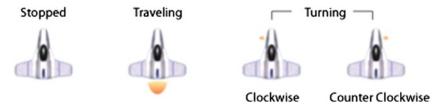

Images used for different spaceship states

5-13, we see four images. The image on the left is used when the spaceship is stopped. The

Viper03 and see what changes are required to make this work. See Listing 5-23.

Viper03.h

```
#import <Foundation/Foundation.h>
#import "Actor03.h"

@interface Viper03 : Actor03 {

}
@property CGPoint moveToPoint;
@property int state;
@property BOOL clockwise;

+(id)viper:(Example03Controller*)controller;
-(void)doCollision:(Actor03*)actor In:(Example03Controller*)controller;
@end
```

In Listing 5-23, we see that we define some constants representing our three states. We have also added a new state property to record the current state of the Viper03. We also added the property clockwise to keep track of which direction we are turning. So we know from the Asteroid03 class that we will be specifying which image we will be using in the task imageName, Listing 5-24 shows what the imageName task looks like for the class Viper03.

#### Listing 5-24. Viper03.m (imageName)

```
-(NSString*)imageName{
   if (self.state == STATE_STOPPED){
      return @"viper stopped";
```

```
} else if (self.state == STATE_TURNING){
    if (self.clockwise){
        return @"viper_clockwise";
    } else {
        return @"viper_counterclockwise";
    }
} else {//STATE_TRAVELING
    return @"viper_traveling";
}
```

In Listing 5-24, the task viper name simply returns the image name based on the state of the object. If the state is STATE\_TURNING, we check the property clockwise to decide which image should be used. In order to implement the change in behavior we have to take a look at the new implementation of the task step:, as shown in Listing 5-25.

## Listing 5-25. Viper03.m (step:)

```
-(void)step:(Example03Controller*)controller{
   CGPoint c = [self center];
    if (self.state == STATE STOPPED){
        if (abs(moveToPoint.x - c.x) < self.speed && abs(moveToPoint.y - c.y) < self.speed){</pre>
            c.x = moveToPoint.x;
            c.y = moveToPoint.y;
            [self setCenter:c];
        } else {
            self.state = STATE TURNING;
            self.needsImageUpdated = YES;
    } else if (self.state == STATE TURNING){
        float dx = (moveToPoint.x - c.x);
        float dy = (moveToPoint.y - c.y);
        float theta = -atan(dx/dy);
        float targetRotation;
        if (dy > 0){
            targetRotation = theta + M PI;
            targetRotation = theta;
        }
        if ( fabsf(self.rotation - targetRotation) < .1){
            self.rotation = targetRotation;
            self.state = STATE TRAVELING;
            self.needsImageUpdated = YES;
            return;
        }
        if (self.rotation - targetRotation < 0){</pre>
            self.rotation += .1;
```

}

```
self.clockwise = YES;
        self.needsImageUpdated = YES;
    } else {
        self.rotation -= .1;
        self.clockwise = NO;
        self.needsImageUpdated = YES;
    }
} else {//STATE TRAVELING
   float dx = (moveToPoint.x - c.x);
    float dy = (moveToPoint.y - c.y);
    float theta = atan(dy/dx);
   float dxf = cos(theta) * self.speed;
    float dyf = sin(theta) * self.speed;
    if (dx < 0){
        dxf *= -1;
        dyf *= -1;
    }
   c.x += dxf;
   c.y += dyf;
    if (abs(moveToPoint.x - c.x) < self.speed && abs(moveToPoint.y - c.y) < self.speed){</pre>
        c.x = moveToPoint.x;
        c.y = moveToPoint.y;
        self.state = STATE STOPPED;
        self.needsImageUpdated = YES;
    }
   [self setCenter:c];
}
```

In Listing 5-25, we see that we now have a set of if statements that controls the ship's behavior based on its state. If the ship is stopped, we check to see if it should stay stopped; if not, we switch to the turning state and indicate that we need the image updated by setting needsImageUpdated to YES.

If the ship is in the turning state, calculate the angle we are turning toward based on moveToPoint and store the result in the variable theta. Because at an only returns a value between  $-\pi$  /2 and  $\pi$  /2, we test to see if we should add  $\pi$  to get our targetRotation. Once we have our targetRotation value, we check to see how close the targetRotation is to the current rotation. If they are close, we simply set rotate and to targetRotation and change state to STATE\_TRAVELING. If we have not yet reached our targetRotation value, we rotate the ship a little way toward our targetRotation. If the ship is traveling, it moves toward the moveToPoint just as it did before.

# **Summary**

In this chapter, we explored how to create a frame-by-frame animation where the items or actors in the game update their location incrementally, many times a second. You learned how to synchronize an animation loop with the refresh rate of the device screen, and how to describe the state of a game in a display-agnostic way, freeing you from the coordinate system of the host UIView. We continued our exploration of this type of game by looking at some simple techniques to create animations and adding life to our actors.

# Create Your Characters: Game Engine, Image Actors, and Behaviors

In this chapter and the next, we will be creating classes for characters that will be used in the complete game presented in this book. But first, we need to refactor the code from the previous chapters to create reusable classes that make up a simple game engine. We will explore the classes and protocols that make up this game engine so you can understand how they fit together.

We will further abstract how actors are drawn on the screen by introducing the protocol Representation, which will allow us to create image-based actors as well as actors that are programmatically drawn (presented in the following chapter). The protocol Representation will provide us with a shared API for working with these two different types of on-screen actors.

We will also introduce the concept of behavior through the protocol Behavior. This protocol provides us with a pattern for describing what an actor does in the game in a reusable way.

By building our first character, the power-up, you will start to learn how to use a game engine. We will create an example GameController subclass that lets a bunch of power-ups loose on the screen, so you can get a feel for how this character looks and behaves.

# **Understanding the Game Engine Classes**

Our simple game engine starts with two core classes: GameController and Actor. GameController is very much like the controller classes from the preceding chapter, except that it has been refined for more general use. The Actor class has similarly been improved to accommodate a greater number of Actor types. The Actor class also defines two protocols, Representation and Behavior that are used to describe each actor in different ways. The protocol Representation describes the tasks required

to create and update an actor's UIView. The protocol Behavior describes a task to be implemented by any class that wishes to create a shared, reusable behavior. These classes and protocols are covered in detail in the following sections.

## The GameController Class

The GameController class coordinates the actors in the game and is ultimately responsible for rendering each actor on the screen. This includes setting up GameController as a UIViewController, defining a way to call our updateScene task repeated with a CADisplayLink, and finally reviewing how updateScene manages the actors in the scene. GameController also provides a mechanism for adding and removing actors. Let's take a look at the header for the class GameController, shown in

GameController.h

```
IBOutlet UIView* actorsView;
    CADisplayLink* displayLink;
    NSMutableSet* actors;
    NSMutableDictionary* actorClassToActorSet;
    NSMutableSet* actorsToBeAdded;
    NSMutableSet* actorsToBeRemoved;
    BOOL workComplete;
}
@property (nonatomic) long stepNumber;
@property (nonatomic) CGSize gameAreaSize;
@property (nonatomic) BOOL isSetup;
@property (nonatomic, strong) NSMutableArray* sortedActorClasses;
-(BOOL)doSetup;
-(void)displayLinkCalled;
-(void)updateScene;
-(void)removeActor:(Actor*)actor;
-(void)addActor:(Actor*)actor;
-(void)updateViewForActor:(Actor*)actor;
-(void)doAddActors;
-(void)doRemoveActors;
-(NSMutableSet*)actorsOfType:(Class)class;
@end
```

As you can see, the header for the class GameController extends the class UIViewController. The UIView named actorsView is an IBOutlet and is the UIView that contains the views for each actor in the game. We don't want to use the Property view as the root view for the actors because we may want to have other views associated with a GameController, such as a background image or other UIViews placed on top of the game. We will take advantage of this setup in a future chapter. For now, all you need to know is that the UIView actorsView is a sub-view of the Property view and will contain all of the actor views.

In this listing, you also can see the now familiar CADisplayLink, as well as various collections. The NSMutableSet actor stores all of the actors in the game. The NSMutableDictionary actorClassToActorSet is used to keep track of specific types of actors. The two NSMutableSets, actorsToBeAdded and actorsToBeRemoved, are used to keep track of actors that are created during a single step of the game and actors that should be removed after the current step.

The last field declared is the BOOL workComplete. This is used for debugging and will be explained later in this chapter, when we look at how the CADisplayLink is used. In addition to the fields declared in Listing 6-1, we see four properties. The first property, stepNumber, keeps track of the number of steps that have passed since the game started. CGSize gameAreaSize is the size of the game area in game coordinates. The BOOL isSetup keeps track of whether the GameController has been set up yet. The last property, sortedActorClasses, is used to tell the GameController which types of actors it should keep track of.

# Setting Up GameController

The use of all of the fields and properties in Listing 6-1 will be made clear as you inspect the implementation of the class GameController. Let's start with the task doSetup, shown in Listing 6-2.

## Listing 6-2. GameController.m (doSetup)

```
-(BOOL)doSetup
{
    if (!isSetup){
        gameAreaSize = CGSizeMake(1024, 768);

        actors = [NSMutableSet new];
        actorsToBeAdded = [NSMutableSet new];
        actorsToBeRemoved = [NSMutableSet new];

        stepNumber = 0;

        workComplete = true;
        displayLink = [CADisplayLink displayLinkWithTarget:self selector:
@selector(displayLinkCalled)];
        [displayLink addToRunLoop:[NSRunLoop currentRunLoop] forMode:NSDefaultRunLoopMode];
        [displayLink setFrameInterval:1];
        isSetup = YES;
```

```
return YES;
}
return NO;
}
```

Here you can see the setup code for the class GameController. Because we want to set up a GameController only once, we put the setup code inside an if-statement governed by the variable isSetup. The isSetup task will return YES if setup was performed, and return NO if setup was not performed.

As for the actual setup of the class, we have to initialize several variables. We start by setting the property gameSizeArea to a default size. Then we initialize the collection's actors, actorsToBeAdded, and actorsToBeRemoved. Finally, we set the stepNumber to zero.

# displayLinkCalled and updateScene

CADisplayLink. In this chapter, we set up the slightly differently from previous examples. Instead of having the CADisplayLink call directly, we have it call displayLinkCalled, which in turn calls updateScene, as shown in

GameController.m (displayLinkCalled)

```
if (workComplete){
    workComplete = false;
    @try {
        [self updateScene];
        workComplete = true;
    }
    @catch (NSException *exception) {
        NSLog(@"%@", [exception reason]);
        NSLog(@"%@", [exception userInfo]);//break point here
    }
}
```

The task displayLinkCalled calls updateScene only if the variable workComplete is true. The variable workComplete can be true only if this is the first time displayLinkCalled is called or if updateScene has completed successfully. If updateScene throws an exception, it is logged, and workComplete is not reset to true. This, in effect, causes the game to stop if there are any errors. This is desirable because exceptions raised by tasks called by CADisplayLink are silently swallowed. To facilitate debugging the task displayLinkCalled, it is required to both log the exception and halt the game, letting the tester know that something has gone wrong. In production, you may wish to change this behavior; it might be better to keep the app moving even if there was an error. The exact behavior required will depend on the application.

## Updating updateScene

The task updateScene is also updated from the preceding chapter, as shown in Listing 6-4.

Listing 6-4. GameController.m (updateScene)

```
-(void)updateScene{
    for (Actor* actor in actors){
        [actor step:self];
    }
    for (Actor* actor in actors){
        for (NSObject<Behavior>* behavoir in [actor behaviors]){
            [behavoir applyToActor:actor In:self];
        }
    }
    for (Actor* actor in actors){
        [self updateViewForActor:actor];
    }
    [self doAddActors];
    [self doRemoveActors];
    stepNumber++;
}
```

In this listing, we iterate over all of the actors in the game three times. In the first loop, we call step: on each actor, giving it a chance to apply any custom code. In the second loop, we apply each Behavior associated with the actor. Behavior is a protocol that describes some shared behavior among actors (this protocol is defined in Actor.h, shown later in Listing 6-9). In the third loop, we update the UIView representing each actor by calling updateViewForActor:.

Because actors and behaviors are free to add or remove other actors and we don't want to modify the NSMutableSet actors while we are iterating over that same collection, we have to add and remove actors in two steps. To implement this two-step process, we store newly added actors in the NSMutableSet actorsToBeAdded and then process each actor in that array in the task doAddActors. We follow an identical pattern for actors to be removed, storing them in the NSMutableSet actorsToBeRemoved and then processing them in the task doRemoveActors.

## Calling doAddActors and doRemoveActors

The last step we take in updateScene is to call doAddActors and doRemoveActors, as shown in Listing 6-5.

Listing 6-5. GameController.m (doAddActors and doRemoveActors)

```
-(void)doAddActors{
   for (Actor* actor in actorsToBeAdded){
        [actors addObject:actor];

UIView* view = [[actor representation] getViewForActor:actor In:self];
      [view setFrame:CGRectMake(0, 0, 0, 0)];
      [actorsView addSubview:view];
```

```
NSMutableSet* sorted = [actorClassToActorSet valueForKey:[[actor class] description]];
    [sorted addObject:actor];
}
[actorsToBeAdded removeAllObjects];
}
-(void)doRemoveActors{
    for (Actor* actor in actorsToBeRemoved){

        UIView* view = [[actor representation] getViewForActor:actor In:self];
        [view removeFromSuperview];

        NSMutableSet* sorted = [actorClassToActorSet valueForKey:[[actor class] description]];
        [sorted removeObject:actor];

        [actors removeObject:actor];
}
[actorsToBeRemoved removeAllObjects];
```

doAddActors iterates through all actors in the NSMutableSet actorsToBeAdded and adds NSMutableSet actors. Additionally, a UIView for each actor is retrieved from the actorsView. The property representation

NSObject that conforms to the protocol Representation (as defined in Actor.h in Listing 6-9).

NSMutableSet sorted that corresponds to the actor's class in
NSMutableDictionary actorClassToActorSet. The actor is then added to the NSMutableSet

NSMutableDictionary actorClassToActorSet. The last step in doAddActors is to remove all of the actors from the set actorsToBeRemoved.

In the preceding listing, we see the task doRemoveActors that parallels the task doAddActors. In doRemoveActors, each actor in the NSMutableSet actorsToBeRemoved has its associated UIView removed from its super-view and is removed from the corresponding NSMutableSet sorted. Each actor is also removed from the NSMutableSet actors. Finally, the NSMutableSet actorsToBeRemoved is cleared of all actors by calling removeAllObjects.

## **Adding and Removing Actors**

To add or remove an actor from the game, we call addActor or removeActor, respectively, as shown in Listing 6-6.

#### Listing 6-6. GameController.m (addActor and removeActor)

```
-(void)addActor:(Actor*)actor{
    [actor setAdded:YES];
    [actorsToBeAdded addObject:actor];
}
-(void)removeActor:(Actor*)actor{
    [actor setRemoved:YES];
    [actorsToBeRemoved addObject:actor];
}
```

In Listing 6-6, you can see two very simple tasks: addActor and removeActor. In addActor, the passed-in actor has its added property set to YES before the actor is added to the NSMutableSet actorsToBeAdded. Similarly, in the task removeActor, the passed-in actor has its removed property set to YES and is added to the NSMutableSet actorsToBeRemoved.

Earlier, in Listing 6-5, when actors are added or removed from the set actors, we also added or removed the actors from sets stored in the NSMutableDictionary actorClassToActorSet. This is done so we can find all actors of a given type without iterating through the entire set actors. We don't, however, want to keep a separate set for each type of actor in the game. We just want to keep track of the types of actors we will need access to in the game logic.

# **Sorting Actors**

The task setSortedActorClasses is used to specify which actors should be sorted, as shown in Listing 6-7.

## Listing 6-7. GameController.m (setSortedActorClasses:)

```
-(void)setSortedActorClasses:(NSMutableArray *)aSortedActorClasses{
    [sortedActorClasses removeAllObjects];
    sortedActorClasses = aSortedActorClasses;

    [actorClassToActorSet removeAllObjects];
    actorClassToActorSet = [NSMutableDictionary new];

    for (Class class in sortedActorClasses){
        [actorClassToActorSet setValue: [NSMutableSet new] forKey:[class description]];
    }

    for (Actor* actor in actors){
        NSMutableSet* sorted = [actorClassToActorSet objectForKey:[[actor class] description]];
        [sorted addObject:actor];
    }
}
```

We start with a little memory management, removing all objects from the NSMutableArray sortedActorClasses and releasing it before reassigning the sortedActorClasses to the passed-in NSMutableArray aSortedActorClasses. Next, we clear the old NSMutableDictionary actorClassToActorSet. Once the bookkeeping is done, we add a new NSMutableSet for each class in sortedActorClass to actorClassToActorSet. Finally, we iterate through all actors and add each one to the corresponding NSMutableSet. This last step is required to allow setSortedActorClasses to be called multiple times in an application, but considering this is a relatively expensive operation, it is best to call setSortedActorClasses once at the beginning of the game.

# Managing the UIView

The last improvement to the GameController class is the task updateViewForActor:, shown in Listing 6-8.

Listing 6-8. GameController.m (updateViewForActor:)

```
-(void)updateViewForActor:(Actor*)actor{
    NSObject<Representation>* rep = [actor representation];
    UIView* actorView = [rep getViewForActor:actor In:self];
    [rep updateView:actorView ForActor:actor In:self];
    float xFactor = actorsView.frame.size.width/self.gameAreaSize.width;
    float yFactor = actorsView.frame.size.height/self.gameAreaSize.height;
    float x = (actor.center.x-actor.radius)*xFactor;
    float y = (actor.center.y-actor.radius)*yFactor;
    float width = actor.radius*xFactor*2;
    float height = actor.radius*yFactor*2;
    CGRect frame = CGRectMake(x, y, width, height);
    actorView.transform = CGAffineTransformIdentity;
    [actorView setFrame:frame];
    actorView.transform = CGAffineTransformRotate(actorView.transform, [actor rotation]);
    [actorView setAlpha:[actor alpha]];
}
```

The task updateViewForActor: is responsible for managing the UIView associated with each actor. In the first line of this task, we get the actor's representation property and store it in the variable rep. The variable rep is an NSObject that conforms to the protocol Representation. The protocol Representation is defined in Actor.h (shown later in Listing 6-9) and describes how a UIView for a given actor is created and updated. UIViews are created when getViewForActor:In: is called. When a UIView is updated to reflect a change to an actor, the task updateView:ForActor:In: is called. These two tasks are discussed later in this chapter.

After the UIView actorView is identified, we calculate the region of its parent view that it should take up. The details of this calculation were described in Chapter 5. We add two new features, however; we rotate actorView based on the actor's rotation property, and we also set the alpha value of actorView, allowing actors to change their opacity during a game.

Now that we have looked at the class GameController and how it manages the actors in a game, let's look at the class Actor so you can understand how it allows for many different types of actors in any game.

## **The Actor Class**

The class Actor is the super-class for all actors in your game. It primarily provides information about an actor's location, but it also describes protocols that indicate how an actor behaves and is represented

on the screen. In this section, we will look at how Actor is implemented, followed by some concrete examples. Let's start by taking a look at the header file of the Actor class, shown in Listing 6-9.

## Listing 6-9. Actor.h

```
#import <Foundation/Foundation.h>
@class GameController, Actor;
@protocol Representation
-(UIView*)getViewForActor:(Actor*)anActor In:(GameController*)aController;
-(void)updateView:(UIView*)aView ForActor:(Actor*)anActor In:(GameController*)aController;
@end
@protocol Behavior
-(void)applyToActor:(Actor*)anActor In:(GameController*)gameController;
@end
long nextId;
@interface Actor : NSObject {
}
//State
@property (nonatomic, strong) NSNumber* actorId;
@property (nonatomic) BOOL added;
@property (nonatomic) BOOL removed;
//Geometry
@property (nonatomic) CGPoint center;
@property (nonatomic) float rotation;
@property (nonatomic) float speed;
@property (nonatomic) float radius;
//Behavoir
@property (nonatomic, strong) NSMutableArray<Behavior>* behaviors;
//Representation
@property (nonatomic) BOOL needsViewUpdated;
@property (nonatomic, strong) NSObject<Representation>* representation;
@property (nonatomic) int variant;
@property (nonatomic) int state;
@property (nonatomic) float alpha;
-(id)initAt:(CGPoint)aPoint WithRadius:(float)aRadius
AndRepresentation:(NSObject<Representation>*)aRepresentation;
-(void)step:(GameController*)controller;
-(BOOL)overlapsWith: (Actor*) actor;
-(void)addBehavior:(NSObject<Behavior>*)behavior;
+(CGPoint)randomPointAround:(CGPoint)aCenter At:(float)aRadius;
@end
```

Here, the protocol Representation is defined. Any object that is to manage the UIView associated with an actor must conform to this protocol. The idea here is that there are at least two kinds of UIViews used to draw an actor: those based on images and those based on programmatic drawing. There can be other ways to implement a UIView that represents an actor, such as a UIView with sub-views. We don't cover that example in this chapter, but we do look at image-based actors in this chapter and vector-based actors in the next chapter.

Regardless of how an actor's UIView is implemented, the class GameController is going to have to know how to get a reference to the correct UIView and give the Representation the chance to update how it looks. Hence, we have the two required tasks: getViewForActor:In: and updateView:ForActor:In:.

In the preceding listing, we see a second protocol named Behavior. We are going to create some

LinearMotion that describes how an

applyToActor:From: that

GameController for every step of the game.

Actor class as reusable as possible. The two properties added and removed are used to keep

NSMutableArray containing objects that conform to the protocol

behaves. This can be as simple as describing the actor's motion or as sophisticated as artificial intelligence. We provide a special task called addBehavior:, which is shorthand for getting the NSMutableArray behaviors and adding a Behavior object. The addBehavior: task also gives us a chance to lazy-load the NSMutableArray behaviors so we don't create it if we don't need it.

You can also see in Listing 6-9 that we added a variant and state property. It is very common for actors to require these two properties, so they are included in the class Actor for simplicity. The property variant can be used to describe actors that are the same class, behave the same, but are perhaps different colors—for example, the different color ghosts in Pac-Man. The property state is used to track the different states an actor may have during its lifetime. Using the ghost example again, the states might include in jail, pursuing, and running. The last property is alpha, which is used to describe the transparency of the actor on the screen.

The tasks defined in Listing 6-9 are basically the same as the task described in the preceding chapter for the class Actor. The only real difference here is that when an actor is initialized, a Representation must be passed-in. We have also added a utility task, randomPointAround:At:, which is used to create a random point on a circle of aRadius size around point aPoint.

# **Implementing Actor**

The implementation of the class Actor is shown in Listing 6-10.

#### Listing 6-10. Actor.m

```
#import "Actor.h"
@implementation Actor
@synthesize actorId;
@synthesize added;
@synthesize removed;
@synthesize center;
@synthesize rotation;
@synthesize speed;
@synthesize radius;
@synthesize needsViewUpdated;
@synthesize representation;
@synthesize variant;
@synthesize state;
@synthesize alpha;
@synthesize behaviors;
-(id)initAt:(CGPoint)aPoint WithRadius:(float)aRadius
AndRepresentation: (NSObject<Representation>*)aRepresentation{
    self = [super init];
    if (self != nil){
        [self setActorId:[NSNumber numberWithLong:nextId++]];
        [self setCenter:aPoint];
        [self setRotation:0];
        [self setRadius:aRadius];
        [self setRepresentation:aRepresentation];
        [self setAlpha:1.0];
    return self;
-(void)step:(GameController*)controller{
    //implemented by subclasses.
-(BOOL)overlapsWith: (Actor*) actor {
        float xdist = abs(self.center.x - actor.center.x);
        float ydist = abs(self.center.y - actor.center.y);
    float distance = sqrtf(xdist*xdist+ydist*ydist);
    return distance < self.radius + actor.radius;</pre>
-(void)setVariant:(int)aVariant{
    if (aVariant != variant){
        variant = aVariant;
        needsViewUpdated = YES;
}
-(void)setState:(int)aState{
    if (aState != state){
        state = aState;
```

```
needsViewUpdated = YES;
}
}
-(void)addBehavior:(NSObject<Behavior>*)behavior{
   if (behaviors == nil){
        behaviors = [NSMutableArray new];
   }
   [behaviors addObject:behavior];
}
+(CGPoint)randomPointAround:(CGPoint)aCenter At:(float)aRadius{
   float direction = arc4random()%1000/1000.0 * M_PI*2;
   return CGPointMake(aCenter.x + cosf(direction)*aRadius, aCenter.y + sinf(direction)*aRadius);
```

needsViewUpdated to YES when these values change. This is done to ensure that the actor's updates the UIView representing this actor when the actor's state or variant property

initAt:WithRadius:AndRepresentation: simply initializes the actor and sets the passed-in

# **Working with the Power-Up Actor**

In the previous section, we looked at the classes GameController and Actor and learned that the Actor class requires a Representation object to be displayed. The Representation protocol describes what is required of a class to manage the UIView associated with an actor. In this section, we will explore the class ImageRepresentation and see how it uses images to represent an actor. In the preceding chapter, we used images to draw different actors. In this section, we will show how we can combine those techniques into a simple, reusable class called ImageRepresentation.

To illustrate ImageRepresentation, in our first example we will create power-ups and animate them across the screen, as shown in Figure 6-1.

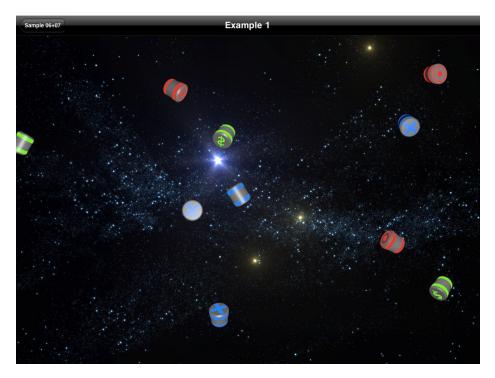


Figure 6-1. Example 1—power-ups

In the image, you can see several cylinders with three symbols: a dollar sign, a dot, and a cross. When this example is running, each cylinder travels in a straight line. When a cylinder reaches the edge of the screen, it wraps around to the opposite edge. As each cylinder travels, it also appears to spin or tumble about itself. After a few seconds, the bands and symbol on each cylinder will start flashing, announcing that it is about to disappear. When you start the example, there will be no power-ups on the screen, but every 5 seconds, a new one is added just offscreen and will drift into view. Let's take a closer look at the images used to create this animation. See Figure 6-2.

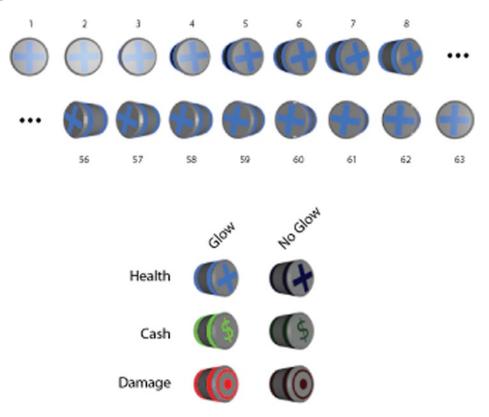


Figure 6-2. Power-up detail

The top of Figure 6-2 shows the beginning and the end of the 63 images that make up the rotating Health power-up with glow. In the example code, you will find six series of images: a glowing version and a nonglowing version for each of the three types of power-ups. By switching between the glowing version and the nonglowing version, we can create the blinking effect.

# **Implementing Our Power-Up Actor**

To implement our power-up actor, we have to configure our GameController subclass, ExampleO1Controller, to add power-ups to our scene. We also have to implement the power-up actor itself, giving it a way to draw itself and define its motion and behavior. The key classes are ImageRepresentation and Powerup, but we should start with the updateScene task from the class ExampleO1Controller, as shown in Listing 6-11.

### Listing 6-11. Example01Controller.m (updateScene)

```
-(void)updateScene{
   if (self.stepNumber % (60*5) == 0){
        [self addActor:[Powerup powerup: self]];
   }
   [super updateScene];
}
```

Here you can see the updateScene task as defined in the class ExampleO1Controller. The class ExampleO1Controller extends GameController so it inherits the game engine logic defined in that class. The updateScene task simply adds a new power-up every 5 seconds and then calls the super-implementation of updateScene. The header file for the class Powerup is shown in Listing 6-12.

#### Listing 6-12. Powerup.h

```
#import <Foundation/Foundation.h>
#import "Actor.h"
#import "ImageRepresentation.h"
#import "ExpireAfterTime.h"
enum{
    STATE GLOW = 0,
    STATE NO GLOW,
    PWR STATE COUNT
};
enum{
    VARIATION HEALTH = 0,
    VARIATION CASH,
    VARIATION DAMAGE,
    PWR VARIATION COUNT
};
@interface Powerup : Actor <ImageRepresentationDelegate,ExpireAfterTimeDelegate>{
}
+(id)powerup:(GameController*)aController;
@end
```

This header file starts by defining two enumerations. The first enumeration defines the values for the two states of Powerup, STATE\_GLOW or STATE\_NO\_GLOW. The second enumeration defines the values for the three variations of Powerup. Both of these enumerations end with a value that has the word COUNT in it. For those developers who are not coming from a C background, this is an old trick used to create a constant for the number of items in an enumeration. For example, in the first enumeration, STATE\_GLOW has a value of 0, so STATE\_NO\_GLOW has a value of 1. This gives PWR\_STATE\_COUNT a value of 2, which is the number of states there are. Clever, no?

The class Powerup as defined in Listing 6-12 extends Actor. It also conforms to the protocols ImageRepresentationDelegate and ExpireAfterTimeDelegate. We will look at the tasks that come with these protocols when we look at the details of the ImageRepresentation and ExpireAfterTime. The only new task defined for the Powerup class is the constructor powerup:. Let's take a look at that task in Listing 6-13.

#### Listing 6-13. Powerup.m (powerup: (partial))

```
+(id)powerup:(GameController*)aController{
    CGSize gameSize = [aController gameAreaSize];
    CGPoint gameCenter = CGPointMake(gameSize.width/2.0, gameSize.height/2.0);
    float distanceFromCenter = sqrtf(gameCenter.x*gameCenter.x + gameCenter.y*gameCenter.y);
    CGPoint center = [Actor randomPointAround:gameCenter At:distanceFromCenter];

    ImageRepresentation* rep = [ImageRepresentation imageRep];
    [rep setBackwards:arc4random()%2 == 0];
    [rep setStepsPerFrame:1 + arc4random()%3];

    Powerup* powerup = [[Powerup alloc] initAt:center WithRadius:32 AndRepresentation:rep];
    [rep setDelegate:powerup];
    float rotation = arc4random()%100/100.0 * M_PI*2;
    [powerup setRotation:rotation];
    [powerup setVariant:arc4random()%PWR_VARIATION_COUNT];

//Section Omitted , see Listing 6-21
    return powerup;
```

The first thing we have to do is figure out values that will be passed to Actor's initAt:WithRadius: AndRepresentation task. After we have those values figured out, we create a new power-up and then set a few starting values, such as the rotation and variation of the power-up. In an omitted section of Listing 6-13, we set up the behavior of the power-up. This code can be found in Listing 6-21 and is discussed later in this section.

Let's take a quick look at how we calculate the center of the power-up before diving into the details of ImageRepresentation. The CGPoint center is created by picking a random point on a circle just beyond the bounds of the screen, as shown in Figure 6-3.

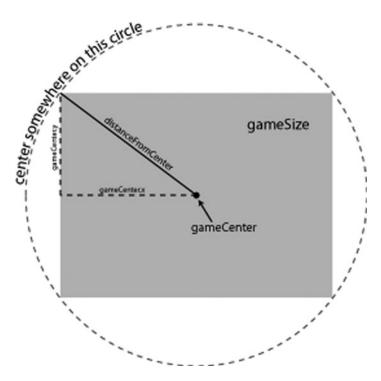


Figure 6-3. Random point offscreen

In this image, you can see the gray rectangle, which is the same size as the variable gameSize. The dot in the middle is the CGpoint gameCenter. The black line going from gameCenter to the upper-left corner of gameSize is of the length distanceFromCenter. The value of distanceFromCenter is calculated based on the X and Y components of gameCenter, using the Pythagorean theorem. Using gameCenter and distanceFromCenter, we can get a random point on the outer circle by calling randomPointAround:At: from the class Actor (shown earlier in Listing 6-10).

In Listing 6-13, after calculating the center point and picking a radius of 32, we have to create a Representation object to handle the drawing of this power-up. Because we want to use a series of images to represent power-ups, we create an instance of ImageRepresentation called rep and set the properties backwards and stepsPerFrame. ImageRrepresentation is passed to Actor's initAt:W ithRadius:AndRepresentation: task to set rep as the power-up's representation. Also note that we set the Powerup as the rep's delegate. This means that the instance of Powerup we are creating will be used to specify information about how to draw this actor.

# Inspecting ImageRepresentation

Because we want to separate the game logic regarding an actor and how it is drawn, we are introducing the class ImageRepresentation. This class is responsible for creating the objects necessary for rendering an actor with a UIView. Primarily, ImageRepresentation will be created UIImageViews with the PNG files in order to draw our actors. Let's take a look at the header of ImageRepresentation, shown in Listing 6-14.

@end

#### Listing 6-14. ImageRepresentation.h

```
#import <Foundation/Foundation.h>
#import "Actor.h"
@protocol ImageRepresentationDelegate
@required
-(NSString*)baseImageName;
@optional
-(int)getFrameCountForVariant:(int)aVariant AndState:(int)aState;
-(NSString*)getNameForVariant:(int)aVariant;
    UIView* view;
+(id)imageRep;
+(id)imageRepWithName:(NSString*)aBaseImageName;
+(id)imageRepWithDelegate:(NSObject<ImageRepresentationDelegate>*)aDelegate;
-(void)advanceFrame:(Actor*)actor ForStep:(int)step;
-(NSString*)getImageNameForActor:(Actor*)actor;
-(UIImage*)getImageForActor:(Actor*)actor;
```

The goal of the ImageRepresentation class is to encapsulate code for handling the common ways images will be used to represent an actor. These include the following cases:

- A single image representing the actor
- A series of images representing the actor
- Actors with multiple states
- Actors with multiple variations
- Actors with a different number of images for every combination of states and variations

Each actor we create that uses an ImageRepresentation will fit one of the preceding cases. We indicate which one of these cases we intend by setting a delegate of type ImageRepresentationDelegate, as shown in Listing 6-14. This allows an instance of ImageRepresentationDelegate to indicate the name of the image that should be used at any given time.

The ImageRepresentationDelegate must specify a baseImageName, which is used in all of the use cases of ImageRepresentation. If the ImageRepresentationDelegate implements only baseImageName:, this indicates that a single image will be used for all instances of the actor. If a sequence of images is to be used, the delegate object must implement the task getFrameCountForVariant:AndState:. If a different sequence of images is to be used based on the state or variant of the actor, the delegate must implement getNameForState: and getNameForVariant:, respectively. Technically speaking, if just a single image is going to be used to represent all actors of a particular type, it is not required to specify a delegate to an ImageRepresentation. However, the ImageRepresentation still requires baseImageName to be specified.

# **Creating the Implementation of Powerup**

The class Powerup must define how it is drawn, as well as its basic behavior. Because the class Powerup will use a different sequence of images for each combination of state and variation, the delegate for ImageRepresentation must implement all four of these tasks. For simplicity, we specified that the class Powerup conforms to the protocol ImageRepresentationDelegate. Let's take a look at the implementation of these methods in Listing 6-15.

Listing 6-15. Powerup.m (ImageRepresentationDelegate tasks)

```
-(NSString*)baseImageName{
   return @"powerup";
-(int)getFrameCountForVariant:(int)aVariant AndState:(int)aState{
   return 63;
-(NSString*)getNameForVariant:(int)aVariant{
    if (aVariant == VARIATION HEALTH){
        return @"health";
    } else if (aVariant == VARIATION CASH){
        return @"cash";
    } else if (aVariant == VARIATION DAMAGE){
        return @"damage";
    } else {
        return nil;
}
-(NSString*)getNameForState:(int)aState{
    if (aState == STATE GLOW){
        return @"glow";
    } else if (aState == STATE NO GLOW){
        return @"noglow";
    } else {
        return nil;
}
```

In this listing, we see the four tasks required by an ImageRepresentationDelegate to create an actor represented by a different sequence of images for each combination of states and variations. The task baseImageName returns the NSString "powerup", indicating that all of the images for this actor

}

will start with "powerup". The task getFrameCountForVariant: AndState: simply returns 63, because there are 63 images for each combination of state and variation. Other types of actors may wish to have a different number of images for each combination of state and variation and are free to return different numbers in getFrameCountForVariant:AndState:.

The tasks getNameForVariant: and getNameForState: return string representations for each variation and state that apply to power-ups and allow ImageRepresentation to figure out exactly what image should be used at a given time.

# Finding the Correct Image for an Actor

Let's take a look at ImageRepresentation's task getImageNameForActor: so you can understand ImageRepresentationDelegate are used to identify an image name. See

ImageRepresentation.m (getImageNameForActor:)

```
NSString* imageName = baseImageName;
    if (imageName == nil){
        imageName = [delegate baseImageName];
   NSString* variant = nil;
    if ([delegate respondsToSelector:@selector(getNameForVariant:)]){
        variant = [delegate getNameForVariant:[actor variant]];
   NSString* state = nil;
    if ([delegate respondsToSelector:@selector(getNameForState:)]){
        state = [delegate getNameForState:[actor state]];
    int frameCount = 0;
    if ([delegate respondsToSelector:@selector(getFrameCountForVariant:AndState:)]){
       frameCount = [delegate getFrameCountForVariant:[actor variant] AndState:[actor state]];
    if (variant != nil){
        imageName = [[imageName stringByAppendingString:@" "] stringByAppendingString:variant];
    if (state != nil){
        imageName = [[imageName stringByAppendingString:@" "] stringByAppendingString:state];
    if (frameCount != 0){
        imageName = [[imageName stringByAppendingString:@" "] stringByAppendingString:[NSString
stringWithFormat:@"%04d", currentFrame] ];
   return imageName;
```

The goal here is to establish the correct name of the image that should be used to represent the actor. The final image name will be stored in the variable imageName. The first thing we do is to establish the baseImageName. This can be either the baseImageName property of the ImageRepresentation or from the delegate.

The next step is to get the string representation of the actor's variation. We test to see whether the delegate responds to the task getNameForVariant. If it does, we assign variant to the result. We follow the same pattern to get a string representation for state.

The last thing we need the delegate for is to establish whether this actor is represented by a single image or by a sequence of images for this particular state and variation. If the delegate responds to getFrameCountForVariation:AndState:, we record the value in frameCount. If the delegate does not respond to getFrameCountForVariation:AndState:, or if getFrameCountForVariation:AndState: returned zero, this indicates that we should not include a frame number in the final image name.

After calling getFrameCountForVariation: AndState:, we have all of the information we require to establish the final name of the image. If the string representation of variant is not nil, we append "\_" and variation to the NSString imageName. Similarly, if state is not nil, we append "\_" and state to imageName. Finally, if frameCount is not zero, we append the currentFrame number to the image name. We don't have to append the file extension to the image name because UIImage will automatically find the correct image based on the name. This task will find image files of the following patterns:

- baselmageName.png
- baseImageName\_variant.png
- baseImageName\_state.png
- baseImageName\_variant\_state.png
- baselmageName\_00FN.png
- baselmageName\_state\_00FN.png
- baselmageName\_variant\_00FN.png
- baselmageName\_variant\_state\_00FN.png

Now you know how ImageRepresentation and ImageRepresentationDelegate are used to specify which image should be used for a particular actor at a given time. Looking back at Listing 6-8, you can see that an actor's representation is responsible for creating and updating the UIView associated with the actor.

## Creating the UIImageView for an Actor

The ultimate goal of ImageRepresentation is to create a UIView that represents the actor. This is done by instantiating a UIImageView that uses the correct image to represent the actor, given its type, state, and variation. We have reviewed how to find the correct image. All that is left is to create UIImageView. This work is done in the task getViewForActor:In:, shown in Listing 6-17.

#### Listing 6-17. ImageRepresentation.m (getViewForActor:In:)

```
-(UIView*)getViewForActor:(Actor*)actor In:(GameController*)aController{
    if (view == nil){
        UIImage* image = [self getImageForActor: actor];
        view = [[UIImageView alloc] initWithImage: image];
    }
    return view;
}
```

ImageRepresentation simply tests to see whether view has been created, and creates it if it has not. To create the UIImageView, we call getImageForActor: and then create UIImageView with the UIImage that was returned. The task getImageForActor: is shown in Listing 6-18.

ImageRepresentation.m (getImageForActor:)

```
NSString* imageName = [self getImageNameForActor:actor];
UIImage* result = [UIImage imageNamed: imageName];
if (result == nil){
    NSLog(@"Image Not Found: %@", imageName);
}
    return result;
```

The task getImageForActor: simply calls getImageNameForActor and creates a UIImage based on that name. If no image exists with the given name, the result will be nil. Placing a beak point on that NSLog statement will save you a lot of trouble when debugging your app, as you will be notified immediately when an actor is being drawn with a nonexisting image.

## **Updating Our Views**

Now that we have looked at how ImageRepresentation creates a UIView used to draw an actor, let's take a look at how ImageRepresentation updates that UIView to create the cycling animations and responds to a change in state or variation. Listing 6-19 shows the task updateView:ForActor:In: for ImageRepresentation.

#### Listing 6-19. ImageRepresentation.m (updateView:ForActor:In:)

```
-(void)updateView:(UIView*)aView ForActor:(Actor*)anActor In:(GameController*)aController{
    if ([delegate respondsToSelector:@selector(getFrameCountForVariant:AndState:)]){
        [self advanceFrame: anActor ForStep:[aController stepNumber]];
    }
    if ([anActor needsViewUpdated]){
        UIImageView* imageView = (UIImageView*)aView;
        UIImage* image = [self getImageForActor: anActor];
```

The task updateView:ForActor:In: is responsible for making sure that the correct image is being used to represent the actor anActor. The first step is to see whether ImageRepresentation is managing a series of images by checking if the delegate responds to getFrameCountForVariation: AndState:. If a series of images is being used, we call advanceFrame:ForStep: to advance the current frame for the actor, as shown in Listing 6-20.

Listing 6-20. ImageRepresentation.m (advanceFrame:ForTick:)

```
-(void)advanceFrame:(Actor*)actor ForStep:(int)step{
   if (step % self.stepsPerFrame == 0){
      if (self.backwards){
            self.currentFrame -= 1;
      } else {
            self.currentFrame += 1;
      }

      int frameCount = [delegate getFrameCountForVariant:[actor variant] AndState:[actor state]];
      if (self.currentFrame>frameCount){
            self.currentFrame = 1;
      }
      if (self.currentFrame<1){
            self.currentFrame = frameCount;
      }

      [actor setNeedsViewUpdated:YES];
   }
}</pre>
```

We change the current frame only if the modulus of step by stepsPerFrame is zero. If backwards is true, we subtract 1 from the currentFrame; conversely, we add 1. If we change currentFrame's value, we have to make sure we don't have a value less than 1 or greater than the number of frames. Note here that currentFrame is one based, not zero based. This was done so the value of currentFrame matches identically with our naming convention for image file names, which is based on how the 3D modeling application Blender names files. This makes life easier when debugging, since you don't have to remember to add or subtract. The last thing we do in advanceFrame:ForStep: is to mark this actor as needing its view updated.

Looking back at Listing 6-19, after calling advanceFrame:ForStep:, we check to see whether needsViewUpdated is true. If we had adjusted the currentFrame value in advanceFrame:ForStep:, then needsViewUpdated will be true. The value of needsViewUpdated could also be true for other reasons (perhaps the actor's state or variation has changed). Regardless of how needsViewUpdates was set to YES, we simply find the correct image for the actor by calling getImageForActor: and updating imageView. Finally, we set needsViewUpdated to NO, because we know at this moment that we have exactly the right image and we don't need to find a different image during the next step unless something sets needsViewUpdated back to YES.

We have reviewed the class ImageRepresentation and how it is used to coordinate the various states of the actor with the image intended to represent it. The goal in designing this class was to make it easy to facilitate creating new Actor classes that use it. In the other examples in the chapter, we will be reusing this class in various configurations and we will see how it handles these other cases.

The last thing to understand about this example is how the power-ups move across the screen and how they change state to create the blinking effect, as discussed in the following section.

# **Understanding Behaviors by Example**

In this example, we have power-ups tumbling across the screen. Eventually they start blinking, just before they vanish. These two distinct behaviors could simply be implemented by providing the Powerup. In the previous chapter, this is how we implemented the different

Powerup's constructor that dealt with

Powerup.m (powerup: (partial))

```
[powerup addBehavior: motion];

ExpireAfterTime* expire = [ExpireAfterTime expireAfter:60*30];
[expire setDelegate: powerup];
[powerup addBehavior: expire];
return powerup;
```

We have just created a new Powerup object called powerup and set a few basic properties. The next step is to create Behavior objects and add them to the newly created Powerup before returning the objects. The first behavior we create is a LinearMotion object called motion, which we add to the powerup with the task addBehavior:. The second behavior is an ExpireAfterTime object called expire. Before adding expire to powerup, we register powerup as a delegate to expire. This gives us an easy way to make the power-up blink when it gets close to its expiration.

## **Behavior: Linear Motion**

Both of these behaviors will be reused with other Actor classes, so they are worth looking at in some detail. Let's start with the class LinearMotion, whose header is shown in Listing 6-22.

```
Listing 6-22. LinearMotion.h
```

```
#import <Foundation/Foundation.h>
#import "Actor.h"
```

```
@interface LinearMotion : NSObject <Behavior>{
    float deltaX;
    float deltaY;
}

@property (nonatomic) float speed;
@property (nonatomic) float direction;
@property (nonatomic) BOOL wrap;
+(id)linearMotionInDirection:(float)aDirection AtSpeed:(float)aSpeed;
+(id)linearMotionRandomDirectionAndSpeed;
@end
```

The class LinearMotion extends NSObject and conforms to the protocol Behavior, which was imported from Actor.h. The class LinearMotion has three properties: speed, direction, and wrap. The properties speed and direction are, we hope, obvious. The wrap property indicates whether the actor should reenter the game area on the opposite side after leaving the game area. The two tasks are constructors for creating LinearMotion objects. We could probably think of a few more handy constructors for this class, but these two are all we need for this chapter. Let's start exploring the implementation of the class LinearMotion by looking at these two constructors, shown in Listing 6-23.

#### Listing 6-23. LinearMotion.m (constructors)

```
+(id)linearMotionInDirection:(float)aDirection AtSpeed:(float)aSpeed{
    LinearMotion* motion = [LinearMotion new];
    [motion setDirection:aDirection];
    [motion setSpeed:aSpeed];

    return motion;
}
+(id)linearMotionRandomDirectionAndSpeed{
    float direction = (arc4random()%100/100.0)*M_PI*2;
    float speed = (arc4random()%100/100.0)*3;

    return [LinearMotion linearMotionInDirection:direction AtSpeed:speed];
}
```

The constructor linearMotionInDirection:AtSpeed: simply creates a new LinearMotion object and sets the two properties. The constructor linearMotionRandomDirectionAndSpeed creates random values for direction and speed, and then simply calls the constructor linearMotionInDirection:AtSpeed:.

Listing 6-24 shows the rest of the implementation of the class LinearMotion.

#### Listing 6-24. LinearMotion.m

```
-(void)setSpeed:(float)aSpeed{
    speed = aSpeed;
    deltaX = cosf(direction)*speed;
    deltaY = sinf(direction)*speed;
}
```

```
-(void)setDirection:(float)aDirection{
    direction = aDirection;
    deltaX = cosf(direction)*speed;
   deltaY = sinf(direction)*speed;
}
-(void)applyToActor:(Actor*)anActor In:(GameController*)gameController{
   CGPoint center = anActor.center;
    center.x += deltaX;
    center.y += deltaY;
    if (wrap){
        CGSize gameSize = [gameController gameAreaSize];
        float radius = [anActor radius];
        if (center.x < -radius && deltaX < 0){</pre>
            center.x = gameSize.width + radius;
        } else if (center.x > gameSize.width + radius && deltaX > 0){
            center.x = -radius;
        }
        if (center.y < -radius && deltaY < 0){</pre>
            center.y = gameSize.height + radius;
        } else if (center.y > gameSize.height + radius && deltaY > 0){
            center.y = -radius;
    [anActor setCenter:center];
}
```

We calculate the values deltaX and deltaY each time the speed or direction values are set. The task applyToActor:In: is defined by the protocol Behavior and is called by a GameController to give a Behavior a chance to modify an actor. In the implementation of applyToActor:In: for the class LinearMotion, we start by getting the current center of the actor and increase the X and Y components by deltaX and deltaY.

If wrap is true, we have to see whether the actor is outside the game area. This is a little more complex than simply checking whether center is inside gameArea or not, because we have to take into account the radius of the actor as well. We want an actor to appear as though it is traveling offscreen instead of simply vanishing when it touches the edge of the screen. Also, we want to move an actor only if it is moving away from the game area. Keeping these two things in mind, we test whether the X value of center is less than radius and has a negative deltaX. This means the actor is to the left of the game area and moving left, away from the game area. So we had better move it to the right of the game area, so its leftward motion brings the actor back onto the right side of the screen. We perform the opposite operation if the X value of center is greater than the width of the game area and is moving to the right, moving the actor to the left side of the screen. These two tests are repeated for the center's Y value.

The implementation of LinearMotion is pretty simple, only slightly complicated by the notion of wrapping. Next, we will explore the class ExpireAfterTime, which is used to remove actors from the scene after a given time.

# Behavior: ExpireAfterTime

The class ExpireAfterTime is used by Powerup to remove it from the scene after a number of steps have passed by. Before the power-up is removed, we want to make the power-up blink by changing its state from glowing to not glowing. To support this second feature, we will want to have some sort of communication between the ExpireAfterTime object and the actor it is acting on. Listing 6-25 shows the header of the class ExpireAfterTime.

#### Listing 6-25. ExpireAfterTime.h

```
#import <Foundation/Foundation.h>
#import "Actor.h"

@class ExpireAfterTime;
@protocol ExpireAfterTimeDelegate
   -(void)stepsUpdated:(ExpireAfterTime*)expire In:(GameController*)controller;
@end

@interface ExpireAfterTime : NSObject <Behavior> {
}
@property (nonatomic) long stepsRemaining;
@property (nonatomic, assign) Actor<ExpireAfterTimeDelegate>* delegate;
+(id)expireAfter:(long)aNumberOfSteps;
@end
```

Here the class ExpireAfterTime conforms to the protocol Behavior, just like the class LinearMotion does. ExpireAfterTime also defines a new protocol called ExpireAfterTimeDelegate that defines the task stepsUpdated:In:, which will be called by the ExpireAfterTime on its delegate every time applyToActor:In: is called, as shown in Listing 6-26.

#### Listing 6-26. ExpireAfterTime.m

```
#import "ExpireAfterTime.h"
#import "GameController.h"

@implementation ExpireAfterTime
@synthesize stepsRemaining;
@synthesize delegate;

+(id)expireAfter:(long)aNumberOfSteps {
    ExpireAfterTime* expires = [ExpireAfterTime new];
    [expires setStepsRemaining: aNumberOfSteps];
    return expires;
}

-(void)applyToActor:(Actor*)anActor In:(GameController*)gameController{
    stepsRemaining--;
    [delegate stepsUpdated:self In:gameController];
```

```
if (stepsRemaining <= 0){
          [gameController removeActor:anActor];
    }
}
@end</pre>
```

In this implementation of the class ExpireAfterTime, the constructor expireAfter: simply creates a new ExpireAfterTime object and sets the stepsRemaining property. The task applyToActor:In: is called by a GameController for each step of the game. In this task, we decrement stepsRemaining and update the delegate that the number of steps was updated. If stepsRemaining is zero or less, we remove the actor from the GameController.

Before we add ExpireAfterTime to the Powerup object, we set the Powerup object as the delegate ExpireAfterTime. This causes ExpireAfterTime to call stepsUpdated:In: on the Powerup object. stepsUpdated:In: for the class Powerup.

#### Powerup.m (stepsUpdated:In:)

```
long stepsRemaining = [expire stepsRemaining];
if (stepsRemaining<60*5){
    if (stepsRemaining % 25 == 0){
        if (self.state == STATE_GLOW){
            self.state = STATE_NO_GLOW;
        } else {
            self.state = STATE_GLOW;
        }
    }
}</pre>
```

In this listing, we check how many steps are remaining for the ExpireAfterTime object. If that value is fewer than 300 steps (5 seconds at 60 frames per second), we want to apply our blinking logic. To make the power-up blink, we swap the state of Powerup from STATE\_GLOW to STATE\_NO\_GLOW, or vice versa.

Changing the state is all that is required to change which image represents the Powerup actor because (looking back at Listing 6-10) we know that setting the state of an actor sets its needViewUpdated property to YES. Further, if an actor's needViewUpdated property is YES and that actor is using an ImageRepresentation, that ImageRepresentation will fetch the correct image for the actor in the task updateView: In: (as shown earlier in Listing 6-19).

# **Summary**

In this chapter, we looked at our base game engine classes GameController and Actor and learned how to use these classes to create a simple scene exercising our new actor, the power-up. We looked at the protocol Behavior, which provides us with a framework for creating reusable bits of game logic to be applied to our actors. We also consolidated the logic required to render an image-based actor into the class ImageRepresentation. This also set the stage for vector-based actors, which will be discussed in the following chapter.

# Build Your Game: Vector Actors and Particles

Core Graphics is a powerful 2D drawing library that is responsible for rendering large portions of iOS and OS X. In this chapter, we see how to use this library to draw actors in our game. The goal is to have actors that are drawn dynamically based on game state. To illustrate this, we'll create two example actors drawn with Core Graphics: a health bar that shows the amount of health remaining for an actor, and a bullet that is drawn in a particular color depending on how powerful it is. These two examples will illustrate how to use Core Graphics within the context of the simple game engine we have started.

We will accomplish this by creating a new class called VectorRepresentation, which is analogous to the class ImageRepresentation from the previous chapter. The class VectorRepresentation will be used to create a UIView to represent our actor, and be drawn with custom code using Core Graphics.

We'll also look at another popular technique used in games to create a compelling visual: the particle system. Stated simply, a particle system is anything in a game that generates lots of little graphics that, when composed on the screen, create an overall effect more interesting than the sum of its parts. Particle systems are used in games to create fire effects, water effects, and spell effects, to name a few.

In this chapter, we use particle systems to create comets that are composed of a large number of simple particle actors to give the comets a glowing, fluid feel. We are also going to use this technique to illustrate a little realism when an asteroid breaks apart.

The sample code for this chapter can be found in the Xcode project Sample 06+07.

# Saucers, Bullets, Shields, and Health Bars

In this example, we will look at four new actors: saucers, bullets, shields, and health bars. The code for this section is found under the group Example 2, in the Xcode project Sample 06+07.

The health bar and bullet actors will be rendered programmatically with Core Graphics instead of using a pre-rendered image. The other actors—saucers and shields—exist in this example to provide a little context (got to have something to shoot with the bullets) and flesh out our example from the last chapter in terms of behaviors. Figure 7-1 shows the saucers, bullets, shields, and health bars in action.



Figure 7-1. Saucers, bullets, shields, and health bars

In Figure 7-1, we see a flying saucer in the middle of the screen. Coming from the right and traveling left are a number of circular bullets. The bullets come in three different sizes, which reflect their potential for damage. If a bullet collides with the saucer, a shield effect is added to the flying saucer and the health bar goes down, indicating the damage done. In this example, the bullets will keep coming until the saucer's health is zero, at which point it is removed and a new flying saucer is added. Figure 7-2 shows the three difference saucers used in this example, as well as the graphic used for the shield.



Shield Over Saucer Scale x2



Figure 7-2. Three saucers and a shield

The shield image is partially transparent and is designed be drawn over a saucer, as can be seen in the scaled up saucer with the shield drawn over it.

To understand how all the parts and pieces of this example fit together, we will start by looking at the implementation of the class Example02Controller, starting with the doSetup task, shown in Listing 7-1.

#### Listing 7-1. Example02Controller.m (doSetup)

```
-(BOOL)doSetup
{
    if ([super doSetup]){
        NSMutableArray* classes = [NSMutableArray new];
        [classes addObject:[Saucer class]];
        [classes addObject:[Bullet class]];

        [self setSortedActorClasses:classes];
        return YES;
    }
    return NO;
}
```

In Listing 7-1, we see the doSetup task of the class Example02Controller. This method simply indicates that we want to keep actors of type Saucer and Bullet sorted for easy access later on. We do this by creating an NSMutableArray called classes and adding the class objects for two classes in which we are interested. The NSMutableArray classes are then passed to setSortedActorClasses:. This way, when we call actorsOfType: in the future, we will not have to sort through all of the actors to find them. Next, we want to take a look at the code that describes the action in this example that is found in the task updateScene of class Example02Controller. See Listing 7-2.

}

#### Listing 7-2. Example 02 Controller.m (update Scene)

```
-(void)updateScene{
   NSMutableSet* suacers = [self actorsOfType:[Saucer class]];
    if ([suacers count] == 0){
        Saucer* saucer = [Saucer saucer:self];
        [self addActor: saucer];
    }
    if (self.stepNumber \% (30) == 0){
        float direction = M_PI - M_PI/30.0;
        float rand = (arc4random()%100)/100.0 * M PI/15.0;
        direction += rand;
        Bullet* bullet = [Bullet bulletAt:CGPointMake(1000, 768/2) WithDirection:direction];
        [self addActor: bullet];
        if (arc4random()\%4 == 0){
            if (arc4random()\%2 == 0){
                [bullet setDamage:20.0];
            } else {
                [bullet setDamage:30.0];
            }
    }
   NSMutableSet* bullets = [self actorsOfType:[Bullet class]];
    for (Bullet* bullet in bullets){
        for (Saucer* saucer in suacers){
            if ([bullet overlapsWith:saucer]){
               [saucer doHit:bullet with:self];
        }
    [super updateScene];
```

In Listing 7-2, we first get all instances of Saucer in the scene and check to see if any exist. If none do, we create a new Saucer and add it to the scene with the addActor: task. This ensures that there is always exactly one Saucer in the middle of the screen. Then, every 30 steps, we create a new Bullet using the task bullatAt: WithDirection:. The location of bullet is specified in game coordinates, and the right-most point at the vertical center. The direction specified will cause the Bullet to travel toward the left, possibly hitting the Saucer. Once bullet is added to the scene, the damage is randomly assigned. The damage each Bullet does will also dictate how we draw the Bullet. The more damage a Bullet does, the larger it will be drawn.

The last thing the updateScene task does is check to see if any Bullet has collided with the Saucer. This is done by calling actorsOfType: and getting all Bullet objects in the scene stored in the NSMutableSet\* bullets. We simply iterate over each Bullet and Saucer and check if there is a hit by calling overlapsWith: If there is a hit, we call the doHit:with: task of the class Saucer.

Let's take a closer look at them implementation of the Actor classes used in this example.

# **The Actor Classes**

In this section, we learn about the Saucer actor and the HealthBar actor classes. The HealthBar is different from other actors we have looked at up until this point. It is different because its location in the scene is dependent on the location of another Actor—in this case, a Saucer. Once we have reviewed the classes Saucer and HealthBar, we will look at the Behavior class FollowActor and see how we implement this feature.

## **Instantiating the Saucer Class**

We will start by looking at the constructor for the class Saucer. We want to start with the Saucer's constructor because this is where we create the HealthBar. In this way, we don't have to worry about adding a HealthBar when we create a new Saucer because one will be created automatically every time we create a Saucer. The constructor for Saucer is shown in Listing 7-3.

#### Listing 7-3. Saucer.m (saucer:)

```
+(id)saucer:(GameController*)controller{
   CGSize gameAreaSize = [controller gameAreaSize];
   CGPoint gameCenter = CGPointMake(gameAreaSize.width/2.0, gameAreaSize.height/2.0);
    ImageRepresentation* rep = [ImageRepresentation imageRep];
    [rep setBackwards:arc4random()%2 == 0];
    [rep setStepsPerFrame:3];
    Saucer* saucer = [[Saucer alloc] initAt:gameCenter WithRadius:32 AndRepresentation:rep];
    [rep setDelegate:saucer];
    [saucer setVariant:arc4random()%VARIATION COUNT];
    [saucer setMaxHealth:100];
    [saucer setCurrentHealth:100];
   HealthBar* healthBar = [HealthBar healthBar:saucer];
    [healthBar setPercent:1];
    [saucer setHealthBar:healthBar];
    [controller addActor:healthBar];
   return saucer;
}
```

In Listing 7-3, we start by finding the center of the game area and storing that value in the CGPoint gameCenter. Next, we create an ImageRepresentation called rep. We indicate that rep should spin the Saucer backward half the time at a rate of 3 steps per frame of animation. The CGRect

gameCenter and the ImageRepresentation rep are passed to the super-initializer initAt:WithRadi us:AndRepresenation: to create a Saucer object with a radius of 32. The object saucer is then set as the delegate to the ImageRepresenation so we can specify the representational details with the class Saucer. This works exactly like the actors in Chapter 6. Have a look at the source code to see exactly how these tasks are implemented.

Once the saucer object is created, we want to initialize it with some details. We set which of the three variants we want to use by calling setVariant: on saucer. We also set the max health and current health properties to 100. Let's move on to the HealthBar class.

# **Instantiating the HealthBar Class**

In order to render the health bar under the saucer, we create a HealthBar object and pass in the saucer. We also set the healthBar property of saucer to the healthBar so the saucer object can update the percentage displayed by healthBar healthBar is added to the scene. Let's take a look at the constructor HealthBar and understand how it is set up and behaves the way it does. See Listing 7-4.

```
VectorRepresentation* rep = [VectorRepresentation vectorRepresentation];

HealthBar* healthBar = [[HealthBar alloc] initAt:anActor.center WithRadius:anActor.radius
    [rep setDelegate:healthBar];
    [healthBar setColor:[UIColor blueColor]];
    [healthBar setBackgroundColor:[UIColor colorWithRed:0 green:0 blue:0 alpha:.5]];

FollowActor* follow = [FollowActor followActor:anActor];
    [follow setYOffset:[anActor radius]];
    [healthBar addBehavior:follow];

return healthBar;
}
```

In Listing 7-4, we see the constructor task healthBar: and that it takes an Actor as an argument. The Actor anActor is the actor that this HealthBar will stay under if anActor moves. In this example, the Saucer associated with it does not move, but we are going to use this class in future examples, where its actor does move. Before we look at the behavior FollowActor, notice that HealthBar is initialized by passing an instance of VectorRepresentation instead of an ImageRepresentation object. This indicates that we want to draw this object programmatically. We will look at how this works in the next section. For now, let's continue to explore this example. The next class we want to inspect is FollowActor.

## The Behavior FollowActor Class

The class responsible for keeping the HealthBar near the Saucer is the class FollowActor. This class is a Behavior and provides the same sort of abstraction we found with the other Behavior classes. Let's see how all of this fits together by looking at the class FollowActor. See Listing 7-5.

#### Listing 7-5. FollowActor.m

```
#import "FollowActor.h"
#import "GameController.h"
@implementation FollowActor
@synthesize actorToFollow;
@synthesize xOffset;
@synthesize yOffset;
+(id)followActor:(Actor*)anActorToFollow{
    FollowActor* follow = [FollowActor new];
    [follow setActorToFollow:anActorToFollow];
    return follow;
-(void)applyToActor:(Actor*)anActor In:(GameController*)gameController{
    if (![actorToFollow removed]){
        CGPoint c = [actorToFollow center];
        c.x += x0ffset;
        c.y += yOffset;
        [anActor setCenter: c];
    } else {
        [gameController removeActor:anActor];
}
@end
```

In Listing 7-5, we see the entire implementation of the class FollowActor. It is constructed with the task followActor:, which takes the actor to follow as an argument. The task applyToActor:In: is called for every step of the game and is responsible for repositioning the actor this behavior is associated with. To do this, we simply set the property center of anActor to the property center of the Actor we are following, adjusting by xOffest and yOffset. Looking at Listing 7-4, we see that the HealthBar is configured to follow the saucer at an xOffset equal to the radius of saucer. This keeps the HealthBar centered below saucer. Now let's explore the Bullet class.

## The Bullet Class

We have seen how the Saucer and the HealthBar classes work together. We now want to look at the Bullet class and understand why it behaves the way it does. Listing 7-6 shows Bullet's constructor.

#### Listing 7-6. Bullet.m (bulletAt:WithDirection:)

```
+(id)bulletAt:(CGPoint)aCenter WithDirection:(float)aDirection{
    VectorRepresentation* rep = [VectorRepresentation vectorRepresentation];
    Bullet* bullet = [[Bullet alloc] initAt:aCenter WithRadius:4 AndRepresentation:rep];
    [rep setDelegate:bullet];
```

```
[bullet setDamage: 10];
LinearMotion* motion = [LinearMotion linearMotionInDirection:aDirection AtSpeed:3];
[motion setWrap:YES];
[bullet addBehavior: motion];
ExpireAfterTime* expires = [ExpireAfterTime expireAfter:240];
[bullet addBehavior:expires];
return bullet;
}
```

initAt:WithRadius:AndRepresentation:, and we are adding the behavior objects
LinearMotion and ExpiresAfterTime. These two behavior objects are used by the class
and are fully described in Chapter 6. The only new feature in the Bullet class is the class
, which was also used by the class HealthBar to indicate that this type of

VectorRepresentation

The Core Graphics library is interesting because it is not a vector graphics library (like SVG), but it is excellent at rasterizing vector data structures. This makes a lot of sense if you consider that Core Graphics was originally based on PDF. Core Graphics is a great library for rendering high-quality graphics in a resolution-independent way. What this means for us is that our code will not be specifying which pixel is which color, but instead will be describing shapes and how they should be filled. Core Graphics is also known as Quartz. A complete description of the available drawing functions can be found here: http://goo.gl/6i5gr.

In iOS, a UIView can specify how it is drawn by overriding the task drawRect:, getting a reference to its graphics context and then calling a number drawing methods. Because our game engine uses UIView's to represent each actor, we know that ultimately we will be creating a subclass of UIView and calling the drawing code for our vector-based actors. It is the job the class VectorRepresentation to manage the relationship between the actor and the view that draws it on the screen.

# **The VectorRepresentation Class**

The VectorRepresentation class is responsible for creating a UIView suitable to draw our actor on. Let's start exploring this class with the header for VectorRepresentation. See Listing 7-7.

#### Listing 7-7. VectorRepresentation.h

```
#import <Foundation/Foundation.h>
#import "Actor.h"

@class VectorActorView;

@protocol VectorRepresentationDelegate
    -(void)drawActor:(Actor*)anActor WithContext:(CGContextRef)context InRect:(CGRect)rect;
@end

@interface VectorRepresentation : NSObject<Representation> {
        VectorActorView* view;
}

@property (nonatomic, assign) NSObject<VectorRepresentationDelegate>* delegate;
+(id)vectorRepresentation;
@end
```

In Listing 7-7, we see that the class VectorRepresentation defines a protocol called VectorRepresentationDelegate to which each vector-based actor must conform. This protocol requires the task drawActor:WithContext:InRect: to be implemented by all classes that conform to it, and is where the actual drawing code should be placed.

The class VectorRepresentation extends NSObject and conforms to the protocol Representation, just like the class ImageRepresentation does. The idea here is that most of the code should not care which type of representation we use—vector or image. We simply create the correct Representation object and associate it with each actor.

We also see that the class VectorRepresentation has a single property view of type VectorActorView. A VectorActorView is a subclass of UIView and will ultimately call the task drawActor:WithContext:InRect: as defined by the protocol VectorRepresentationDelegate. Before looking at the class VectorActorView, let's look at the implementation of VectorRepresentation as shown in Listing 7-8.

#### Listing 7-8. VectorRepresentation.m

```
#import "VectorRepresentation.h"
#import "VectorActorView.h"

@implementation VectorRepresentation
@synthesize delegate;

+(id)vectorRepresentation{
    return [VectorRepresentation new];
}
-(UIView*)getViewForActor:(Actor*)anActor In:(GameController*)aController{
    if (view == nil){
        view = [VectorActorView new];
        [view setBackgroundColor:[UIColor clearColor]];
        [view setActor: anActor];
```

```
[view setDelegate:delegate];
       [anActor setNeedsViewUpdated:YES];
}
return view;
}
-(void)updateView:(UIView*)aView ForActor:(Actor*)anActor In:(GameController*)aController{
    if ([anActor needsViewUpdated]){
       [aView setNeedsDisplay];
       [anActor setNeedsViewUpdated:NO];
    }
}
@end
```

VectorRepresentation and that it has a trivial getViewForActor:In: and updateView:In:

Representation. In the task getViewForActor:In: we create a new , and specify the actor and delegate that should be used to draw. Then we call , making sure the actor's drawing code is called at least once.

updateView:In: we check to see if the actor needs updating; if so, we call
on the UIView aView. The task setNeedsDisplay is defined by the class UIView
UIView should be redrawn. In effect,
drawRect: task of our VectorActorView to be called, which in turn will call the
of our actor. Next we want to look at the details of the class

.

## A UIView for Vector-Based Actors: VectorActorView

The class VectorActorView is a subclass of UIView and is used to represent the actor in the scene in much the same way as we use UIImageView instances to represent image-based Actors. Let's take a look at the class VectorActorView and see how it all fits together, starting with the header. See Listing 7-9.

#### Listing 7-9. VectorActorView.h

```
#import <UIKit/UIKit.h>
#import "Actor.h"
#import "VectorRepresentation.h"
@interface VectorActorView : UIView {
}
@property (nonatomic, retain) Actor* actor;
@property (nonatomic, retain) NSObject<VectorRepresentationDelegate>* delegate;
@end
```

In Listing 7-9, we see that VectorActorView extends UIView and has two properties. The first is the Actor that is to be drawn. The second property is the VectorRepresentationDelegate that

is responsible for actually drawing the Actor. In this example, these two objects—the actor and the delegate—will be the same object, either a Bullet or a HealthBar. However, this is not a requirement. I like to keep all the code related to an actor in the actor's class. The delegate could be its own class responsible for drawing the actor. This would make sense if you wanted to use a single VectorRepresentationDelegate to draw multiple types of actors. The implementation of the class VectorActorView is very simple, as can be seen in Listing 7-10.

#### Listing 7-10. VectorActorView.m

```
- (void)drawRect:(CGRect)rect
{
    CGContextRef context = UIGraphicsGetCurrentContext();
    [delegate drawActor:actor WithContext:context InRect:rect];
}
```

In Listing 7-10, we see that the implementation is the class VectorActorView a single method, the implementation of the task drawRect:. In this method, we get a reference to the current graphics context by calling UIGraphicsGetCurrentContext and passing the context and the actor to the delegate to be drawn in the CGRect specified. Let's now take a look at a specific example.

# **Drawing a HealthBar**

As mentioned, the vector-based actors used in this example are their own delegates in terms of drawing, so let's look at the HealthBar class again and see how it draws itself. See Listing 7-11.

#### Listing 7-11. HealthBar.m (drawActor:WithContext:InRect:)

```
-(void)drawActor:(Actor*)anActor WithContext:(CGContextRef)context InRect:(CGRect)rect{
    CGContextClearRect(context,rect);

    float height = 10;

    CGRect backgroundArea = CGRectMake(0, self.radius-height/2, self.radius*2, height);
    [self.backgroundColor setFill];
    CGContextFillRect(context, backgroundArea);

CGRect healthArea = CGRectMake(0, self.radius-height/2, self.radius*2*percent, height);
    [self.color setFill];
    CGContextFillRect(context, healthArea);
}
```

In Listing 7-11, we start by calling CGContectClearRect. This erases any old content in the given rect, getting us ready to do our real drawing. To draw the HealthBar, all we have to do is draw two rectangles, one for the background and another on top of the background representing the current percentage of the health bar. To draw a rectangular area (as apposed to drawing the edges of a rectangle), we define a rect by calling CGRectMake. Then we specify the color to be used by calling setFill on the UIColor object backgroundColor, which is a property of HealthBar.

To actually change the color of the pixels of the UIView being drawn, we call CGContextFillRect passing in our context and the CGRect backgroundArea. To draw the foreground rectangle, we repeat the process, but the width of our top rectangle, healthArea, is calculated based the value of the property percent. This indicates that every time the percent of the HealthBar changes, we have to redraw the HealthBar. To make sure this happens, we have to provide our own implementation of setPercent: instead of relying on the default implementation that would be provided by a synthesized property. Listing 7-12 shows the custom implementation of setPercent: for the class HealthBar.

#### Listing 7-12. HealthBar.m (setPercent:)

```
-(void)setPercent:(float)aPercent{
    if (percent != aPercent){
        percent = aPercent;
        if (percent < 0){
            percent = 0;
        }
        if (percent > 1){
            percent = 1;
        }
        [self setNeedsViewUpdated:YES];
}
```

setPercent:. First we check to see if the values of percent (the backing variable for the property) and the passed in value aPercent have different values. If they do, we set percent to aPercent and we normalize the values by ensuring it is between the values 0 and 1. Lastly, we call setNeedsViewUpdate: with YES. This ensures that the HealthBar will be redrawn during the next step in the animation. Let's now take a look at how the Bullet class is drawn.

# **Drawing the Bullet Class**

We have looked at the class HealthBar and inspected how it is drawn. We only used a single drawing function, CGContextFillRect, to create our visual effect. Of course, there are many, many more drawing functions that allow you to create any visual effect you want. We are not going to cover all of these functions, but there is fantastic documentation available online. That being said, let's take a look at the drawing implementation of the class Bullet. See Listing 7-13.

#### Listing 7-13. Bullet.m (drawRect:WithContext:InRect:)

```
-(void)drawActor:(Actor*)anActor WithContext:(CGContextRef)context InRect:(CGRect)rect{
    CGContextAddEllipseInRect(context, rect);
    CGContextClip(context);

    CGFloat locations[2];

    locations[0] = 0.0;
    locations[1] = 1.0;
```

```
CGColorSpaceRef space = CGColorSpaceCreateDeviceRGB();
    UIColor* color1 = nil:
    UIColor* color2 = nil;
    if (damage >= 30){
        color1 = [UIColor colorWithRed:1.0 green:0.8 blue:0.8 alpha:1.0];
        color2 = [UIColor colorWithRed:1.0 green:0.0 blue:0.0 alpha:1.0];
    } else if (damage >= 20){
        color1 = [UIColor colorWithRed:0.8 green:1.0 blue:0.8 alpha:1.0];
        color2 = [UIColor colorWithRed:0.0 green:1.0 blue:0.0 alpha:1.0];
    } else {
        color1 = [UIColor colorWithRed:0.8 green:0.8 blue:1.0 alpha:1.0];
        color2 = [UIColor colorWithRed:0.0 green:0.0 blue:1.0 alpha:1.0];
    }
    CGColorRef clr[] = { [color1 CGColor], [color2 CGColor] };
    CFArrayRef colors = CFArrayCreate(NULL, (const void**)clr, sizeof(clr) / sizeof(CGColorRef),
&kCFTypeArrayCallBacks);
    CGGradientRef grad = CGGradientCreateWithColors(space, colors, locations);
    CGColorSpaceRelease(space);
    CGContextDrawLinearGradient(context, grad, rect.origin, CGPointMake(rect.origin.x +
rect.size.width, rect.origin.y + rect.size.height), 0);
    CGGradientRelease(grad);
}
```

In Listing 7-13, we see the code that draws each bullet on the screen. This code draws a circle with a gradient based on the damage of the Bullet. In my opinion, this is a lot of code to accomplish something so simple. Let's break it down piece by piece. The first line of the task creates an oval clipping region for the graphic context based on the provided rectangle. This means that future drawing operations will be visible only with this oval region.

The next step is to create the gradient used by the drawing operation. A gradient is made of two main parts. The first part is an array specifying where each color of the gradient should be applied. In our case, we are only using a two-color gradient, so we create an array called locations, making the first value 0 and second 1. This means that the colors should blend evenly from the start of the gradient to the end.

The second part of a gradient is the colors used. In our example, we specify each color based on value of damage. We simply assign the variables color1 and color2 to the colors we want to use to draw the Bullet. Once we have our colors, we create a CFArrayRef to store our colors in.

Once we have the locations of the colors and the colors themselves stored in the correct type of array, we call CGGradientCreateWithColors and pass the arrays in to create a CGGradientRef call grad. Note we also have passed in a reference to the color space, as defined by CGColorSpaceRef call ref. This is the default color space for the display and will only have to be changed if your application is doing sophisticated color presentation.

Once the CGGradientRef is created, call CGContextDrawLinearGradient. It would normally fill the entire UIView with the specified gradient, but because we specified the clip region at the top of the task, we get a nice circle with the gradient evenly drawn over it.

We have looked at how we can create actors that are drawn using Core Graphics to open up the possibility of dynamically drawing our actors, preventing us from having to create an image for every possible state of our actors. In the next section, we will look at another strategy for drawing actors, those based on particles.

# **Adding Particle Systems to Your Game**

Particle systems in games are collections of many, usually small, images drawn together to create an



7-3 shows this next example in action.

Figure 7-3. Comets and destructible asteroids

In Figure 7-3, we see three comets traveling across the screen. We also see a number of asteroids in various states of exploding. The asteroids drift in from off the screen, and when you tap the screen they explode into a number of smaller asteroids. In addition to creating the new, smaller asteroids, we send out a number of particles that look like asteroids. This gives the destruction of the larger asteroid some added realism because big chunks of rock seldom break cleanly into smaller pieces. These two different particle effects, the comets and the asteroid debris, are very different, but

each is implemented with the same base class, Particle. Let's take a closer look at the class Example03Controller to better understand how this example works before diving into the details of each new actor. Listing 7-14, shows the important parts of Example03Controller.

Listing 7-14. Example03Controller.m (doSetup and updateScene)

```
-(BOOL)doSetup{
    if([super doSetup]){
        NSMutableArray* classes = [NSMutableArray new];
        [classes addObject:[Asteroid class]];
        [self setSortedActorClasses:classes];
        UITapGestureRecognizer* tapRecognizer = [[UITapGestureRecognizer alloc]
initWithTarget:self action:@selector(tapGesture:)];
        [tapRecognizer setNumberOfTapsRequired:1];
        [tapRecognizer setNumberOfTouchesRequired:1];
        [actorsView addGestureRecognizer:tapRecognizer];
        return YES;
   return NO;
}
-(void)updateScene{
    if (self.stepNumber % (60*5) == 0){
        [self addActor:[Comet comet:self]];
    }
    if ([[self actorsOfType:[Asteroid class]] count] == 0){
        int count = arc4random()%4+1;
        for (int i=0;i<count;i++){</pre>
            [self addActor:[Asteroid asteroid:self]];
        }
    }
    [super updateScene];
}
```

In Listing 7-14, we see two tasks of the class Example03Controller: doSetup and updateScene. The task doSetup follows our now familiar pattern of identifying the actor classes we want efficient access to—in this case, Asteroid, by calling the task setSortedActorClass:. We also create a UITapGestureRecognizer called tapRecognizer and register that with the actorsView object. In this way, the task tapGesture: will be called when we tap the screen.

The task updateScene, as shown in Listing 7-14, adds a new Comet actor every five seconds (60\*5) and adds one to four Asteroids whenever there are zero Asteroids in the scene. As with the previous examples, the code in the controller class is relatively simple. Most of the real logic for the example lives in the different actor classes. Before we look at the Asteroid class, let's consider the task tapGesture:, shown in Listing 7-15.

#### Listing 7-15. Example03Controller.m (tapGesture:)

```
- (void)tapGesture:(UIGestureRecognizer *)gestureRecognizer{
   for (Asteroid* asteroid in [self actorsOfType:[Asteroid class]]){
        [asteroid doHit:self];
   }
}
```

In Listing 7-15, we see that the tapGesture: task, which is called when the user taps the screen, simply iterates through each Asteroid in the scene and calls doHit: on it. It is because of this task that we want to make sure we have easy access to the Asteroids in the scene.

The following section describes the implementation details of the actor Asteroid, as well the particle Asteroid explodes.

Asteroid class and see how we can create a

Asteroid, let's take a

moment to understand the Asteroid class as whole. This will give us the context to understand the particle effect while building another Actor class. The header for the Asteroid class is shown in Listing 7-16.

#### Listing 7-16. Asteroid.h

```
@interface Asteroid : Actor{
}
@property (nonatomic) int level;
+(id)asteroid:(GameController*)aController;
+(id)asteroidOfLevel:(int)aLevel At:(CGPoint)aCenter;
-(void)doHit:(GameController*)controller;
@end
```

In Listing 7-16, we see the declaration of the class Asteroid. We see that Asteroid class extends Actor and has two constructors. The constructor asteroid: is used by the Example03Controller to add the biggest Asteroids into the scene. The constructor asteroid0fLevel:At: is used to create and add the smaller Asteroids in the task doHit:, which is called after a tap event. Listing 7-17 shows the first constructors for the class Asteroid.

#### Listing 7-17. Asteroid.m (asteroid:)

```
+(id)asteroid:(GameController*)acontroller{
    CGSize gameSize = [acontroller gameAreaSize];

CGPoint gameCenter = CGPointMake(gameSize.width/2.0, gameSize.height/2.0);

float directionOffScreen = arc4random()%100/100.0 * M_PI*2;
    float distanceFromCenter = MAX(gameCenter.x,gameCenter.y) * 1.2;

CGPoint center = CGPointMake(gameCenter.x + cosf(directionOffScreen)*distanceFromCenter,gameCenter.y + sinf(directionOffScreen)*distanceFromCenter);

return [Asteroid asteroidOfLevel:4 At:center];
}
```

In Listing 7-17, we see the task asteroid:, which creates a new Asteroid of size 4 by calling the other constructor. Most of the work being done is simply finding the starting point for the Asteroid off screen. This is identical to the code used to find a point for the Powerup actor in Chapter 6. The details can be found in Figure 7-3. The second constructor for Asteroid is shown in Listing 7-18.

#### Listing 7-18. Asteroid.m (asteroidOfLevel:At:)

```
+(id)asteroidOfLevel:(int)aLevel At:(CGPoint)aCenter{
    ImageRepresentation* rep = [ImageRepresentation
imageRepWithDelegate:[AsteroidRepresentationDelegate instance]];
    [rep setBackwards:arc4random()%2 == 0];
    if (aLevel >= 4){
        [rep setStepsPerFrame:arc4random()%2+2];
    } else {
       [rep setStepsPerFrame:arc4random()%4+1];
   Asteroid* asteroid = [[Asteroid alloc] initAt:aCenter WithRadius:4 + aLevel*7
AndRepresentation:rep];
    [asteroid setLevel:aLevel];
    [asteroid setVariant:arc4random()%AST VARIATION COUNT];
    [asteroid setRotation: (arc4random()%100)/100.0*M PI*2];
    float direction = arc4random()%100/100.0 * M PI*2;
    LinearMotion* motion = [LinearMotion linearMotionInDirection:direction AtSpeed:1];
    [motion setWrap:YES];
    [asteroid addBehavior:motion];
   return asteroid;
}
```

In Listing 7-18, we see the main constructor of the class Asteroid. We also see that we create the Asteroid with a radius based on the value of aLevel. In this way, we have progressively smaller

asteroids as they break apart, since each new asteroid has a level of one less than its creator. The last thing we do in the asteroidOfLevel:At: is to add a LinearMotion behavior the Asteroid so it moves in a straight line, wrapping around the screen.

Another thing to note in Listing 7-8 is that we are creating an ImageRepresentation in a slightly different way than we have up until this point. Previously, all the ImageRepresentations we created used the actor as the delegate, This made sense because it put all of the information about an actor into a single file. However, we will want the Asteroid class and the particles we create to look the same, though different size. To facilitate this, we have created a new class called AsteroidRepresentationDelegate that is responsible for specifying how things that look like asteroids are rendered. Let's move on to the class AsteroidRepresentationDelegate.

Asteroid is drawn is defined in the class AsteroidRepresentationDelegate. This Asteroid, as well as the particles we create when an Asteroid AsteroidRepresentationDelegate is shown in Listing 7-19.

```
static AsteroidRepresentationDelegate* instance;
    @synchronized(self) {
                if(!instance) {
                        instance = [AsteroidRepresentationDelegate new];
        return instance;
-(int)getFrameCountForVariant:(int)aVariant AndState:(int)aState{
   return 31;
-(NSString*)getNameForVariant:(int)aVariant{
    if (aVariant == VARIATION A){
        return @"A";
    } else if (aVariant == VARIATION_B){
        return @"B";
    } else if (aVariant == VARIATION C){
        return @"C";
    } else {
        return nil;
    }
}
-(NSString*)baseImageName{
   return @"Asteroid";
}
```

In Listing 7-19, we see the expected tasks for defining an image-based actor. We see that image files will start with the string "Asteroid" as shown in the task baseImageName. We also see that there are 31 images for each of the three variants, as shown in getFramesCountForVariant:AndState: and getNameForVariant:.

The task, instance in Listing 7-19, is something new for us. This task represents a way for us to create a singleton of the class AsteroidRepresentationDelegate. We do this by synchronizing on the class object for Asteroid and only creating a new AsteroidRepresentationDelegate if the variable instance is nil. This allows us to only create one instance of this class, even though we could have hundreds of Asteroids and Particles using it to specify how they look. Let's now put all the pieces together and look at how an Asteroid is destroyed.

# **Destroying an Asteroid**

We have set the groundwork for understanding how an Asteroid is created and represented on the screen. Let's take a look at the task doHit: to understand how these pieces are brought together to create the desired behavior. See Listing 7-20.


#### Listing 7-20. Asteroid.m (doHit:)

```
-(void)doHit:(GameController*)controller{
    if (level > 1){
        int count = arc4random()%3+1;
        for (int i=0;i<count;i++){</pre>
            Asteroid* newAst = [Asteroid asteroidOfLevel:level-1 At:self.center];
            [controller addActor:newAst];
        }
    }
    int particles = arc4random()%5+1;
    for (int i=0;i<particles;i++){</pre>
        ImageRepresentation* rep = [ImageRepresentation imageRepWithDelegate: [AsteroidRepresentation
Delegate instance]];
        Particle* particle = [Particle particleAt:self.center WithRep:rep Steps:25];
        [particle setRadius:6];
        [particle setVariant:arc4random()%AST VARIATION COUNT];
        [particle setRotation: (arc4random()%100)/100.0*M PI*2];
        LinearMotion* motion = [LinearMotion linearMotionRandomDirectionAndSpeed];
        [particle addBehavior:motion];
        [controller addActor: particle];
    [controller removeActor:self];
}
```

In Listing 7-20, we see the task doHit:. This task is called when we tap on the screen, causing all Asteroids in the scene to break apart into a number of smaller Asteroids. We also want to generate a number of asteroid-looking Particles when we do this. The first thing we do is to make sure the Asteroid we call doHit: on is bigger than level one, because those asteroids should not create additional Asteroids. If the Asteroid is bigger than level one, we create one to three new Asteroids

at the same location as the current Asteroid with one level smaller. These new Asteroids will travel away from the current Asteroid in a straight line until they also explode.

To create the particle effect in Listing 7-20, we first decide how many particles we will be adding to the scene. We then create a new Particle using the Asteroids current position, the singleton instance of AsteroidRepresentationDelegate, and indicate that the particle should live for 25 steps of animation. The radius of particle is set to 6. This is a purely aesthetic choice; it could be any value. The variation and rotation properties are also set to provide visual variation in each particle that is created. The last thing we do to the particle is to specify a random LinearMotion before adding it to the scene. Figure 7-4 shows a close-up of the new Asteroids being created, as well as the Particles.



Asteroids and particles, zoomed in

## **The Particle Class**

We looked at how the Particles are created when the each Asteroid explodes, so let's now look at the Particle class in detail and see how it is implemented, starting with the header file shown in Listing 7-21.

```
Listing 7-21. Particle.h
```

```
@interface Particle : Actor<ExpireAfterTimeDelegate> {
}
@property (nonatomic) float totalStepsAlive;
+(id)particleAt:(CGPoint)aCenter WithRep:(NSObject<Representation>*)rep Steps:(float)numStepsToLive;
@end
```

In Listing 7-21, the header for the class Particle extends Actor and conforms to the protocol ExpireAfterTimeDelegate. Particle conforms to ExpireAfterTimeDelegate, because we want to change the opacity of the particle, fading it out, during its lifetime. The property totalStepsAlive indicates how long the particle should exists in the scene, and is set as part of the constructor particleAt:WithRep:Steps:. We can also see that a particle requires a Representation to be passed as an argument to the constructor. The implementation of Particle is shown in Listing 7-22.

#### Listing 7-22. Particle.m

```
@implementation Particle
@synthesize totalStepsAlive;
+(id)particleAt:(CGPoint)aCenter WithRep:(NSObject<Representation>*)rep Steps:(float)numStepsToLive{
    Particle* particle = [[Particle alloc] initAt:aCenter WithRadius:32 AndRepresentation:rep];

    [particle setTotalStepsAlive:numStepsToLive];

    ExpireAfterTime* expire = [ExpireAfterTime expireAfter:numStepsToLive];
    [expire setDelegate: particle];
    [particle addBehavior:expire];

    return particle;
}
-(void)stepsUpdated:(ExpireAfterTime*)expire In:(GameController*)controller{
    self.alpha = [expire stepsRemaining]/totalStepsAlive;
}
@end
```


In Listing 7-22, we see that the constructor particleAt:WithRep:Steps: is pretty straightforward. We create a new Particle object, passing in the provided Representation object. We also set the property totalStepsAlive and create an ExpiresAfterTime Behavior. Notice that particle is set as expire's delegate; this causes the task stepsUpdated:In: to be called every time expire is executed.

In the task stepsUpdated:In: we simply adjust the alpha value of Particle based on how far along Particle's life cycle we are. In a more complex implementation of Particle, this fading behavior would be configurable, not just on or off but also at which rate a Particle fades. In this simple implementation, each particle simply fades in a linear way.

We have looked at the implementation of Asteroid and Particle, and see that it is pretty simple to create a particle effect in our scene. In the next section, we will look at the Comet actor and see a more visually striking example, though the implementation will be just as simple.

# **Creating Based Vector-Based Particles**

In the previous example, we looked at Particles that were represented by a sequence of images. Because we have a flexible way of rendering actors, we can just as easily create particles that are programmatically drawn. In this example, we will be creating Particles that stay in one place, but we will move the point where they are created. This will give our Comet actors a nice glowing tail, as any comet should have. Figure 7-5 shows our new actor, the Comet.

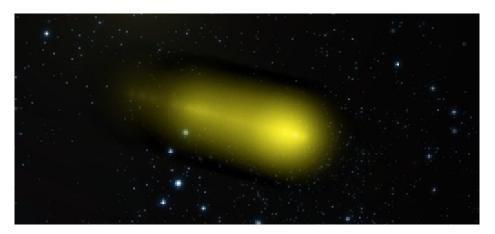

Comet detail

7-5, we see a zoomed-in detail of a comet. It is composed of many particles, each one Comet class and see Comet class.

```
VARIATION_RED = 0,
VARIATION_GREEN,
VARIATION_BLUE,
VARIATION_CYAN,
VARIATION_MAGENTA,
VARIATION_YELLOW,
VARIATION_COUNT
};
@interface Comet : Actor<VectorRepresentationDelegate> {
}
+(id)comet:(GameController*)controller;
@end
```

In Listing 7-23, we see that Comet extends Actor and conforms to the protocol VectorRepresentationDelegate. There is a single constructor, taking a GameController as the only argument. Let's look at the implementation of this constructor, shown in Listing 7-24.

#### Listing 7-24. Comet.m (comet:)

```
+(id)comet:(GameController*)controller{
   CGSize gameSize = [controller gameAreaSize];
   CGPoint gameCenter = CGPointMake(gameSize.width/2.0, gameSize.height/2.0);
    float directionOffScreen = arc4random()%100/100.0 * M PI*2;
    float distanceFromCenter = MAX(gameCenter.x,gameCenter.y) * 1.2;
   CGPoint center = CGPointMake(gameCenter.x + cosf(directionOffScreen)*distanceFromCenter,
gameCenter.y + sinf(directionOffScreen)*distanceFromCenter);
    ImageRepresentation* rep = [ImageRepresentation imageRep];
    Comet* comet = [[Comet alloc] initAt:center WithRadius:16 AndRepresentation:rep];
    [rep setDelegate:comet];
    [comet setVariant:arc4random()%VARIATION COUNT];
    float direction = arc4random()%100/100.0 * M PI*2;
    LinearMotion* motion = [LinearMotion linearMotionInDirection:direction AtSpeed:1];
    [motion setWrap:YES];
    [comet addBehavior: motion];
    ExpireAfterTime* expire = [ExpireAfterTime expireAfter:60*15];
    [comet addBehavior: expire];
   return comet;
}
```

In Listing 7-24, we see that we again create each Comet offscreen by calculating CGPoint called center, which is on a circle just off the edge of the game area. We also create a VectorRepesentation and use the Comet as the delegate. We will be drawing the Comet and the Comet's tail particles with the same tasks. After specifying an ExpireAfterTime and a LinearMotion as the Comet's behavior, it is ready to be added to the scene. Listing 7-25 shows the task that draws each Comet and Particle.

#### Listing 7-25. Comet.m (drawActor:WithContect:InRect:)

```
-(void)drawActor:(Actor*)anActor WithContext:(CGContextRef)context InRect:(CGRect)rect{
    CGContextClearRect(context,rect);
    CGColorSpaceRef space = CGColorSpaceCreateDeviceRGB();

    CGFloat locations[4];
    locations[0] = 0.0;
    locations[1] = 0.1;
    locations[2] = 0.2;
    locations[3] = 1.0;

UIColor* color1 = nil;
    UIColor* color2 = nil;
    UIColor* color3 = nil;
```

```
float whiter = 0.6;
    float c2alpha = 0.5;
    float c3aplha = 0.3;
    if (self.variant == VARIATION RED){
        color1 = [UIColor colorWithRed:1.0 green:whiter blue:whiter alpha:1.0];
        color2 = [UIColor colorWithRed:1.0 green:0.0 blue:0.0 alpha:c2alpha];
        color3 = [UIColor colorWithRed:1.0 green:0.0 blue:0.0 alpha:c3aplha];
    } else if (self.variant == VARIATION GREEN){
        color1 = [UIColor colorWithRed:whiter green:1.0 blue:whiter alpha:1.0];
        color2 = [UIColor colorWithRed:0.0 green:1.0 blue:0.0 alpha:c2alpha];
        color3 = [UIColor colorWithRed:0.0 green:1.0 blue:0.0 alpha:c3aplha];
    } else if (self.variant == VARIATION BLUE){
        color1 = [UIColor colorWithRed:whiter green:whiter blue:1.0 alpha:1.0];
        color2 = [UIColor colorWithRed:0.0 green:0.0 blue:1.0 alpha:c2alpha];
        color3 = [UIColor colorWithRed:0.0 green:0.0 blue:1.0 alpha:c3aplha];
    } else if (self.variant == VARIATION CYAN){
        color1 = [UIColor colorWithRed:whiter green:1.0 blue:1.0 alpha:1.0];
        color2 = [UIColor colorWithRed:0.0 green:1.0 blue:1.0 alpha:c2alpha];
        color3 = [UIColor colorWithRed:0.0 green:1.0 blue:1.0 alpha:c3aplha];
    } else if (self.variant == VARIATION MAGENTA){
        color1 = [UIColor colorWithRed:1.0 green:whiter blue:1.0 alpha:1.0];
        color2 = [UIColor colorWithRed:1.0 green:0.0 blue:1.0 alpha:c2alpha];
        color3 = [UIColor colorWithRed:1.0 green:0.0 blue:1.0 alpha:c3aplha];
    } else if (self.variant == VARIATION YELLOW){
        color1 = [UIColor colorWithRed:1.0 green:1.0 blue:whiter alpha:1.0];
        color2 = [UIColor colorWithRed:1.0 green:1.0 blue:0.0 alpha:c2alpha];
        color3 = [UIColor colorWithRed:1.0 green:1.0 blue:0.0 alpha:c3aplha];
    UIColor* color4 = [UIColor colorWithRed:0.0 green:0.0 blue:0.0 alpha:0.0];
    CGColorRef clr[] = { [color1 CGColor], [color2 CGColor] , [color3 CGColor], [color4 CGColor]};
    CFArrayRef colors = CFArrayCreate(NULL, (const void**)clr, sizeof(clr) / sizeof(CGColorRef),
&kCFTypeArrayCallBacks);
    CGGradientRef grad = CGGradientCreateWithColors(space, colors, locations);
    CGColorSpaceRelease(space);
    CGContextDrawRadialGradient(context, grad, CGPointMake(self.radius, self.radius), 0,
CGPointMake(self.radius, self.radius), self.radius, 0);
    CGGradientRelease(grad);
}
```

In Listing 7-25, we want to draw a simple radial gradient with the color appropriate to the variant at the center and transparent at the edge. We have to create a four-color gradient to achieve a nice-looking Comet. The first color is mostly white and fully opaque, the next two colors are the color of the variant with two different alpha values. The last color will be completely transparent. The function CGContextDrawRadialGradient draws the radial gradient at the center of the actor with the first color and creates a smooth transition to the transparent edge of the actor.

Now that we can see how each particle is drawn, we should look how the particles are created, Listing 7-26 shows the implementation of Comet's step: task.

#### Listing 7-26. Comet.m (step:)

```
-(void)step:(GameController*)controller{
    if ([controller stepNumber]%3 == 0){
        VectorRepresentation* rep = [VectorRepresentation vectorRepresentation];
        [rep setDelegate:self];

        int totalStepsAlive = arc4random()%60 + 60;
        Particle* particle = [Particle particleAt:self.center WithRep:rep Steps:totalStepsAlive];
        [particle setRadius:self.radius];
        [controller addActor: particle];
    }
}
```

In Listing 7-26, the step: task creates a new Particle every three steps in the animation. For each new Particle, a VectorRepresentation is created, but note that the delegate is the Comet object. The Particle is created with a random life span from 1 to 2 seconds. This randomness creates the slight flickering variation in the tail of the comet. Notice that the Particle has no additional behaviors added at this point; this causes the Particle to just sit in one place and fade away.

# **Summary**

In this chapter we looked at a technique to create actors in our game that are drawn programmatically. We created a new class called VectorRepresentation to handle the details of creating a UIView for our code to draw on. We used these new vector-based actors to create a health bar and a simple bullet. The chapter continued by showing two simple examples of creating particle systems. The first example reused the art for the asteroids to create a sense of debris when we exploded the asteroids. The second example used vector-based particles to create comets with glowing tails. The actors created in this and the previous chapter will be used to create a complete game in Chapter 12.

# Building Your Game: Understanding Gestures and Movements

The really neat thing about creating games for mobile devices is the unique way that the user interacts with the game. The complex gestures supported by i0S are a relatively new way to interact with a computer, and new interface techniques can give users trouble if they are unfamiliar with them. However, users of i0S are already familiar with the concepts of double taps, pinches, and swipes, so including these gestures in your game does not present a usability problem.

In this chapter, we will explore how you can add gestures to your application or game using the built-in libraries provided by iOS. We will also explore how to attach specific gestures to specific actors in a game. By the end of this chapter, you will know how to work with all supported gestures and be able to use them to drive user interaction in a game. We will be using the familiar classes of GameController, Actor, and the rest, in our examples. So your understanding of these gesture events will be tied directly into what you have learned in the previous chapters.

Beyond simply touching the screen, users can interact with i0S 6 applications through the accelerometer or the gyroscope included in the newer devices. Using the motion of the device as input to a game opens up a new dimension to the user experience. We will explore how to use the sensors and tie them into game events.

# **Touch Input: The Basics**

There are really three ways to accept touch input from the user. The first is to use buttons or other prebuilt widgets and implement tasks that respond to the user events. I am not going to go through the details of this type of input, as it is the most basic, and is well covered in all i0S introductory books. The second method is to create subclasses of UIView and implement a number of

touch-related tasks. The last technique is to wire up one of the six UIGestureRecognizer classes to a UIView and register an object to respond to the different gestures.

I think the last technique is the most robust in most cases, because it provides a way for users to interact with your application using a set of known gestures. However, there are perfectly good reasons to use the second technique, implementing the touch-related tasks, especially if the user interaction you are shooting for is not a gesture per se. An example might be a drawing application, where you simply want access to all points of contact on the screen to do your drawing.

The following section will review the touch-related tasks of UIView. We will then move on and explore UIGestureRecognizer classes and motion events.

The sample code that accompanies this chapter is found in the project Sample 08. While most of the code in this book can be run on either a device or the emulator, I highly recommend running this iPhone (or iPod touch)—if possible, i0S 4.2 or later—because the complex gestures are

### **UIView to Receive Touch Events**

has four tasks that get called when a user touches it on the screen. I am collectively calling

#### The four touch-related tasks

- -(void)touchesBegan:withEvent:
- -(void)touchesCancelled:withEvent:
- -(void)touchesEnded:withEvent:
- -(void)touchesMoved:withEvent:

The first argument of each of these tasks is an NSSet that contains a UITouch for each discrete touch on the screen. The second argument is a UIEvent that is basically a generic wrapper for the three different input types available on i0S: touch events, motion events, and remote-control events. We won't be covering remote-control events; those are events generated by accessories, like an external keyboard.

The task touchesBegan:withEvent: is called as soon as a finger (or fingers) touch the screen. The task touchesEnded:withEvent: is called when the fingers are removed. If the fingers slide around, the touchesMoved:withEvent: would be called. The task touchesCancelled:withEvent: is called if the system has to take control of the screen. For example, if another application is launched, the touchesCancelled:withEvent: is called on the first application before control is passed to the new app. The sample code provides an example of using these tasks, as shown in Figure 8-1.



Figure 8-1. Touch events

In Figure 8-1, we see a several lines composed of dots. Each one of these lines is the result of a finger being dragged across the screen. The topmost line was created when a single figure was moved across the screen—it is drawn with red dots. The second topmost line was created by dragging two fingers across the screen, as was the one below it, and both are drawn with green dots. The bottom three lines were drawn with three fingers, and it is made of blue dots. If you can see Figure 8-1 in color (if you have the ebook), take a look at the left-most dots on the bottom line. Notice that one is red and the other is green. This is because I did not get all three of my fingers to land on the screen at the same time.

In this first example, besides drawing dots with your finger, you can scale the dots up or down by tapping with a single finger or two fingers, respectively. The scaling feature demonstrates how touch events and gestures can work together. We will explore this in more detail once we understand the basics of the touch events.

# **Looking At the Event Code**

The implementation of this simple demonstration shows how we receive the touch events and create actors out of each touch on the screen. There are two classes involved: TouchEventsController that extends GameController and TouchEventsView that extends UIView. Let's start by looking the class TouchEventsView. The header is shown in Listing 8-2.

#### Listing 8-2. TouchEventsView.h

```
@interface TouchEventsView : UIView{
    IBOutlet TouchEventsController* controller;
    NSMutableArray* sparks;
}
```

IBOutlet so we can wire the TouchEventsView up to a . We also see an NSMutableArray called sparks. This collection is used to

: is called. Let's take a look at the implementation of the class , as shown on Listing 8-3.

#### TouchEventsView.m

@implementation TouchEventsView

```
- (void)touchesBegan:(NSSet *)touches withEvent:(UIEvent *)event{
   NSLog(@"Begin: %i", [touches count]);
```

```
Noting(@ Begin: %1 , [touches count]);
sparks = [NSMutableArray new];
}
- (void)touchesCancelled: (NSSet *)touches withEvent: (UIEvent *)event{
    NSLog(@"Cancelled: %i", [touches count]);

    for (Spark* spark in sparks){
        [controller removeActor:spark];
}

    [sparks removeAllObjects];
}
- (void)touchesEnded: (NSSet *)touches withEvent: (UIEvent *)event{
        NSLog(@"Ended: %i", [touches count]);
        int count = [touches count];

    for (UITouch* touch in touches){
        Spark* spark = [Spark spark:count-1 At:[touch locationInView:self]];
        [controller addActor:spark];
        [sparks addObject:spark];
}
```

```
[sparks removeAllObjects];
}
- (void)touchesMoved:(NSSet *)touches withEvent:(UIEvent *)event{
    NSLog(@"Moved: %i", [touches count]);
    int count=[touches count];

    for (UITouch* touch in touches){
        Spark* spark=[Spark spark:count-1 At:[touch locationInView:self]];
        [controller addActor:spark];
        [sparks addObject:spark];
    }
}
@end
```

In Listing 8-3, we see the four tasks discussed earlier. The class UIResponder defines each task, which is the super-class of UIView. These methods are called as the user interacts with the screen. By implementing them, we can add our custom behavior. The task touchesBegan:withEvent: is called when a finger touches the screen. When this happens, we create a new NSMutableArray to keep track of all of the sparks we are going to add. Any of the other three tasks could be called next. If the user moves his or her finger, or places another new finger on the screen, the task touchesMoved:withEvent: is called. In this task, we create and a new spark for each touch. We use the number of touches minus 1, to specify the variant or color of the spark, which is then added the scene. The spark is just a simple particle-like class that removes itself after five seconds.

There are two ways that a touch event can end. The first way is when touchesEnded:withEvent: is called after the user has removed all of his fingers. In this case, we do the same thing we did in touchesMoved:withEvent:: we create a spark for each touch. We also clear the NSMutableArray sparks, to remove reference to the spark objects.

The other way a touch event can end is by it being cancelled. An event is cancelled when something else in the system happens that makes completing the event inappropriate. When this tasks is called, we removed all of the Spark objects we have created since touchesBegan:withEvent: was last called, undoing the work we have done up until this point.

The touchesCancelled:withEvent: task can be called when switching applications or having a dialog popup. Another perhaps more common way for touch events to be cancelled is if a gesture recognizer is triggered. A gesture recognizer, as defined by the class UIGestureRecognizer, is an object that inspects the touch events on a UIView and responds when the touches can be considered a specific gesture, like a tap, pinch, or swipe.

To experiment with the touchesCancelled:withEvent: tasks, do a two-finger double tap. Notice that after the first tap, there are two sparks where you fingers touched. After the second tap, the Spark objects that where added get removed. This is because touchesCancelled:withEvent: was called when the two-figure double-tap gesture recognizer was activated by the touch events.

The fact that gesture recognizers are able to cancel touch events allows developers to mix and match any number of gestures on a UIView without worrying about the gestures conflicting. In addition to canceling the touch events, gestures can also cancel each other. For example, a pinch gesture and a two-finger drag gesture both start the same way, with two fingers landing on the screen at about the same time. These two gestures could easily conflict if there was no mechanism in place to cancel each other. Let's move on a see how these touch events apply to the game-related classes.

# **Applying Touch Events to Actors**

Let's take a quick look at the class TouchEventsController and see how we set up the demo to respond to tap gestures. The important part of TouchEventsController.m is shown in Listing 8-4.

Listing 8-4. TouchEventsController.m (doSetup)

```
-(BOOL)doSetup{
    if ([super doSetup]){

        [self setGameAreaSize:CGSizeMake(320, 480)];
        [self setSortedActorClasses:[NSMutableArray arrayWithObject:[Spark class]]];

        UITapGestureRecognizer* doubleTapTwoTouch=[[UITapGestureRecognizer alloc]
        [doubleTapTwoTouch setNumberOfTapsRequired:2];
        [doubleTapTwoTouch setNumberOfTouchesRequired:2];

        [doubleTapOneTouch setNumberOfTapsRequired:2];
        [doubleTapOneTouch setNumberOfTapsRequired:2];
        [doubleTapOneTouch setNumberOfTouchesRequired:1];

        [actorsView addGestureRecognizer:doubleTapOneTouch];
        [actorsView addGestureRecognizer:doubleTapTwoTouch];
        return YES;
    }
    return NO;
}
```

In Listing 8-4, we see the task doSetup, from the class TouchEventsController. This task is called when this UIViewController instance's view is loaded. After setting up the game area size and marking the class Spark as a sorted actor class, we create two instances of UITapGestureRecognizer. The first instance of UITapGestureRecognizer is called doubleTapTwoTouch and is configured to respond when two fingers do a double tap. The second UITapGestureRecognizer is called doubleTapOneTouch and is configured for a single-finger double tap. Both of these UITapGestureRecognizer are added to actorsView with the task addGestureRecognizer:.

Looking at the constructor used to create these gesture recognizers, we see a selector referencing the task doubleTap:. This task is called whenever one of these two tasks recognizes a gesture. We could have had each gesture recognizer call different tasks, and that may be desirable in a more complex application. In this example, it is easy enough to distinguish these two gesture recognizers in the doubleTap: tasks, as shown in Listing 8-5.

#### Listing 8-5. TouchEventsController.m (doubleTap:)

```
-(void)doubleTap:(UITapGestureRecognizer*)doubleTap{
    float scale;
    if ([doubleTap numberOfTouches] == 1){
        scale = 2.0;
    } else {
        scale=0.5;
    NSLog(@"Touches: %i", [doubleTap numberOfTouches]);
    for (Spark* spark in [self actorsOfType:[Spark class]]){
        float radius = [spark radius]*scale;
        if (radius < 2){
            radius = 2;
        } else if (radius>128){
            radius = 128;
        [spark setRadius:radius];
    }
}
```

In Listing 8-5, we check to see if the UITapGestureRecognizer doubleTap that triggered this task is configured for a single touch. Based on this result of this check, we set the value of scale to either 2.0 or 0.5. In this way, a single-finger double tap will increase the scale of the Spark objects, and a two-finger double tap will reduce the size of the Spark objects. Once we have the correct value for scale, we simply iterate over all of the Spark objects in the scene and adjust their radius based on scale.

We have looked at touch events so we can understand the touch event lifecycle. We also took a quick look at the UITapGestureRecognizer class. The following section will discuss the UITapGestureRecognizer in more detail.

# **Understanding Gesture Recognizers**

i0S allows the user to interact with an application with a rich set of gestures. These include taps, swipes, pinches, and so on. Each of these gestures comprises some reasonably complex logic to interpret touch events into a cohesive gesture. If this was left up to each developer to implement, the user experience would be pretty bad, as each developer would inevitably make different assumptions about each gesture. For example, the long press gesture has a default duration. We would want this consistent across all applications because we don't want to "retrain" each user for each application as to what a long press is. In this spirit, Apple provides a number of classes that are designed to identify the most common gestures a developer is going need. Each of the gesture recognizers extends the abstract base class UIGestureRecognizer and is shown in Listing 8-6.

Listing 8-6. Concrete Implementations of UIGestureRecognizer

UITapGestureRecognizer UIPinchGestureRecognizer UIRotateGestureRecognizer UISwipeGestureRecognizer UIPanGestureRecognizer UILongPressGestureRecognizer

In Listing 8-6, we see each subclass of UIGestureRecognizer that is built into i05 6. Tap is probably the most common gesture in i05, and needs no description. The pinch gesture is when two fingers either move closer or farther away from each other. The rotation gesture is when two fingers move on the screen like you are opening a bottle of ketchup. The swipe gesture is when one or more fingers are flicked across the screen, as if turning a page in a magazine. The pan gesture is similar to swipe, but slower and more deliberate. The long press gesture is much like a tap, but the finger is held to the screen longer.

Each of these classes provides an easy way for a developer to request that a task be called should UIView. In addition to calling a task, each gesture

Values for the enum UIGestureRecognizerState

In Listing 8-7, we see the seven possible states for a gesture recognizer to be in, and these are analogous to four tasks that are called touch events (see Listing 8-1). The default state is UIGestureRecognizerStatePossible and is the state that all UIGestureRecignizer instances will be in if no touch events are happening. UIGestureRecognizerStateBegan is the state when a gesture has started, but not yet changed or completed. For a pinch gesture, this would be when both fingers have landed on the screen. UIGestureRecognizerStateChanged is the state of gesture in progress. A gesture will be over when one of the three following states has occurred: UIGestureRecognizerStateEnded, UIGestureRecognizerStateCancelled, or UIGestureRecognizerStateFailed. The state UIGestureRecognizerStateEnded corresponds the successful completion of a gesture. UIGestureRecognizerStateCancelled is the state of a gesture that cannot be completed. UIGestureRecognizerStateFailed is the state of a gesture that has received touch events in contradiction to the gesture. The last state, UIGestureRecognizerStateRecognizerStateEnded and simply provides a semantic difference that might be useful in code.

While the states in Listing 8-7 provided a comprehensive description of the states a gesture recognizer can go through, not all gesture recognizers use all of these states. For example, UITapGestureRecognizer is known as a "discrete" gesture recognizer and does not report changes. Further, discrete gestures cannot fail or be cancelled. They simply call the selector task once, with the state of UIGestureRecognizerStateRecognized (e.g., UIGestureRecognizerStateEnded).

It is possible to implement a new UIGestureRecognizer, but we will not be covering that. We will, however, take each gesture recognizer and explore how it works with an example.

### **Tap Gestures**

Tap gestures are used throughout i0s. From launching an application to dropping a pin in the Maps application, tap gestures are the backbone of the i0s interface. This makes sense because they are very similar to mouse clicks on desktop operating systems. There are similarities between the tap gesture and the mouse click; for example, launching an application from the system dock in OS X is done with a single click, while launching an i0s application is done with a single tap. The analogy continues if we consider the "secondary click" (also known as a control click or right click) on OS X; this is similar to the two-finger tap in i0s. In fact, if you are using a Mac laptop, the touch pad can be configured to treat a two-finger tap as a "secondary click."

For this example, we are going to configure a bunch of UITapGestureRecognizers to respond to different combinations of tap counts and the number of fingers involved (touches). Figure 8-2 shows this example in action.

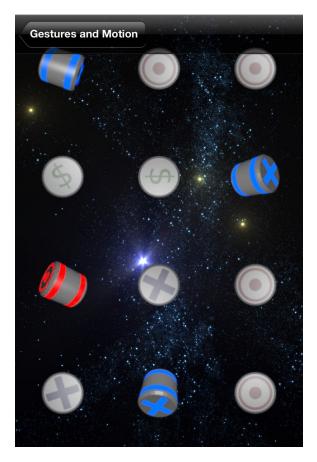


Figure 8-2. Power-ups activated by tap gestures

In Figure 8-2, we see 12 power-ups organized into three columns and four rows. The power-ups start disabled, like the one in the lower right. When the user taps the screen, a power-up enables, becoming brighter and spinning. The power-up that is enabled is based on the number of fingers used in the gesture and whether one, two, or three fingers are used. For example, a two-finger triple tap enabled the right-most power-up on the second row. Similarly, a three-finger single tap enabled the left-most power-up on the third row. So, in short, the columns show the number of taps and the rows the number fingers involved. If you want to waste an hour of your life, try to get all of the power-ups spinning. I think I got it to happen, but I could not get a screenshot in time to prove it.

This demo is implemented in the class TapGestureController. Listing 8-8 shows the file TapGestureController.h.

#### Listing 8-8. TapGestureController.h

TapGestureController and that it extends GameController TemporaryBehaviorDelegate. We also see that there is an NSMutableArray powerups that is used to store the 12 power-ups in this example. In other examples, we have relied on GameController to keep track of different types of actors by specifying classes that should be sorted. In this example, we are using a separate NSMutableArray because we want to use the order of the Powerup objects in powerups to keep track of the row and column. Lastly, we see the declaration of the task tapGesture: that is called when a UITapGestureRecognizer recognizes a gesture. The implementation of the setup code for TapGestureController is shown in Listing 8-9.

#### Listing 8-9. TapGestureController.m (doSetup)

```
-(B00L)doSetup{
    if ([super doSetup]){
        [self setGameAreaSize:CGSizeMake(320, 480)];
        powerups=[NSMutableArray new];

    for (int tap=0;tap<=2;tap++){
        for (int touch=0;touch<=3;touch++){
            float x=320.0/6.0+tap*320.0/3;
            float y=480.0/8.0+touch*480/4;
            CGPoint center=CGPointMake(x, y);

        Powerup* powerup=[Powerup powerup:self At:center];
        [self addActor: powerup];
        [powerups addObject:powerup];
        }
}</pre>
```

```
for (int touch=1;touch<=4;touch++){</pre>
            UITapGestureRecognizer* tripleTap = [[UITapGestureRecognizer alloc] initWithTarget:self
action:@selector(tapGesture:)];
            [tripleTap setNumberOfTapsRequired:3];
            [tripleTap setNumberOfTouchesRequired:touch];
            UITapGestureRecognizer* doubleTap = [[UITapGestureRecognizer alloc] initWithTarget:self
action:@selector(tapGesture:)];
            [doubleTap setNumberOfTapsRequired:2];
            [doubleTap setNumberOfTouchesRequired:touch];
            [doubleTap requireGestureRecognizerToFail:tripleTap];
            UITapGestureRecognizer* singleTap=[[UITapGestureRecognizer alloc] initWithTarget:self
action:@selector(tapGesture:)];
            [singleTap setNumberOfTapsRequired:1];
            [singleTap setNumberOfTouchesRequired:touch];
            [singleTap requireGestureRecognizerToFail:doubleTap];
            [actorsView addGestureRecognizer:tripleTap];
            [actorsView addGestureRecognizer:doubleTap];
            [actorsView addGestureRecognizer:singleTap];
        }
        return YES;
   return NO;
}
```

In Listing 8-9, we see the task doSetup for the class TapGestureController. In this task, we generate the 12 Powerup objects and add them as actors. We also keep track of each Powerup in the NSMutableArray powerups. After creating the Powerup objects, we create 12 UITapGestureRecognizers—done for each Powerup. Each UITapGestureRecognizer is added to actorsView with the task addGestureRecognizer:. Note that we are creating a UITapGestureRecognizer for each possible combination of taps and touches, instead of trying to use a single UITapGestureRecognizer to recognize the various combinations. Although it is possible in some cases to do this, everything works a lot better when you are as concise as possible with UIGestureRecognizers, as there are some subtle interactions between gesture recognizers. For example, the recognizer responsible for detecting triple taps has to cancel those responsible for double and single taps.

Each UITapGestureRecognizer is configured to call tapGesture: when a gesture is recognized, as shown in Listing 8-10.

#### Listing 8-10. TapGestureController.m (tapGesture:)

```
- (void)tapGesture:(UITapGestureRecognizer *)sender{
  int taps=[sender numberOfTapsRequired];
  int touches=[sender numberOfTouches];

int index=(taps-1)*4+(touches-1);
```

```
Powerup* powerup=[powerups objectAtIndex:index];

TemporaryBehavior* tempBehav=[TemporaryBehavior temporaryBehavior:nil for:60*5];
[tempBehav setDelegate:self];

NSMutableArray* behaviors=[powerup behaviors];
[behaviors removeAllObjects];
[behaviors addObject:tempBehav];

[powerup setState:STATE_GLOW];
}
```

tapGesture:, which is called whenever one of the 12 recognizes a tap gesture. Note that we are not checking the state of UITapGestureRecognizer; this is because tap gestures are considered discrete and don't use numberOfTapsRequired and numberOfTouches to figure UITapGestureRecognizer has responded and store these values in taps and touches, Powerup that should be enabled and is found in NSMutableArray powerups. Once we have the correct Powerup, we create a TemporaryBehavior self as the delegate. The power-up then has its behavior set to the newly created , as well as having its state set to STATE\_GLOW. This starts the power-up TemporaryBehavior.

### The TemporaryBehavior Class

The class TemporaryBehavior applies a behavior to an actor for a fixed number of steps. In this case, we don't really want to apply any behaviors; we just want to know when five seconds has gone by. Let's take a quick look the class TemporaryBehavior and see how this works. The declaration of TemporaryBehavior is shown in Listing 8-11.

#### Listing 8-11. TemporaryBehavior.h

```
@class TemporaryBehavior;
@protocol TemporaryBehaviorDelegate
    -(void)stepsUpdatedOn:(Actor*)anActor By:(TemporaryBehavior*)tempBehavior In:(GameController*)
controller;
@end
@interface TemporaryBehavior : NSObject<Behavior>{
}
@property (nonatomic) long stepsRemaining;
@property (nonatomic, strong) NSObject<Behavior>* behavior;
@property (nonatomic, strong) NSObject<TemporaryBehaviorDelegate>* delegate;
+(id)temporaryBehavior:(NSObject<Behavior>*)aBehavior for:(long)aNumberOfSteps;
@end
```

In Listing 8-11, we see this definition of the class TemporaryBehavior. We see that it defines a protocol called TemporaryBehaviorDelegate, which TapGestureController conforms to (see Listing 8-8). The constructor for TemporaryBehavior takes a behavior and a number of steps as arguments. Listing 8-12 shows the implementation of TemporaryNehavior.

#### Listing 8-12. TemporaryBehavior.m

```
+(id)temporaryBehavior:(NSObject<Behavior>*)aBehavior for:(long)aNumberOfSteps{
    TemporaryBehavior* temp=[TemporaryBehavior new];
    [temp setBehavior:aBehavior];
    [temp setStepsRemaining:aNumberOfSteps];

    return temp;
}
-(void)applyToActor:(Actor*)anActor In:(GameController*)gameController{
    stepsRemaining--;

    [behavior applyToActor:anActor In:gameController];
    [delegate stepsUpdatedOn:anActor By:self In:gameController];

    if (stepsRemaining<= 0){
        [[anActor behaviors] removeObject:self];
    }
}</pre>
```

In Listing 8-12, we see the implementation of the class TemporaryBehavior. The constructor simply creates a TemporaryBehavior object and populates it with the provided arguments. The task, applyToActor:In:, comes from the protocol Behavior (which TemporaryBehavior conforms to), and is called for every step of the game. In this task, we simply apply the provided behavior to the actor and inform the delegate that this work has been done. Continuing with the tap gesture example, let's look at how TapGestureController responds to the task stepsUpdatedOn:By:In:, as shown in Listing 8-13.

#### Listing 8-13. TapGestureController.m (stepsUpdatedOn:By:In:)

```
-(void)stepsUpdatedOn:(Actor*)anActor By:(TemporaryBehavior*)tempBehavior In:(GameController*)
controller{
    if ([tempBehavior stepsRemaining]==0){
        [anActor setState:STATE_NO_GLOW];
    }
}
```

In Listing 8-13, we see the task stepsUpdatedOn:By:In: as defined by the class TapGestureController. In this task, we simply see if the TemporaryBehavior, tempBehavior, is at the end of its life. If it is, we set the actor's state to STATE\_NO\_GLOW, which stops the power-up from spinning.

We have looked in detail at the different configurations available for UITapGestureRecognizer. The following section will explore a new one: the pinch.

### **Pinch Gestures**

Pinch gestures show up in i0S usually as a way of zooming in and out or scaling something on the screen. This gesture is started by placing two fingers down and then by moving them either toward each other or away. Figure 8-3 shows this gesture in action.

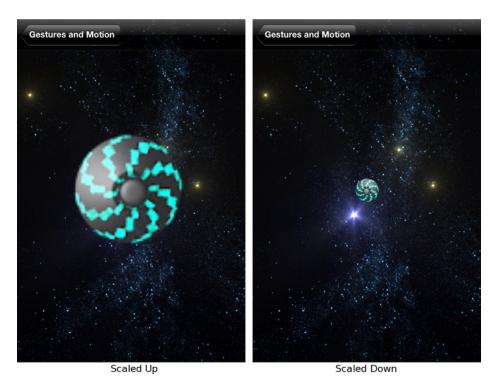


Figure 8-3. Pinch gesture changing the size of a saucer

In Figure 8-3, we see our example of using pinch gestures. On the left, the saucer is scaled up as the result of a pinch-out gesture. On the right we see the same saucer scaled down as the result of a pinch-in gesture. As the saucer is being scaled, it stops spinning. We take advantage of the different states of the pinch gesture to stop and start the spinning.

A pinch gesture can be detected by adding an instance of UIPinchGestureRecognizer to a UIView. A UIPinchGestureRecognizer will not only inform you when a pinch gesture occurs but will also report a scale and velocity value associated with the gesture. Having the scale reported by a UIPinchGestureRecognizer is very handy because this is such a common use of the pinch gesture.

This example is implemented in the class PinchGestureController. Let's take a quick look at the header file, as shown in Listing 8-14.

#### Listing 8-14. PinchGestureController.h

```
@interface PinchGestureController : GameController{
    Saucer* saucer;
    float startRadius;
}
-(void)pinchGesture:(UIPinchGestureRecognizer*)sender;
@end
```

In Listing 8-14, we see the header file for the class PinchGestureController; like the previous example, it extends GameController. It also maintains a reference to the Saucer object, as well the radius of the Saucer object at the beginning of a gesture. The task pinchGesture: is called by the gesture recognizer. The implementation of this class will shed more light on how this example works, starting with the doSetup task, as shown in Listing 8-15.

#### Listing 8-15. PinchGestureController (doSetup)

```
-(BOOL)doSetup{
    if ([super doSetup]){
        [self setGameAreaSize:CGSizeMake(320, 480)];

        saucer = [Saucer saucer:self];
        [self addActor:saucer];

        UIPinchGestureRecognizer* pinchRecognizer = [[UIPinchGestureRecognizer alloc]
initWithTarget:self action:@selector(pinchGesture:)];
        [actorsView addGestureRecognizer:pinchRecognizer];

        return YES;
    }
    return NO;
}
```

In Listing 8-15, we have a very simple doSetup task for the class PinchGestureController. We simply add a new saucer and set up a UIPinchGestureRecognizer to call pinchGesture: when a pinch gesture is recognized. Let's take a look at how we respond to the gesture in the following section.

### **Responding to the Pinch Gesture**

We have looked at how to register the pinch gesture recognizers. The implementation of pinchGesture: is shown in Listing 8-16.

#### Listing 8-16. PinchGestureController (pinchGesture:)

```
-(void)pinchGesture:(UIPinchGestureRecognizer*)pinchRecognizer{
   if (pinchRecognizer.state == UIGestureRecognizerStateBegan){
      startRadius=[saucer radius];
      [saucer setAnimationPaused:YES];
   } else if (pinchRecognizer.state == UIGestureRecognizerStateChanged){
```

```
float scale = [pinchRecognizer scale];
float velocity = [pinchRecognizer velocity];

NSLog(@"Scale: %f Velocty: %f",scale, velocity);

float radius=startRadius*scale;
if (radius<8){
    radius = 8;
} else if (radius>128.0){
    radius=128;
}

[saucer setRadius:radius];
} else if (pinchRecognizer.state == UIGestureRecognizerStateEnded){
    [saucer setAnimationPaused:NO];
} else if (pinchRecognizer.state == UIGestureRecognizerStateCancelled){
    [saucer setRadius:startRadius];
    [saucer setAnimationPaused:NO];
}
```

pinchGesture: that is called whenever a pinch gesture is detected UIView actorsView. In this example, we are checking the state of the gesture recognizer. The UIGestureRecognizerStateBegan), is in UIGestureRecognizerStateChanged), or has terminated (UIGestureRecognizerStateEnded

When the gesture starts, we record the radius of saucer and store it in the variable startRadius. We also call setAnimationPaused: on saucer to stop if from animating while being scaled. It is not a requirement to stop the animation. We are simply doing this so we can observe the change of the gesture recognizer's state as we play with the sample on our phone.

When the gesture is in progress, we get the scale and velocity of the gesture. The scale value is the change in scale since the beginning of the gesture. To put it another way, the scale is accumulative, and that's why we apply the scale to the startRadius and not to the current radius of saucer. Once we calculate our new radius, we apply that to saucer. The velocity is the scale factor per second. This value can be used to calculate how much drift to apply to an animation after the gesture is over. We are not using the value except to log it.

When the gesture has ended, normally we simply set the animationPaused property of saucer to No. This starts the saucer animating again. If the gesture was cancelled, we reset the saucer back to its original radius and unpause the animation. To test the cancel state, start with the saucer scaled all the way down, then begin scaling it up with one hand while the other hand hits the power button at the top of the iPhone. This will kick you out of the application. Then re-launch the sample application and notice that the saucer is back at its original small scale.

The pinch gesture is the first multi-state gesture we have looked at in this chapter. The next gesture we are going to look at is the pan or drag gesture, which is another multi-state gesture. We will see that it behaves in very much the same way as the pinch gesture.

# Pan (or Drag) Gesture

A pan gesture is the kind of gesture you use in the Maps application to view different parts of the map. A drag gesture is also used to unlock the phone or pull down the notification center. If you think about it, these gestures are really the same thing: the user puts his or her finger down, moves it in a mostly straight line, and then lifts it. The difference is in how the application responds. We call it a pan gesture when the view pans over some content (e.g., a map or image). We call it a drag when you move a UI component on the screen (e.g., the knob of a slider). Regardless of what we call it in our description, this gesture is implemented with the class UIPanGestureRecognizer (sorry, drag). Figure 8-4 shows an example using UIPanGestureRecognizer.

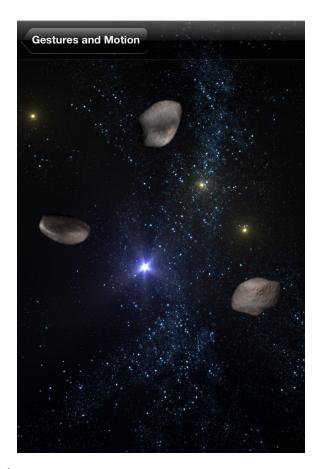


Figure 8-4. Pan or drag example

In Figure 8-4 we see three asteroids. Each asteroid can be dragged up or down along an invisible path. When dragging an asteroid, you can move your finger all the way to the right or the left. This makes it a lot easier to use because the user does not have to be too careful about where the finger moves once the desired asteroid gets moving. This simple example starts with the header file for the class PanGestureController, as shown in Listing 8-17.

#### Listing 8-17. PanGestureController.h

```
@interface PanGestureController : GameController{
    NSMutableArray* asteroids;
    int asteroidIndex;
    CGPoint startCenter;
}
@property (nonatomic) float minYValue;
@property (nonatomic) float maxYValue;
-(void)panGesture:(UIPanGestureRecognizer*)panRecognizer;
@end
```

PanGestureController, which again extends
. We keep an ordered list of the asteroids in the NSMutableArray asteroids. We also
int asteroidIndex and

CGPoint startCenter. The properties minYValue and maxYValue specify how far each Asteroid panGesture: is called by the UIPanGestureRecognizer when a

, so let's start with the doSetup tasks, as shown in Listing 8-18.

#### PanGestureController.m (doSetup)

```
if ([super doSetup]){
        [self setGameAreaSize:CGSizeMake(320, 480)];
        [self setMinYValue:72.0f];
        [self setMaxYValue:480-[self minYValue]];
        asteroids = [NSMutableArray new];
        for (int i=0;i<3;i++){
            Asteroid* asteroid = [Asteroid asteroid:self];
            [[asteroid behaviors] removeAllObjects];
            [self addActor:asteroid];
            [asteroids addObject:asteroid];
            CGPoint center=CGPointMake(i*320.0/3.0+320.0/6.0, [self minYValue]);
            [asteroid setCenter:center];
        }
        UIPanGestureRecognizer* panRecognizer=[[UIPanGestureRecognizer alloc] initWithTarget:self
action:@selector(panGesture:)];
        [panRecognizer setMinimumNumberOfTouches:1];
        [actorsView addGestureRecognizer:panRecognizer];
        return YES;
    }
   return NO;
}
```

In Listing 8-18, we see the task doSetup for the class PanGestureController. The first thing we do after specifying the size of the game area is specify the minYValue and the maxYValue for the asteroids, so they cannot move within 72 points of the top or bottom of the screen. Next, we create our three Asteroid objects, add them to the scene, and add them to the NSMutableArray asteroids. Each Asteroid starts at the top of the screen.

The last thing we do in doSetup is create a UIPanGestureRecognizer, configure it to call panGesture:, and add it to actorsView. The next section explains how we respond to these gestures to create the desired behavior.

### **Responding to Pan Gestures**

We have reviewed how to set up the class UIPanGestureController. Now we will explore how to respond to this gesture in the task panGesture:, as shown in Listing 8-19.

Listing 8-19. PanGestureController.m (panGesture:)

```
-(void)panGesture:(UIPanGestureRecognizer*)panRecognizer{
    if ([panRecognizer state] == UIGestureRecognizerStateBegan){
        CGSize gameAreaSize=[self gameAreaSize];
        CGPoint locationInView = [panRecognizer locationInView:actorsView];
        if (locationInView.x<gameAreaSize.width/3.0){</pre>
            asteroidIndex = 0;
        } else if (locationInView.x>gameAreaSize.width/3.0*2){
            asteroidIndex = 2;
        } else {
            asteroidIndex = 1;
        }
        Asteroid* asteroid=[asteroids objectAtIndex:asteroidIndex];
        startCenter = [asteroid center];
        [asteroid setAnimationPaused:YES];
    } else if ([panRecognizer state] == UIGestureRecognizerStateChanged){
        Asteroid* asteroid = [asteroids objectAtIndex:asteroidIndex];
        CGPoint locationInView = [panRecognizer locationInView:actorsView];
        CGPoint center=[asteroid center];
        center.y = locationInView.y;
        if (center.y<[self minYValue]){</pre>
            center.y=[self minYValue];
        if (center.y>[self maxYValue]){
            center.y=[self maxYValue];
        }
        [asteroid setCenter:center];
    } else if ([panRecognizer state] == UIGestureRecognizerStateEnded){
```

```
Asteroid* asteroid=[asteroids objectAtIndex:asteroidIndex];
   [asteroid setAnimationPaused:N0];
} else if ([panRecognizer state] == UIGestureRecognizerStateCancelled){
   Asteroid* asteroid=[asteroids objectAtIndex:asteroidIndex];
   [asteroid setAnimationPaused:N0];
   [asteroid setCenter:startCenter];
}
```

In Listing 8-19, we can see that the task panGesture: is broken up by the state of panRecognizer in the same way as for the pinch-out example. If the state of panRecognizer equals UIGestureRecognizerStateBegan, we calculate which of the three asteroids the gesture is closest asteroidIndex, we can get

NSMutableArray asteroids and record its location in startCenter. animationPaused to No.

panGesture, the panRecognizer will have the state of
. When this happens, we simply set the Y value of the selected
locationInView of panRecognizer.

or UIGestureRecognizerStateCancelled. In both cases, we want to

I hope by this point a pattern is emerging as to how these gesture recognizers work. The basic pattern is to set up the recognizer to detect gestures on a UIView, configure the callback task to record the starting state of whatever is being manipulated (saucer, asteroid, and so on), then apply changes to the scene or roll back the changes in the case of cancellation. Let's look at the rotation gesture next.

### **Rotation Gesture**

The rotation gesture is not as common as the previously covered gestures in the core i0S applications. In fact, I could not find a single example in the applications that ship with the iPhone, but I may be overlooking something. The rotation gesture, however, does show up in a number puzzle games, where you need to rotate an object this way or that. The rotation gesture is performed by putting two fingers on the screen and spinning your hand, like you are opening a bottle. Figure 8-5 shows a rotation example.

In Figure 8-5 we see a spaceship being rotated counterclockwise. We know the ship is being rotated counterclockwise because its starboard-maneuvering thruster is firing. If the ship were rotating clockwise, we would see the port-maneuvering thruster firing. The class that is responsible for this example is RotationGestureController, whose header file is shown in Listing 8-20.

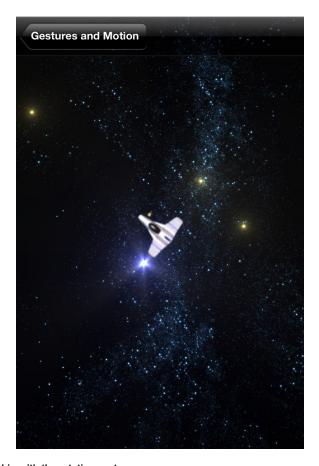


Figure 8-5. Rotating a spaceship with the rotation gesture

#### Listing 8-20. RotationGestureController.h

```
@interface RotationGestureController : GameController{
    Viper* viper;
    float startRotation;
}
-(void)rotationGesture:(UIRotationGestureRecognizer*)rotationRecognizer;
@end
```

In Listing 8-20, we see the header file for the class RotationGestureController. We see that we have a reference to the spaceship, called Viper. We also keep track of the starting rotation of the spaceship in the variable startRotation. The task rotationGesture: is called when a UIRotationGestureRecognizer recognizes a gesture. Let's take a quick look at the doSetup task for the class RotationGestureController so we understand how the UIRotationGestureRecognizer is set up. See Listing 8-21.

#### Listing 8-21. RotationGestureController.m (doSetup)

```
-(BOOL)doSetup{
    if ([super doSetup]){
        [self setGameAreaSize:CGSizeMake(320, 480)];

        viper=[Viper viper:self];
        [self addActor:viper];

        UIRotationGestureRecognizer* rotationRecognizer=[[UIRotationGestureRecognizer alloc]
initWithTarget:self action:@selector(rotationGesture:)];

        [actorsView addGestureRecognizer:rotationRecognizer];
        return YES;
    }
    return NO;
```

doSetup task of RotationGestureController is very simple.

UIRotationGestureRecognizer. There should be no
rotationGesture: will be called as the object
detects touch events that can be interpreted as a rotation gesture. Let's take a
rotationGesture:, as shown in Listing 8-22.

#### RotationGestureController.m (rotationGesture:)

```
-(void)rotationGesture:(UIRotationGestureRecognizer*)rotationRecognizer{
    if ([rotationRecognizer state] == UIGestureRecognizerStateBegan){
        startRotation = [viper rotation];
    } else if ([rotationRecognizer state] == UIGestureRecognizerStateChanged){
        float rotation=[rotationRecognizer rotation];
        float finalRotation = startRotation + rotation*2.0;
        if (finalRotation>[viper rotation]){
            [viper setState:VPR_STATE_CLOCKWISE];
        } else {
            [viper setState:VPR STATE COUNTER CLOCKWISE];
        [viper setRotation: finalRotation];
    } else if ([rotationRecognizer state] == UIGestureRecognizerStateEnded){
        [viper setState:VPR STATE STOPPED];
    } else if ([rotationRecognizer state] == UIGestureRecognizerStateCancelled){
        [viper setState:VPR STATE STOPPED];
        [viper setRotation:startRotation];
    }
}
```

Listing 8-22 shows the rotationGesture: task for the class RotationGestureController. In this task, we perform the now familiar tasks based on the state of the rotationRecognizer. If the state is UIGestureRecognizerStateBegan, we simply record the starting rotation of actor Viper. If the state is UIGestureRecognizerStateChanged, we get the rotation value from rotationRecognizer. The value of rotation is relative to where the user first placed his or her fingers. Since the value of rotation is relative to startRotation, we have to add rotation to startRotation to have the ship turn like a knob. We multiply the rotation by 2.0 to make the rotation faster and more responsive. This is only done because we might use this technique in an action game, where we want the user to be able to rotate the ship pretty quickly. Once the value of finalRotation is calculated, we see if it is bigger or smaller than the current rotation. This allows us to set the state of Viper to either VPR\_STATE\_CLOCKWISE or VPR\_STATE\_COUNTER\_CLOCKWISE.

When the gesture is over, we simply set the state of Viper back to VPR\_STATE\_STOPPED. Additionally, if the gesture was cancelled, we reset the rotation of the ship back to the startRotation.

The next example is more similar to the tap example than to the previous example because it handles what it is called a long press.

### **Long Press Gesture**

The long press gesture is a gesture where the user touches a point on the phone and holds it for a bit. It is sort of like a tap, but longer—as the name implies. Users often invoke the long press gesture when they want to rearrange their apps; when you press an app to make them all start shaking, it is a long press. You also use a long press when pressing a key on the keyboard that has sub-items. For example, open Safari and tap on the address field. Once the keyboard shows up, put your finger on the ".com" button. After a moment, five alternative top-level domains are displayed. For this example, we are going to combine taps with long presses to change which size bullet a spaceship fires, as shown in Figure 8-6.

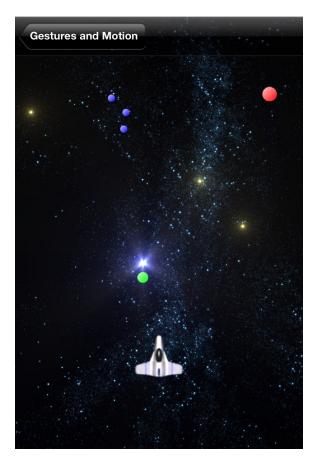


Figure 8-6. A spaceship shooting three different sized bullets

In Figure 8-6, we see a spaceship toward the bottom of the screen. There are a number of circles above the spaceship; these are bullets that are shot out of the spaceship based on user gestures. The cluster of three circles toward the upper left are the basic bullets, created from a simple tap. The circle closest to the bottom is a bigger bullet, created when the user does a long press. If the user does a touch that is longer than two seconds, an even bigger bullet is fired, as can be seen in the upper right of Figure 8-6. Let's take a look at the header file for the class LongPressController in Listing 8-23.

#### Listing 8-23. LongPressController.h

```
@interface LongPressController : GameController{
    Viper* viper;
    NSDate* longStart;
}
-(void)tapGesture:(UITapGestureRecognizer*)tapRecognizer;
-(void)longPressGesture:(UILongPressGestureRecognizer*)longPressRecognizer;
-(void)fireBulletAt:(CGPoint)point WithDamage:(float)bulletSize;
@end
```

In Listing 8-23, we see the header for the class LongPressController, which shows that we have a reference to the spaceship, as well as an NSDate that is used to keep track of when a long press gesture starts. The task tapGesture: is used when the user simply taps the screen to fire a small bullet. The task longPressGesture: is called when the user performs a long press gesture to fire a larger bullet. The last task is used to create a Bullet actor and add it to the scene. Let's start by looking at the doSetup task of LongPressController. See in Listing 8-24.

Listing 8-24. LongPressController.m (doSetup)

```
-(BOOL)doSetup{
    if ([super doSetup]){
        [self setGameAreaSize:CGSizeMake(320, 480)];
       viper = [Viper viper:self];
        [self addActor:viper];
       CGPoint center=[viper center];
        center.y=[self gameAreaSize].height/5.0*4.0;
        [viper setCenter:center];
       UITapGestureRecognizer* tapRecognizer=[[UITapGestureRecognizer alloc] initWithTarget:self
action:@selector(tapGesture:)];
        [actorsView addGestureRecognizer:tapRecognizer];
       UILongPressGestureRecognizer* longPressRecognizer = [[UILongPressGestureRecognizer alloc]
initWithTarget:self action:@selector(longPressGesture:)];
        [longPressRecognizer setMinimumPressDuration:1.0f];
        [actorsView addGestureRecognizer: longPressRecognizer];
       return YES;
   return NO;
}
```

In Listing 8-24, we see task doSetup. After we perform the usual steps of setting the game area size and adding the actor Viper, we register two gesture responders. The first gesture recognizer is a UITapGestureRecognizer that will call tapGesture:. The second gesture recognizer is a UILongPressGestureRecognizer that is configure to call longPressGesture:. The UILongPressGestureRecognizer has the property minimumPressDuration set to 1.0 f. This means that the user must hold the press for one second before this UILongPressGestureRecognizer will consider the touch a long press. Both gesture recognizers are added to actorsView.

### **Responding to the User**

In the following section, we will look at how bullets are added, based on which gesture was triggered. Let's get the tap gesture out of the way first. The implementation of tapGesture: is shown in Listing 8-25.

#### Listing 8-25. LongPressController.m (tapGesture:)

```
-(void)tapGesture:(UITapGestureRecognizer*)tapRecognizer{
    [self fireBulletAt:[tapRecognizer locationInView:actorsView] WithDamage:10];
}
```

In Listing 8-25, we see that every time a tap gesture is recognized, we simply call fireBulletAt:WithDamage: specifying the location of the tap and the damage value of 10. The more interesting interaction is found in the implementation of longPressGesture:, as shown in Listing 8-26.

Listing 8-26. LongPressController.m (longPressGesture:)

```
if ([longPressRecognizer state] == UIGestureRecognizerStateBegan){
    [viper setState:VPR_STATE_TRAVELING];
    longStart=[NSDate date];
} else if ([longPressRecognizer state] == UIGestureRecognizerStateEnded){
    NSDate* now=[NSDate date];
    float damage=20;
    if ([now timeIntervalSinceDate:longStart]>1.0f){
        damage=30;
    }
    [self fireBulletAt:[longPressRecognizer locationInView:actorsView] WithDamage:damage];
    [viper setState:VPR_STATE_STOPPED];
}
```

In Listing 8-26, we use the state of longPressRecognizer to decide what should be done. If the gesture has been started, we record the time in the variable longStart; we also set the state of the Viper object to VPR\_STATE\_TRAVELING, which causes the thrust of the spaceship to be shown. If you have played with the demo application, you will notice that the thrust comes on after the one-second delay associated with the gesture. This means that longPressGesture: does not get called until this minimum time has passed.

If the state of longPressRecognizer is UIGestureRecognizerStateEnded, then we know the user has lifted his or her finger. When this happens, we see if more than a second has passed since the gesture was started. If so, we upgrade the damage from 20 to 30. This means that if the user holds a finger down for a second, the next bullet will do 20 damage, and if the user holds it down for two seconds, the damage will be 30. When the long press gesture is over, we set the state of the Viper back to VPR\_STATE\_STOPPED and fire the bullet with the appropriate damage.

### Adding the Bullet

Let's take a look at the implementation of fireBulletAt:WithDamage: to complete this example. See Listing 8-27.

#### Listing 8-27. LongPressController.m (fireBulletAt:WithDamage:)

```
-(void)fireBulletAt:(CGPoint)point WithDamage:(float)damage{
    Bullet* bullet=[Bullet bulletAt:[viper center] TowardPoint:point];
    [bullet setDamage:damage];
    [self addActor:bullet];
}
```

In Listing 8-27, we see that we simply create a new Bullet actor that is configured to travel toward a specified point and add it the scene.

# **Swipe Gesture**

The swipe gesture is probably most recognizable as the gesture used to switch the set of apps you see on the home screen. This gesture is often used to switch context, as with the home screen. Other examples include the four-finger swipe used to switch the foreground application on the iPad 2 and 3. It is a bit like pawing your way through your running applications. In our example, we are going to use swipe gestures to add comets to the scene, as shown in Figure 8-7.

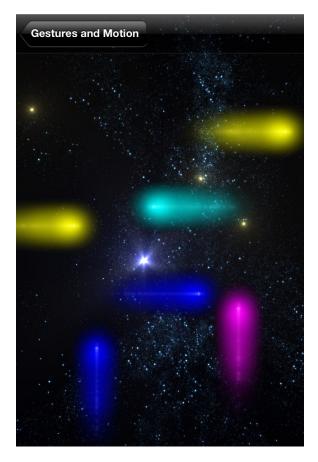


Figure 8-7. Swipes create comets

In Figure 8-7, we see several comets on the screen. Each comet is created by a swipe gesture that determines where the comet starts and in which direction it travels. For example, a swipe to the right causes a comet to be created on the left and travel to the right. Let's take a look at the doSetup task of the SwipeGestureController class in Listing 8-28.

Listing 8-28. SwipeGestureController.m (doSetup)

```
-(BOOL)doSetup{
    if ([super doSetup]){
       [self setGameAreaSize:CGSizeMake(320, 480)];
       UISwipeGestureRecognizer* down=[[UISwipeGestureRecognizer alloc] initWithTarget:self
action:@selector(swipeGesture:)];
        [down setDirection:UISwipeGestureRecognizerDirectionDown];
        [actorsView addGestureRecognizer:down];
       UISwipeGestureRecognizer* up = [[UISwipeGestureRecognizer alloc] initWithTarget:self
        [up setDirection:UISwipeGestureRecognizerDirectionUp];
        [actorsView addGestureRecognizer:up];
       UISwipeGestureRecognizer* left=[[UISwipeGestureRecognizer alloc] initWithTarget:self
        [left setDirection:UISwipeGestureRecognizerDirectionLeft];
        [actorsView addGestureRecognizer:left];
       UISwipeGestureRecognizer* right=[[UISwipeGestureRecognizer alloc] initWithTarget:self
action:@selector(swipeGesture:)];
        [right setDirection:UISwipeGestureRecognizerDirectionRight];
        [actorsView addGestureRecognizer:right];
       return YES;
    }
   return NO;
}
```

In Listing 8-28, we see the code that registers the gesture recognizers for this example. We see that we create a UISwipeGestureRecognizer for each direction we want to listen for. The only surprise in this example is that it requires four different gesture recognizers to achieve what we want. UISwipeGestureRecognizer does allow you to specify a single recognizer for multiple directions. However, when responding to a swipe gesture, the device has no way to tell which direction the gesture took. Only by creating a recognizer for each direction can we tell which direction the user's gesture took.

Let's look at the task swipeGesture:. See Listing 8-29.

#### Listing 8-29. SwipeGestureController.m (swipeGesture:)

```
-(void)swipeGesture:(UISwipeGestureRecognizer*)swipeRecognizer{
   CGSize gameSize=[self gameAreaSize];
   UISwipeGestureRecognizerDirection direction=[swipeRecognizer direction];
   CGPoint locationInView=[swipeRecognizer locationInView:actorsView];
   CGPoint center=CGPointMake(0, 0);
   float directionInRadians = DIRECTION DOWN;
    if (direction == UISwipeGestureRecognizerDirectionRight){
        center.x = -20;
        center.y = locationInView.y;
        directionInRadians = DIRECTION RIGHT;
    } else if (direction == UISwipeGestureRecognizerDirectionDown){
        center.x = locationInView.x;
        center.y=-20;
        directionInRadians = DIRECTION DOWN;
    } else if (direction == UISwipeGestureRecognizerDirectionLeft){
        center.x = gameSize.width + 20;
        center.y = locationInView.y;
        directionInRadians = DIRECTION LEFT;
    } else if (direction == UISwipeGestureRecognizerDirectionUp){
        center.x = locationInView.x;
        center.y = gameSize.height + 20;
        directionInRadians = DIRECTION UP;
    }
   Comet* comet = [Comet comet:self withDirection:directionInRadians andCenter:center];
    [self addActor:comet];
}
```

In Listing 8-29, we see the code that is called when a swipe gesture is recognized. To create the effect we want, we are simply going to create a new Comet actor with the correct location and direction. To figure out where the Comet should be placed and in what direction it travels, we simply look at the direction property of swipeRecognizer.

We are not going to go into the details of how the Comet class is implemented; we have discussed that at length already. If you are really interested, please review the source code provided.

We have looked at the built-in gesture recognizers available in i0S and have explored the basics of how they work. In the next section, we will explore how movements of the device can be incorporated into an application.

# **Interpreting Device Movements**

Starting with the iPhone 4, i0S devices have an accelerometer and a gyroscopic sensor built into them. There are several ways to use these sensors in an application. The two most common ways are to simply respond to a motion event, which corresponds to shaking the device. The other

and more fine-tuned way is to access the orientation data of these sensors directly through the UIAccelerometer class. Let's take a look at the shaking example first.

### **Responding a to Motion Event (Shaking)**

Whenever an i0S device is shaken, a motion event is generated for the application to consume. Personally, I find using the shake in an application to be super annoying; however, some people think it is a good idea, so let's look at how we can take advantage of this feature. Figure 8-8 shows our example.



Figure 8-8. Asteroids breaking apart from a device shake

In Figure 8-8, we see a number of asteroids. These asteroids used to be a single asteroid, but a few shake events caused it to break apart. The class for this example is called ShakeController and extends GameController. There is nothing particularly interesting about its header file, so let's just jump to its doSetup task, shown in Listing 8-30.

#### Listing 8-30. ShakeController.m (doSetup)

```
-(BOOL)doSetup{
    if ([super doSetup]){
        [self setGameAreaSize:CGSizeMake(320, 480)];

        NSMutableArray* classes = [NSMutableArray new];
        [classes addObject:[Asteroid class]];

        [self setSortedActorClasses:classes];

        return YES;
    }
    return NO;
}
```

In Listing 8-30, we see the task doSetup that configures the ShakeController, marking Asteroid as a class of actor we will want to get access to later. We add our Asteroid in the task updateScene. We do this since we want to add a new Asteroid only when there are no Asteroid objects in the scene, as can be seen in Listing 8-31.

#### Listing 8-31. ShakeController (updateScene)

```
-(void)updateScene{
    if ([[self actorsOfType:[Asteroid class]] count] ==0 ){
        Asteroid* asteroid = [Asteroid asteroid:self];
        [self addActor:asteroid];
    }
    [super updateScene];
}
```

In Listing 8-31, we see the updateScene task that is called in order to move the game forward through each step of the animation. In this task, we check to see if there are Asteroid objects in the scene; if there are none, we go ahead and add one. Lastly, we call the super-implementation of updateScene to drive the game forward.

Now the question is, How do we respond to shake events so we can blow up the asteroid? By informing the application that the top view can become the "first responder" and implement the appropriate method to respond to a motion event, we achieve this. A UIView that is the first responder is a UIView that gets the first crack at interpreting user input. There are two steps to getting a view to be first responder: first, you have to inform the application that the view property of a UIViewController can be the first responder; then, you have to make a request to become first responder. Listing 8-32 shows the code to accomplish this.

#### Listing 8-32. ShakeController (first responder related tasks)

```
-(BOOL)canBecomeFirstResponder {
    return YES;
}
```

```
-(void)viewDidAppear:(BOOL)animated {
    [super viewDidAppear:animated];
    [self becomeFirstResponder];
}
- (void)viewWillDisappear:(BOOL)animated {
    [self resignFirstResponder];
    [super viewWillDisappear:animated];
}
```

In Listing 8-32, we see three tasks. The first task, canBecomeFirstResponder, simply informs the application that the view property of this UIViewController is eligible to be first responder, and that this UIViewController will handle its events. The next two tasks are part of a UIViewController's viewDidAppear: is called and this UIViewController's view property is displayed,

becomeFirstResponder. Or, when this UIViewsController UIViewController to be first responder.

resignFirstResponder. These three tasks simply make this class eligible to receive motionBegan:withEvent:

motionEnded:withEvent:. We only need to implement one of these in our example: the motionBegan:withEvent: is shown in Listing 8-33.

#### ShakeController.m (motionBegan:withEvent:)

```
- (void)motionBegan:(UIEventSubtype)motion withEvent:(UIEvent *)event
{
   if (motion == UIEventSubtypeMotionShake)
   {
      for (Asteroid* asteroid in [self actorsOfType:[Asteroid class]]){
            [asteroid doHit:self];
      }
   }
}
```

In Listing 8-33, we see the task motionBegan:withEvent:, where we first check that the motion subtype is a UIEventSubtypeMotionShake. If it is, we simply iterate over all of the asteroids in the scene and call doHit: on them. The task doHit: causes each asteroid to break apart into a number of smaller asteroids. The details of doHit: are discussed in Chapter 7.

As we can see, responding to shake events is pretty simple—very much like responding to touch events. I find it a little weird that shake events are not implemented as a gesture. I suspect the reason is that shake events have been around before the many different gesture recognizers made it into the SDK.

### **Responding to Accelerometer Data**

As a developer, being able to know the orientation of the device is really cool to me. It allows things like augmented reality to be possible, as well as a bunch of other cool things. The last example in this chapter will use the accelerometer to manipulate actors in our scene. I can't promise it will

be as cool as an augmented reality game, but it should help to pave the way for other developers. Figure 8-9 shows the accelerometer example being run.



Figure 8-9. Multiple screen of accelerometer demo

In Figure 8-9, we see several screenshots of this example superimposed. In this example, the location of the Viper is based on the X and Y accelerometer values, so when the iPhone is flat on its back, the spaceship should be in the center of the game area. When the device is tilted to the left, the ship moves to the left. When the device is tilted up, the ship will move up, and so on. Figure 8-9 highlights how jumpy the accelerometer data are. These were all taken while I was trying to hold the device flat (though I was trying to take screenshots at the same time). For a real application, the accelerometer data would need to be massaged.

The class responsible for our example is the class AccelermoterController, the header of which is shown in Listing 8-34.

#### Listing 8-34. AccelerometerController.h

```
@interface AccelerometerController : GameController<UIAccelerometerDelegate>{
    Viper* viper;
}
@end
```

In Listing 8-34, we see the header for the class AccelerometerController. The things to note here are that the class AccelerometerController conforms to the protocol UIAccelerometerDelegate, and that it has a reference to the Viper that will be moving around the screen. Conforming the protocol allows AccelerometerController to receive data from the accelerometer in real time, as we will see in a bit. Let's first look at how I set up the class AccelerometerController so it receives data, as

#### AccelerometerController.m (doSetup)

```
if ([super doSetup]){
    [self setGameAreaSize:CGSizeMake(320, 480)];

    viper=[Viper viper:self];
    [self addActor:viper];

    UIAccelerometer* theAccelerometer=[UIAccelerometer sharedAccelerometer];
    theAccelerometer.updateInterval=1 / 50.0;
    theAccelerometer.delegate=self;

    return YES;
}
return NO;
}
```

In Listing 8-35, we do the usual setup, specifying the game size area and adding the Viper that we will be moving around with accelerometer data. To start receiving accelerometer data, we have to get access to the singleton UIAccelerometer associated with the running application. To do this, we use the static task sharedAccelermoter of the class UIAccelermoter, and then we simply set self as the delegate. Another thing to note is that we have to specify the frequency at which we get data. In this case, we are requesting data 50 times a second, which is plenty fast for real-time input. The data is actually received by a call to accelerometer: didAccelerate:, as shown in Listing 8-36.

#### Listing 8-36. AccelerometerController.m (accelerometer:didAccelerate:)

```
- (void)accelerometer:(UIAccelerometer *)accelerometer didAccelerate:(UIAcceleration *)acceleration{
    CGSize size=[self gameAreaSize];

UIAccelerationValue x, y, z;
    x = acceleration.x;
    y = acceleration.y;
```

```
z = acceleration.z;
NSLog(@"x = %f y = %f z = %f", x, y, z);
CGPoint center = CGPointMake(size.width/2.0 * x + size.width/2.0, size.height/2.0 * y + size.height/2.0);
[viper setCenter:center];
}
```

In Listing 8-36, we simply get the X, Y, and Z values from the UIAcceleration acceleration. These values range from -1.0 to 1.0, based on the orientation of the device. Because the X value corresponds to the device being tilted left or right (in portrait), we can simply use the value of X to specify the X value of our new center value. We do the same for the Y value, and set the center property of Viper.

This is a very simple example, but I hope it will get you headed down the right track. It seems to me that getting basic functionality working is pretty simple, as in this example, but getting more complex user interactions just right is considerably more work. I recommend reading the document entitled "Event Handling Guide for iOS," which is available at http://developer.apple.com.

# **Summary**

In this chapter, we explored how to respond to basic touch events. We also looked at how the subclasses of UIGestureResponder can be used to interpret those touch events as concise gestures, such as pinches, long presses, rotations, and more. In the last section, we looked at two ways to use the accelerometer to control game actors. The first method allowed us to simply respond to a shake event. The second technique showed how we could get direct access to accelerometer data to control our application, laying the groundwork for motion-based gestures more complex than a simple shake.

Chapter **S** 

# **Game Center and Social Media**

One of the key ways to market your game these days is to integrate your application with one or more social media services. The idea is that users will promote your game as they play and share their experience with their friends. To get users to play your game more often, it is also very common to provide a mechanism for users to compare their scores with other players. Providing a way for users to track their scores against others and to post their progress is so common in game development that Apple provides libraries to support these requirements.

The primary service provided by Apple is called Game Center, which is implemented in the library called GameKit. Game Center is a service that allows users to compare their scores with other players on what is called a leaderboard. Game Center also allows users to reach what are called achievements. Achievements are defined by each game and are intended as incentives to keep people playing. For example, if you have an achievement that is hard to achieve, people will want to earn it to set themselves apart from their friends playing the same game. Game Center also provides a mechanism for multiplayer games, but we will focus on the social aspects of its services in this chapter.

To broadcast a player's progress in a game, it is common to use an existing social media site such as Twitter or Facebook, so the user's friends will be notified. A new feature in iOS 5 was the inclusion of a built-in Twitter account. In this chapter, we will look at how to use the classes that expose a Twitter account to send a tweet on behalf of the user. New to iOS 6 is built-in Facebook support. We will look at how Twitter and Facebook supports are wrapped into a library called Social Framework. We will look at how we can use this library to make posts to Facebook on behalf of the user.

The examples in this chapter are taken from the project Belt Commander. We will continue using what you learn in the following pages as examples for the final two chapters, as we explore a complete game.

### **Game Center**

Game Center, as the user sees it, is an application on an iOS device where information about a user's games is aggregated. This information includes a place to log in and manage your account, a list of friends, and a list of games. For each listed game, there are a number of leaderboards for

displaying scores, as well as a list of the achievements available in the game. Figure 9-1 shows a typical Game Center screen.



Figure 9-1. Game Center showing games

In Figure 9-1, we see nine installed games that support Game Center. Select a game to view its leaderboards and any achievements the user has earned.

From a developer's perspective, Game Center is a set of classes used to interact with Game Center to define the leaderboards and achievements. Collectively, these classes are called GameKit, which is available as part of your standard iOS SDK installation. Once GameKit is integrated with your game, will be able to sign the user in and perform GameKit operations on his or her behalf. Figure 9-2 shows the user being signed into GameKit.



Figure 9-2. Signing into GameKit

In Figure 9-2, we see the Welcome screen for the game Belt Commander. At the top, we see a notification from Game Center letting the user know that this game is using GameKit with the user account displayed. We also see the word "sandbox." This is informing us that we're not using the live version of Game Center but, rather, the development version. For the most part, you don't have to worry about this; while developing, you will be using the sandbox exclusively.

To enable GameKit in your project, you obviously use classes from GameKit, but you also have to tell Apple that you want GameKit support for a given game. The following section describes how to set up GameKit in iTunes Connect.

## **Enabling Game Center in iTunes Connect**

Game Center is not just an app or set of libraries on your iOS device. It is also a set of Web services hosted by Apple that provide much of the functionality. In order for your game to use these services, you have to configure your application. You will have to create an App ID in the provisioning portal, configure Xcode to use the resultant Bundle Identifier, and configure your application in iTunes Connect to use Game Center. Let's assume we are making a new game and start with the Provisioning Portal, as shown in Figure 9-3.

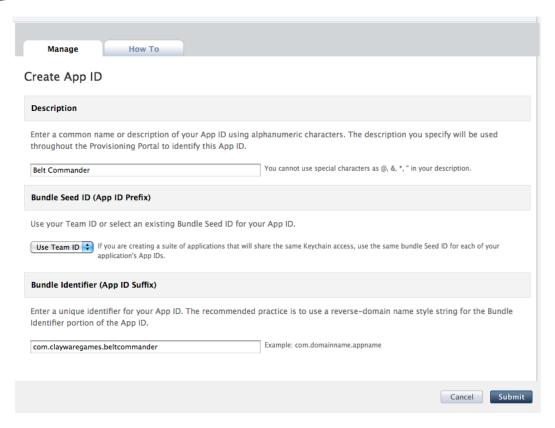


Figure 9-3. Creating an App ID in the Provisioning Portal

In Figure 9-3, we see the form used to create an App ID. The top field, labeled Description, can be anything you want to remind you of why you created this App ID. You can select any Bundle Seed ID you want, but I have found an important reason not to just use the default: selecting the default Bundle Seed ID removes a number configuration steps when working with Xcode.

The last item is the Bundle Identifier. This is used to identify your application at runtime. For games that are meant to support Game Center, you have to specify a Bundle Identifier without a wildcard. Once you press Submit, you should open your game project in Xcode.

The Bundle Identifier must be set on Xcode, so iOS knows how to associate the binary running on your device to the application defined by iTunes Connect. Figure 9-4 shows where to set the Bundle Identifier.



Figure 9-4. Bundle Identifier in Xcode

In Figure 9-4, the Identifier field contains our Bundle Identifier in Xcode. This value, in combination with the version number, identifies to iTunes Connect, which application is running. Once you have set the Bundle Identifier, you have to create a new application in iTunes Connect, as shown in Figure 9-5.

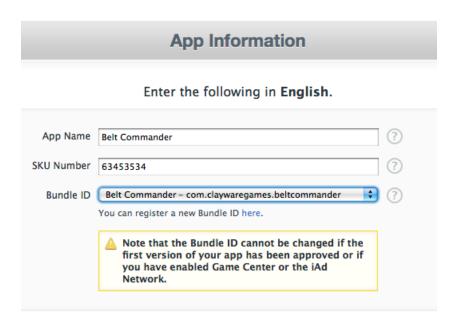


Figure 9-5. New application in iTunes Connect

In Figure 9-5, we see the first step in creating a new application in iTunes Connect. We have specified the App name and selected an SKU number. The SKU number can be anything you want; it is included so the producer of the game can track sales in his or her internal systems. We also see that we can select the Bundle ID from a pull-down menu; this is the value we specified when we created a new App ID. There are a few more steps required to create a new application in iTunes Connect, but they are just filling in information about the app and are not required steps to getting Game Center working. You will be asked to provide a description, copyright information, and other details. All of the information added at the last step can be skipped and added later.

Once the application is created, inspect its details and find the Manage Game Center button, as shown in Figure 9-6.

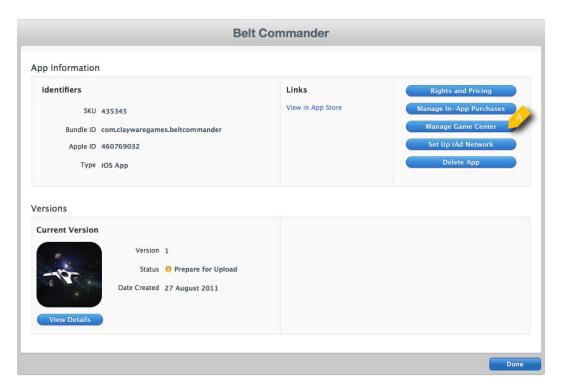


Figure 9-6. Configuration buttons for an application in iTunes Connect

In Figure 9-6, we see the Manage Game Center button (labeled A). Click this, and you will be prompted to enable Game Center and create a leaderboard. Figure 9-7 shows the page for creating or editing a leaderboard.


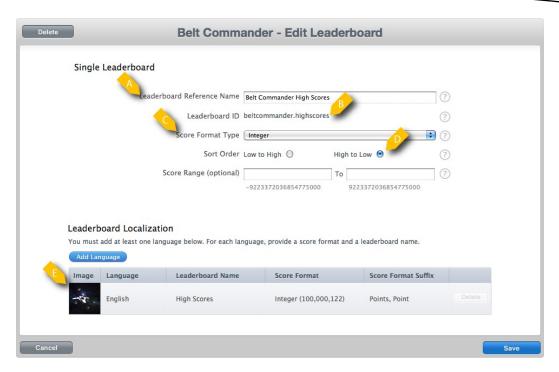


Figure 9-7. Creating or editing a leaderboard

In Figure 9-7, we see the web page in iTunes Connect for editing and creating a leaderboard. At item A, we see a name for the leaderboard. This name is not the display name—it is for internal use only and can be anything you want. Item B indicates the ID for the leaderboard. This is the value used in code when referring to the leaderboard. Items C and D indicate how the scores in this leaderboard should be organized. We have chosen to display our scores as an integer value (with no decimal places), and we consider higher scores better. Item E shows that we have added display information for one language. New languages can be added by clicking the Add Language button and specifying the display name of the leaderboard, as well as indicating that the values are called "points" in our case. Creating or editing an achievement is very similar to working with a leaderboard, as shown in Figure 9-8.

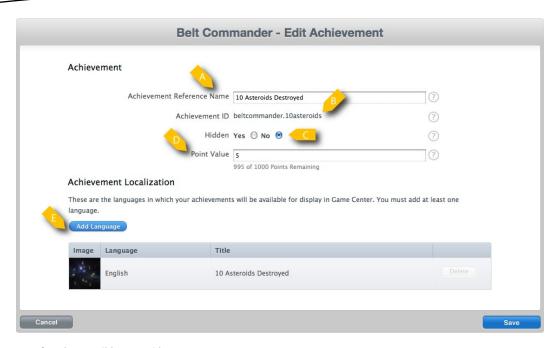

Creating or editing an achievement

9-8, we see the web page for creating and editing an achievement in iTunes Connect. Item A shows the internal name used for the achievement. Item B is where the ID for the achievement is displayed. Item C indicates that this achievement is not hidden. By default, achievements are viewable to users even if they have not achieved them. However, it can be fun to specify some achievements that are listed, so users are surprised when they achieve them. Item E shows that we have specified the display text for the English language. Of course, text for other languages can be added by clicking the Add Language button.

We have looked at how to create a new App ID and a new application in iTunes Connect. We also briefly looked at the screens required to create a leaderboard and an achievement. Now, let's look at the code that takes advantage of these new resources.

# **Using Game Center in Your Game**

It is surprisingly easy to work with GameKit to start using the leaderboard and achievement features once Game Center is set up to include them. The following sections will discuss how to connect to the user's Game Center account, submit his or her scores to a leaderboard, and earn an achievement.

### **Enabling Game Center for a User**

When a game is Game Center-enabled, the user must still opt into the Game Center features. The user is required to create an account with Game Center and be authenticated on the current iOS device with that account. Thankfully, Apple has made it simple to get going with Game Center.

To get started with Game Center, all apps must get access to an instance of GKLocalPlayer that represents the local player and authenticate them. Listing 9-1 shows the canonical example of doing this.

### Listing 9-1. RootViewController.m (initGameCenter)

```
-(void)initGameCenter{
    Class gkClass = NSClassFromString(@"GKLocalPlayer");

BOOL iosSupported = [[[UIDevice currentDevice] systemVersion]
compare:@"4.1" options:NSNumericSearch] != NSOrderedAscending;

if (gkClass && iosSupported){

    localPlayer = [GKLocalPlayer localPlayer];
    [localPlayer authenticateWithCompletionHandler:^(NSError *error) {
        if (localPlayer.authenticated){
            [leaderBoardButton setEnabled:YES];
        } else {
            [leaderBoardButton setEnabled:NO];
        }
    }];
    }
}
```

In Listing 9-1, we see the task initGameCenter of the class RootViewController. This task is called once at the beginning of the application launch. It first checks to see if GameKit is available on this iOS device by looking for the class GKLocalPlayer. The tasks also checks to see if the version of iOS is recent enough to support Game Center. If yes, we get a pointer to the local player by calling localPlayer on the class GKLocalPlayer.

To authenticate our local player, we simply call authenticateWithCompletionHandler: and pass a block that will be executed asynchronously when the user has authenticated (or cancelled). A block is simply a way of declaring a function that can be passed around as value. In this case, we are using a block in the same way we would use an anonymous class on a language like Java. The first time this code is run, the user will see something like Figure 9-9.



Figure 9-9. First-time authentication with Game Center

In Figure 9-9, we see the result of calling GameKit's authentication task. The user is prompted to sign in to Game Center with an existing account, create a new account, or cancel. If the user cancels enough times, the application will no longer display this dialog. The exact number of times that the user must cancel before this happens seems to change with different releases. With iOS 5, it is approximately three times. Once the user has successfully authenticated, the application is now connected to Game Center for that user account. When the application is run again, calls to authenticateWithCompletionHandler: will call the handler code without pestering the user to sign in again. The user will see something like Figure 9-2.

Once Game Center is enabled, we will want to start taking advantage of its features. The following section looks at how to report a score to a leaderboard.

### RootViewController.m (notifyGameCenter)

```
if ([localPlayer isAuthenticated]){
    GKScore* score = [[GKScore alloc] initWithCategory:@"beltcommander.highscores"];
    score.value = ([beltCommanderController score];

    [score reportScoreWithCompletionHandler:^(NSError *error){
        if (error){
            //handle error
        }
    }];
}
```

In Listing 9-2, we see the task notifyGameCenter, which is called every time a game ends. In this task, we check to see if the localPlayer is authenticated. If so, we simply create a GKScore object, specifying the ID of the leaderboard to which we are submitting the score—in this case, "beltcommander.highscores." Once we have a reference to the GKScore object, we set the score property to the score from the last game. The property score can by any type of number—in this case, it is a long. Lastly, we call reportScoreWithCompletionHandler: and pass a block to handle any error. In our example, we don't do anything with the error.

**Note** If the user is offline or there was some sort of network issue, GameKit will automatically resubmit scores when it is run in the future, ensuring that a player's hard work is properly recorded.

Figure 9-10 shows a score on the leaderboard.



Figure 9-10. A leaderboard with a sample score

In Figure 9-10, we see a score displayed on a leaderboard. There is only one score at the moment, because the screenshot was taken during development of the game. At the top, we can see three options for viewing high scores: Today, This Week, or All Time. The component that is displaying the high scores is a pre-built component called GKLeaderboardViewController that comes with GameKit; the code to bring up this component is shown in Listing 9-3.

### Listing 9-3. RootViewController.m (leaderBoardClicked:)

```
- (IBAction)leaderBoardClicked:(id)sender {
         GKLeaderboardViewController* leaderBoardController =
[[GKLeaderboardViewController alloc] init];
         leaderBoardController.category = @"beltcommander.highscores";
         leaderBoardController.leaderboardDelegate = self;
         [self presentModalViewController:leaderBoardController animated:YES];
}
```

In Listing 9-3, we see the task leaderBoardClicked:, which is called when the user clicks the Leaderboard button. This class is called on an instance of RootViewController, which is the main UIViewController for our example game Belt Commander. We don't have to know much about RootViewController except that it is a UIViewContoller and conforms to GKLeaderboardViewControllerDelegate. To display the view shown in Figure 9-10, first create a GKLeaderboardView and set the category property to the ID of our leaderboard. Then call

presentModalViewController:animated: on self, which will display the Leaderboard view. In order to remove the leaderboard when the user clicks Done, set self as the leaderboardDelegate, which means the task leaderboardViewControllerDidFinish: from GKLeaderboardViewControllerDelegate will be called when the user is done. The implementation leaderboadViewControllerDidFinish: should be as follows, shown in Listing 9-4.

### Listing 9-4. RootViewController.m (leaderboardViewControllerDidFinish:)

```
- (void)leaderboardViewControllerDidFinish:(GKLeaderboardViewController *)viewController{
    [self dismissModalViewControllerAnimated:YES];
}
```

leaderboardViewControllerDidFinish:, where we dismissModalViewControllerAnimated: to remove the Leaderboard view from the screen.

Figure 9-8). In our sample game, Belt Commander, the player destroys wave after wave of asteroids. We want to give the user an achievement when he destroys his first 10 asteroids—an easy achievement, which will remind the user early in the game that there are other achievements to earn. Figure 9-11 shows the achievement in the Game Center app.



Figure 9-11. First achievement in the Game Center app

In Figure 9-11, we see a screenshot from the Game Center app displaying the achievements for Belt Commander. We can see that the achievement in this view was awarded. Listing 9-5 shows the code that awards the achievement.

### Listing 9-5. BeltCommanderController.m (checkAchievements)

In Listing 9-5, we see the task checkAchievements from the class BeltCommanderController, which is responsible for handling the in-play game logic. The first thing we do is check if the asteroids\_destroyed is bigger or equal to 10. The variable asteroids\_destroyed is simply incremented whenever an asteroid in the game is destroyed. If asteroids\_destroyed is at least 10,

we get a reference to a GKAchievement by passing the achievement's ID (as defined in iTunes Connect) to the initWithIdentifier task of GKAchievement. Once we have a reference, we simply assign 100 to the property percentComplete, call reportAchievementWithCompletionHander, and we are done.

There are a few things to note about achievements. First, as shown in Listing 9-5, achievements can be partially complete. We could have set percentComplete to 30 or 50. This is an important feature for long-running achievements. Say, for example, our achievement was to destroy 10,000 asteroids. We would want to let users know how far they have progressed to date or they may not pursue it further.

Another thing to note about achievements is that each has a value. Our achievement is worth 5 points, as shown in Figure 9-11. The value of an achievement can be whatever the developer

# **Twitter Integration**

Love it or hate it, Twitter exists. As a mobile application developer, you need to be aware that it is more and more common for clients to ask for social media integration in their apps. On the short list of everyone's social services is Twitter. Twitter provides a very nice and useful REST service that can be used to tweet on behalf of a user. New to iOS 6 is the Social Framework. This framework extends and replaces the Twitter API from iOS 5. The Social Framework allows a user to do a sort of single sign-on with their Twitter or Facebook account, making it simple for application developers to request access to this global account. This feature is great for users, because they have to authenticate only once with the device, and they still have control over which applications are allowed to tweet for them.

This feature is also great for developers. It makes tweeting really, really easy. If you have ever worked with any OAuth service on an embedded device, you know there is a bit of a disconnect between how OAuth works and how native applications operate. In short, OAuth was designed to work within a browser, and our application was not written on HTML. One solution was to pop up a UIWebView and do the authentication through it. This works, but it is clumsy. This new approach is much better.

Not only does this new Twitter API provide a simple way to authenticate, it also has a simple component where users can enter their tweets, as shown in Figure 9-12.



Figure 9-12. Tweeting from Belt Commander

In Figure 9-12, we see the built-in component for tweeting on iOS. On the top, we have the place where the 120 characters can be typed. To the right, there is a paperclip holding a Safari icon. This indicates that a link was attached to this tweet. The user can also add a location, cancel, or send the tweet. The code to populate this view with default values and display them is shown in Listing 9-6.

### Listing 9-6. RootViewController.m (tweetButtonClicked:)

In Listing 9-6, we see the tweetButtonClicked: task of the class RootViewController. This task is called when a user clicks the Tweet button. To display the Twitter component, we simply create a new SLComposeViewController and indicate that we are interested in the Twitter service. After specifying the initial text and attaching a URL, we simply pass twitterSheet to presentModalViewController. If we want to know whether the tweet was sent, we can assign a block to the value completionHandler of twitterSheet.

Of course, not every user will have Twitter set up on his or her device. As a developer, you want to be able to test this, which turns out to be as simple as the code in Listing 9-7.

### Listing 9-7. RootViewController.m (initTwitter)

```
-(void)initTwitter{
    [tweetButton setEnabled:[SLComposeViewController isAvailableForServiceType:SLServiceTypeTwitter]];
}
```

In Listing 9-7, we see the simple task initTwitter, which is called when the containing UIViewController is loaded. In this task, we simply call isAvailableForServiceType to see if we can tweet. By using the returned value to set the enabled status of tweetButton, we prevent the user from being able to click the button until Twitter is enabled on the device.

The Twitter integration is great. It makes life very simple to include this feature. Next, let's explore how the Social Framework makes working with Facebook just as easy.

SLServiceTypeTwitter for SLServiceTypeFacebook, and users would

In this section, we will see how users can request that high scores be posted on their timelines by clicking the Facebook button from Figure 9-2. Before we can look at the source code, though, we need to go to our Facebook account and create a Facebook application.

# **Creating a Facebook Application**

The Facebook application can be thought of as the Facebook component of our application. Facebook has us do this so there is an identity associated with any Facebook action performed on behalf of the user. Facebook also uses the Facebook application as a security context. When users agree to let our application make posts, they are saying that our new Facebook application is allowed to make posts. Figure 9-13 shows the Facebook application I created for the sample game Belt Commander.

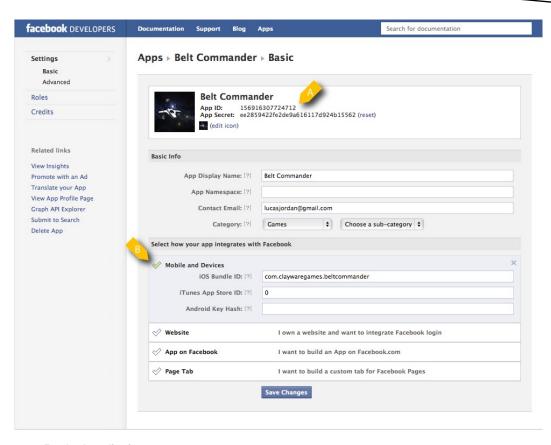


Figure 9-13. Facebook application

In Figure 9-13, we see the settings page for a Facebook application. At item A, you can see the App ID. We will use this value in our code when we authenticate with Facebook. At Item B, you will notice that Facebook wants to you add the iOS Bundle ID, which must match the Bundle ID you have set in your Xcode project. Creating a Facebook application is not hard, but I don't want to document it here, because the process seems to change every few months. Basically, you need to register your Facebook account as a developer and add a new application. Directions can be found at https://developers.facebook.com/apps.

Next, let's look at how we use the Social Framework and the Accounts Framework to connect with Facebook and post a high score to the user's timeline.

### **Authenticating with Facebook**

In order to post a message to the user's timeline, we first have to check with Facebook to see if this is something the user is allowing our application to do. Let's jump right into the code that is called when a user touches the Facebook button, as shown in Listing 9-7.

### Listing 9-7. facebookButtonClicked.m (RootViewController.m)

```
- (IBAction)facebookButtonClicked:(id)sender {
    accountStore = [[ACAccountStore alloc] init];
   ACAccountType* facebookAccountType = [accountStore
accountTypeWithAccountTypeIdentifier: ACAccountTypeIdentifierFacebook];
   NSDictionary *dict = @{
        ACFacebookAppIdKey: FB APP ID,
        ACFacebookPermissionsKey: @[@"publish stream"],
       ACFacebookAudienceKey: ACFacebookAudienceFriends
    };
    [accountStore requestAccessToAccountsWithType:facebookAccountType
        if (granted){
            NSArray* accounts = [accountStore accountsWithAccountType:facebookAccountType];
            facebookAccount = [accounts lastObject];
        } else {
            NSLog(@"Could not get permission to access FB: \\@", error);
        }
    }];
}
```

In Listing 9-7, we start by creating an instance of ACAccountStore; note that we are storing this object in a member field of the RootViewController. Next, we create an ACAccountType called facebookAccountType using the accountTypeWithAccountIdentifier: task of accountStore. The object facebookAccountType will be used in subsequent calls to accountStore to indicate which social service we are trying to work with. The next step is to create an NSDictionary that contains details about how we wish to work with Facebook. The first item in the NSDictionary is the Facebook App ID specified by the key ACFacebookAppIdKey. This is the key we created when we created a Facebook App in the previous section.

The second key, ACFacebookPermissionsKey, specifies which Facebook actions we are asking to perform. In this case, we just want to be able to write on the user's timeline, which is controlled by the permission publish\_stream. (More information about Facebook permissions can be found at <a href="http://goo.gl/00EDG">http://goo.gl/00EDG</a>.) The last key in dict is ACFacebookAudienceKey, which indicates who will be able to see any posts we create. In this case, ACFacebookAudienceFriends indicates that only friends of the user will be able to see the great posts by Belt Commander.

At this point, we are ready to make a call to Facebook and ask if it is OK for us to make posts. We do this by calling requestAccessToAccountsWithType:options:completion:, passing in facebookAccountType, dict, and a block which is called on completion of the call.

In the completion block, we check to see if granted is true; if so, we ask accountStore for all accounts that are Facebook accounts. In iOS 6, a user can have only one Facebook account

associated with each device. So, we just grab the last (and only) account and assign it to facebookAccount, which is an ACAccount object, defined in the header (source not show).

If this is the first time we have called requestAccessToAccountsWithType:options:completion:, then the user will be prompted with a dialog like the one shown in Figure 9-14.



Figure 9-14. User Being Asked to Grant Permission

If the user touches the OK button in Figure 9-14, the application has permission to make posts on their behalf. Next, let's take a look at how Belt Commander uses this permission to make those posts.

### **Making Posts to Facebook**

We just explored how an application requests permission to make Facebook posts. In Belt Commander, we are going to make a Facebook post whenever a player's game is over, reporting the score. We do this in the task reportToFacebook, as shown in Listing 9-8.

### Listing 9-8. notifyFacebook (RootViewController.m)

```
-(void)notifyFacebook{
    if (facebookAccount){

        NSString* desc = [NSString stringWithFormat:@"I just scored %ld points

        on Belt Commander.", [beltCommanderController score]];

        NSDictionary* params = @{
            @"link": @"http://itunes.apple.com/us/app/belt-commander/id460769032",
            @"caption": @"Presented by ClayWare Games, LLC",
            @"description": desc,
            @"message": @"A new high score!"
            };
            NSURL* feedURL = [NSURL URLWithString:@"https://graph.facebook.com/me/feed"];
```

SLRequest\* request = [SLRequest requestForServiceType:SLServiceTypeFacebook requestMethod:SL
RequestMethodPOST URL:feedURL parameters:params];

facebookAccount is set; if so, we create an called params and populate it with the content of our post. The items in params are

SLRequest object, being requestMethod, SLRequestMethodPOST. We also specify that the request facebookAccount. This makes sure that the request is properly performRequestWithHandler and pass in our

handler block.

In our case, there is not much to do in the handler block except to log if there was a problem. With any luck, the user will see something like Figure 9-15 in their timeline.

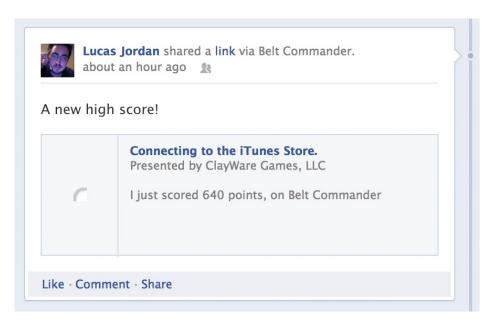


Figure 9-15. A Successful Post

# **Summary**

In this chapter, we explored Game Center and introduced what services it provides to the user. We explored those features in terms of GameKit to see how we can post the user's score to a leaderboard and award achievements. Continuing with the social trend, we looked at the built-in support for Twitter in iOS 6. Lastly, we looked at integrating Facebook into an iOS application. We covered how to handle authentication and post a simple message to the user's feed.

Chapter 10

# Monetizing via the Apple App Store

There are three main ways to make money by having apps in the Apple App Store. The most obvious way is to simply charge for the application. The second is to give the app away for free, but include ads. Another way, which can work for free and paid apps, is to include things for sale within the app. These are called in-app purchases, and are very popular with some styles of games.

This chapter will not cover what makes a good in-app purchase or whether your application should be free or available for a fee. It will cover the basics of setting up in-app purchases and explain the different types of purchases available.

# **In-App Purchases**

In-app purchases are virtual items or services found within an app that are available for a fee. Many different applications take advantage of in-app purchases to make money—not just games. Some nongame examples include downloading articles or comics, cooking recipes, and detailed map data. Some in-game examples include additional levels, new powers, extra game money, and novelty items for customizing the look of the game.

We will look at the example code from the game Belt Commander. The source code can be found in the Belt Commander folder in the sample code for this book. In Figure 10-1, you can see the in-app purchase options for Belt Commander.

In Figure 10-1, we see a screenshot from the game Belt Commander. There are three buttons, each specifying which type of actors should be present in the game when it is played. The game comes with asteroids available by default; the two buttons on the right are used to purchase additional types of actors in the game. The button in the middle is for saucers, which were already purchased but won't be included the next time the game is played (Inactive). The button to the right indicates that the user may choose to purchase the ability to include power-up actors in the game. The user initiates the purchase by clicking the button and walking through the purchase dialogs.



In-app purchases in Belt Commander

four types of in-app purchases do not fit your business needs, you will have to roll your own. Writing your own in-app purchase service could be very time-consuming. I would recommend seeing if your business needs can be adapted to fit Apple's model. The benefit is not only a decrease in development time but also a benefit for the user. When you use Apple's system, your user will see a familiar interface and login with a familiar set of credentials: the user's Apple ID. The five types of in-app purchases are as follows:

- Nonconsumable
- Consumable
- Free subscriptions
- Auto-renewing subscriptions
- Nonrenewing subscriptions

Let's take a closer look at each of the five types of in-app purchases.

### **Nonconsumable**

Nonconsumable in-app purchases are items that are purchased once and grant persistent access to some item or service. Nonconsumable items can be downloaded again by the user, and should be available on all of the user's devices. Nonconsumable purchase can include additional game levels, new types of enemies to fight, or silly hats to customize your user's game character.

### **Consumable**

Consumable in-app purchases are designed to support items or services that are consumed. In a game, this might include additional lives, points for buying in-game items, or other things that can be used up. Consumable purchases are designed to be repeated.

Consumable purchases cannot be downloaded again, so by their nature they will not be available across a user's devices unless you implement your own service to share this information across accounts.

# **Free Subscriptions**

Free subscriptions are a way to offer freely available content in the Newstand application. This particular type of in-app purchase really has nothing to do with games or apps.

### **Auto-Renewing Subscriptions**

Auto-renewing subscriptions are a way for users to purchase a feature or gain access to content for a set amount of time. You can think of this as a magazine subscription that automatically charges your credit card every year.

# **Nonrenewing Subscriptions**

Nonrenewing subscriptions are subscriptions that will not automatically charge the user to renew the subscription. This type of in-app purchase exists because Apple is picky about which features or content are suitable as auto-renewing subscriptions. The nonrenewing subscription is sort of a compromise, allowing subscriptions in an app that Apple would not otherwise feel is suitable for an auto-renewing subscription.


Now let's look at what is required to ready an application for in-app purchases.

# **Preparing for In-app Purchases**

Much like Game Center, an application must be enabled in iTunes Connect to include in-app purchases. The requirements are exactly the same: you have to use an App ID that does not have a wildcard. In Chapter 9, we covered the process of creating an App ID in your provisioning center that works with Game Center. You can follow the directions to create a second App ID, or simply add in-app purchases to that same game.

### **Enabling and Creating In-App Purchases**

Once you have an app in iTunes Connect, enabling in-app purchases is done by pressing the Manage In-App Purchases button, as shown in Figure 10-2.

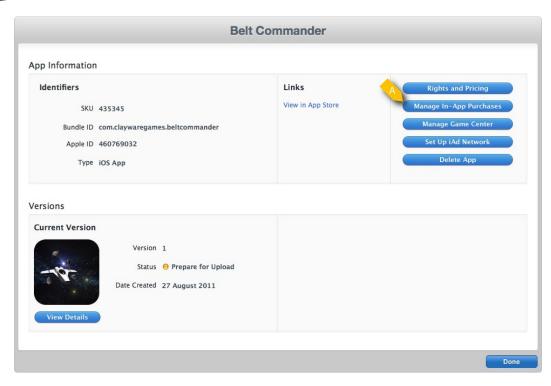

Enabling In-app Purchases in iTunes Connect

In Figure 10-2, we see the view in iTunes Connect for configuring an application. Item A shows the button to click to enable in-app purchases. After clicking this button, you will be able to add items to your app that users may purchase. Figure 10-3 shows the items I prepared for Belt Commander.

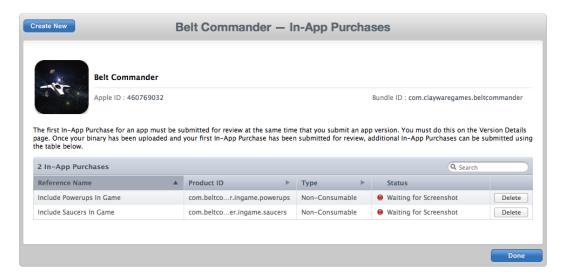


Figure 10-3. In-App purchases available for Belt Commander

In Figure 10-3, we see the screen in iTunes Connect where in-app purchases are listed. We can see that we added two: one for each additional type of actor the user can add to the game. For each in-app purchase, we see a reference name, a product ID, a product type, and the product status. The reference name is for internal use—it will not be seen by the user. The product ID is a unique name, used across all iOS applications, that identifies the purchase. The product ID will be how we reference this purchase in code.

The type refers to the different purchase types we discussed earlier—in this case, nonconsumable. The status value indicates what is required for this in-app purchase to be accepted by Apple. (Apple must review each in-app purchase you create, much like how each app must be reviewed before sale.) In this case, we are informed that Apple is waiting for screenshots of the purchase before it will review it. The screenshots are not shown to the user—they just give context to Apple about what the in-app purchase is. In Figure 10-4, we see the view in iTunes Connect that is used to create a new in-app purchase.

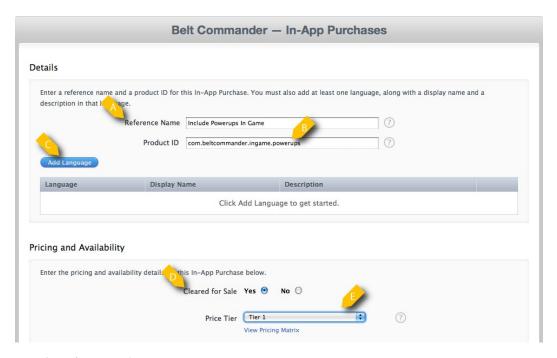


Figure 10-4. A new in-app purchase

Item A in Figure 10-4 shows where we enter our reference name for the in-app purchase. Item B shows the Product ID for the in-app purchase. In order for you to create the in-app purchase, you must provide the localized strings for the in-app purchase by clicking the Add Language button (item C).

Under the Pricing and Availability section of Figure 10-4, you must set the item as cleared for sale, at item D, for you to test the purchase. You must also specify a Price Tier at item E. The price tiers are the same as the tiers for an application, with the exception that there is no free tier.

Once you have in-app purchases defined for you application, you must configure a test user so you can test your purchases. It is highly recommended that you test your in-app purchases before you submit your application.

### **Creating a Test User**

Once you have in-app purchases defined, you will want to create a test user to "purchase" those items in your application. This give you a chance to test enabling or disabling each purchased feature with the same workflow that a real user will experience. Figure 10-5 shows where you start the process of adding a test user in iTunes Connect.



Creating a test user

In Figure 10-5, we see the option to create a test user from the Select User Type view. This view is available in iTunes Connect by clicking on the Manage Users button found on the home screen.

**Note** I emphasize using a test user to debug your in-app purchases because trying to debug with a real user will confound your efforts.

Once you click the Test User button shown in Figure 10-5, you will be prompted to create a new user. There should be nothing surprising—just keep in mind that you should not use an e-mail address that is currently an Apple ID.

We have looked at adding in-app purchases to our application in iTunes Connect and how to make sure we have a test user to debug our application. Next, we will look how in-app purchases are integrated into Belt Commander, giving us an understanding of the classes involved and how to use them.

# **Class and Code for In-App Purchases**

Creating in-app purchases in iTunes Connect is just the first step in actually having in-app purchases available in your application. The next step is to understand the process of how in-app purchases are actually purchased and what classes are involved. The framework that contains the pertinent classes is called StoreKit, and is available as part of you iOS SDK installation. Using these classes,

we are going to implement the workflow as shown in Figure 10-6, which shows the process of determining which products are available and how to handle the request to make a purchase.

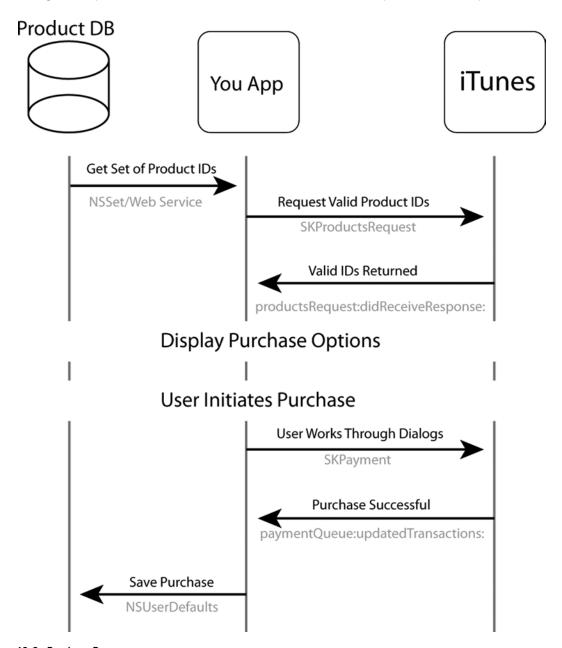


Figure 10-6. Purchase Process

Starting at the top-left of Figure 10-6, we begin by getting a set of Product IDs for products we want to present to the user. This list might come from an external web service or just be a hardwired set of strings in the application. How you get this list will depend on how you are managing what is for sale in your app. If you are adding new products all the time, you probably want to pull the list of

products from a web service. If you are just getting started with in-app purchases, a fixed list might work for you, but you will have to update your app to change the list.

Once we have our list of possible Product IDs, we make a request to the iTunes Store, asking which of the IDs we have passed along are valid and ready for sale. The IDs returned from the iTunes Store represent the items we want to make available to the user. The iTunes Store will not return Product IDs that are unknown or not ready for sale. This ensures that we are presenting only valid items that have gone through Apple's review process. In addition to letting us know that the IDs are valid, the iTunes Store returns the localized strings associated with the purchase, allowing us to present language-appropriate text to the user that matches exactly what was entered into iTunes Connect.

Continuing with the workflow shown in Figure 10-6, at some point the user will click a button to purchase an item. When this happens, we simply create a payment request and submit it, at which

NSUserDefaults, or we can do something more sophisticated, like save it to a web service.

10-7.









Figure 10-7. Making a purchase

The dialog on the upper left side of the figure will always be shown, as well as the one on the lower right. The other two dialogs will be shown between the first and last dialog if the user has to log in with his Apple ID. It is important to remember that, as a developer, we have no control over exactly which dialogs will be displayed or how long the user will take to complete the process. It is important not to expect the user to complete this process while the action of the game is in process.

Now let's look at a specific example, where we implement the purchase of a nonconsumable in-app purchase for our game Belt Commander. We are going to implement the view from Figure 10-1, where the user can select which actors are involved in the game and purchase new actors to be made available.

# **In-App Purchase Implementation**

As we discussed, the process of making a purchase is really just two calls to the iTunes Store. We will see in this section that it really only involves a handful of classes. In our example, we will be handling most of the details of working with StoreKit and handling the UI in a single class called ExtrasController, whose header is shown in Listing 10-1.

### Listing 10-1. ExtrasController.h

```
@interface ExtrasController : UIViewController<SKPaymentTransactionObserver, SKProductsRequestDelegate>{
    GameParameters* gameParams;
    NSMutableDictionary* idsToProducts;
}
@property (strong, nonatomic) IBOutlet UIButton *asteroidButton;
@property (strong, nonatomic) IBOutlet UIButton *saucerButton;
@property (strong, nonatomic) IBOutlet UIButton *powerupButton;
-(void)setGameParams:(GameParameters*)params;
@end
```

In Listing 10-1, we see the header for the class ExtrasController. The class ExtrasController plays two roles: it manages the purchasing process and it updates the three buttons accordingly.

The object gameParams is responsible for storing which actors are enabled in the game and which purchases have been made. The object idsToProducts is used to map our ids for purchases to SKProduct objects that Apple tells us are valid; we will see how we use these objects shortly.

In order to interact with StoreKit, ExtrasController conforms to the protocols SKPaymentTransactionObserver and SKProductsRequestDelegate. These protocols provide everything you need for your application to respond to interactions with the store. We will see how ExtrasController implements the tasks from these two protocols as we work through the code.

The first step when working StoreKit is to set up an object that responds to changes in the state of purchases. We create an object that responds to changes in purchases by adding an observer to the default SKPaymentQueue, as shown in Listing 10-2.

### Listing 10-2. ExtrasController.m (viewDidLoad)

```
#define PURCHASE_INGAME_SAUCERS @"com.beltcommander.ingame.saucers"
#define PURCHASE_INGAME_POWERUPS @"com.beltcommander.ingame.powerups"
//....
- (void)viewDidLoad
{
    [super viewDidLoad];
    idsToProducts = [NSMutableDictionary new];
    [[SKPaymentQueue defaultQueue] addTransactionObserver:self];

    //Get set of product ids
    NSSet* potentialProducts = [NSSet setWithObjects:PURCHASE_INGAME_POWERUPS,

    SKProductsRequest* request = [[SKProductsRequest alloc] initWithProductIdentifiers:potentialProducts];
    [request setDelegate:self];
    [request start];

    [self setGameParams: [GameParameters readFromDefaults]];
```

viewDidLoad for the class ExtrasController. In this task, we start by idsToProducts map and by getting the default SKPaymentQueue by calling defaultQueue, self as an observer. Because self conforms to the protocol SKPaymentTransactionObserver, ExtrasController will be informed of all changes in state for a purchase. Once we have a registered observer, we create a set of known product IDs. In this case, the NSSet potentialProducts is created from two constants: PURCHASE\_INGAME\_POWERUPS and PURCHASE\_INGAME\_SAUCERS. As we can see, these constants are the same strings as we specified when we created the products in iTunes Connect.

Once we have specified our set of potential products, we create an SKProductsRequest, set self as the delegate, and call start on it. While StoreKit is working out which product IDs are valid, we call setGameParams and specify that we should use the GameParameters object we have stored the default NSUsersDefaults. When StoreKit has its results, the tasks productsRequest:didReceiveResponse:, as shown in Listing 10-3.

### Listing 10-3. ExtrasController.m (productsRequest:didReceiveResponse:)

```
- (void)productsRequest:(SKProductsRequest *)request didReceiveResponse:(SKProductsResponse *)response {
    for (SKProduct* aProduct in response.products){
        if ([aProduct.productIdentifier isEqualToString:PURCHASE_INGAME_SAUCERS]){
            [saucerButton setEnabled:YES];
            [saucerButton setHidden:NO];
            [idsToProducts setObject:aProduct forKey:PURCHASE_INGAME_SAUCERS];
        } else if ([aProduct.productIdentifier isEqualToString:PURCHASE_INGAME_POWERUPS]){
            [powerupButton setEnabled:YES];
            [powerupButton setHidden:NO];
            [idsToProducts setObject:aProduct forKey:PURCHASE_INGAME_POWERUPS];
        }
    }
}
```

In Listing 10-3, we see the task productsRequest:didReceiveResponse: that gets called when we have a valid set of product IDs. In this task, we simply iterate over all of the products returned and make our buttons visible for purchasing saucers and power-ups. In this way, we make sure the user only sees viable purchase options.

We also map each of valid product IDs to the SKProduct objects set to the application. In this way, when the user makes a purchase, we can pull out the exact object Apple sent to us. This ensures we are presenting good data to our users.

We have looked at how we figure out which purchases are valid. Before we look at how purchases are actually made, we should examine the class GameParameters. The class GameParameters is responsible for storing which products have already been purchased and which actors the user wants in his or her game.

# **Driving the UI from Existing Purchases**

The three buttons, shown in Figure 10-1, allow the user to select which actors are available in the game. The same UI allows the user to purchase new actors. In order to keep track of this information we have created the model class GameParameters, whose header is shown in Listing 10-4.

### Listing 10-4. GameParameters.h

```
@interface GameParameters : NSObject<NSCoding>
@property (nonatomic) BOOL includeAsteroids;
@property (nonatomic) BOOL includeSaucers;
@property (nonatomic) BOOL includePowerups;
@property (nonatomic, retain) NSMutableSet* purchases;
+(id)gameParameters;
+(id)readFromDefaults;
-(void)writeToDefaults;
@end
```

In Listing 10-4, we see the header for the class GameParameters. We have three BOOL properties to keep track of which actors the user wants in the game. We also have an NSMutableSet called purchases that is used to store a set of product ID strings. The constructor gameParameters will create a new GameParameters object with no purchases and only includeAsteroids set to true (implementation not shown). The class task readFromDefaults is used to pull a GameParameter out of the default NSUserDefaults, whereas writeToDefaults is used to serialize a GameParameter back to the default NSUserDefautls. Listing 10-5 shows both readFromDefaults and writeToDeafaults.

Listing 10-5. GameParameters.m (readFromDefaults and writeToDefaults)

```
+(id)readFromDefaults{
    NSUserDefaults* defaults = [NSUserDefaults standardUserDefaults];
    NSData* data = [defaults objectForKey:GAME_PARAM_KEY];
    if (data == nil){
        GameParameters* params = [GameParameters gameParameters];
        [params writeToDefaults];
```

```
return params;
} else{
    return [NSKeyedUnarchiver unarchiveObjectWithData: data];
}
}
-(void)writeToDefaults{
    NSData* data = [NSKeyedArchiver archivedDataWithRootObject:self];
    NSUserDefaults* defaults = [NSUserDefaults standardUserDefaults];
    [defaults setObject:data forKey:GAME_PARAM_KEY];
    [defaults synchronize];
}
```

readFromDefaults and writeToDefaults. These two tasks are readFromDefaults will return a GameParameter for the key GAME\_PARAM\_KEY as stored in writeToDefaults writes a GameParameter to the user defaults for the key . The key idea to both of these tasks is that we store a GameParameter in the user purchases. The

GameParameters can be stored in an NSUserDefaults, because it implements the tasks from the NSCoder. See Chapter 2 for a description of that process.

10-1. This is handled in the task setGameParameters:, as shown in Listing 10-6.

```
-(void)setGameParams:(GameParameters*)params{
  gameParams = params;
 NSSet* purchases = [gameParams purchases];
  if ([params includeAsteroids]){
      [asteroidButton setImage:[UIImage imageNamed:@"asteroid active"] forState:UIControlStateNormal];
  } else {
    [asteroidButton setImage:[UIImage imageNamed:@"asteroid inactive"] forState:UIControlStateNormal];
  }
  if ([purchases containsObject:PURCHASE INGAME SAUCERS]){
     if ([params includeSaucers]){
         [saucerButton setImage:[UIImage imageNamed:@"saucer_active"] forState:UIControlStateNormal];
     } else {
       [saucerButton setImage:[UIImage imageNamed:@"saucer inactive"] forState:UIControlStateNormal];
  } else {
    [saucerButton setImage:[UIImage imageNamed:@"saucer purchase"] forState:UIControlStateNormal];
  if ([purchases containsObject:PURCHASE INGAME POWERUPS]){
     if ([params includePowerups]){
        [powerupButton setImage:[UIImage imageNamed:@"powerup_active"] forState:UIControlStateNormal];
     } else {
       [powerupButton setImage:[UIImage imageNamed:@"powerup_inactive"] forState:UIControlStateNormal];
```

```
}
} else {
  [powerupButton setImage:[UIImage imageNamed:@"powerup_purchase"] forState:UIControlStateNormal];
}
```

In Listing 10-6, we see the task setGameParameters. This task is responsible for making the UI reflect the state of the passed in GameParameters object called param. For the asteroidButton, we simply indicate which image should be displayed depending on the value of the property includeAsteroids. For saucerButton, we perform a similar test, but only if the product ID for the saucers is included in the NSSet purchases. If the product ID is not present, we set the image on the button to display the purchase version. We give the UIButton powerButton a similar treatment by setting the background to be active, inactive, or purchase.

# **Making the Purchase**

Now that we know how the button state is managed, let's look at how clicking one of the purchase buttons triggers a purchase. Listing 10-7 shows the code that is run when a user presses the saucer button.

### Listing 10-7. ExtrasController.m (saucerButtonClicked:)

```
- (IBAction)saucerButtonClicked:(id)sender {
   if ([gameParams.purchases containsObject:PURCHASE_INGAME_SAUCERS]){
        [gameParams setIncludeSaucers:![gameParams includeSaucers]];
        [self setGameParams:gameParams];
        [gameParams writeToDefaults];
   } else {
        SKProduct* product = [idsToProducts objectForKey:PURCHASE_INGAME_SAUCERS];
        SKPayment* payRequest = [SKPayment paymentWithProduct: product]; [[SKPaymentQueue defaultQueue]
addPayment:payRequest];
   }
}
```

In Listing 10-7, we see the task saucerButtonClicked that is called when the user clicks the saucer button. If we have already purchased the saucer feature, we know that the user is simply looking to toggle if saucers are included. We respond to this by flipping the value of includeSaucers, updating the UI by calling setGameParams, and writing the change to disk. If the user has not yet purchased the saucer feature, we know he or she wants to make a purchase. To start this process, we retrieve our SKProduct object from idsToProducts, and then we create an SKPayment object with that SKProduct. Lastly, we add the SKPayment object to the default SKPaymentQueue. This triggers the dialog process, as shown in Figure 10-7. The code to manage the power-ups is almost identical to the code in Listing 10-7, and it's not worth looking at. Next, let's look at how we respond to a successful purchase.

# **Responding to a Successful Purchase**

In order to respond to a successful purchase, we had to add an instance of SKPaymentTransactionObserver to the default SKPaymentQueue back in Listing 10-2. We are now ready to look at the code that gets called when the SKPaymentQueue successfully processes a purchase, as shown in Listing 10-8.

Listing 10-8. ExtrasController.m (paymentQueue: updatedTransactions:)

```
- (void)paymentQueue:(SKPaymentQueue *)queue updatedTransactions:(NSArray *)transactions{
    for (SKPaymentTransaction* transaction in transactions){
        if (transaction.transactionState == SKPaymentTransactionStatePurchased || transaction.

        NSString* productIdentifier = transaction.payment.productIdentifier;

        [[gameParams purchases] addObject: productIdentifier];
        [gameParams writeToDefaults];

        [self setGameParams:gameParams];

        [queue finishTransaction:transaction];
    }
}
```

In Listing 10-8, we see the tasks paymentQueue:updatedTransactions: as implemented by the class ExtrasController. In this task, we iterate through each SKPaymentTransaction in the array transactions. For each SKPaymentTransaction we check to see if the state is SKPaymentTransactionStatePurchase or SKPaymentTransactionStateRestore. If it is, we add the product ID of the transaction to our gamePagam's purchases property and save it. We also update the UI by calling setGameParams:. Lastly, we inform the queue that we are done working with the transaction by calling finishTransaction:.

Technically speaking, if the task paymentQueue:updatedTransactions: is a result of the user making a new purchase the state of the transaction would be SKPaymentTransactionStatePurchased. But because the type of products we are using are non-consumable, we need to make sure the user has a way to restore his purchases if his device is reset or if he made the purchase on another iOS device. In order to handle this, we make sure we allow the transaction state to be SKPaymentTransactionStateRestored and treat it the same as a new purchase. In order to allow the user to restore we provide a restore purchases button that calls the code in Listing 10-9.

### Listing 10-9. ExtrasController.m (restorePurchasesClicked:)

```
- (IBAction)restorePurchasesClicked:(id)sender {
    [[SKPaymentQueue defaultQueue] restoreCompletedTransactions];
}
```

In Listing 10-9, we see the task trestorePurchasesClicked that gets called when the user clicks the restore purchases button. In this task, we simply call restoreCompletedTransactions on the default SKPaymentQueue. This causes StoreKit to contact the iTunes Store and re-download all product IDs

for the current app and user. When it has done that, it calls paymentQueue:updatedTransaction:, as shown in Listing 10-8. This is all that is required to allow the user to get access to her purchases.

# **Summary**

In this chapter, we reviewed what in-app purchases are and the five different types. We also looked at how we implemented the purchasing of in-app products in our Belt Commander game. We reviewed how to get a valid list of product IDs from the iTunes Store and how to create a UI based on that list. We also looked at how to trigger a purchase process and how to respond to a successful completion, keeping in mind how to store a record of that purchase for the user.

Chapter

# **Add Sound to Your Game**

No game is complete without sound. This includes both background music and sound effects. Playing a sound effect in any OS is a pretty simple thing, but making sure your application or game plays nice with the rest of the iOS system can be a little tricky. If you consider that the game should allow users to play their own music, respond to interrupts and notifications, and honor the Silence switch, you can see that there is more to it than just playing an audio track.

In this chapter we will explore how to make sure your game is a good citizen on iOS, as well as the basics for playing sound. We will not be covering advanced sound concepts or OpenAL, as those are sophisticated topics and we don't have the space to do them justice here. The project Sample 11 contains the code for this chapter.

# **How to Play Sound**

Before we get into some of the details of a full application, let's quickly look at the basic class for playing audio, AVAudioPlayer. Listing 11-1 shows the simplest code to play a sound.

Listing 11-1. AVAudioPlayer Example

```
NSURL *url = [NSURL fileURLWithPath:[[NSBundle mainBundle] pathForResource:@"
viper_explosion" ofType:@"m4a"]];
AVAudioPlayer* player = [[AVAudioPlayer alloc] initWithContentsOfURL:url error: nil];
[player play];
```

In Listing 11-1, we see the AVAudioPlayer player, instantiated with an NSURL. The NSURL is constructed from the applications main NSBundle for the file viper\_explosion.m4a. The file viper\_explosion.m4a is simply a file added the Xcode project. In order to actually play the sound, we call play on player. This plays the audio once at the default volume and pan. There are a number of ways we can improve on this basic code to make it more suitable for a game. But before we get into those details, let's understand how sound in an iOS application works in terms of being a good citizen on the iPhone or iPad.

# **Correct Audio Behavior**

Apple's Human Interface Guidelines explain how they expect applications to behave in terms of audio. This is worth a read at some point, and can be found here: http://goo.gl/LovYH.

Without going over Apple's guidelines point by point, let's look at some of the highlights in regard to how they apply to games. Before we get started, I must say that these points seem to apply more to the iPhone than to the iPad, since the usage of the iPhone is more sensitive. People always have their phones on them and often are in social situations that demand a specific behavior. If you are at a wedding or some other event, you really don't want your phone to start beeping even when you have the Silent switch set to silence. Which brings us to our first point.

really good reason. For most run-of-the-mill time-waster games (my favorite), I want to be

The last point on this topic concerns the volume controls for the device. A game should honor the volume levels of the phone. So when users adjust the buttons on the side of the device to lower the volume of the game, the volume should go lower. Again, it sounds obvious, but paying attention to these little details will ensure your game plays well with the rest of the system and meets user expectations.

# **Your Game May Not Be the Only Application Making Sound**

Many users like to play games while listening to music or other audio that's playing through their iOS devices. It is important that your game allow this other audio to play while your game is running. Apple recommends that a game (or other application) in which the sound is not a critical part of the experience should remain silent if other audio is playing. Personally, I deviate slightly from this philosophy. If your game has background music, then I agree that the audio track should yield to the user's music or podcast. However, there are other types of sound in a game that might make sense to play over the user's audio. Perhaps a sound that warns the user of a boss fight might be a good exception to this rule. You can make the case that some sounds should be played regardless of which background music the user has selected.

# **Your Game Is Not the Only Application**

In addition to honoring the background music, the game should consider the different ways that the game can be interrupted and still behave correctly. Consider the ways that a game may be interrupted:

- 1. The user exits the game with the Home button.
- The user double-clicks the Home button to reveal the background applications.
- 3. The user does a four-finger swipe (iPad only) to switch to another application.
- 4. The user receives a popup warning, such as low power.
- 5. The user receives a phone call.

All of these events can be summarized as the game's resigning its active status. Conversely, when the user returns to the game, it is said to become active. These ideas, of course, are captured in the tasks applicationWillResignActive: and applicationDidBecomeActive: of the class UIApplicationDelegate. In the following section, we will review how we use these tasks to ensure correct application behavior.

# **Implementing Sound in Your Game**

We have discussed some of the finer points of audio in an iOS game. We have looked at the expected behavior concerning the hardware controls, headphones, and different ways a game interacts with other applications. In this section, we will explore how these concerns are addressed in code. We will also look at how the class GameController can be extended to provide a simple audio framework for your game.

# **Setting Up Audio**

The first thing that any game should do regarding audio is to define how audio should be played by the application. iOS offers many different ways that applications can play sound to support different categories of applications. For example, the built-in Music application plays audio while other applications are active. Further, a sound-editing application or Garage Band has different requirements. A game application has yet a different set of requirements. Listing 11-2 shows how a game should initialize its audio session.

### Listing 11-2. initializeAudio: (GameController.m)

```
-(void)initializeAudio{
   AVAudioSession* session = [AVAudioSession sharedInstance];
   [session setCategory: AVAudioSessionCategoryAmbient error: nil];
   [session setDelegate:self];
```

AVAudioSession by calling

. We assign a category to this application by calling setCategory and specifying

. This indicates that the game is willing to allow audio from other

AudioSessionGetProperty and populating the UInt32 otherAudioIsPlayingVal UInt32 to a more Objective-C friendly BOOL and store the value in

Lastly, we either play or pause our background music depending on whether the other audio is playing. We do this by calling the appropriate task on backgroundPlayer, which is an AVAudioPlayer defined elsewhere. (We will get back to backgroundPlayer later in this chapter.)

initializeAudio is called in the doSetup task of GameController, so we know it will be called before our game gets under way. However, it is possible for users to start or stop their audio after the game has been initialized. The following section shows how we make sure our application is always in the correct state regarding the user's choice of audio.

# **Responding to Other Audio Changes**

Say the user starts the game without his own audio, plays for a while, and then decides to listen to his own audio. He might do this by hitting the Home button twice, swiping over to the audio controls, hitting Play, and then hitting Home twice again to return to the game. Therefore, we want to make sure we adjust the audio behavior of our application appropriately. Figure 11-1 shows an iPhone in the processing of doing just this.

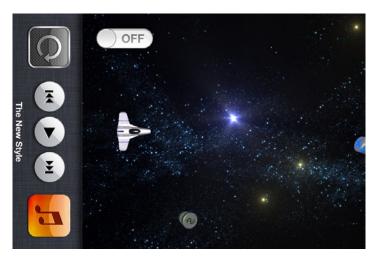


Figure 11-1. User Playing Other Audio from the Background Menu

In Figure 11-1, the user has double-clicked the Home button and is about to press Play and listen to the Beastie Boys. What you can't see in this picture is that the audio of the game stopped as soon as the Background menu opened. The game also paused. Additionally, after the user hits Play and returns to the game, the game will resume, but no more sound will be produced by the game. The ON/OFF switch controls whether or not nonbackground sound effects will be played over the Beastie Boys, but more on that later.

To understand how the application responds to the Background menu's opening and closing, look at the code in Listing 11-3.

### Listing 11-3. UIApplicationDelegate Tasks from AppDelegate.m

```
- (void)applicationWillResignActive:(UIApplication *)application
{
     [self.viewController applicationWillResignActive];
}
- (void)applicationDidBecomeActive:(UIApplication *)application
{
     [self.viewController applicationDidBecomeActive];
}
```

In Listing 11-3, we see the tasks applicationWillResignActive and applicationDidBecomeActive of the class AppDelegate. These are called whenever the application resigns being active or just becomes active. We simply call a corresponding method on our GameController—in this case, referenced by this.viewController. Listing 11-4 shows how our GameController responds to these events.


Listing 11-4. applicationWillResignActive and applicationDidBecomeActive (GameController.m)

```
-(void)applicationWillResignActive{
   [self setIsPaused:YES];
   [backgroundPlayer pause];
```

```
}
-(void)applicationDidBecomeActive{
    [self setIsPaused:NO];
    [self initializeAudio];
}
```

In Listing 11-4, the task applicationWillResignActive simply pauses the game by calling setIsPaused on self and pause on the AVAudioPlayer backgroundPlayer. When the application becomes active again, we resume the game and then call initializeAudio from Listing 11-2. By calling initializeAudio again, we have the chance to recheck if other audio is playing or not, ensuring our game respects the user's wishes regarding sound.

By following the simple recipe above, we can ensure that any game will behave in a correct way

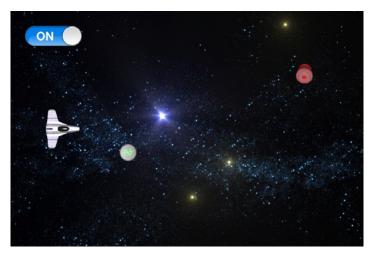

11-2 shows the example in action.

Figure 11-2. Sample 11 in Action

In Figure 11-2, we see four elements on our familiar space background. We see two power-ups on the screen. These are being generated off the right side of the screen and move to the left. We also see a spaceship on the left that will be hit by power-ups that happen to be created midway up the screen. When a power-up collides with the spaceship, a sound is produced indicating the user got the power-up. The power-ups also start blinking when they get about halfway across the screen.

Each time they blink off, a quick little click sound is made. When you run this example, you will also hear a background sound track that plays continuously while the game is running. The switch on the upper left controls whether such sound effects, like the blinking sound, should be heard regardless of other audio being played. Obviously, we would not include a switch like this on the screen while your game is playing, but it might be a good option on a setting screen someplace, probably defaulting to OFF.

As mentioned, there is a background sound track that plays in addition to the sound effects. As you will see in the following sections, these two types of audio are handled differently to make the developer's life a little easier.

The following sections will go over this example piece by piece, highlighting how sound effects are played

# **Setting up the GameController**

Like many of the examples in this game, we start by extending GameController to specify our game specific features—the business logic of the game, if you will. Listing 11-5 shows how we set up this example.

### Listing 11-5. doSetup (ViewController.m)

```
-(BOOL)doSetup{
    if ([super doSetup]){
        [self setGameAreaSize:CGSizeMake(480, 320)];
        [self setIsPaused: NO];
        NSMutableArray* classes = [NSMutableArray new];
        [classes addObject:[Powerup class]];
        [self setSortedActorClasses:classes];
        viper = [Viper viper:self];
        [self addActor: viper];
        [self prepareAudio: AUDIO POWERUP BLINK];
        [self prepareAudio: AUDIO GOT POWERUP];
        [self playBackgroundAudio: AUDIO BC THEME];
        return YES;
    }
   return NO;
}
```

In Listing 11-5, we see our standard GameController setup code. We specify the size of the game area, indicate that we want to keep track of Powerup actors, and we create and add a Viper. The last few things we do in doSetup is to set up the audio we want to play. We call prepareAudio:, then pass in the NSString constants AUDIO\_POWERUP\_BLINK and AUDIO\_GOT\_POWER. We will look at the task prepareAudio: shortly. For completeness, let's take a quick look at the three NSString constants that are defined in Listing 11-6.

### Listing 11-6. Sample 11-Prefix.pch (partial)

```
#define AUDIO_POWERUP_BLINK @"powerup_blink"
#define AUDIO_GOT_POWERUP @"got_powerup"
#define AUDIO BC THEME @"bc theme"
```

In Listing 11-6, we see that we have defined three constants. Each is simply a string referring to the name of an audio file included in the project, excluding the file extension. Figure 11-3 shows these files in the Xcode project.

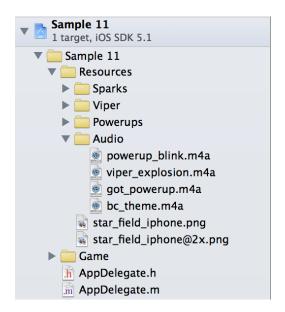


Figure 11-3. Including Audio in an Xcode Project

In Figure 11-3, we see that, to include audio in a project, we simply add the files as we would any other resource. Also, note that they are all m4a files. iOS is capable of playing many types of audio files, but AAC-encoded files are recommended, which these are. In our example, the m4a extension is assumed.<sup>1</sup>

Looking back at Listing 11-5, we see that we pass these constants to two different tasks, prepareAudio: and playBackgroundAudio:. The task prepareAudio: gets an audio file ready so that the audio is played promptly when a game event requires a sound effect. The task playBackgroundAudio: loops a single track forever to provide background music for a game. Let's start with prepareAudio:, as shown on Listing 11-7.

<sup>&</sup>lt;sup>1</sup>There is a lot more to know about audio formats and encodings. Here is a good starting place to learn about Apple's Core Audio Format: http://en.wikipedia.org/wiki/Core Audio Format.

### Listing 11-7. prepareAudio: (GameController.m)

```
-(AVAudioPlayer*)prepareAudio:(NSString*)audioName{
    if (audioNameToPlayer == nil){
        audioNameToPlayer = [NSMutableDictionary new];
    }
    NSURL *url = [NSURL fileURLWithPath:[[NSBundle mainBundle] pathForResource:audioName
ofType:@"m4a"]];

    AVAudioPlayer* player = [[AVAudioPlayer alloc] initWithContentsOfURL:url error: nil];
    [player prepareToPlay];

    [audioNameToPlayer setValue:player forKey: audioName];
    return player;
}
```

In Listing 11-7, we see the task prepareAudio:. This task is responsible for creating an AVAudioPlayer for each audio file passed in. We do this by first lazily initializing an NSMutableDictionary called audioNameToPlayer, which maps the NSString audioName to an AVAudioPlayer once constructed. To create an NSAudioPlayer, we first create an NSURL pointing to the desired m4a file in the project. To construct the NSAudioPlayer, we simply call initWithContentsOfURL:error:, ignoring any error.

We call prepareToPlay on the newly created player in order to make sure that the file is loaded and ready to make sound as soon as we call play on it sometime later.

The other sound-related task called in our doSetup task, from Listing 11-5, is playBackgroundAudio:, which is shown in Listing 11-8.

### Listing 11-8. playBackgroundAudio: (GameController.m)

```
-(void)playBackgroundAudio:(NSString*)audioName{
    if (backgroundPlayer != nil){
        [backgroundPlayer stop];
    }
    backgroundPlayer = [self prepareAudio:audioName];
    [backgroundPlayer setNumberOfLoops:-1];

    if (!otherAudioIsPlaying){
        [backgroundPlayer play];
    }
}
```

In Listing 11-8, the task playBackgroundAudio: takes the name of an audio file. If an existing AVAudioPlayer backgroundPlayer exits, we stop it. Next, we call prepareAudio: to construct and initialize an AVAudioPlayer. To make the audio play indefinitely, we call setNumberOfLoops: and specify -1. While we want the background audio to play continuously, we can instead use setNumberOfLoops: to play an audio file a fixed number of times. The naming of the task setNumberOfLoops: is a little weird; it indicates the number of extra times a track is played. So, for example, if you specified 0, the audio would play once (the default number of times). If you specified 3, the audio track would play 4 times. Basically, setNumberOfLoops: specifies the number of additional times the audio should be played.

}

The last thing to do in playBackgroundAudio: is check if there is no other audio playing and start the audio by calling play on backgroundPlayer.

We have looked at how to specify what audio we will want to be able to play during the life of our game. We have also looked at how to set up a background audio track that plays indefinitely and with regard to other audio being played. Next, we will see how we play sound effects that are driven by in-game events.

# **Sound Effects for In-game Events**

At this point, we have done a lot of setup to make sure our application plays audio correctly. We have also done a little work to make it easy for our game-related classes to play sound effects. In

### applyGameLogic (ViewController.m)

```
if (self.stepNumber%120==0){
    [self addActor:[Powerup powerup:self]];
}
for (Powerup* powerup in [self actorsOfType: [Powerup class]]){
    if ([powerup overlapsWith:viper]){
        [self removeActor: powerup];
        [self playAudio: AUDIO_GOT_POWERUP];
    }
}
```

In Listing 11-9, we see the task applyGameLogic. This task is called once per game step, giving subclasses of GameController a place to specify game-specific logic. In our case, we have things to do in this task: create Powerup actors and check collisions between Powerups and the spaceship.

We create a new Powerup every 120 steps in the game, or every 3 seconds (120 steps at 60 steps per second, 120/60 = 3). The newly created Powerup is simply added to the scene with the task addActor:. The logic that drives where the Powerup is created and how it moves is covered in more detail in Chapter 12.

The next step in applyGameLogic is to test to see if a Powerup has collided with the spaceship viper. We do this by iterating over each Powerup and testing if it collides with the task overlapsWith: If we have a collision, we remove the Powerup and call playAudio:, passing in the NSString AUDIO\_GOT\_POWER.

The task playAudio: is shown in Listing 11-10.

### Listing 11-10. playAudio: (GameController.m)

```
-(void)playAudio:(NSString*)audioName{
    [self playAudio:audioName volume:1.0 pan:0.0];
}
-(void)playAudio:(NSString*)audioName volume:(float)volume pan:(float)pan{
    if (alwaysPlayAudioEffects || !otherAudioIsPlaying){
        AVAudioPlayer* player = [audioNameToPlayer valueForKey:audioName];

        NSArray* params = [NSArray arrayWithObjects:player, [NSNumber numberWithFloat:volume],
[NSNumber numberWithFloat:pan], nil];
        [self performSelectorInBackground:@selector(playAudioInBackground:) withObject:params];
    }
}
```

In Listing 11-10, we see the task playAudio:, which actually calls playAudio:volume:pan: with some default values. Actors or other game elements can call either version, depending on their needs. In playAudio:volume:pan:, we can see that we first check if we should actually play a sound at all. We do this by testing alwaysPlayAudioEffects and otherAudioIsPlaying. The BOOL alwaysPlayAudioEffects is a property of GameController and indicates if sound effects should ignore the fact that the user is playing his own audio. In this example, the value of alwaysPlayAudioEffects is controlled by the switch on the game screen. Flip the switch to experiment with the two different behaviors. The BOOL otherAudioIsPlaying is set in initializeAudio from Listing 11-2.

If it is determined that we should play a sound, playAudio:volume:pan: continues by finding the AVAudioPlayer in the NSMutableDictionary audioNameToPlayer associated with audioName. Once we have the player, we package player up with the volume and pan parameters in an NSArray called params. We then call performSelectorInBackground:withObject:, passing in the selector playAudioInBackground: and params.

The task playAudioInBackground: has nothing to do with background music; the word background indicates that this task should be performed in a background thread, hence the call to performSelect orInBackground:withObject:. Listing 11-11 shows the implementation of playAudioInBackground:.

### Listing 11-11. playAudioInBackground: (GameController.m)

```
-(void)playAudioInBackground:(NSArray*)params{
    AVAudioPlayer* player = [params objectAtIndex:0];

    NSNumber* volume = [params objectAtIndex:1];
    NSNumber* pan = [params objectAtIndex:2];

    [player setCurrentTime:0];
    [player setVolume: [volume floatValue]];
    [player setPan: [pan floatValue]];

    [player play];
}
```

In Listing 11-11, the task playAudioInBackground: is responsible for actually configuring the AVAudioPlayer and finally calling play on it. As mentioned, this task is called in a background thread. This is done because it greatly improves the performance of the application. If this were called on the same thread the game is running in, you would see considerable jerkiness in the game's animations.

After pulling the player, volume, and pan objects out of the NSArray params, we prepare the player to play the audio. We set the currentTime property to 0, the start of the track; we also set the volume and pan values to be used. The volume value is from silent (0.0) to full volume (1.0). By full volume, we mean the maximum volume given the user's volume settings. The pan value is like the balance knob on a stereo. The value –1.0 indicates all the way to the left, the value 0.0 indicates evenly left and right, and 1.0 indicates all the way to the right. (We will use this feature when we look at the Powerup's blinking behavior.)

play on player, which caused the sound to be emitted by the iOS device. Notice

AVAudioPlayer per type of sound—meaning that it is possible for a

AVAudioPlayer to be part way through playing when it is called to start over. This is a bit of a

AVAudioPlayer

AVAudioPlayers for each type of sound, GameController would be responsible for figuring out which (if any) AVAudioPlayer is

governing what to do when an AVAudioPlayer is unavailable, will vary greatly in different games and for different sounds. I leave it up to the reader to extend GameController if this is a required feature for a game. Let me know what you come up with! You can email me at lucasjordan@gmail.com.

# Audio Driven by an Actor

In our example, we have considered the simplest example of playing. We looked at playing a sound when a Powerup collides with the spaceship; this sound effect was called by the ViewController. One of the overarching design decisions being presented in this book is that actors should encapsulate as much logic as they can, being free agents in the scene to do as they wish, and this includes playing sounds. There is nothing interesting from a technical perspective about the following example, but it will illustrate how sound effects can be driven by a particular actor's state. Let's explore the sound that occurs when a Powerup blinks; this is shown in Listing 11-12.

### Listing 11-12. step: (Powerup.m)

```
-(void)step:(GameController*)gameController{
   if (self.center.x < -self.radius){
        [gameController removeActor:self];
        return;
   }</pre>
```

```
if (self.center.x < gameController.gameAreaSize.width-100){
    if ([gameController stepNumber] % 25 == 0){
        if (self.state == STATE_GLOW){
            float pan = 1.0 - (self.center.x / gameController.gameAreaSize.width)*2.0;
            [gameController playAudio: AUDIO_POWERUP_BLINK volume:.1 pan: pan];
            self.state = STATE_NO_GLOW;
        } else {
            self.state = STATE_GLOW;
        }
    }
}</pre>
```

In Listing 11-12, we see the step: task for the class Powerup. This task is called once per step in the game and is a place where an actor can specify some of its own behavior. The first test in this task simply checks if the Powerup is off the left side of the screen and removes itself accordingly. The second test checks to see if the Powerup should start blinking; if so, every 25 steps it alternates between STATE\_GLOW and STATE\_NO\_GLOW. If the Powerup has just switched to STATE\_NO\_GLOW, it plays the audio AUDIO\_POWERUP\_BLINK. Notice how the pan for this audio is based on the *x* value of the Powerup. This makes it sound like the blinks are coming from one side of the screen or the other. To observe this effect, play the example code with headphones on.

# **Summary**

In this chapter, we reviewed how to set up a game to be a good iOS citizen by responding correctly to the user's behaviors and expectations. We also looked at some framework code in GameController to make playing audio easier for our particular games. We looked at differentiating background music from sound effects. Lastly, we looked at how we use this framework by exploring a simple example that played two different sound effects driven by different events in the game.

# A Completed Game: Belt Commander

Throughout this book, we have covered a number of techniques for building iOS games. We looked at how to build the basic application flow for a game in Chapter 3. We learned how to build a basic turn-by-turn game when we looked at Coin Sorter in Chapter 4. Then we moved in to frame-by-frame games and learned how to build a game that is in constant motion in Chapter 5. In Chapters 6 and 7, we looked at how to create different types of actors to populate our game. Chapter 8 covered how to capture user input that manipulates in-game elements, and Chapter 9 looked at how to reach out to our players with Game Center and other social media services. In Chapter 10, we discussed how to add in-app purchases and to help make some money with our game. In Chapter 11, we added sound effects to our game. In this chapter, we are going to bring all of these elements together into one full-featured game, Belt Commander. The title graphic is shown in Figure 12-1.



Figure 12-1. Title graphic for Belt Commander

In this chapter, we are going to take a high-level look at the game Belt Commander. We are also going to walk through how the game is put together, including how the views are organized and how the application game logic is implemented. We will discuss the different actors in the game and how they are added. In some ways, this chapter is a review of the techniques we learned in previous chapters. However, exploring how these techniques fit together will give you a roadmap that will help you put together your own games. In fact, feel free to start out with the sample code for this chapter for your own game. It is my intention to do just that and release a commercial version of Belt Commander in the iTunes Store. So let's get started.

# **Belt Commander: Game Recap**

Belt Commander is an action game in which you control a spaceship that is traveling through an asteroid belt. Destroying asteroids and alien flying saucers rewards the player with points. During play, a power-up occasionally floats onto the screen, giving the player a chance to heal some damage, earn some bonus points, or upgrade weapons. This is a relatively fast-paced game with simple interactions. Let's take a look at the opening screen of the game, shown in Figure 12-2.

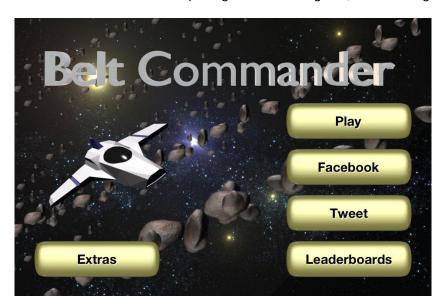


Figure 12-2. Belt Commander's opening screen

In Figure 12-2, we see the first screen of the game. We have a title at the top of the screen as well as a number of buttons. The Facebook, Tweet, and Leaderboards buttons enable the various social functions that we discussed in Chapter 9. The extras button allows the user to configure the game and purchase new parts of the game. How purchases are handled is described in Chapter 10. For this chapter, we will assume all of the extras are purchased. The Play button will take the user into the action part of the game, as shown in Figure 12-3.



Figure 12-3. Belt Commander in action

In Figure 12-3, we see the action part of the game. On the left is the spaceship controlled by the user. The user can tap on the screen and the ship will travel up or down to the location of the tap. This is how the user can avoid the many asteroids that travel from the right side of the screen to the left. In addition to the asteroids, there are alien saucers that travel up and down on the screen, shooting bullets at the user's ship. Both the asteroids and the saucers' bullets do damage to the ship when they hit. The game continues until the ship is overwhelmed with damage. To help the player along, power-ups appear on the right and travel to the left. If users can intercept a power-up, they receive whatever bonus it gives: health, more damage, or extra points.

In the lower right-hand side of the Figure 12-3, we see a Pause button (II). This will pause the game and allow the user to guit or continue playing, as shown in Figure 12-4.



Belt Commander on pause

12-4, we see the dialog that pops up when the user clicks the touch button on the lower right

has no health left, the game is over. The dialog shown in Figure 12-5 appears.



Figure 12-5. Game over

In Figure 12-5, we see the dialog presented at the end of the game. This dialog allows the user to get right back into the action by clicking Yes. If the user clicks No, he is sent back to the starting screen of the game. The entire application flow is shown in Figure 12-6.



Figure 12-6. Application flow

In Figure 12-6, we see the eight screens of the game. The arrows indicate how the user navigates from one view to another. Each transition is lettered as described in the following:

The application starts at A, the Start view. This is the first thing the user sees.

By pressing the Extras button, the user is taken to the Extras view, where he can select which actors are in the game: asteroids, saucers, and power-ups. The user returns to the Start view by clicking the Back button.

Clicking the Leaderboard button brings up the standard Leaderboard view. Clicking Done on the upper right returns the user to the Start view.

The Tweet button brings up the Twitter dialog. While not technically a separate view, since the Tweet dialog is a pop-up, it still takes up most of the screen. The Send or Cancel button returns the user to the Start view.

Clicking the Facebook button will exit the app and bring up a Facebook authentication screen. When the user enters her credentials, he is brought back to the Start view.

Clicking the Play button starts the game proper. In the Action view, the user plays the game. He moves the ship up and down, trying to score as many points as possible by destroying asteroids and saucers.

While playing, the user may click the Pause button to stop the game. When the Pause button is pressed, a dialog pops up asking the user if he would like to exit the game or not. This dialog is also brought up if the application is sent to the background while the game is in progress.

When the ship's health reaches zero, the game ends. When this happens, a dialog is presented asking the user if he would like to play again or not.

If the user has paused the game and selected not to end it, he is brought back to the Start view. Similarly, when the game is over, if the user chooses not to play again, he is brought back to the main view.

# **Launching the Application**

Like all iOS applications, the starting place is the main function found in the file main.m. However, in this application, we don't customize that at all, so we can skip describing it. The real starting place for this application is the plist file, Belt Commander-Info.plist. Figure 12-7 shows Xcode's representation of this file.

Key	Type	Value
Localization native development region	String	en
Bundle display name	String	\${PRODUCT_NAME}
Executable file	String	\${EXECUTABLE_NAME}
▶ Icon files	Array	(0 items)
Bundle identifier	String	com.claywaregames.beltcommander
InfoDictionary version	String	6.0
Bundle name	String	\${PRODUCT_NAME}
Bundle OS Type code	String	APPL
Bundle versions string, short	String	1.0
Bundle creator OS Type code	String	????
▶ URL types	Array	(1 item)
Bundle version	String	1.0
Application requires iPhone environmer	Boolean	YES
Main nib file base name (iPad)	String	Window_iPad
Main nib file base name (iPhone)	String	Window_iPhone
Status bar is initially hidden	Boolean	YES
▶ Supported interface orientations	Array	(3 items)
Supported interface orientations (iPad)	Array	(4 items)

Figure 12-7. Belt Commander-Info.plist in Xcode

In Figure 12-7, we see file Belt Commander-Info.plist as presented by Xcode. In this file, we see a pretty standard setup for an iOS application. We see that the Bundle identifier is com.claywaregames. beltcommander that corresponds to the application we created in iTunes Connect that supports in-app purchases and Game Center. What is a little different in this file from the other samples in this book is that we specify the starting XIB files in this file. The starting XIB files are indicated by the key values "Main nib file base name (iPad)" and "Main nib file base name (iPhone)." These keys are set to the values "Window\_iPad" and "Window\_iPhone," respectively. By setting these values, we are requesting that the iOS application automatically use these files to create our main UIWindow and call makeKeyAndVisible on it. This removes the need for us to put any code in our application delegate's application:didFinishLaunchingWithOptions: task. To understand how the other objects in the application relate to each other, let's take a look at XIB files for this game.

# **The XIB Files**

The XIB files in this application bind instances of the key classes together and allow them to coordinate. While this application is a universal one, and runs on both the iPhone and iPad, we are going to focus on the iPhone XIB file because the iPad version is different only in layout. By looking at the contents of this XIB file, we will understand how the application is put together. An overview is shown in Figure 12-8.

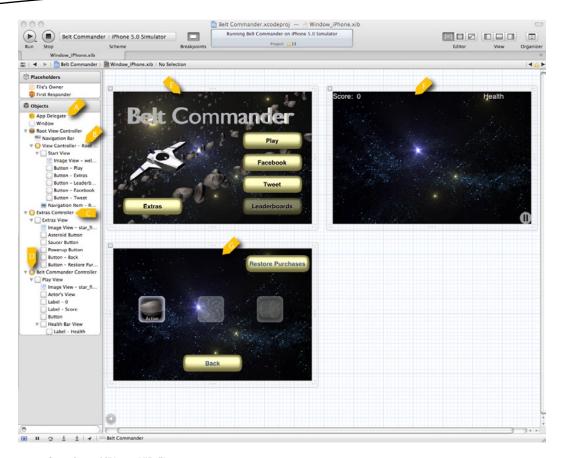


Figure 12-8. Overview of iPhone XIB file

In Figure 12-8, we see the XIB file for the iPhone version of this game fully expanded. On the left, at item A, we see a reference to the main UIWindow of the game, as well as a reference to the AppDelegate. The view controller at item B is an instance of the class RootViewController, which is a subclass of UINavigationController. The view controller RootViewController is wired up to the Window so that it is the root controller; this causes the RootViewController's top-level UIViewController to be displayed. In short, everything is wired up so the view at item E is displayed at launch.

In Figure 12-8, we see that there are two other UIViewControllers: Extras Controller at item C and Belt Commander Controller at item D. The object Extras Controller corresponds to the view at item G, while the object BeltCommanderController corresponds to the view at item G. Both of these controllers have an IBOutlet in our class RootViewController so they can be referenced. In fact, many of the objects in the XIB file are connected to the RootViewController, as shown in Listing 12-1.

### Listing 12-1. RootViewController.m

```
@interface RootViewController : UINavigationController<BeltCommanderDelegate,
UIAlertViewDelegate, GKLeaderboardViewControllerDelegate>{
    IBOutlet UIViewController* welcomeController;
    IBOutlet BeltCommanderController* beltCommanderController;
```

```
IBOutlet ExtrasController *extrasController;
    IBOutlet UIButton *leaderBoardButton;
    IBOutlet UIButton *tweetButton;
    IBOutlet UIButton *facebookButton;
   UIAlertView* newGameAlertView;
   UIAlertView* pauseGameAlerTView;
   GKLocalPlayer* localPlayer;
   ACAccountStore* accountStore;
   ACAccount* facebookAccount;
   BOOL isPlaying;
}
-(void)doPause;
-(void)endOfGameCleanup;
-(void)initGameCenter;
-(void)initFacebook;
-(void)initTwitter;
-(void)notifyGameCenter;
-(void)notifyFacebook;
-(BOOL)handleOpenURL:(NSURL *)url;
-(void)applicationWillResignActive;
-(void)applicationDidBecomeActive;
@end
```

In Listing 12-1, we see the header for the class RootViewController. The class RootViewController is responsible for managing the application state that does not involve the actual playing of the game. This includes transitioning from view to view, handling the application startup, and managing the social services from Chapter 9. As we can see in Listing 12-1, we have IBOutlets for the three UIViewControllers: welcomeController, beltCommanderController, and extrasController.

Listing 12-1 also shows that the class RootViewController has IBOutlets for two buttons: leaderBoardButton and tweetButton. A reference to these objects is required, as they will be enabled or disabled at runtime. The GKLocalPlayer is used to manage Game Center and the ACAccountStore and ACAccount objects are used to manage interactions with Facebook. Let's take a look at how we handle the navigation across views.

# **View Navigation**

In order to change views when a user clicks a button, we have created a number of IBAction tasks in the implementation of RootViewController and are wired up in the XIB file to the corresponding buttons. Listing 12-2 shows two of these IBAction tasks.

### Listing 12-2. RootViewController.m (extrasButtonClicked: and playButtonClicked:)

```
- (IBAction)extrasButtonClicked:(id)sender {
    [self pushViewController:extrasController animated:YES];
}
- (IBAction)playButtonClicked:(id)sender {
    [self pushViewController:beltCommanderController animated:YES];
    [beltCommanderController doNewGame: [extrasController gameParams]];
}
```

In Listing 12-2, we see two tasks responsible for handling a button click. The task extrasButtonClicked: is called when the user presses the Extras button on the Start view. This task simply uses task pushViewController:animated:, as defined by UINavigationController, to present extrasController. Similarly, the task playButtonClicked: uses the same beltCommandController, as well as calls doNewGame: on . Listing 12-3 shows how we navigate back to the Start view.

### RootViewController.m (backFromExtras:)

```
- (IBAction)backFromExtras:(id)sender {
   [self popViewControllerAnimated:YES];
```

backFromExtras: that is called when the user clicks the Back button popViewControllerAnimated: to

remove the Extras view showing the Start view. The task popViewControllerAnimated: is defined by UINavigationController, of which RootViewController is a subclass.

There is one last piece of code that handles navigation, and that is the code that responds to the two dialogs that appear on the game view, as shown in Listing 12-4.

### Listing 12-4. RootViewController.m (alertView:clickedButtonIndex:)

In Listing 12-4, we see the task alertView:clickedButtonAtIndex:, which is defined by the protocol UIAlertViewDelegate and implemented by RootViewController. In this task, we first check which UIAlertView was clicked.

If alertView is equal to pauseGameAlertView, then we know that the user has clicked the Pause button on the Game view and is responding to the dialog that is presented. If the user clicks Yes on the dialog (buttonIndex == 0), then the user wants to exit the current game. We call endOfGameCleanup and popViewControllerAnimated:; the latter, of course, returns us to the Start view. The task endOfGameCleanup is responsible for reporting on the social media services, and we will look at it shortly. If the user had clicked No, we simply unpause the game by calling setIsPaused: and beltCommanderController and pass in NO.

In Listing 12-4, there are two possible UIAlertViews that might be responsible for alertView:clickedButtonAtIndex: being called. We looked at the case for the UIAlertView pauseGameAlertView; the other option is that the newGameAlertView is responsible. This UIAlertView is displayed at the end of a game when the user's ship has lost all of its health. This dialog allows the user to simply start a new game or return to the Start view. As can be seen, starting a new game is as simple as calling doNewGame: on beltCommanderController. To return to the Start view, we use the now familiar task popViewControllerAnimated:.

The code responsible for displaying the two different UIAlertView is very similar; let's just look at one of those to understand it. The code that displays the UIAlertVIew at the end of a game is shown in Listing 12-5.

### Listing 12-5. RootViewController.m (gameOver:)

```
-(void)gameOver:(BeltCommanderController*)aBeltCommanderController{
   if (newGameAlertView == nil){
        newGameAlertView = [[UIAlertView alloc] initWithTitle:@"Your Game Is
        Over." message:@"Play Again?" delegate:self cancelButtonTitle:@"Yes"
        otherButtonTitles:@"No", nil];
   }
   [newGameAlertView show];
   [self endOfGameCleanup];
}
```

In Listing 12-5, we see the task gameOver: as implemented by RootViewController. The task gameOver: is defined by the protocol BeltCommanderDelegate, which is the delegate protocol used to communicate between the RootViewController and the BeltCommanderController when a game starts or stops. That is to say, the RootViewController is a delegate of beltCommanderView. This relationship is defined in the XIB file. In this case, we are looking at the code that is called when the game is over. In this task, we lazily create the UIAlertView newGameAlertView, specifying the text to be displayed and that self should be used as the delegate. To display the UIAlertView we call show, causing the view to pop up on the user's screen. The last thing we do is call endOfGameCleanup, as shown in Listing 12-6.

### Listing 12-6. RootViewController.m (endOfGameCleanup)

```
-(void)endOfGameCleanup{
    isPlaying = NO;
    [self notifyGameCenter];
    [self notifyFacebook];
}
```

In Listing 12-6, we see the task endOfGameCleanup that is called when the game ends, either by the user's losing all her ship's health or by quitting her active game from the pause dialog. In this task, we record that we are no longer playing by setting isPlaying to NO. The tasks notifyGameCenter and notifyFacebook inform those two services of the user's score, and are described in Chapter 9.

BeltCommanderController, along with the Actor subclasses, creates the game.

will then explore the class BeltCommanderController and understand how it manages the game. Lastly, we will look at each actor and understand how its implementation makes it work the way that it does.

# **Game Classes**

In previous chapters, we have built a collection of classes for implementing a game. We have the class GameController that is responsible for adding and removing actors from the game, as well as rendering them into the screen. We also have the class Actor that represents the characters and interactive elements of the game. Subclasses of Actor specify a Representation, a collection of Behaviors, and some custom code. The following is a review of these classes.

The class GameController is the beating heart of the game; subclasses of this class need only add Actors and animations will start happening. To customize the GameController, subclasses should implement the task applyGameLogic to perform any game-specific logic, such as add or remove Actors, check for victory or failure conditions, or anything else unique to a particular game.

In addition to updating the Actors and game logic, GameController is responsible for rendering the Actors to the screen. GameController does this in two ways. First, GameController extends UIControllerView so it has a primary UIView called view, which can be part of an applications scene. Second, GameController has a UIView called actorsView, which is the super-view for all of the UIViews that represent actors in the game. By specifying the view and actorsView in a XIB file, an instance of GameController can draw to the screen. The second way that GameController is responsible for rendering the game is by working with the Representation of each Actor to create a UIView to add as

a child to actorsView. For each step of the animation, GameController changes the location, scale, and transparency for each Actor's UIView. The key tasks for GameController are as follows:

- doSetup. In the task doSetup, a subclass of GameController should specify the subclasses of Actor that should be kept sorted by calling setSortedActorClasses:. Also, any audio files to be played should be prepared by calling prepareAudio:.
- applyGameLogic. The task applyGameLogic is called once for every step of the animation. It is in this task that subclasses should implement all game logic, including:
  - Setting end-of-game conditions
  - Adding and removing Actors
  - Keeping score
  - Tracking achievements
  - Updating heads-up display (HUD)
  - Managing user input (touches, gestures, and so on)
- actorsOfType:. The task actorsOfType: is used inside of the applyGameLogic to find all Actors of a particular class. The type of actor requested needs to be specified during doSetup with the setSortedActorClasses: task.
- addActor:/removeActor:. The tasks addActor: and removeActor: are how actors get added and removed from the game. These tasks collect all Actors added or removed during an animation step, and then apply those changes all at once at the end of the animation loop. This prevents modification of the collections that hold the actors, so any subclass of Actor or GameController can add or remove any Actor during their apply task.

### Actor

The Actor class represents anything that is dynamic in a game. In our example, the ship, asteroids, saucers, power-ups, health bars, particles, and bullets are all actors. When creating a game, a subclass of GameController will handle the big details about the game, but it is the subclasses of Actor that provide the unique and interesting behaviors of each item in the game. In practice, each Actor in the game is a composition of its properties, how it is drawn (Representation), how it behaves (Behaviors), and the custom code defined in a subclass. We will look at Representations and Behaviors after we look at the class Actor. The following is a list of the properties of an Actor and what each means.

- long actorId: The actorId is a unique number assigned to each Actor. This value can be used to provide a soft reference to Actors in the game.
- BOOL added/removed: The properties added and removed can be used to test if an Actor has successfully been added or removed from a game.

- CGPoint center: The property center defines the location of the center of the Actor in game coordinates.
- float rotation: The rotation property indicates the rotation of the Actor in radians.
- float radius: The radius of the Actor describes how big it is. Together, center and radius describe the area of the game occupied by the Actor.
- NSMutableArray\* behaviors: The behaviors property is a collection of Behavior objects. A Behavior object describes some sort of aspect of an Actor. It might describe how it moves or when it is removed from the game. Each Behavior in the behaviors array will be applied to the Actor on each step of the game.
- B00L needsViewUpdated: Throughout a step of the game, an Actor may undergo changes that require its UIView to be updated. These might include advancing the image that should represent it or a change in state. This flag informs the GameController that work is required to synchronize the Actor with its representation.
- NSObject<Representation> representation: Each Actor in the game requires an object conforming to Representation to describe how to create a UIView to represent it in the game. Representations are discussed in the next section.
- int variant: It is common to have Actors in a game that differ only slightly. Perhaps they are a different color or have a slightly different behavior. Since this is a common requirement, the property variant provides a simple way of distinguishing Actors of the same class.
- int state: The property state is used to describe the state of an Actor. This state can be anything, and is up to the subclass to define exactly what this indicates. The property state and variant work with the class ImageRepresentation to figure out which image should be used for an Actor.
- float alpha: The property alpha describes how opaque an Actor is. An Actor with an alpha of 0.0 is fully transparent, while an alpha value of 1.0 is fully opaque. Transparent regions in an Actor's representation are unaffected.
- BOOL animationPaused: The property animationPaused is used to pause any animation that is being applied to the Actor. It is up to the implementation of the animation to honor this value. ImageRepresentation will not update the image, in a sequence of images, used to represent an Actor if this property is true.

In addition to the properties that define an Actor, there are a handful of tasks that come with the class Actor. These are the following:

-(id)initAt:(CGPoint)aPoint WithRadius:(float)aRadius AndRepresentation:
 (NSObject<Representation>\*)aRepresentation: This task is the designated
 constructor for the class Actor. It requires that each Actor has a center, a radius,
 and a representation. All subclasses of Actor should be sure that this task gets
 called when the Actor is created.

- -(void)step:(GameController\*)controller: The task step: is called once per game step by the GameController. Subclasses of Actor can provide custom logic in their implementation of this task.
- -(B00L)overlapsWith: (Actor\*) actor: The task overlapsWith: is used to test if an Actor occupies any of the same space as another Actor. This can be used to implement simple collision detection.
- -(void)addBehavior: (NSObject<Behavior>\*)behavior: The task addBehavior: is a utility method for adding Behaviors to an Actor in a single step.

### Representation

Each Actor has to describe how the GameController should render it. The protocol Representation (defined in Actor.h) describes how a GameController can get and update a UIView for each Actor. There are two concrete implementations of Representation: ImageRepresentation and VectorRepresentation. The class ImageRepresentation uses UIImages and UIImageViews to create a UIView suitable for presenting the Actor. The class VectorRepresentation draws the Actor dynamically using Core Graphics. The details for how ImageRepresentation are covered in Chapter 6, while the implementation of VectorRepresentation is covered Chapter 7. There are two tasks defined by the protocol:

- -(UIView\*)getViewForActor:(Actor\*)anActor In:(GameController\*)
   aController: This task is called once shortly after an Actor is added to a
   GameController. It is responsible for creating and returning a UIView suitable for
   rendering the Actor.
- -(void)updateView:(UIView\*)aView ForActor:(Actor\*)anActor
   In:(GameController\*)aController: This task is called whenever an Actor's needsViewUpdated property is true. This task should make any changes to the UIView required to make it accurately represent the Actor.

### **Behavior**

When creating a game, a lot of different Actors will require very similar code to implement. While it is definitely possible to construct a class hierarchy that provides just the right code for each class, I find this cumbersome. One solution is the Behavior protocol and the classes that implement it. Each instance of the protocol Behavior is responsible for applying some logic to an Actor, one per step. The protocol Behavior defines a single task:

- -(void)applyToActor:(Actor\*)anActor In:(GameController\*)gameController;
- The task applyToActor:In: is implement by the classes that conform to this protocol to provide some sort of behavior to the Actors they are attached to. There are several implementations of Behavior included in the game Belt Commander; those are:
- LinearMotion: The class LinearMotion is used to move an Actor in a straight line during the game. The class provides several utility constructors to make it easy to define the motion based on a direction or a target point.

- ExpireAfterTime: The class ExpireAfterTime is used to remove an Actor after a given number of steps. This is handy for Particles, where you want to create them, add them to the scene, and then forget about them.
- FollowActor: This class is used to keep one Actor at a fixed distant from another Actor. This is used by the HealthBars attached to the Saucers to keep them together.

Now that we have reviewed the core classes used to create the game Belt Commander, it is time to look at the subclasses of the classes we just described to understand how we can extend and customize them to create the game Belt Commander.

GameController to make our examples. To create a

BeltCommanderController. The
BeltCommanderController is responsible for managing the Actors in the game, determining the

12-9.



Figure 12-9. Belt Commander, mid-game

In Figure 12-9, we see the game Belt Commander. The player controls the ship on the left by tapping the screen. The ship will move to the same height as the tap. The ship constantly fires bullets to the right, as represented by the circle just to the lower right of the bright star in the background. From the right, moving left, come an endless wave of asteroids. If a bullet collides with an asteroid, the asteroid breaks into smaller parts, and the score is incremented. If an asteroid collides with the ship, the asteroid is destroyed, but the ship's health is decremented. To add a little chaos to the game, saucers

appear on the right side of the game and travel up and down, firing bullets at the ship. The bullets will destroy asteroids, but their main purpose is to hit the ship and reduce its health. To help out our poor ship, three types of power-ups come from the right and travel to the left. If the ship is lucky enough to be in the path of a power-up, it gains its benefit. These benefits are increased health, more powerful bullets, and extra points. The game continues until the ship's health is reduced to zero.

Now that we have an overview of how the game is played, we are going to look at the class BeltCommanderController, first examining at how a new game is set up and then looking at the code that runs every step of the game.

# **BeltCommanderController: Getting Started**

To understand how this game is implemented, we need to understand how the BeltComanderController gets set up to play the game. The following section provides an overview of the initial code required to get a game up and running. Let's start with the header file for the class BeltCommanderController, as shown in Listing 12-7.

Listing 12-7. BeltCommanderController.h

```
@class BeltCommanderDelegate, BeltCommanderController;
@protocol BeltCommanderDelegate
@required
-(void)gameStarted:(BeltCommanderController*)aBeltCommanderController;
-(void)gameOver:(BeltCommanderController*)aBeltCommanderController;
@end
@interface BeltCommanderController : GameController{
    IBOutlet HealthBarView* healthBarView;
    IBOutlet UILabel* scoreLabel;
    GameParameters* gameParameters;
    Viper* viper;
    //achievement tracking
    int asteroids destroyed;
}
@property (nonatomic, retain) IBOutlet NSObject<BeltCommanderDelegate>* delegate;
-(void)doNewGame:(GameParameters*)aGameParameters;
-(void)tapGesture:(UITapGestureRecognizer*)tapRecognizer;
-(void)doEndGame;
-(void)doAddNewTrouble;
-(void)doCollisionDetection;
-(void)doUpdateHUD;
-(void)checkAchievements;
-(Viper*)viper;
@end
```

In Listing 12-7, we see the header file for the class BeltCommanderController. As expected, the class extends GameController. It also defines a protocol called BeltCommanderDelegate. This protocol is implemented by RootViewController and is used to pass game state. There are two IBOutlets associated with this class. The first, HealthBarView, is the UIView subclass that is responsible for rendering the health bar at the upper right of the screen. The second, scoreLabel, is used to display the player's score as the game is played.

In Listing 12-7, we see that there is a GameParameters object called gameParameters. This object is used to determine which types of Actors should be included in the game. The idea is that this game would be free and the player could purchase different types of Actors to make it more fun (and profitable). Such in-app purchases are discussed in Chapter 10. For this chapter, we are assuming all in-app purchases have been made.

Viper object is used to keep a reference to the ship in the game. Since we will want easy access

. The last field is called asteroids\_destroyed and is used to track achievements, as described 9.

```
BeltCommanderController. The only ones doNewGame: and tapGesture:; the others we will cover as doNewGame: is called by RootViewController to start tapGesture: is called when a
```

tureRecognizer detects a tap on the screen; we will see this shortly as well. More about 8. Let's focus on the setup first.

# **Understanding the Setup**

There are few steps that we must take to get BeltCommanderController set up. Since we know that BeltCommanderController extends GameController, we know that it should implement a doSetup task, as shown in Listing 12-8.

Listing 12-8. BeltCommanderController.m (doSetup)

```
-(BOOL)doSetup{
    if ([super doSetup]){
        [self setGameAreaSize:CGSizeMake(480, 320)];
        [self setIsPaused:YES];

        NSMutableArray* classes = [NSMutableArray new];
        [classes addObject:[Saucer class]];
        [classes addObject:[Bullet class]];
        [classes addObject:[Asteroid class]];
        [classes addObject:[Powerup class]];
        [self setSortedActorClasses:classes];

        UITapGestureRecognizer* tapRecognizer = [[UITapGestureRecognizer alloc] initWithTarget:self action:@selector(tapGesture:)];

        [self prepareAudio: AUDIO_BLIP];
        [self prepareAudio: AUDIO_GOT POWERUP];
```

```
[self prepareAudio: AUDIO_VIPER_EXPLOSION];
    [self playBackgroundAudio: AUDIO_BC_THEME];

    [actorsView addGestureRecognizer:tapRecognizer];
    return YES;
}
return NO;
}
```

In Listing 12-8, we see the task doSetup as defined by the class BeltCommanderController. In this task, we define the size of the game to be 480x320, which happens to be the native size of the iPhone screen in points. We also set the property isPaused to YES, so nothing is animating until doNewGame: is called later. The next step is to indicate which classes of Actors we want easy access to as the game progresses. In this case, we specify the classes Saucer, Bullet, Asteroid, and Powerup. Keep in mind that there is only one Viper in the game, and we have a reference to it in the header file. The last thing we do is to create a UITapGestureRecognizer and add it to actorsView. In this way, the task tapGesture: will be called when the user taps on the screen. Before any of that can happen, we need to understand how a new game is created.

### A New Game

Whether we are running the first game or the hundredth, they all start with the task doNewGame:, as shown in Listing 12-9.

Listing 12-9. BeltCommanderController.m (doNewGame:)

```
-(void)doNewGame:(GameParameters*)aGameParameters{
    gameParameters = aGameParameters;

    [self removeAllActors];

    [self setScore:0];
    [self setStepNumber:0];
    [self setScoreChangedOnStep:0];

    viper = [Viper viper:self];
    [self addActor:viper];

    asteroids_destroyed = 0;

    [self setIsPaused:NO];
    [delegate gameStarted:self];
}
```

In Listing 12-9, we see the task doNewGame:, which is called by the RootViewController to start a new game. In this task, we set the gameParameters for future reference. Then we have to reset this object so that it is ready for a new game. To remove all Actors, we call removeAllActors. We also want to reset the score, the number of steps, and the number of Asteroids destroyed. We also create

a Viper object and store it in the variable viper. Once we are reset, we set is Paused to NO and inform the delegate that the game has started. Let's take a look at how we handle input and then we will be ready to move beyond the setup.

# **Handling Input**

As soon as isPaused is set to NO, the game is up and running. At this point, the only actor in the game is the Viper. Let's take a moment to understand how we intercept input to make it move before the Asteroids and aliens show up. The task tapGesture: is shown in Listing 12-10.

Listing 12-10. BeltCommanderController.m (tapGesture:)

```
if (![self isPaused]){
    CGSize gameSize = [self gameAreaSize];
    CGSize viewSize = [actorsView frame].size;
    float xRatio = gameSize.width/viewSize.width;
    float yRatio = gameSize.height/viewSize.height;

    CGPoint locationInView = [tapRecognizer locationInView:actorsView];
    CGPoint pointInGame = CGPointMake(locationInView.x*xRatio, locationInView.y*yRatio);
    [viper setMoveToPoint: pointInGame within:self];
}
```

In Listing 12-10, we see the task tapGesture: that is called when the user taps the screen. In this task, after checking if we are paused, we have to convert the point of the touch into game coordinates. On the iPhone, this is not strictly necessary because the view actorsView is the same number of points wide and high as the size of our game. However, when we play this game on the iPad, the actorsView is 1024x682, while our game is still 640x480. In order to convert from one coordinate space to the other, we divide the game width by the width of actorsView and multiply it by the X location of the touch. We repeat the process for the height and Y value. Once we have the point figured out, we call setMoveToPoint:within: on Viper, which sets it in motion. We will look at the implementation of setMoveToPoint:within: when we take a closer look at the class Viper in the next section.

We have covered all there is to know about getting BeltCommanderController setup to play the game. Everything is ready to start processing user input and adding new Actors to the mix. The following section describes how BeltCommanderController checks for an end condition, adds Actors, and performs other task appropriate for the BeltCommanderController class.

# BeltCommanderController, One Step at a Time

We have our BeltCommanderController class all set up and ready to play the game. We are going to look at the code that is run for every step to manage the overall state of the game. We will look at how the end condition is tested for, how we add new Actors to the scene, and how we manage the interactions between the Actors. Since BeltCommanderController is a subclass of GameController, we start out in game logic in the task applyGameLogic, as shown in Listing 12-11.

### Listing 12-11. BeltCommanderController.m (applyGameLogic)

```
-(void)applyGameLogic{
    if ([viper health] <= 0.0f){
        [self playAudio:AUDIO_VIPER_EXPLOSION];
        [self doEndGame];
    } else {
        [self doAddNewTrouble];
        [self doCollisionDetection];
        [self doUpdateHUD];

        if ([self stepNumber]%30 == 0){
            [self checkAchievements];
        }
    }
}</pre>
```

In Listing 12-11, we see the task applyGameLogic that is called once for every step of the game. The first thing we do is check to see if the Viper's health is below 0.0. If it is, we play the explosion sound and end the game—simple as that. If the Viper is still alive, we continue by calling doAddNewTrouble, doCollisionDetection, and doUpdateHUD. The call to checkAchievements is done only once every 30 steps. This is done for performance reasons—we don't really want to make these extra calls for every step. This does have the drawback that achievements might be reached by the player but not recorded. For a more sophisticated game, we would designate which achievements are tested when.

We just listed off a good number of tasks, and we will take each in turn, starting with the task doEndGame, as shown in Listing 12-12.

### Listing 12-12. BeltCommanderController.m (doEndGame)

```
-(void)doEndGame{
    [self setIsPaused:YES];
    [delegate gameOver:self];
}
```

In Listing 12-12, we see the very simple task doEndGame where we simply pause the game and call gameOver: on the delegate. The task gameOver: is implemented by RootViewController and can be seen in Listing 12-5. Next, let's review how Actors are added to the game.

### **Adding Actors**

We know from experience that Actors are added by calling addActor:. However, to make a game, we have to include some logic that dictates when and how an Actor is added. Let's continue and see how we add new Actors to the game in the task doAddNewTrouble, as shown in Listing 12-13.

### Listing 12-13. BeltCommanderController.m (doAddNewTrouble)

```
-(void)doAddNewTrouble{
    if ([gameParameters includeAsteroids] && arc4random() % (5*60) == 0){
        if ([[self actorsOfType:[Asteroid class]] count] < 20){
            [self addActor:[Asteroid asteroid:self]];
        }
    }
    if ([gameParameters includeSaucers] && arc4random() % (10*60) == 0){
        if ([[self actorsOfType:[Saucer class]] count] < 3){
            [self addActor:[Saucer saucer:self]];
        }
    if ([gameParameters includePowerups] && arc4random() % (20*60) == 0){
        [self addActor:[Powerup powerup:self]];
    }
}</pre>
```

doAddNewTrouble that is responsible for adding new Actors to
Actors we might add, we first check to see if gameParameters
gameParameters indicates that we should add an Actor of a

Asteroids

Actor we create it and call addActor:. The Actor's

Actor is created. We will now move on and

### **Collision Detection**

Now we know how each Actor is added to the scene. Let's move on and look at how they interact. If we consider the five main Actors in this game, there are several interactions that must be considered, as follows:

- Bullets and Asteroids
- Asteroids and the Viper
- Bullets and the Viper
- Bullets and Saucers
- Powerups and the Viper

These interactions are handled in the task doCollisionDetection, the first part of which is shown in Listing 12-14.

Listing 12-14. BeltCommanderController.m (doCollisionDetection, part 1)

```
-(void)doCollisionDetection{
   NSSet* bullets = [self actorsOfType:[Bullet class]];
   NSSet* asteroids = [self actorsOfType:[Asteroid class]];
   NSSet* saucers = [self actorsOfType:[Saucer class]];
   NSSet* powerups = [self actorsOfType:[Powerup class]];
```

```
for (Asteroid* asteroid in asteroids){
   for (Bullet* bullet in bullets){
        if ([bullet overlapsWith:asteroid]){
            [bullet decrementDamage: self];
            asteroids destroyed++;
            [asteroid doHit:self];
            [self incrementScore: [asteroid level]*10];
            break;
        }
    if ([asteroid overlapsWith:viper]){
        [viper decrementHealth: [asteroid level]*2];
        Shield* shield = [Shield shieldProtecting:viper From: asteroid];
        [self addActor:shield];
        asteroids destroyed++;
        [asteroid doHit:self];
   }
}
```

In Listing 12-14, we see the first part of the task doCollisionDetection where we handle the interaction concerning Asteroids. The first thing we do in this task is to get a reference to all of the different Actors we are going to need to interact with. Once we have reference to all of the Asteroids, Bullets, and the Viper, we can start testing to see if there are collisions. Inside the outermost loop in Listing 12-14, we start by testing to see if each Asteroid overlaps with each Bullet. If they do, we have the bullet decrement the Asteroid's damage, which usually removes the Asteroid from the game, but more on that later. We also record that we have destroyed another Asteroid before calling doHit; on the Asteroid. Lastly, we increment the score.

In Listing 12-14, after we have considered the relation between each Asteroid and Bullet, we check to see if the Asteroid is overlapping the Viper. If it is, we decrement the health of the Viper and add a Shield to the scene. The Shield is an Actor that is just decoration and has no game function beyond that; it looks like a shield went up to protect the spaceship.

Let's look at the rest of the doCollisionDetection task and understand how the rest of the inter-Actor relationships are handled. The task continues in Listing 12-15.

Listing 12-15. BeltCommanderController.m (doCollisionDetection, part 2)

```
for (Bullet* bullet in bullets){
   if ([[bullet source] isKindOfClass:[Saucer class]]){
      if ([viper overlapsWith: bullet]){
          [viper decrementHealth: [bullet damage]];

          Shield* shield = [Shield shieldProtecting:viper From: bullet];
          [self addActor:shield];

          [self removeActor:bullet];
          break;
}
```

```
} else {
        for (Saucer* saucer in saucers){
            if ([saucer overlapsWith: bullet]){
                [saucer decrementHealth:[bullet damage]];
                Shield* shield = [Shield shieldProtecting:saucer From:bullet];
                [self addActor:shield];
                [self removeActor:bullet];
                break;
        }
   }
}
for (Powerup* powerup in powerups){
    if ([powerup overlapsWith:viper]){
        [self playAudio:AUDIO GOT POWERUP];
        [powerup doHitOn:viper in:self];
   }
}
```

doCollisionDetection. While iterating over all of Bullets, we start by considering the interactions between Bullets and the Vipers. We do this source property on the Bullet. If the source was a Saucer, then the Bullet was Viper and cannot hurt a Saucer. If the Bullet overlaps with the Viper, we decrement Viper's health, add a Shield, and remove the Bullet from the game.

If the Bullet was not shot by a Saucer, it must have come from the Viper. So we check to see if the Bullet overlaps with any of the Saucers. If it does, we decrement the health of the Saucer, add a Shield to the Saucer, and remove the Bullet.

The last relationship we have to consider in doCollisionDetection is that between Powerups and the Viper. We iterate over all of the Powerups in the game and check if they overlap. If they do, we call doHitOn:in: on the Powerup to apply the bonus. The implementation of doHit:in: will be described when we consider the Powerup class in detail.

We have now looked at all of the interactions between the different Actors. Before looking at each of the different Actor classes, let's take a look how we update the score and the health bar on the screen.

#### **Updating the HUD**

For every step of the game, the score or the health meter might change. Collectively, these two components are called the heads-up display (HUD). Looking back to Listing 12-7, we see that these two components are connected to the BeltCommanderController though an IBOutlet. We see that the scoreLabel is a simple UILabel, but the class HealthBarView is unfamiliar. We will discuss the class HealthBarView in a moment; first, let's look at the code that updates these components in the task doUpdateHUD, as shown in Listing 12-16.

#### Listing 12-16. BeltCommanderController.m (doUpdateHUD)

```
-(void)doUpdateHUD{
   if ([self stepNumber] == [self scoreChangedOnStep]){
        [scoreLabel setText: [[NSNumber numberWithLong:[self score]] stringValue] ];
   }
   [healthBarView setHealth:[viper health]/[viper maxHealth]];
}
```

In Listing 12-16, we see the task doUpdateHUD that is called for every step of the game. In this task, we check to see if the current stepNumber is equal to the property scoreChangedOnStep. The property scoreChangedOnStep is the value of stepNumber when the score was last updated. So, if stepNumber is equal to scoreChangedOnStep, we know that the score was changed in this step and, hence, scoreLabel needs to be updated. To update scoreLabel, we simply call setText: and pass in an NSString version of the score.

In Listing 12-16, we also call setHealth: on healthBarView to update how the health bar is drawn. The object healthBarView is of type HealthBarView, which is simply a UIView with a custom drawRect: task, as shown in Listing 12-17.

#### Listing 12-17. HealthBarView.m (drawRect:)

```
- (void)drawRect:(CGRect)rect
{
    [self setDefaults];
    int index = 0;
   float marker = [[percents objectAtIndex:index] floatValue];
   while (percent > marker) {
       marker = [[percents objectAtIndex:++index] floatValue];
    }
   UIColor* baseColor = [colors objectAtIndex:index];
    const float* rgb = CGColorGetComponents( baseColor.CGColor );
   UIColor* frameColor = [UIColor colorWithRed:rgb[0] green:rgb[1] blue:rgb[2] alpha:.8f];
   UIColor* healthColor = [UIColor colorWithRed:rgb[0] green:rgb[1] blue:rgb[2] alpha:.5f];
    [frameColor setStroke];
    [healthColor setFill];
   CGSize size = [self frame].size;
    CGContextRef context = UIGraphicsGetCurrentContext();
   CGRect frameRect = CGRectMake(1, 1, size.width-2, size.height-2
   CGContextStrokeRect(context, frameRect);
```

```
CGRect heatlhRect = CGRectMake(1, 1, (size.width-2)*percent, size.height-2);
CGContextFillRect(context, heatlhRect);
}
```

In Listing 12-17, we see the task drawRect: of class HealthBarView. In this task, we draw two rectangles. The first rectangle is filled and the second is just an outline. Besides just drawing the rectangles, we want to adjust the color of the rectangles to reflect how damaged the ship is. To figure out which color we should use as our baseColor, we iterate through the NSArray percents until the percent we are going to draw is higher than the percent at index.

Once we have our base color, we create two modified colors from it. The first is the color frameColor used for the outline of the health bar; it has an alpha of 0.8. The second color is healthColor and will be used to draw the interior of the health bar; it has an alpha of 0.5.

CGRectMake. Once the CGRect is created, we CGContextStrokeRect and CGContextFillRect, respectively.

BeltCommanderController and know it works. In the next section, we

BeltCommanderController handles the big picture. It controls how Actors are created, and it manages the interactions between them. However, a lot of the Actors. In this

Actors and understand what the key customizations are

to make them work the way we want. In several earlier chapters, we have implemented Actors of different types. In that light, we are only going to look at the bits of code that make each interesting feature of the Actor work. If you would like a refresher on how to implement Actors, check out Chapters 6 and 7. Also, you can always look at the full source code. Let's start with the class Viper.

#### **The Viper Actor**

The Viper class represents the spaceship at the left side of the screen. This is the Actor that the user controls to achieve a high score. The Viper fires Bullets continuously to the right. To move the Viper, the user taps the screen, indicating a point above or below the Viper where it should travel. When traveling, the graphic changes to show thrusters on the top or bottom of the craft. Also, a Viper can intercept a Powerup that improves its guns. Lastly, the Viper has a fixed amount of health that slowly regenerates. In summary, the key features of the Viper are as follows:

- Moves to a point specified by user.
- Thrusters fire when ship moves.
- Fires bullets continuously.
- Improves quality of bullets when "powered up."
- Has a health value that regenerates.

Let's take a look at the source code and see how we implement these features, starting with the header file for context, as shown in Listing 12-18.

```
Listing 12-18. Viper.h
```

```
enum{
    VPR STATE STOPPED = 0,
    VPR STATE UP,
   VPR STATE DOWN,
    VPR STATE COUNT
};
@interface Viper : Actor <ImageRepresentationDelegate, LinearMotionDelegate>{
    LinearMotion* motion;
    long lastStepDamageWasModified;
@property (nonatomic) float health;
@property (nonatomic) float maxHealth;
@property (nonatomic) long lastShot;
@property (nonatomic) long stepsPerShot;
@property (nonatomic) BOOL shootTop;
@property (nonatomic) int damage;
+(id)viper:(GameController*)gameController;
-(void)setMoveToPoint:(CGPoint)aPoint within:(GameController*)gameController;
-(void)incrementHealth:(float)amount;
-(void)decrementHealth:(float)amount;
-(void)incrementDamage:(GameController*)gameController;
-(void)decrementDamage:(GameController*)gameController;
@end
```

In Listing 12-18, we see the header file for the class Viper. In this file, we see that we define an enum with three states. This is very much like the enums we have declared in the past to specify the state of an Actor. Looking at the properties, we can see that we have a property for health and maxHealth. We also have a property called lastShot, which will be used to keep track of whether it is time to shoot another Bullet in conjunction with the property stepsPerShot. The BOOL property shootTop is used to keep track if the next Bullet should come from the top of the Viper or not. The last property damage indicates the damage value of the next Bullet.

The tasks in Listing 12-18 are pretty mundane. There are four tasks for incrementing and decrementing health and damage. Each keeps the value of health and damage within a reasonable range. The interesting task is setMoveToPoint:within:, as shown in Listing 12-19.

#### Listing 12-19. Viper.m (setMoveToPoint:within:)

```
-(void)setMoveToPoint:(CGPoint)aPoint within:(GameController*)gameController{
   if (motion){
        [[self behaviors] removeObject: motion];
   }
   CGPoint point = CGPointMake([self center].x, aPoint.y);
```

```
if (point.y < self.center.y){
      [self setState:VPR_STATE_UP];
} else if (point.y > self.center.y){
      [self setState:VPR_STATE_DOWN];
}

motion = [LinearMotion linearMotionFromPoint:[self center] toPoint:point AtSpeed:1.2f];
[motion setDelegate:self];
[motion setStopAtPoint:YES];
[motion setPointToStopAt:point];

[motion setStayInRect:YES];
[GSize gameSize = [gameController gameAreaSize];
[motion setRectToStayIn:CGRectMake(63, 31, 2, gameSize.height - 63)];

[motion setWrap:NO];
[[self behaviors] addObject:motion];
```

setMoveToPoint:within: In this task, the goal is to set up a object that will move the Viper to the specified point. The first step is to see if we have LinearMotion object stored at the variable motion. If so, we want to remove it from our CGPoint called point, based on the CGPoint

find a point that keeps the Viper horizontally fixed. Once we know where our point is, we can set our state to either VPR\_STATE\_UP or VPR\_STATE\_DOWN.

Creating the new LinearMotion is as simple as passing the Viper's current center and point to the constructor linearMotionFromPoint:toPoint:AtSpeed:. Setting self as the delegate, and telling it to stop when it reaches the specified point, further modifies the LinearMotion. The last modification is to set LinearMotion so that it stays within the specified rectangle. This prevents the Viper from going outside the bounds of the screen.

We have looked at how the Viper moves about the screen. The rest of the interesting features are implemented in the task step:, as shown in Listing 12-20.

#### Listing 12-20. Viper.m (step:)

```
-(void)step:(GameController*)gameController{
  long stepNumber = [gameController stepNumber];
  if (stepNumber - lastShot > stepsPerShot - damage){
      [gameController playAudio:AUDIO_BLIP];

      CGPoint center = [self center];
      CGSize gameSize = [gameController gameAreaSize];
```

```
float offset;
        if (shootTop){
            offset = -15;
        } else {
            offset = 15;
        CGPoint bCenter = CGPointMake(center.x + 20, center.y + offset);
        CGPoint bToward = CGPointMake(gameSize.width, bCenter.y);
        Bullet* bullet = [Bullet bulletAt:bCenter TowardPoint:bToward From:self];
        [bullet setDamage:damage];
        [gameController addActor:bullet];
        shootTop = !shootTop;
        lastShot = stepNumber;
    if (stepNumber \% 60 == 0){
        [self incrementHealth:1];
    if (lastStepDamageWasModified + 10*60 == stepNumber){
        [self decrementDamage:gameController];
    }
}
```

In Listing 12-20, we see the task step:, which is called for every step of the game. We do a number of things in this task; primarily, we figure out if a Bullet should be shot and, if so, shoot it. But we also regenerate our health and keep track of whether we are still under the influence of a Powerup. To figure out if we should fire a Bullet, we see if stepNumber minus lastShot is greater than stepsPerShot minus damage. In this way, we fire more often if damage is higher, which happens when a Powerup has given the Viper extra damage.

To fire a Bullet, we figure out if the Bullet should come from the top or the bottom of the ship. Then it is just a matter of creating the CGPoints that describe its motion. Lastly, we clean up by flipping the value of shootTop and set lastShot to stepNumber.

In Listing 12-20, we also increase our health. This is done by calling incrementHealth every 60 frames. Calculating if we should decrement our damage is done by checking when our damage was last increased and calculating if 600 frames (~10 seconds) have passed.

All in all, very little is required to get our Viper class to do what we want. Let's move on the Asteroid class.

#### The Asteroid Class

The Asteroids are the primary opponents in Belt Commander (presumably, the word *belt* in the title refers to an asteroid belt). These Actors start on the right and travel to the left. When they reach the left side, they start over again on the right. We have used the variations of the Asteroid class several times in this book, and they are well documented. However, the feature that makes the Asteroid interesting is how it breaks up into multiple, smaller asteroids while shooting Particles. This code was modified from previous examples, and is shown in Listing 12-21.

```
Listing 12-21. Asteroid.m (doHit:)
```

```
-(void)doHit:(GameController*)controller{
    if (level > 1){
        int count = 1;
        float percent = arc4random()%1000/1000.0f;
        if (percent > 0.9){
            count = 3;
        } else if (percent > 0.5){
            count = 2;
        for (int i=0;i<count;i++){</pre>
            float radius = [self radius];
            float rx = arc4random()%1000/1000.0*radius*2 - radius;
            float ry = arc4random()%1000/1000.0*radius*2 - radius;
            CGPoint newCenter = CGPointMake(self.center.x + rx, self.center.y + ry);
            Asteroid* newAst = [Asteroid asteroidOfLevel:level-1 At: newCenter];
            [controller addActor:newAst];
        }
   }
    int particles = arc4random()%4+1;
    for (int i=0;i<particles;i++){</pre>
        ImageRepresentation* rep = [ImageRepresentation
imageRepWithDelegate:[AsteroidRepresentationDelegate instance]];
        Particle* particle = [Particle particleAt:self.center WithRep:rep Steps:25];
        [particle setRadius:6];
        [particle setVariant:arc4random()%AST VARIATION COUNT];
        [particle setRotation: (arc4random()%100)/100.0*M PI*2];
        LinearMotion* motion = [LinearMotion linearMotionRandomDirectionAndSpeed];
        [particle addBehavior:motion];
        [controller addActor: particle];
    [controller removeActor:self];
}
```

In Listing 12-21, we see the task doHit: as implemented by the class Asteroid. In this task, we check to see if the Asteroid we are working with is above level one. If it is, then we need to create sub-Asteroids to replace this one. In other examples, we just randomly picked a number of child Asteroids to create. However, while play-testing Belt Commander, this was unsatisfactory because the number of Asteroids generated was way too high. To reduce the number of Asteroids created, a percentage was given for each possible value of count. So only 10 percent of the time an Asteroid will create three children Asteroids; 40 percent of the time there will be two children Asteroids; the rest of the time only a single Asteroid is created. In this way, the game is balanced, keeping it fun and playable.

The other interesting thing about the task doHit:, as shown in Listing 12-21, is how it creates Particles to emphasize the destruction of the parent Asteroid. By creating 1 to 5 Particles that look just like Asteroids and sending them out in random directions, we make a very pleasing Asteroid destruction.

Let's continue and explore a little about the class Saucer.

#### The Saucer Class

The Saucer class is mostly a troublemaker. It appears at either the top or the bottom of the screen, shooting Bullets at the Viper. What makes the Saucer class troublesome is that the Bullets most often break apart Asteroids, creating an unpredictable pattern. The implementation of the Saucer class in this chapter is much likes its implementation in the other chapters. However, some modification was made to the step: task as shown in Listing 12-22.

#### Listing 12-22. Saucer.m (step:)

```
-(void)step:(GameController*)gameController{
    if (health <= 0){
        [gameController incrementScore:[self radius]*10];
        [gameController removeActor:self];
        return;
    }
   CGSize gameAreaSize = [gameController gameAreaSize];
   CGPoint center = [self center];
    if (center.y < -[self radius]){</pre>
        [linearMotion setDirection:DIRECTION DOWN];
    } else if (center.y > gameAreaSize.height + [self radius]){
        [linearMotion setDirection:DIRECTION UP];
    if (arc4random()\%180 == 0){
        BeltCommanderController* bc = (BeltCommanderController*)gameController;
        [gameController addActor:[Bullet bulletAt:[self center] TowardPoint:[bc viper].center
From:self]];
}
```

In Listing 12-22, we see the implementation of the class step: from the class Saucer. In this task, we check to see if the Saucer's health is below zero. If it is, we increment the gameControllers score and remove the Saucer from the game. The next part of the task step: is to determine if the Saucer should change direction on account of going off the screen. The last section of the task step: is responsible for shooting Bullets. In order to do this, we get the viper property of the gameController so we can target the Bullet on it. This is the first case where we had to cast gameController to BeltCommanderController. It raises the question of how we might add a general way to reference particular actors (like Viper) without depending on class definition. But, this is an exercise for another time.

The last Actor we are looking at is Powerup.

#### **The Powerup Class**

The Powerup class is pretty simple, really. It is just an Actor that moves from the right to the left. We have reviewed in other chapters how it appears to be spinning and how it flashes at the end of its life. In this game, the interesting thing is the effect it has on a Viper. This feature is implemented in the task doHitOn:in:, as shown in Listing 12-23.

#### Listing 12-23. Powerup.m (doHitOn:in:)

```
-(void)doHitOn:(Viper*)viper in:(GameController*)gameController{
   if (self.variant == VARIATION_HEALTH){
        [viper incrementHealth:30];
   } else if (self.variant == VARIATION_DAMAGE){
        [viper incrementDamage:gameController];
   } else if (self.variant == VARIATION_CASH){
        [gameController incrementScore:1000];
   }
   [gameController removeActor:self];
```

doHitOn:in: of the class Powerup. This is called when a Powerup Viper. The implementation could not be more straightforward: we simply check the Powerup and apply the correct effect. For VARIATION\_HEALTH, we increment the Viper's VARIATION \_DAMAGE, we increment the Viper's damage. Lastly, for VARIATION\_CASH,

Actors the way we do. It turned out to be a strong OO model.

# **Summary**

In this chapter, we brought together all of the techniques we have discussed in this book. We started by exploring what our game, Belt Commander, is and how it is played. We then reviewed the flow of the application and looked at how we used the UINavigationController class to implement switching between views. We continued by looking at the class BeltCommanderController and learned how to implement the major parts of the game. Lastly, we looked at a few specific implementation choices that added life to our Actors.

When creating a game, there will always be unique code and techniques involved. Each game is one of a kind and requires a unique effort to bring it to life. It would be impossible to write a book that explains every possible challenge a game developer can face. However, many developers and game designers are going to face requirements that are very similar to what I have outlined here. It is my hope that this book shows how to work through a number of these common challenges. From the most basic issue of switching screens and saving user data, to the more complex topics like particle animations and in-app purchases, I think of this book as a map of the code and classes that are the infrastructure of a game. Ultimately, it is up to each developer to fill in the middle parts and create a new game. Thank you for reading this book.

Chapter 13

# Physics!

There are many games for iOS that utilize a physics simulator to control the motion of actors. In general, this usually means some library is included in the game that describes the motion of bodies in a realistic way, using real physics formulas and concepts like mass, momentum, velocity, and other principles used to describe the real world. Do physics engines provide a perfect simulation of how objects move? Not really. For starters, we will be working with the library Box2D. As the name implies, it simulates the interaction of two-dimensional (2D) bodies, which is clearly not an accurate representation of reality. However, Box2D does provide a level of realism that is good enough to trick our monkey brains into believing that things in the game are moving in a realistic way.

In this chapter, you will learn how to add Box2D to our game project and understand how to integrate its functionality into our existing framework. The code in this chapter is taken from the Sample 13 project.

I would like to mention that Box2D is not the only physics engine suitable for iOS development. Another very popular physics library is Chipmunk Physics. The folks at Chipmunk Physics recommend their pro version (at a cost) for iOS development. This pro version provides an Objective C wrapper for their C-based library, which sounds pretty handy. I have not used either Box2D or Chipmunk Physics enough to make a recommendation. However, I would recommend evaluating both of these libraries before starting on a complex physics-based game. There are also many other open-source projects that may be a good starting point for a physics-based game.

Let's start by taking a look at Sample 13 and understand what we are trying to build here.

# **Overview of the Physics-Based Example**

In this chapter we will modify our existing game framework to create a sample application that uses physics to simulate the motion of asteroids. Figure 13-1 shows the example running.



Asteroid motion described by physics

13-1, we see a number of asteroids against the familiar starry background. Each asteroid

side. When the asteroids collide, they bounce off each other like pool balls. The smaller asteroids are defined to have a lower mass; hence, they tend to bounce off the larger asteroids, while the larger asteroids tend to plow through the smaller ones.

In previous chapters, each actor in the game recorded its state within the game scene and then the GameController was responsible for using the state of each actor to figure out where it should be drawn on the screen. In this chapter, we are still following that same pattern, but we are using Box2D to tell us where each actor is in the scene. Before we look at how this is implemented, let's get an overview of Box2D and understand its principles; this will make the explanation of the code more clear.

### An Overview of Box2D

Box2D is a 2D physics engine for games. It is a library written in C++ so it can be used on a wide range of platforms and is available under the permissive zlib open-source licenses. In addition to the primary C++ version of Box2D, there are a large number of ports to other platforms, including Java, C#, JavaScript, and a few others. The main developer and driver of the project is Erin Catto, who can be contacted through the forum on the Box2D website: http://www.box2d.org.

**Note** Information about the zlib licenses can be found here:

http://en.wikipedia.org/wiki/Zlib License

As mentioned, Box2D is written in C++ and not Objective C. This can be a little off-putting to a new iOS developer, who is just getting the hang of Objective C. Also, there are also some hurdles that must be jumped to make your Xcode project play nicely with combined Objective C and C++ code. We will take a brief look at setting that up in a moment; for now, though, let's ignore this hurdle and spend some time looking at what Box2D is really all about.

#### The World

The starting place for all Box2D applications is understanding that Box2D simulates the motion of bodies and joints within a world. Bodies are what you would expect—blocks, balls, and other game elements. Joints are constraints put on bodies in the world; this includes things like pulleys and teeters. We are not going to use joints in our example. These bodies and joints are all in a world that describes how they interact with each other. This is analogous to how we have Actors in a GameController, as in the other chapters in this book.

In addition to being a collection of bodies and joints, a world also describes the force of gravity in a simulation. The gravity can be set to any value and go in any direction. Since our example is in space, gravity will be set to zero.

**Note** Units in the world are assumed to be meters-kilogram-second (MKS). Because you probably don't want one pixel to be one meter, you will want to scale Box2D coordinates to your display coordinate system.

A world is also responsible for advancing the simulation, similar to how GameController advances the location and presentation of each Actor. There are some differences; for example, a Box2D world advances the simulation a number of seconds (fractions of a second, really) into the future, while GameController simply advances the frame count by 1. This is a subtle distinction, but it means you can adjust how much simulated time has passed within the scene. Let's consider an example to see why this is useful. Say you are building a game that runs at 60 frames a second. If you are using the GameController class, and you adjust the frame rate to 30 frames a second, the game will appear to be running in slow motion on the device (half speed). If you are using the Box2D world, and you drop your frame rate from 60 to 30 frames a second, you can double the amount of simulated time that passes in each frame; this would cause the game to appear to be running at full speed—just with lower fidelity in the animations.

This advantage comes with a price, however. With the GameController (and other engines that work in the same way), each Actor knows that it has been exactly one frame in the animation since the last time it was updated. This makes some aspects of game logic very simple; if a particle is supposed to be on the screen for 15 frames, you can just count them off and remove the particle. In a Box2D world, if you want to be able to change the amount of time for a given frame, you have to specify the life span of a particle in simulated seconds. Additionally, in order to know when to remove the particle, you have to calculate how much time has passed since the last time it was checked. This may not seem like a big deal; you just have to do a little subtraction. However, if the duration of your particle's life is not evenly divisible by the duration between each frame, your particle may exist longer than you intended and can cause some unexpected interactions that may be hard to debug.

Given all this talk about the differences between how GameController and a Box2D world progress the actors in their scenes, you may think that getting these two classes to work together is going to be tricky. It is not. We are simply going to ignore this issue in this example and not take advantage of this feature of Box2D. I wanted to point out this difference in case any readers are looking to make a complex physics game, in which case they will want to account for this early in their design.

#### **The Bodies**

Once a world is created, we want to put something in it—those things are called bodies. A body represents the location, angle, velocity, and other physical attributes of an object in the world. Here is the full list of attributes:

- **Type** Either static, kinematic, or dynamic
- Position A point in world coordinates
- Angle The rotate of the body
- Linear Velocity A vector describing the current velocity of a body
- Angular Velocity A vector describing the rotational velocity of a body
- Linear Damping How much the linear velocity is reduced over time
- Angular Damping How much the angular velocity is reduced over time
- **Allow Sleep** A flag indicating that the world can use an optimization that ignores this body when appropriate
- Awake A flag indicating that the body is currently being used in the simulation (not asleep)
- Fixed Rotation A flag that prevents the body from rotating
- Bullet A flag indicating the simulation should pay special attention to this fast-moving body to prevent "tunneling"
- Active A flag indicating that the body is participating in the simulation. If a body is not active, then it does not participate in the simulation until active is set to true by user code
- User Data A place to attach additional data to a body
- Gravity Scale The effect that gravity has on the object

There are a few items in the above list that require a little more explanation. The type of a body dictates how it interacts with other bodies in the world. A static body will never move or rotate, but another body may hit or bounce off it. A kinematic body is similar to a static body but moves according to a velocity, like a moving platform in a game. A kinematic body will not collide with other static or kinematic bodies. A dynamic body moves according to the laws of physics; it collides with all other types of bodies. In a game, a dynamic body may be a block, ball, bird, pig, or what have you.

The Allow Sleep and Awake properties are used by the simulation engine to make some optimizations. Since it is computationally expensive to simulate a body, it makes sense to skip bodies that are not moving. If Allow Sleep is set to true, the simulation will put a body to sleep (Awake = false) if it comes to rest, temporarily removing it from the simulation. If a body is hit by another body, it will be awakened and continue participating in the simulation. In general, you use these flags only when you want to mark a body as not being allowed to sleep. You may do this because the body is a particularly important part of the game. The property Active is similar to Awake, in that an inactive body is very much like a sleeping body—it does not participate in the simulation. However, an inactive body will never be activated by the simulation; you have to do that in your code.

You will notice in the above list that there is no mention of shape, density, or other physical characteristics. These other attributes are covered by the concept of a fixture, as discussed in the next section.

#### **Fixtures**

A fixture attaches a shape to a body, as well as some additional physical properties. Those properties are:

- Shape The shape of the body
- User Data A place to attach game-specific data
- **Friction** The friction coefficient—how much the body is slowed when it slides on another body
- **Restitution** How bouncy an object is
- Density The density of the body, in k/m²
- **Is Sensor** A sensor that records that a body has touched other bodies but has not created a collision—a nonsolid body

The shape of a fixture can be a convex polygon or a circle. There is also the option for the shape to be a chain or an edge (used with chains). We are only going to use circles in our example, but these other shapes could be used to make some interesting games. The friction, restitution (not in the legal sense), and density all describe addition physical characteristics of the body. Friction describes how a body slows down when sliding on another body. This is different from linear damping, which is more like air resistance. Restitution describes how a body comes to rest after colliding with another body; low restitution means that the body will not bounce much, while high restitution is very bouncy, like a super ball. Density is a calculation of the mass of a dynamic body based on the area of its shape. Notice that density is given in terms of m², because we are working in a 2D world.

We have looked at the world, bodies, and fixtures. While Box2D offers a bit more, such as joints, chains, and a number of other features, we have enough background to explore the code that makes up our example. I leave it up to the interested reader to explore the Box2D documentation and examples in more detail. Covering a physics engine in full detail would require a whole book!

# Adding Box2D to an Xcode Project

As mentioned, Box2D is written in C++; it is distributed as source code and not in any easy-to-use library. This was done to make it possible to integrate Box2D into any C-based project. However, this does leave us with a little work of actually getting it into our project and compiling it. Don't feel compelled to follow along with all of the steps in this section; feel free to use the provided sample project as a starting place for your own project.

The first step is to download the Box2D source code from: http://code.google.com/p/box2d/downloads/list. You want the file Box2D\_v2.2.1.zip. Unzip it and you should see the files, as shown in Figure 13-2.

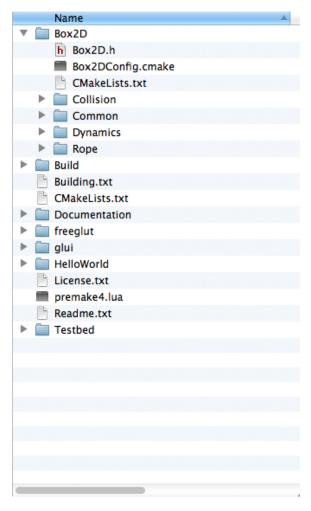


Figure 13-2. The downloaded and unzipped Box2D source code

In Figure 13-2, note the expanded directory Box2D at the top. This is the directory you want to add to your Xcode project. I did this by copying the Box2D directory into the project folder before using Xcode's "Add Files to..." feature. This makes sure the files that are added to the project stay in a folder called Box2D. This is not exactly required, but it simplifies importing and compiling the files down the road.

Once the source code is added, make sure all of the cpp files are considered "Default – C++ Source," as shown in Figure 13-3.

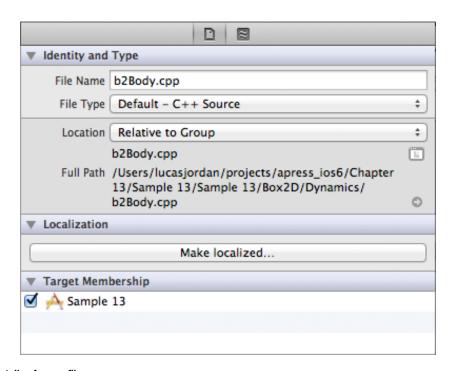


Figure 13-3. Details of a cpp file

Also, make sure that all of the cpp files are included in your main build target, as shown by the check box at the bottom of Figure 13-3. At this point, your project will not compile; you have to set your Header Search Paths to ../\*\*, as shown in Figure 13-4.

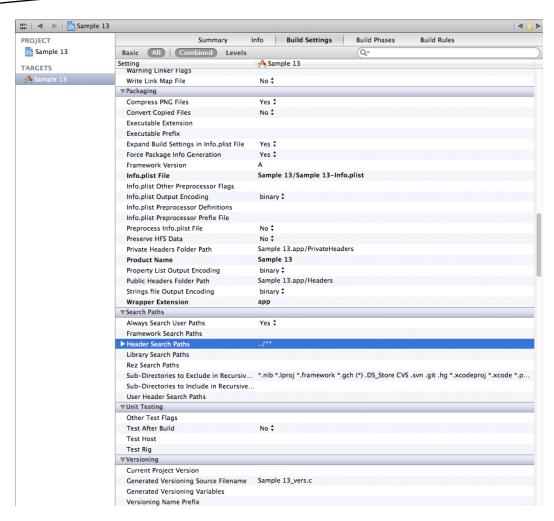


Figure 13-4. Correct Header Search Paths to Compile Box2D

At this point, your project should compile. To use the Box2D classes, you import the classes like this:

#import <Box2D/Box2D.h>

However, you will probably be importing Box2D into an Object C class, so you have to tell Xcode that it should expect mixed C++ and Objective C code. This is done by changing the type of the file to "Object-C++ Source," as shown in Figure 13-5.

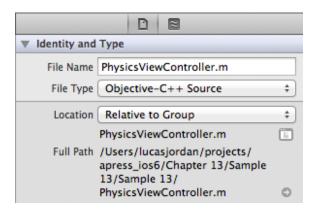


Figure 13-5. Correct type for Object C .m files that import Box2D

Now, you can actually use the Box2D classes in your project. I must warn future readers, however, that this process was cobbled together from various Googled sources that describe this process for older versions of both Xcode and Box2D. I assure you this setup will change in future versions of Xcode.

Now that you know a little about Box2D, and how to get Box2D source code working in our project, let's take a look at how we can extend our GameController class to take advantage of physics in our games.

# **Understanding the Example**

In this example, we have a bunch of different-size asteroids in our scene that bounce off each other in a physical way. From the previous description of Box2D, we know that we need to define our world. Let's jump right in and see how we do that in the class PhysicsViewController, as shown in Listing 13-1.

Listing 13-1. createPhysicsWorld (PhysicsViewController.m)

```
- (void)createPhysicsWorld {
    b2Vec2 gravity;
    gravity.Set(0.0f, 0.0f);

    world = new b2World(gravity);
    world->SetAllowSleeping(false);
    world->SetContinuousPhysics(true);
}
```

In Listing 13-1, we start by creating a b2Vec2 named gravity and set its force to 0.0f in both the X and Y directions. The struct b2Vec2 is used by Box2D for all vector data types; this includes forces, velocity, and so on. Using gravity, we create a new b2World object and store it at the variable world. World is defined in the header (not shown) for PhysicsViewController because we need to keep a reference to this object for the lifetime of our simulation. The last two method calls in world—SetAllowSleeping and SetContinuousPhysics—are just there for demonstration and not

strictly required. Feel free to change these values and see if you tell any difference in the simulation. For an example this simple, they seemed to have no effect I could discern, though I am sure they are critical to making a complex scene efficient enough to play. Let's now look at how we define our main view controller to make use of this new Box2D world.

# **Extending GameController**

Let's look at how we start to use this Box2D world created in createPhysicsWorld by seeing where it is called. We call createPhysicsWorld from the task doSetup of the class PhysicsViewController, as shown in Listing 13-2.

```
if ([super doSetup]){
    [self setGameAreaSize:CGSizeMake(1024, 768)];
    [self createPhysicsWorld];

for (int i=0;i<30;i++){
    float startY = rand()%(int)self.gameAreaSize.height;
    float startX = rand()%(int)self.gameAreaSize.width;

    CGPoint center = CGPointMake(startX, startY);

    int level = 1 + rand()%4;

    Asteroid* asteroid = [Asteroid asteroidOfLevel:level At: center];
    [self addActor: asteroid];
    }

    return YES;
}
return NO;
}</pre>
```

In Listing 13-2, we specify the game area size and create our physics world. The game area size is not considered by Box2D. Box2D does not contain the idea of a fixed boundary for the game to happen within, except for limits of a float value to represent coordinates within the world. Next, we create 30 Asteroids and position them randomly in the scene. Each Asteroid is then added with the familiar addActor: method.

You may notice at this point that we have not really done anything with Box2D except create the world object. We appear to be adding actors to a GameController, just as we did in previous chapters. The reason it looks this way is that we have done two things to enable physics, while not upsetting our framework too much. We have overridden a few of GameController's tasks in PhysicsViewController and have created a new actor type called PhysicsActor, which Asteroid now extends. These two modifications work together to enable physics. Let's start with modifications to GameController and understand how this all fits together.

#### Listing 13-3. addActor: (PhysicsViewController.m)

```
-(void)addActor:(Actor *)actor{
    if ([actor isKindOfClass:[PhysicsActor class]]){
        PhysicsActor* physicsActor = (PhysicsActor*)actor;
        b2BodyDef bodyDef = [physicsActor createBodyDef];
        b2Body* body = world->CreateBody(&bodyDef);
        b2CircleShape circle;
        circle.m p.Set(0.0f, 0.0f);
        circle.m radius = [PhysicsViewController convertDistanceToB2:[actor radius]];
        b2FixtureDef fixtureDef;
        fixtureDef.shape = &circle;
        fixtureDef.density = [physicsActor radius];
        fixtureDef.friction = 0.1f;
        fixtureDef.restitution = .8;
        body->CreateFixture(&fixtureDef);
        [physicsActor setBody:body];
    [super addActor:actor];
}
```

In Listing 13-3, we see the overridden task addActor:. In this task, we first check to see if the actor being added is a PhysicsActor. If it is, we need to do a little work to create a Box2D body within our world object so we can have our Actor participate in the physics simulation. We also need to create a fixture so the body has size and mass. Let's look at this step by step.

When creating a body in Box2D, we specify the starting values of body in a struct of type b2BodyDef. This struct specifies all of the properties of a body, as described earlier in this chapter. Since things like the location of the body are driven by the physicsActor, we ask it for the b2BodyDef by calling createBodyDef and storing the value in bodyDef. Once we have a bodyDef, we call the method CreateBody on the object world and store the result in the b2Body variable body. The task CreateBody both creates the body and adds it to the simulation. Note that we are using a method on world to create a b2Body instead of instantiating it ourselves. This is done because Box2D has very particular memory-management requirements, and it is recommended to always use the factory methods provided.

Continuing with Listing 13-3, we next create a b2CircleShape called circle. We center the circle on our body by calling Set and passing in 0.0f for both X and Y locations. We also specify the radius of the circle. Logically, we know we want the circle to be the same radius as our physicsActor, but Box2D recommends that we don't make one point equal to one unit in Box2D. In this case, we call a utility method convertDistanceToB2 to create a scaled value suitable for the Box2D coordinate system. There are four of these handy conversion methods, and we will look at them more closely in a bit.

Once we have our circle, we attach it to our body by creating a b2FixtureDef called fixtureDef. Fixtures follow the same pattern as bodies in Box2D; they are created with a struct that defines their starting values and then actually creates them by calling an appropriate factory method—in this case, CreateFixture on body.

On fixtureDef, we also specify the density, friction, and restitution. In our example, these values were set by trial and error to see what looked good. Notice, for example, that the density is based on the radius of the asteroid. This is obviously not very realistic; one would expect a bunch of asteroids to have, if not identical, similar densities if they are made out of the same stuff. But when playing with the simulation, I liked how changing the densities gave the little asteroids more bounce. Feel free to play with these values and see how it changes the simulation.

Once we have created a body and a fixture for it, we store that object in the body property of . In this way, the physicsActor has reference to its representation in the Box2D world

addActor: is call the super-implementation so that the actor is attached to the scene, as in previous chapters. The following section will explore our new type of PhysicsActor—and see how we link its Box2D body with our scene.

PhysicsActor is intended to be a super-class for any Actor that wishes to participate in

we look at the class Asteroid, we will see that we do break this encapsulation, but I thought the code was easier to understand as an example. Anyway, let's start by looking at the header of PhysicsActor, shown in Listing 13-4.

#### Listing 13-4. PhysicsActor.h

```
#import <Foundation/Foundation.h>
#import <Box2D/Box2D.h>
#import "Actor.h"
#import "PhysicsViewController.h"
@interface PhysicsActor : Actor
@property (nonatomic) b2Body* body;
-(b2BodyDef)createBodyDef;
@end
```

In Listing 13-4, we see that PhysicsActor extends Actor. It also adds a new property called body that is used to store b2Body that represents it in the Box2D world. You can also see the declaration of the task createBodyDef that was used in Listing 13-3 when adding the Actor to the scene. Let's take a quick look at the implementation of createBodyDef, shown in Listing 13-5.

#### Listing 13-5. createBodyDef (PhysicsActor.m)

```
-(b2BodyDef)createBodyDef{
    b2BodyDef bodyDef;
    bodyDef.type = b2_dynamicBody;
    bodyDef.position = [PhysicsViewController convertPointToB2:self.center];
    return bodyDef;
}
```

In Listing 13-5, we declare a new b2BodyDef and then set its type to b2\_dynamicBody so this b2Body created by this b2BodyDef will participate fully in the simulation. We also specify position by converting the Actor's center to a b2Vec2 using the task convertPointToB2. Again, this is done because we want a different scale between the Box2D and the coordinates we are using to represent our Actors in the scene. Lastly, we simply return it.

PhysicsActor really has two jobs. The first job is to provide a b2BodyDef to be used when adding the Actor to the scene. The second job is to update the properties of the Actor as the location and rotation of the corresponding b2Body moves about in the simulation. This is done in the step: task, shown in Listing 13-6.

#### Listing 13-6. step: (PhysicsActor.m)

```
-(void)step:(GameController *)controller{
    b2Vec2 position = body->GetPosition();
    CGPoint center = [PhysicsViewController convertPointToCG:position];
    [self setCenter: center];
    [self setRotation:body->GetAngle()];
}
```

In Listing 13-6, we need to change the location and rotation of the Actor based on the state of the body property. As you can see, this is pretty simple. We just convert the position of the body to a CGPoint in the GameController's coordinate system using convertPointToGC:; this new center value is assigned to the Actor. Then, we set the rotation of the Actor to the angle of the body, using GetAngle. No conversion is required, as the rotation property of Actor and the angle property of body are both in radians.

Next, let's explore the how we can extend PhysicsActor so it behaves like the asteroids in our example.

# **Extending Physics Actor**

We have the class PhysicsActor that provides basic support for an Actor that wishes to participate in the physics simulation. In this section, we will look at the class Asteroid and understand how we can modify its behavior to do what we want.

Looking back at the PhysicsActor, note that we didn't mention the starting velocities of the bodies in the simulation. Let's look at how we customize Asteroid so things start out zipping around our scene. Listing 13-7 shows how we do this.

#### Listing 13-7. createBodyDef (Asteroid.m)

```
-(b2BodyDef)createBodyDef{
   b2BodyDef bodyDef = [super createBodyDef];
   bodyDef.linearVelocity.Set(-20+rand()%40, -20+rand()%40);
   return bodyDef;
}
```

In Listing 13-7, we call PhysicsActor's implementation of createBodyDef, since that does a lot of the work we would want to do here anyway, such as setting the starting position. We then simply set the linear velocity to be some random value. In this example, each X and Y component is from -20 to 20. In this way, all newly added Asteroids are given an initial velocity.

<sup>1</sup> Listing 13-8 shows how we update the

```
if (self.center.x < -self.radius){</pre>
        CGPoint center = CGPointMake(controller.gameAreaSize.width+self.radius, self.center.y);
        self.body->SetTransform([PhysicsViewController convertPointToB2: center],
    } else if (self.center.x > controller.gameAreaSize.width + self.radius){
        CGPoint center = CGPointMake(-self.radius, self.center.y);
        self.body->SetTransform([PhysicsViewController convertPointToB2: center],
self.body->GetAngle());
    if (self.center.y < -self.radius){</pre>
        CGPoint center = CGPointMake(self.center.x, controller.gameAreaSize.height + self.radius);
        self.body->SetTransform([PhysicsViewController convertPointToB2: center],
self.body->GetAngle());
    } else if (self.center.y > controller.gameAreaSize.height + self.radius){
        CGPoint center = CGPointMake(self.center.x, -self.radius);
        self.body->SetTransform([PhysicsViewController convertPointToB2: center],
self.body->GetAngle());
    }
    [super step: controller];
}
```

In Listing 13-8, for each axis X and Y, we check to see if the Asteroid has gone outside of the screen by more than radius points. If so, we simply specify a new center value on the other side of the screen. We then convert this new center into a value suitable for Box2D, and call the SetTransform

<sup>&</sup>lt;sup>1</sup> Infinite up to the maximum value of a float—which, I guess, is not really all that infinite.

method on the body property. Note that we also pass in the current angle of the body, since SetTransform requires that value to change its location.

This is all there is to customizing Asteroid to make it behave the way we want. In this example, we don't remove any Actors from the scene, but that is something people very well might want to do. The next section covers a little bit about cleaning up.

### **A Little Cleanup**

Though we don't remove any Actors in this example, let's take a look at how we would do that. Listing 13-9 shows how.

Listing 13-9. removeActor: (PhysicsViewController.m)

```
-(void)removeActor:(Actor *)actor{
    if ([actor isKindOfClass:[PhysicsActor class]]){
        PhysicsActor* physicsActor = (PhysicsActor*)actor;
        b2Body* body = [physicsActor body];
        world->DestroyBody(body);
    }
    [super removeActor:actor];
}
```

In Listing 13-9, we see the task removeActor:, which is called anytime we want to remove an Actor from the scene. As with the task addActor: from Listing 13-3, we first check to see if the Actor is a PhysicsActor. If so, we get a reference to the body property and call DestroyBody to remove it from our Box2D world object. In this way, we keep the Actors in our scene synchronized with the bodies in the simulation.

# **Summary**

In this chapter we explored some of the core features of Box2D, a game physics engine. We learned how to create a world and simulate the motion of bodies in that world. We also looked at how to extend our GameController class to enable physics within our existing game framework. We looked at the class PhysicsActor and a new version of Asteroid to see what changes are required to Actors that participate in the physics simulation.

# Designing and Creating Graphics

In this appendix, we'll cover three main topics: designing graphics, creating graphics, and some open-source tools to use in doing so.

When creating a video game, a lot of the work is put into creating the graphics used in the game. In this appendix, we will be considering 2D games. These graphics will be images for the actors in the game, backgrounds, buttons, and other decorations. The images are a large part of the game: they are the first thing people see, and they can dictate whether people are going to download the game. Images are what grab people's attention. It is the image of Link or Mario that people remember, not the collision detection algorithm. It is not to say that there aren't popular games with simple graphics—because there definitely are. But even creators of successful games with simple graphics spend a lot of time making sure their art conforms to a unified design goal.

In addition to concerns of style, a game designer must also consider what is required to create images suitable for building a game. We must consider the size of the final images, as well as how the images are organized. Should we use separate images for everything, or can we create a composite image for backgrounds? How do we organize our images so we can easily make changes? Do we have a budget for how many megabytes of images we can include? These are just a couple of the questions I will be addressing in this appendix.

The last part of this appendix will be a quick review of some of the great open-source tools available to a game designer. These tools are not only important for small game developers but also were critical in the writing of this book.

#### The Art in Video Games

Before a video game is created, someone has an idea about how the game is played and what it looks like. That initial vision may or may not make it into the final release. In any case, it is ideal

to have a single person, or group of people, responsible for shaping the art of the game so it has a consistent style. Once a game has art direction, work will commence on building the assets for the game. As the game comes together, other pieces of artwork will be created to support the game, such as a website or an advertisement. These other pieces of work should be in the same visual style. In this section, we will do a quick review of what art style is and how that shapes user expectations.

## **Style in Video Games**

The style of a video game refers to all of the choices the designers and artists made to create the art in a game, and how that art fits together. The style of a game is no different from style in other

teriyaki to be drawn in a typeface that looks like it came from the Far East, perhaps like the A-1.

# ナドドー ナダドー

"Teriyaki" rendered in a Far Eastern style

A-1 shows a word rendered in a style that matches the expectations of the users of teriyaki

genre, users may have no expectations at all about the style. If you are making a game about knights and castles, the user will welcome a style that looks medieval. In any case, it is important that the style of the art be consistent throughout the game.

Having a consistent style does not require the art to be overly elaborate. The goal is simply to make the art appear to be created by a single hand, as the example in Figure A-2 shows.



Figure A-2. The Exterminator, by SUMO Productions. © 2011 Table Mountain Church

On the left side of the figure, we see the Welcome screen for the game. Phil Hassey developed this simple game with a number of teens from Table Mountain Church (who owns the copyright). Because this game was a collaboration between Phil and a number of young people without years of graphics or game design experience, they adopted a simple hand-drawn style. This choice allowed several people with limited drawing skills to contribute art to the game. In order to maintain the style throughout the game, we can see that four buttons, in the corners of the left screen, are also drawn by hand. The bottom right button is a Facebook button. By making their own Facebook button, they maintain a consistent style. If they used one of the stock Facebook buttons, it would clash with the entire visual experience. We should also consider a game that does not have a consistent style, as shown in Figure A-3.



Figure A-3. Colors and Shapes. © ClayWare Games. Background by txd on Flickr

In Figure A-3, we see an old game I created for the original iPhone, called Colors and Shapes. On the left is the Welcome screen, where a child or parent can pick one of three activities. For each activity, the player is directed by voice and text to perform a number of simple tasks involving colored balloons. The 3D text and the balloons were rendered with Blender 3D, and I think are pretty consistent. They both use strong primary colors and have a sense of depth—not a perfect match, but pretty close. However, I don't think the background was a good choice. While it is a very nice photo, it doesn't match the balloons at all, and is visually distracting.

**Tip** Creative Commons has a license option by which all you have to do to use a creative work in your game is to include a byline in your credits. Flickr allows you to search for images that are published with this license. We found the background image for Colors and Shapes this way.

### **Branding and Perception**

As mentioned, the art for a game is more than just images moving about the screen. People remember the art and associate it with the game. Figure A-4 shows an advertisement created for the game Space Attack!!



Figure A-4. Space Attack!! ad

This flyer was handed out at a convention. When I made this flyer, I was in the middle of updating the art for the game, so I decided to use the new art for the flyer, even though the game had not been updated in the App Store with the new art. So when people downloaded the game, they downloaded the version with the old art, as shown in Figure A-5.



Figure A-5. Space Attack!!, old art

Because this art did not match the art on the flyer, and the art on the game is considerably worse, people felt ripped off, even though the game was free! I failed to appreciate my users' expectations, and I paid for it with some negative reviews. This could have easily been avoided by either getting the game updated in time for the conference or using the older graphics in the ad.

We have taken a quick look at what style in a video game is and why it is important. Let's now shift our focus to the more practical matters of creating the image files. After that, we will review a number of excellent tools for creating 2D art.

# **Creating the Images Files**

Regardless of the art direction of your game, at the end of the day you will need a number of image files, at a specific size, to actually implement your game. We are going to first explore some naming conventions that will help you manage the case where you want different images for different devices. Then we will review the images required by all iOS applications—things like icons and launch screens. We will conclude this section with a discussion of how to pick appropriate image sizes.

# **Naming Conventions**

At the time of this writing, there are three different screen resolutions that must be accounted for when creating an application. It is very common to want to use different images based on which one of the three resolutions the application is running on. To support these resolutions, a naming convention was created to facilitate this in a mostly painless way. The idea is that by naming the images in a particular way, a different image will be loaded depending on the device. So there is no need to test which device you are using in your code. The pattern for this naming convention is

Basename[@2x][~iphone|~pad].extension

So, basename can be whatever you want—for example, "background". You can then optionally append an @2x to indicate that image is for a high-resolution display, like the retina display of the iPhone 4. After indicating whether the image is a high-resolution version, you can specify a device class, either iPhone or iPad. Lastly, you add the extension as you normally would. Table A-1 shows how this naming convention works for an image that would otherwise be called background.png.

Table A-1. Naming Convention for a Background Image in Portrait

Device	Filename	Resolution of image in Pixels
iPhone 3GS, iPod Touch 3rd Generation	background~iphone.png	320x480
iPhone 4, iPod Touch 4th Generation	background@2x~iphone.png	640x960
iPad 1, iPad 2, iPad mini	background~ipad.png	1024x768
iPad 3 <sup>rd</sup> and 4 <sup>th</sup> Generation	background@2x~ipad.png	2048x1536

In Table A-1, we see in the first column a set of devices for each row. In order to provide a full-screen, portrait background image for each set of devices, we name our background file as shown in the second column. The right-most column shows the resolution of the image in pixels. In the sample code for this appendix, the background image of the application is configured to support the devices available in the emulator. I have changed each background image to include text indicating which file is being loaded. Figure A-6 shows the different devices with the different images.





A different background for each device

for this application.

#### Listing A-1. ViewController.m (viewDidLoad)

```
- (void)viewDidLoad
{
    [super viewDidLoad];

    UIImage* image = [UIImage imageNamed:@"background"];
    [backgroundImageView setImage:image];
}
```

In Listing A-1, we see the viewDidLoad task of the class ViewController. We load a UIImage by calling imageNamed and passing in just the base name. What is returned is the image appropriate for the specific devices based on the filenames of the images included in the project. In this case, we have the same filenames as those shown in Table A-1.

Now let's take a look at how we specify other support images based on device type, such as icons and splash screens.

# **Support Images**

Every iOS application has a number of images that must accompany the application. At the very least, an icon must be specified. Optionally, an image can be specified that is displayed as the application is launched. It is generally a good idea to provide a launch image, especially if your application takes a moment to start. Specifying which image to use is very simple: Xcode provides places where images can be dragged to specify icons and launch images, as shown in Figures A-7 and A-8.


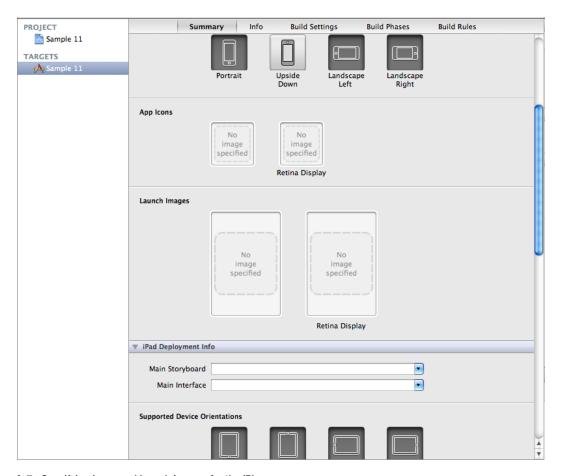


Figure A-7. Specifying icons and launch images for the iPhone

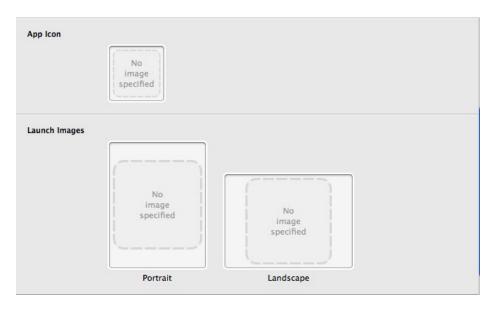

Specifying icons and launch images for the iPad

A-7, we see four places where images can be dragged for the iPhone version of the A-8 shows the iPad version. Note that, for the iPad, a landscape and portrait A-7 and A-8,

application. You are allowed to specify a different image for the retina display, so you can provide a high-resolution version. To specify an image, simply drag the image into one of these places. The image can either be part of the project already, or can be some other image. Xcode will check to make sure the image you are dragging into one of these boxes is appropriate for that role. If it is not, you will be prompted with an error dialog, like the one shown in Figure A-9.

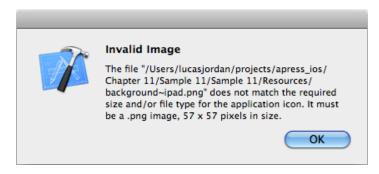


Figure A-9. Inappropriate image specified as an icon

Figure A-9 shows an error dialog that is triggered when an image of an incorrect size is dragged into the application icon spot in Xcode. Even though a simple drag-and-drop interface is provided, it can actually be a little tricky to get all of the images formatted correctly. This is tricky because there is incorrect information about image sizes on most websites, including Apple's. I hope that by the time you are reading this, Apple has fixed this problem on its site. Table A-2 list the correct image sizes for each support image.

Table A-2. Support Image Sizes

Device	lcon	Launch (Portrait)	Launch (Landscape)
iPhone 3GS, iPod Touch 3	57x57	320x480	NA
iPhone 4, iPod Touch 4	114x114	640x960	NA
iPad1 + 2, iPad min	72x72	768x1024	1024x768
iPad 3 <sup>rd</sup> /4 <sup>th</sup> Generation	144x144	2048x1536	1536x2048

Once you create the files in the correct size, you can drag them into the appropriate spots on Xcode. Xcode will automatically copy the files into the project directory (if required) and add the files to the project. Older versions of iOS relied on a naming convention to specify which file was which. This was pretty buggy and hard to maintain. The newer versions of iOS and Xcode allow you to name your files anything you want. Listing A-2 shows how this information is represented in our info.plist file.

Listing A-2. Sample A-Info.plist

In Listing A-2, we see that the filenames are simply stored in an array. The names of files are the names I gave them, and they can be anything—they are not names assigned by Xcode.

We have looked at two examples of how we can have a single logical image, but with a few different versions of it at different resolutions. The following section talks briefly about how best to create the same image at different resolutions.

#### **Mutli-Resolution Images**

There are several cases where an application has two different images files, at different resolutions, that are being used as the same logical image in the application. This is done so that the application can provide the best user experience based on which device the user has. The ideal situation for any application is to display images at a 1:1 ratio (number of pixels in the image to the number of pixels on the screen). We want to avoid scaling wherever possible, because the scaling produces lower-quality images and is an extra and potentially expensive operation.

Apple computers seem to really excel at scaling images. If you have the opportunity, try playing an old-fashioned DVD (not a high-definition video) on one of the new 27–inch iMacs. When played in full-screen mode, the images are scaled up a lot, yet still look excellent. Whatever this magic scaling algorithm is, it seems to be included in iOS devices as well. As a result, it is tempting to simply use

from a 3D representation or from vector art—it makes sense to render each image twice, once for high resolution and then again for low resolution.

#### **A Multi-Resolution Example**

Let's look at an example. Say you are creating an icon for your application with Adobe Illustrator (or similar application). If you create a new file that is 57 pt x 57 pt, you can export this file at 72 dpi and get an image that is 57 pixels x 57 pixels—perfect for the low-res iPhone icon. You can then export this image again at 144 dpi and get an image that is 114 pixels x 114 pixels, which is perfect for the retina version of the iPhone. To make the icon for the iPad, you can export again at 92 dpi, making an image that is 72 pixels x 72 pixels. Figure A-10 shows the difference between rendering at different scales and scaling down.



Figure A-10. Rendering verses scaling

In Figure A-10, we see three different versions of an icon. In the middle is a vector presentation, nice and smooth. On the left is the image produced by Illustrator when asked to export a 57x57 version of the image in the middle. The image looks pixelated because it is scaled up so we can see the quality of the rendering. The image on the right is the result of Illustrator creating an 114x114 image and then having GIMP scale it down to 57x57 (Sinc Lanczos3). Even this simple two-step process introduces noise. Notice the lighter pixels around the dot of the *i* on the right. Maybe in this case it doesn't matter too much, but it seems to me that if you are going to spend the time (and money) to create high-quality art, it is worth going the extra mile and preventing this type of issue.

Keeping with the ideas presented here about quality and rendering, the following section walks you through an example of how to select the final image size for an application.

#### **Creating Final Assets**

We have taken a look at how to represent images with multiple resolutions and why that is important. But when it comes to game art, we still have not answered the question, "How big should my images be?" In this section, we will take an example game that runs on both the iPad and both versions of the iPhone, and figure out the best sizes for images used in that game. We will be using the game from Chapter 3, Coin Sorter.

Because we are working with three possible image sizes—one for the iPad and two for iPhone—we should look at the relative sizes (in pixels) of these screens and get sense of the differences in size. Figure A-11 shows the different screen sizes.


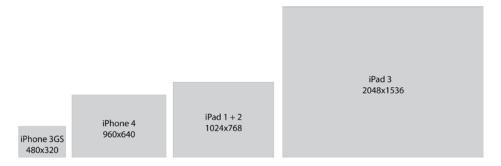



Figure A-11. Relative resolution of the different screens

In Figure A-11, we see a rectangle representing the screen size for each of the iOS devices on the market. The left-most image is the size of the iPhone 3GS (and its two predecessors). The second rectangle from the left shows the size of the iPhone 4, which has four times as many pixels as the iPhone 3GS. The third rectangle represents the size, in pixels, of the iPad 1 and iPad 2. Note that the iPhone 4 has almost as many pixels as the iPad 1 and iPad 2. The rectangle all the way on the right is the resolution for the iPad 3rd Generation. Let's take a look at how these different sizes affect our decisions when it comes to laying out our game.

#### **Screen Real Estate**

Though we have three different screen sizes in terms of pixels, we have only two different aspect ratios. The aspect ratio of the two iPhones is the same at 2:3, while the aspect ratio of the iPad is 3:4. Working with these differences, we want to figure out how to lay out our applications to make the best use of the screen space. Let's start by looking at the layout of the game from Chapter 3, as shown in Figure A-12.





Coin Sorter on iPhone (retina) and iPad

A-12, we see on the left the game running on the iPhone in landscape, and on the right we see the game running on the iPad in landscape. In both cases, we use the game area on the right surrounded by a gray border. Because the game area is square, we have to figure out only one dimension, but we still have to figure out the best sizes for our coin images based on how much space the game area takes up. Figure A-13 shows the size of these two areas and how it relates to the size of the coins.

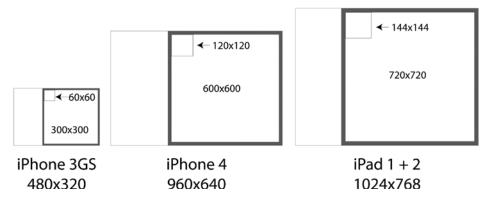


Figure A-13. Relative size of game area and coin images in pixels

In Figure A-13, we see the screen size of our three devices. For the two iPhone versions, the white game areas with the thick gray borders are the same size in terms of points, 300x300. Of course, the iPhone 4 version is 600x600 pixels versus the 300x300 pixels of the iPhone 3GS, but because we are concerned with finding the best size for our images, we are concerned with pixels and not points. The size of the game area on the right for the iPad 1 and iPad 2 is 720 pixels (and points). So, to calculate the size of each coin image, we simply divide by 5. We get 60x60 for the 3GS, 120x120 for the iPhone 4, and 144x144 for the iPads. Figure A-14 shows one of the coin images in all three sizes.



Figure A-14. Coin in three different sizes

In Figure A-14, we see three different versions of the file coin\_circle0029. By providing these different resolutions, we have ensured that our images get rendered at a 1:1 ratio for the number of pixels in the image versus the number of pixels on the screen. This assures we are doing our part to render these images as best we can. Next, let's take a look at some of the tools used to create graphic assets.

#### **Tools**

The following is a short description of three open source graphics tools that can be used to create compelling graphic assets. These are the tools I have used to create the majority of the art files for this book. Not only are these tools open source but they run on Windows, OS X, Linux, and probably other platforms as well.

#### **GIMP**

The GNU Image Manipulation Program (or GIMP) is an open-source image editing application. It provides Adobe Photoshop-like functionality with the low, low price of free. During game development, it is necessary to have an image-manipulation program for many tasks. Figure A-15 shows an example of the GIMP.

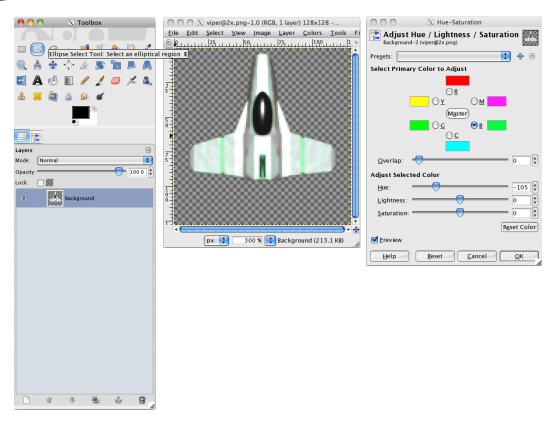


Figure A-15. Adjusting the color of a spaceship in GIMP

In Figure A-15, we see our spaceship from previous chapters open in GIMP. GIMP allows you to adjust the color of an image to make variations of it. In Figure A-15, we started with a ship that had blue highlights and have converted them to green, perhaps for a multi-player scenario.

With GIMP (www.gimp.org) you can:

- View images
- Crop images
- Resize images
- Adjustment colors
- Combine images
- Fine-tune images
- Perform the other thousand image-related tasks in game development

#### **Blender 3D**

Blender 3D is a 3D modeling tool designed for creating 3D animations and assisting in 3D game development. For 2D game development, Blender provides a great way to create art assets that are very consistent. I personally can't draw very well, but I have been able to learn how to "draw" objects in Blender and let it do the hard work of applying lighting, shading, reflections, and the other cool effects you get from a ray-traced imaged. Figure A-16 shows Blender's interface.

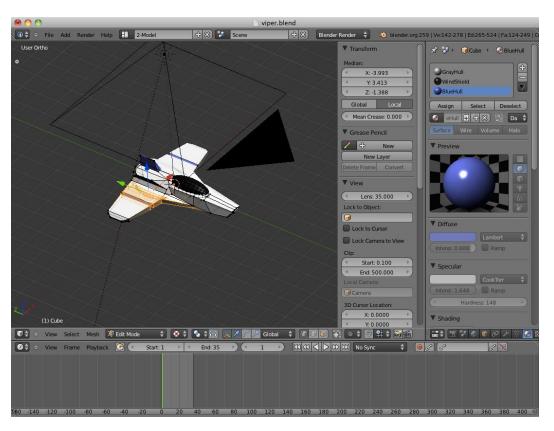


Figure A-16. Blender 3D

In Figure A-16, we see the UI for Blender. I will be honest: there is a lot to learn about Blender. But it is very rewarding to master each new technique with this application. The folks who make Blender recently revamped the entire application, making it easier to use. If you tried Blender in the past and got frustrated with it, give it another shot. It is now a lot easier to use.

With Blender (www.blender.org) you can:

- 1. Create 2D images to be used as actors in game
- 2. Pre-render high-quality movies for cut scenes

- 3. Render high-quality background images
- 4. Render sequences of image to created animated actors
- 5. Create isometric tile sets

#### Inkscape

Inkscape is a vector drawing application. Although most games won't do a lot of vector drawing at runtime, vector editing applications are very good at doing WYSIWYG layout. For laying out all of the great art you created with GIMP and Blender, Inkscape can't be beat. Figure A-17 shows the Inkscape application.

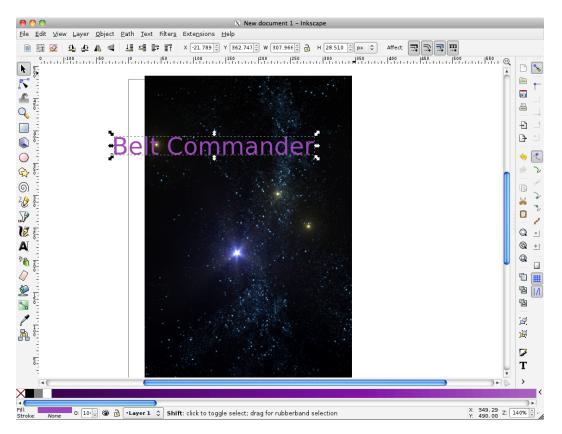


Figure A-17. Inkscape

The figure shows my early layout work on the Welcome screen for the application Belt Commander. As you can see, I have imported the star field image used throughout this book and am starting to add the title text.

With Inkscape (http://inkscape.org) you can:

- Create text images
- 2. Lay out images and text relative to each other
- 3. Create Welcome screens, Helps screens, and other static content
- 4. Build wireframes and prototypes

#### **Summary**

We have reviewed some simple concepts regarding style in our games. This appendix highlighted the importance of consistent style by showing examples where style was maintained and examples where it was not. We continued our discussion of graphics in our application by showing how to add some basic support images to your application, including an icon and launch screen. We discussed how to determine the correct size for final art assets. We discussed why we should first lay out our game and then calculate the size that each item will be. Lastly, we reviewed three open-source applications that are very useful for creating content for your game.

## Index

A	readFromDefaults and
	writeToDeafaults, 253
Abstracted UI, 107	saucer button, 255
actors, 108-110, 112, 119-120	setGameParameters, 254
asteroid 02, 112-114	purchase overview, 244–245
controlling actors, 108–109	auto-renewing subscriptions, 245
implementation, 109	Consumable, 245
on screen, 114–119	free subscriptions, 245
Ullmage view, 120	Nonconsumable, 244
UIView, 119	nonrenewing subscriptions, 245
viper02, 110	SKPaymentQueue, 256
Interface builder, 114	types, 244
Actors	Archiving and unarchiving, 62
asteroid, 112	Audio
behaviors, 154-158	AVAudioplayer, 270
ImageRepresentation, 147, 149, 150–152	behavior, 260
correcting image, 150-151	drivern, 270–271
delegate tasks, 149	game in, 264–265
powerup, 149	GameController setup, 265
Ullmage view, 151-152	interrupting, 261
updating view, 152-154	ios devices, 260
implementation, 144-145, 147	silent switch, 260
powerup, 145–146	
random offscreen, 147	■B
power up, 142–144	
spaceship, 110	Behaviors, 154
Animations, 72	ExpireAfterTime, 157–158
core animation, 90	linear motion, 154–156
fade effect, 75	power-ups, 154
fade transition, 74–75	Belt Commander, 243, 273. See In–app purchasae
flip, 72–73	add Actor, 293–294
stopAnimation, 89	applyGameLogic, 292–293
UIView static, 72	Asteroids, 301–303
updateCoinViews, 95	BeltCommanderController, 288–294, 296,
Apple App Store, 243. See In-app purchase	298, 301, 303–304
existing purchases, 253-255	classes
GameParameters, 253	actor, 285–287

Belt Commander (cont.)	C
behavior, 287	U
GameController, 284-287	CABasicAnimation, 92
Representation, 287	CADisplayLink/NSRunLoop
Collision Detection, 294–296	frameinterval, 106
doNewGame, 291	scenarios, 106
game recap, 274–279, 281	Characters, 131
action part, 274	behaviors, 131
application flow, 277	game engine, 131
game over, 276	image actor, 131
launching application, 278–279	power-up actor, 142-144
opening screen, 274	Coin sorter
Pause button, 275	CoinsController, 44
view navigation, 281-284	CoinsControllerDelegate, 53
XIB files, 279–281	Controller XIB file, 45
handling input, 292	Controller_iPhone.xib, 45
heads-up display, 296	decodeInt, ForKey, 61
implement actors, 298	encodeInt, ForKey, 61
mid-game, 288	Life Cycle, 37
Powerup class, 304	NSCoding protocol, 62
Saucer class, 303	NSKeyedUnarchiver, 61
setup, 290	NSStrings, 57
start, 289	NSUserDefaults, 61
title graphic, 273	preserving, 61–63
Viper class, 298	archiving and unarchiving, 62-63
Blender 3D, 337	implementing life cycle, 63
Box2D, 305-306	initialization life cycle, 62
asteroid motion, 306	reusable component, 55
bodies, 308	Score objects, 59
cpp file, 311	view, 37-43, 46-47, 55
createBodyDef, 315	button, 40
destroybody, 319	coinsorter application flow, 38
extension of Physics Actor class, 317	DidLoad task, 47
fixture, 309	high score, 42
fixtureDef, 316	launch image and loading view, 39
gamecontroller, 314-315	progress, 41
addactor, 315	role, 39
doSetup, 314	Ullmage, 39
googled sources, 313	UIViewControllers, 55
header search path, 312	UIViews, 46
physics actor, 316	welcome view, 43
PhysicsViewController, 313	Coin sorter game, 76
unzipped source code, 310	CoinController, 76
world, 307	continuegame, 81
Xcode project into, 310	findmatchingrows, 86
, ,	implementation, 78–79

initialization, 79–80	application loop, 98
interpretation, 87–90	CADisplayLink/NSRunLoop, 105
life cycle of, 76–77	simple movement
model game, 83-87	implementation, 101
randomizerows, 87	rotating effect, 125
starting new task, 80-81	Spaceship movement, 102
task swap, 86	user tap, 104
UIView initialization, 81	tumbling effect, 122-125
CoinView, 89	•
CommitAnimations, 75	G
Core animation, 90	
frame work, 90	Game
switching locations, 90-95	Coin Sorter life cycle, 77
-	CoinsController, 69
D	input driven, 67
	Game center, 221
Delegate, 52	authentication, 229
declare coinscontroller, 52	awarding achievement, 232
highscorecontroller, 55, 57, 59	enabling game, 228
highscore class, 57	GameKit, 223
implementation and layout, 55–57	iTunes Connect, 223–228
score class, 59–61	bundle identifier, 225
implementing task, 53–54	configure button, 226
Designing and creating graphics, 321. See	create App ID, 224
Video games	create/edit leaderboard, 227
image files, 327, 329, 332–333	edit achievement, 228
final assets creation, 333	leaderboard scores, 230
multi-resolutions, 332	RootViewController.m, 229
naming convention, 327	Game engine, 131
Xcode images, 329	actor class, 138
Inkscape application, 338–339	actor implementation, 140
overview of, 321	CADisplayLink call, 134
tools, 335, 337	dosetup, 133
Blender 3D, 337–338	GameController, 132
GIMP, 335–336	updateScene, 135–138
3D modeling tool, 337. See Blender 3D	doAddActors, 135
	removing actors, 136
■E	sorting actors, 137
Event-driven game	UIView, 138
animation, 72	Gestures and movements, 185, 213. See
managing game state, 72	Interpreting device movements
managing game state, 72	iOS, 185
■ F	long press gestures, 207–210
	bullet adding, 210
Frame-by-Frame Game, 97	LongPressController.h, 208
abstracted UI, 107	LongPressController.m (doSteup), 209
animation, 98	response, 209
animations and actor state, 122	spaceship fires, 207

Gestures and movements (cont.)	different devices, 327
pan/drag gestures, 201-203	patterns, 327
PanGestureController, 201	ViewController.m (viewDidLoad), 328
PanGestureController.m, 202	final assets creation
pinch gestures, 198–200	coin images, 335
respond, 203	coin sorter, 334
UIPanGestureRecognizer, 201	different screen sizes, 333
pinch gestures	pixels, 334
animationPaused property, 200	inappropriate image, 330
doSetup task, 199	info.plist file, 331
implementation, 199	iPad, 330
PinchGestureController.h, 198	iPhone, 329
saucer, 198	sizes, 331
rotation gestures, 204–206	multi-resolutions, 332
doSetup task, 205	naming convention, 327–328
rotationGesture task, 206	background image, 327
RotationGestureController, 204	different devices, 327
RotationGestureController, 204 RotationGestureController.h, 205	patterns, 327
•	•
swipe gesture, 212	ViewController.m (viewDidLoad), 328
comet creation, 212	rendering <i>versus</i> scaling, 332
swipeGesture task, 212	Xcode images, 329–331
SwipeGestureController.m (doSetup), 212	In-app purchases
tap gestures, 193–196	Belt Commander, 246
power-ups activation, 193, 195	iTunes Connect, 245
TapGestureController.h, 194	new app, 247
TapGestureController.m, 194	test user, 248
TemporaryBehavior class, 196	class and code, 248, 250
touch input, 186, 188–191	creation, 248
actors, 190	IDs, 250
basics, 186	workflow, 250
event code, 188	enable and creation, 245-248
TouchEventsController, 190	implementation, 251
UIResponder, 189	overview, 243
UITapGestureRecognizer, 191	Inkscape application, 338
UIView, 186	Input-driven game, 67
UIGestureRecognizer, 189, 191–192	core graphics, 69-71
GNU Image Manipulation Program (GIMP), 335	definition, 69
	framework, 70
H	types, 71
	exploration of components, 68–69
Heads-up display (HUD), 296	nested UIView instance, 68
=1 1 1/	UIView frame, 68-69
■I, J, K	life cycle of, 67
IBOutlet, 47	Interpreting device movements
Image files	accelerometer data, 217–218
Adobe Illustrator, 332	AccelerometerController.h, 218
background image, 327	AccelerometerController.m (doSetup), 218
Sacrigicalia illiago, ozi	multiple screen, 217

motion events (shaking), 214-216	Xcode project, 2–4
asteroids breaking, 214	creation of, 2
first responder related tasks, 215	file structure, 4
motionBegan, 216	naming, 3
ShakeController.m (doSetup), 215	templates, 3
updateScene, 215	' '
IOS Application	<b>S</b>
initialization, 18–20	
UIApplicationMain, 19	Social media, 221
universal application, 16–18	facebook intergration, 236-237, 239
universal application, 10 10	authentication, 237–239
=1	creation of, 236-237
L .	making posts, 239-241
Life Cycle, coin sorter, 37	twitter intergration, 234–236
• ,	Sound, 259
M	effect, 268
	implementation, 261–262
Model View Controller (MVC), 20	audio changes, 262–264
	audio set up, 261–262
■N, O	play, 259
-	Swipe gesture
NSMutableArray, 85	comet creation, 211
NSString, 73	swipeGesture task, 211
= D O	•
■P, Q	SwipeGestureController.m (doSetup), 212
Project's Structure, coin sorter, 43	■ <b>T</b>
action touch up, 50	
delegate, 52. See Delegate	TapRecognizer, 88
gamecontroller.m, 48	3, 3, 3, 3, 3, 3, 3, 3, 3, 3, 3, 3, 3, 3
IBOutlet, 47	U
multiple view configuring, 45–47	UIGestureRecognizer, 88
gamecontroller iphone.xib, 46	UIView, 68
gamecontroller.h, 46–47	
screen, 47–48	■V, W
user action, 48–52	•
Xcode, 43	Vector Actors and Particles, 159
- D	action, 160
R	Example02Controller, 161
Reusable Component, 55	shield, 160
Rock Paper Scissors, 1, 21	updateScene, 161
customization, 5–8	classes
adding new view, 6	actor classes, 163–165
drag files, 7	Bullet, 165, 170
	Core Graphics, 159
MainStroyboard, 5	Core Graphics via VectorRepresentation,
navigation, 7	166, 168–170
UlView, 8	FollowActor class, 164
Xcode view, 5	HealthBar class, 169

Vector Actors and Particles (cont.) HealthBar object, 164	styles, 322-325 colors and shapes, 324
Saucer class, 163	Exterminator, 323
particle systems	Far Eastern style, 322
Asteroid class, 174 AsteroidRepresentationDelegate, 176 Comet and Asteroid actor, 172 doHit task, 177 Example03Controller, 173 Particle class, 178 saucers, bullets, shields and health bars, 160–161, 163 tapGesture, 173 UIView, 166 Vector-based creation, 179 VectorActorView, 168	X, Y, Z  Xcode project, 11 device type behavior customization, 23–25 Interface Builder, 26 iOS application, 18–19 initialization, 18 UIApplicationMain, 19 new IBOutlets, creation of, 32–34 orientation changes, response to, 34 single view application creation, 13 UI layout, 26 UIViewController, 20–21, 24, 31
Comet details, 179 Comet.h, 180 Comet.m (comet), 181 Comet.m (drawActor WithContect InRect), 181 Comet.m (step), 183 Video games branding and perception, 325–326 advertisement, 325 flyer, 325 pieces, 322	Model View Controller (MVC), 20 RockPaperScissorsController, 21 subclass, 24 XIB, addition of, 31 universal application, 12, 16–17 customization, 16 iOS application, 18–19 status bar, 17 XIB File addition of, 31 RockPaperScissors, 31 UI elements addition to, 29

# Beginning iOS6 Games Development



Lucas Jordan

Apress<sup>\*</sup>

#### **Beginning iOS6 Games Development**

Copyright @ 2012 by Lucas Jordan

This work is subject to copyright. All rights are reserved by the Publisher, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilms or in any other physical way, and transmission or information storage and retrieval, electronic adaptation, computer software, or by similar or dissimilar methodology now known or hereafter developed. Exempted from this legal reservation are brief excerpts in connection with reviews or scholarly analysis or material supplied specifically for the purpose of being entered and executed on a computer system, for exclusive use by the purchaser of the work. Duplication of this publication or parts thereof is permitted only under the provisions of the Copyright Law of the Publisher's location, in its current version, and permission for use must always be obtained from Springer. Permissions for use may be obtained through RightsLink at the Copyright Clearance Center. Violations are liable to prosecution under the respective Copyright Law.

ISBN-13 (pbk): 978-1-4302-4422-6

13 (electronic): 978-1-4302-4423-3

President and Publisher: Paul Manning

Lead Editor: Steve Anglin

Developmental Editor: Tom Welsh Technical Reviewer: Tony Hillerson

Editorial Board: Steve Anglin, Ewan Buckingham, Gary Cornell, Louise Corrigan, Morgan Ertel, Jonathan Gennick, Jonathan Hassell, Robert Hutchinson, Michelle Lowman, James Markham, Matthew Moodie, Jeff Olson, Jeffrey Pepper, Douglas Pundick, Ben Renow-Clarke, Dominic Shakeshaft,

Gwenan Spearing, Matt Wade, Tom Welsh

Coordinating Editor: Katie Sullivan Copy Editor: Carole Berglie Compositor: SPi Global Indexer: SPi Global

Artist: SPi Global

Cover Designer: Anna Ishchenko

Distributed to the book trade worldwide by Springer Science+Business Media New York, 233 Spring Street, 6th Floor, New York, NY 10013. Phone 1-800-SPRINGER, fax (201) 348-4505, e-mail orders-ny@springer-sbm.com, or visit www.springeronline.com.

For information on translations, please e-mail rights@apress.com, or visit www.apress.com.

Apress and friends of ED books may be purchased in bulk for academic, corporate, or promotional use. eBook versions and licenses are also available for most titles. For more information, reference our Special Bulk Sales–eBook Licensing web page at <a href="https://www.apress.com/bulk-sales">www.apress.com/bulk-sales</a>.

Any source code or other supplementary materials referenced by the author in this text is available to readers at www.apress.com. For detailed information about how to locate your book's source code, go to www.apress.com/source-code.



### **Contents**

About the Author	
About the Technical Reviewer	
Acknowledgments	
■ Chapter 1: A Simple First Game1 Cr	eating a Project in Xcode: Sample 1
	2
A Project's File Structure	4
Customizing Your Project	5
Arranging Xcode Views to Make Life Easier	5
Adding a New View	6
Simple Navigation.	7
Adding the Rock, Paper, Scissors View	7
Customizing a UIView	8
Summary	9
■Chapter 2: Setting up Your Game Project	11 Creating Your Game Project
	13
Customizing a Universal Application	16
How an iOS Application Initializes	18

Understanding UIViewControllers	<mark>20</mark>
Customizing Behavior Based on Device Type	23
Graphically Designing Your UI in a Universal Way	<mark>26</mark>
A First Look at Interface Builder	26
Adding UI Elements to an XIB File	29
Responding to Changes in Orientation	34
Summary	35
Chapter 3: Explore the Game Application Life Cycle	37
Understanding the Views in a Game	37
Exploring the Role Each View Plays	39
Understanding the Project's Structure	43
Configuring an Application for Multiple Views	45
Changing Views in Response to User Actions	48
Using a Delegate to Communicate Application State	52
HighscoreController: A Simple, Reusable Component	<u>5</u> 5
Preserving Game State	61
Archiving and Unarchiving Game State	62
Implementing Life Cycle Tasks	63
Summary	65
■ Chapter 4: Quickly Build an Input-Driven Game	67
Exploring How to Get Content on the Screen	
Understanding UIView	68
Core Graphics Type Definitions	69
Using Core Graphics Types	71
Understanding Animations	72
The Static Animation Tasks of UIView	72
Building the Game Coin Sorter	<mark>7</mark> 6
Implementing Game State	78
Initialization and Setup	79
Starting a New Game	80

Continuing a Game	8
Initializing the UIViews for Each Coin	8
The Model	8
Interpreting User Input	8
Animating Views with Core Animation	90
Summary	95
Chapter 5: Quickly Build a Frame-by-Frame Game	97
Setting Up Your First Frame-by-Frame Animation	
Simple Movement	
Implementing the Classes	
Moving the Spaceship	
Understanding CADisplayLink and NSRunLoop	
Abstracting the Ul	
Understanding Actors	
Drawing Actors on the Screen	
Actor State and Animations	
The Tumbling Effect	
The Rotating Effect	
Summary	
•	
Chapter 6: Create Your Characters: Game Engine, Image Actor	
Understanding the Game Engine Classes	131
The GameController Class	132
Setting Up GameController	133
The Actor Class	138
Implementing Actor	140
Working with the Power-Up Actor	142
Implementing Our Power-Up Actor	14
Inspecting ImageRepresentation	14
Understanding Behaviors by Example	154
Summary	158

Chapter 7: Build Your Game: Vector Actors and Particles	1 <mark>59</mark>
Saucers, Bullets, Shields, and Health Bars	159
The Actor Classes	163
Drawing Actors with Core Graphics via VectorRepresentation	166
The VectorRepresentation Class	166
A UIView for Vector-Based Actors: VectorActorView	168
Drawing a HealthBar	169
Drawing the Bullet Class	170
Adding Particle Systems to Your Game	172
Simple Particle System	174
Creating Based Vector-Based Particles	179
Summary	183
Chapter 8: Building Your Game: Understanding Gestures and Movements	105
Touch Input: The Basics	
Extending UIView to Receive Touch Events	
Looking At the Event Code	
Applying Touch Events to Actors	
Understanding Gesture Recognizers	
Tap Gestures	
Pinch Gestures	
Pan (or Drag) Gesture	
Rotation Gesture	
Long Press Gesture	
Swipe Gesture	
·	
Interpreting Device Movements	
Responding a to Motion Event (Shaking)	
Summary	
əuiiiiai v	

■Chapter 9: Game Center and Social Media	<mark>22</mark> 1
Game Center	221
Enabling Game Center in iTunes Connect	223
Using Game Center in Your Game	228
Awarding Achievements	232
Twitter Integration	234
Facebook Integration	236
Creating a Facebook Application	236
Authenticating with Facebook	237
Making Posts to Facebook	239
Summary	241
■Chapter 10: Monetizing via the Apple App Store	242
In-App Purchases	
Overview of Purchase Types	
Nonconsumable	
Consumable	
Free Subscriptions	
Auto-Renewing Subscriptions	
Nonrenewing Subscriptions	245
Preparing for In-app Purchases	245
Enabling and Creating In-App Purchases	245
Creating a Test User	248
Class and Code for In-App Purchases	248
In-App Purchase Implementation	251
Driving the UI from Existing Purchases	<mark>25</mark> 3
Making the Purchase	<mark>25</mark> 5
Responding to a Successful Purchase	256
Summary	257

■ Chapter 11: Add Sound to Your Game	<mark>259</mark>
How to Play Sound	259
Correct Audio Behavior	<mark>260</mark>
Users Switch Their Devices to Silent When They Want To	260
Your Game May Not Be the Only Application Making Sound	260
Your Game Is Not the Only Application	261
Implementing Sound in Your Game	261
Setting Up Audio	261
Responding to Other Audio Changes	262
Audio in a Game	264
Setting up the GameController	265
Sound Effects for In-game Events	268
Audio Driven by an Actor	270
Summary	<mark>27</mark> 1
Chapter 12: A Completed Come: Polt Commander	979
Chapter 12: A Completed Game: Belt Commander	
Belt Commander: Game Recap	
Implementing View-to-View Navigation	
Launching the Application	
The XIB Files  View Navigation	
-	
Implementing the Game	
Game Classes	
Understanding BeltCommanderController  BeltCommanderController, One Step at a Time	
·	
Summary	304

■Chapter 13: Physics!	305
Overview of the Physics-Based Example	305
An Overview of Box2D	306
The World	307
The Bodies	308
Fixtures	309
Adding Box2D to an Xcode Project	310
Understanding the Example	
Extending GameController	
The Physics Actors	316
Extending Physics Actor	318
A Little Cleanup	320
Summary	320
Appendix A: Designing and Creating Graphics	321
The Art in Video Games	321
Style in Video Games	322
Branding and Perception	325
Creating the Images Files	326
Naming Conventions	327
Support Images	329
Mutli-Resolution Images	332
A Multi-Resolution Example	332
Creating Final Assets	333
Tools	335
GIMP	335
Blender 3D	337
Inkscape	338
Summary	339
Index	341

### **About the Author**



**Lucas L. Jordan** is a lifelong computer enthusiast who has worked for many years as a developer, with a focus on user interface. He is the author of *JavaFX Special Effects: Taking Java RIA to the Extreme with Animation, Multimedia, and Game Elements* and the co-author of *Practical Android Projects*, both by Apress. Lucas is interested in mobile application development in its many forms. He has recently quit his day job to pursue a career developing apps under the name ClayWare, LLC. Learn more at <a href="http://claywaregames.com">http://claywaregames.com</a>.

# About the Technical Reviewer



**Tony Hillerson** is a mobile developer and cofounder at Tack Mobile. He graduated from Ambassador University with a BA in MIS. On any given day he may be working with Objective-C, Java, Ruby, Coffeescript, Javascript, HTML, or shell scripts. Tony has spoken at RailsConf, AnDevCon, 360|Flex, and has created popular O'Reilly Android screencasts.

In his free time Tony enjoys playing the bass and Warr Guitar, and making electronic music. Tony lives outside Denver, CO with his wife Lori and sons Titus and Lincoln.

## **Acknowledgments**

As always this book would not exists without the fine people at Apress who can turn a bunch of Word documents into a book. Amazing! Specifically, Katie Sullivan did a great job keeping me on track. Tom Welsh helped track down those elusive Code Inline formatting issues. Tony Hillerson ran the code and insured I wasn't just making stuff up. Thank you all.