Microsoft® Most Valuable Professional (MVP)— Microsoft Access


Microsoft®

# Access 2010 VBA Programming

Includes
YOUR BOOK + SAMPLE
FILES—ONLINE!

See back

- The ultimate, in-depth reference
- Hundreds of timesaving solutions
- Supremely organized, packed with expert advice





#### **Conquer Microsoft® Access® VBA Programming—from the inside out!**

You're beyond the basics, so dive right in and customize, automate, and extend Access—using Visual Basic® for Applications (VBA). This supremely organized reference is packed with hundreds of timesaving solutions, troubleshooting tips, and workarounds. It's all muscle and no fluff. Discover how the experts use VBA to exploit the power of Access and challenge yourself to new levels of mastery!

- Enhance your application with VBA built-in functions and SQL code
- Use the Access Object Model to work with data in forms and reports
- Manipulate data using SQL, queries, and recordsets with Data Access Objects (DAO)
- Create classes for handling form and control events
- Connect your Access database to different sources of data
- Effectively plan how to upsize an existing Access database to Microsoft SQL Server®
- Dynamically update Microsoft Excel® spreadsheets from your database
- Migrate your Access database directly to the cloud using SQL Azure™

#### Your book + sample files—online!



- Fully searchable online edition of the book—with unlimited access on the web. See inside back; free online account required.
- Download sample database files—ready to put to work, with examples for Access 2003 and later. See http://go.microsoft.com/FWLink/?Linkid=223727



U.S.A. \$49.99 Canada \$57.99 [Recommended]

Microsoft Office/ Microsoft Access

www.it-ebooks.info

microsoft.com/mspress



#### **About the Author**

Andrew Couch, Microsoft MVP for Access, has been programming with VBA since it was introduced in Access

and Microsoft Office. He uses VBA on a daily basis in commercial applications. An experienced instructor, Andrew has also taught VBA programming courses.

#### Microsoft®

# Microsoft® Access® 2010 VBA Programming Inside Out

**Andrew Couch** 

Published with the authorization of Microsoft Corporation by: O'Reilly Media, Inc. 1005 Gravenstein Highway North Sebastopol, California 95472

Copyright © 2011 by Andrew Couch

All rights reserved. No part of the contents of this book may be reproduced or transmitted in any form or by any means without the written permission of the publisher.

ISBN: 978-0-7356-5987-2

123456789 M 654321

Printed and bound in the United States of America.

Microsoft Press books are available through booksellers and distributors worldwide. If you need support related to this book, email Microsoft Press Book Support at mspinput@microsoft.com. Please tell us what you think of this book at http://www.microsoft.com/learning/booksurvey.

Microsoft and the trademarks listed at <a href="http://www.microsoft.com/about/legal/en/us/">http://www.microsoft.com/about/legal/en/us/</a> IntellectualProperty/Trademarks/EN-US.aspx are trademarks of the Microsoft group of companies. All other marks are property of their respective owners.

The example companies, organizations, products, domain names, email addresses, logos, people, places, and events depicted herein are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

This book expresses the author's views and opinions. The information contained in this book is provided without any express, statutory, or implied warranties. Neither the author, O'Reilly Media, Inc., Microsoft Corporation, nor its resellers, or distributors will be held liable for any damages caused or alleged to be caused either directly or indirectly by this book.

**Acquisitions and Developmental Editor:** Kenyon Brown

**Production Editor:** Teresa Elsey

**Editorial Production:** Octal Publishing, Inc.

**Technical Reviewer:** Alan Cossey

**Indexer:** Denise Getz

**Cover Design:** Twist Creative • Seattle **Cover Composition:** Karen Montgomery

**Illustrator:** Robert Romano





## Contents at a Glance

Part 1: VBA Environment and Language	Part 4: Advanced Programming with VBA Classes
Chapter 1	Chapter 9
Using the VBA Editor and Debugging Code 3	Adding Functionality with Classes 339
Chapter 2 Understanding the VBA Language Structure 39	Chapter 10 Using Classes and Events
Chapter 3 Understanding the VBA Language Features 89	Chapter 11 Using Classes and Forms381
Part 2: Access Object Model and Data Access Objects (DAO)	Part 5: External Data and Office Integration
Chapter 4  Applying the Access Object Model127	Chapter 12 Linking Access Tables
Chapter 5	Chapter 13
Understanding the Data Access Object Model161	Integrating Microsoft Office
•	Part 6: SQL Server and SQL Azure
Part 3: Working with Forms and Reports	Chapter 14 Using SQL Server
Chapter 6 Using Forms and Events	Chapter 15 Upsizing Access to SQL Server543
Chapter 7 Using Form Controls and Events273	Chapter 16 Using SQL Azure589
Chapter 8 Creating Reports and Events	Part 7: Application Design
	Chapter 17 <b>Building Applications</b>
	Chapter 18 Using ADO and ADOX659



## **Table of Contents**

	Introduction	xix
Part 1: \	/BA Environment and Language	
Chapter 1:	Using the VBA Editor and Debugging Code	3
·	Debugging Code on a Form	
	Entering the VBA Editor	
	The Application and VBA Code Windows	
	Creating Modules and Procedures	
	Creating a Module	
	Creating a Procedure	
	Executing a Subroutine	
	Executing a Function	
	Viewing and Searching Code	16
	Split Window	
	Searching Code	19
	Debugging Code in a Module	
	Debug Commands	23
	Breakpointing Code	23
	Set Next Command	25
	Breakpoint Step and Run Commands	26
	Displaying Variables in the Locals Window	29
	Tracing Procedures with the Call Stack	30
	Watching Variables and Expressions	31
	Adding Conditional Watch Expressions	32
	Working with the Immediate Window	33
	Changing Code On-the-Fly	34
	Using the Object Browser and Help System	
	Configuring the Help System	35
	Working with the Object Browser	
	Summary	37

#### What do you think of this book? We want to hear from you!

Microsoft is interested in hearing your feedback so we can continually improve our books and learning resources for you. To participate in a brief online survey, please visit:

microsoft.com/learning/booksurvey

Chapter 2:	Understanding the VBA Language Structure	39
	VBA Language Settings	40
	Comments	40
	Setting Option Explicit	41
	Selecting Option Compare	43
	Compiling Code	44
	Conditional Compilation	45
	References	46
	Working with Constants and Variables	49
	Improving Code Quality with Constants	49
	The <i>Enum</i> Keyword	
	Variables and Database Field Types	
	Handling <i>NULL</i> Values, <i>IsNull</i> and <i>Nz</i>	
	Using Static Variables	55
	Using Global Variables	
	Variable Scope and Lifetime	
	Working with Arrays	
	Type Structures	
	Functions and Procedures	
	Managing Code with Subroutines	
	Defining ByRef and ByValue Parameters	
	Private and Public Procedures	
	Optional and Named Parameters	
	The ParamArray Qualifier	
	Organizing Code in Modules and Class Modules	
	Control Statements and Program Flow	
	IF Then Else Statements	
	IIF Statements	
	Choose Statements	
	Select Case Statements	
	TypeOf Statements	
	For and For Each Loops	
	Do While and Do Until Loops	
	Exit Statements	
	The With Statement	
	GoTo and GoSub	
	Line Continuation	
	Splitting SQL Over Multiple Lines	
	Summary	8/
Chapter 3:	Understanding the VBA Language Features	89
	Using Built-In Functions	90
	Date and Time Functions	
	String Functions	
	Domain Functions	
	Constructing Where Clauses	97
	SQL and Embedded Quotes	98

	Using VBA Functions in Queries	101
	The <i>Eval</i> Function	
	Shell and Sendkeys	
	The DoEvents Command	
	Objects and Collections	103
	Object Variables	105
	Is Nothing, IsEmpty, IsObject	
	Creating Maintainable Code	108
	Naming Access Document Objects	108
	Naming Database Fields	109
	Naming Unbound Controls	110
	Naming Variables in Code	
	Indenting Code	
	Other Variable Naming Conventions	113
	VBA and Macros	114
	Access Basic	114
	Converting Macros to VBA	115
	Error Handling	
	On Error Resume Next	116
	Err Object	
	On Error GoTo	
	Developing a General Purpose Error Handler	
	OpenArgs and Dialog Forms	
	Err.Raise	
	Summary	123
Dout 2.	Assess Object Model and Data Assess Objects (DAO)	
	Access Object Model and Data Access Objects (DAO)	
Chapter 4:	Applying the Access Object Model	127
	The Application Object Methods and Properties	128
	The Run Method	128
	The RunCommand Method	129
	Simplifying Filtering by Using BuildCriteria	130
	The ColumnHistory and Append Only Memo Fields	
	Examining TempVars	132
	Invoking the Expression Builder	133
	The CurrentProject and CurrentData Objects	134
	Retrieving Version Information	135
	Changing Form Datasheet View Properties	136
	Object Dependencies	137
	The <i>DoCmd</i> Object	
	Controlling the Environment	
	Controlling Size and Position	
	Application Navigation	
	Data Exchange	
	Manipulating the Forms and Reports Collections	
	Using the Expression Builder	1//

	Referencing Controls on a Subform	
	Creating Access Objects in Code	
	Using the Screen Object	
	Changing the Mouse Pointer Shape	
	Working with the ActiveForm and ActiveControl	
	Enhancing the User Interface	
	Setting and Getting Options	
	Locking Down Access	
	Monitoring Progress with SysCmd	
	Custom Progress Bars	
	Selecting Files with the Office FileDialog	
	Summary	160
Chapter 5:	Understanding the Data Access Object Model	161
	The DAO Model	162
	DAO, ADO, and References	
	Working with Databases	
	The <i>DBEngine</i> Object	
	The Workspace Object	
	Transactions	
	The Errors Collection	171
	The <i>Database</i> Object	
	CurrentDB, DBEngine, and CodeDB	
	The TableDefs Collection and Indexes	179
	Managing Datasheet Properties	
	Relationships	
	Manipulating Data with Recordsets	188
	Searching	
	Bookmarks	
	Field Syntax	
	Filter and Sort Properties	
	Adding, Editing, and Updating Records	
	Multiple-Values Lookup Fields	
	Attachment Fields	
	The <i>OLE Object</i> Data Type	
	Calculated Fields	
	Cloning and Copying Recordsets	
	Reading Records into an Array	
	Working with Queries in Code	
	Temporary <i>QueryDefs</i>	
	QueryDefs and Recordsets	
	Creating QueryDefs	
	QueryDef Parameters	
	Investigating and Documenting Objects	
	Containers and Documents	
	Object Properties	
	Sample Applications	224

	Documenting a Database by Using the DAO	224
	Finding Objects in a Database by Using the DAO	225
	Summary	227
Part 3: \	Norking with Forms and Reports	
Chapter 6:	Using Forms and Events	231
·	Displaying Records	
	Bound and Unbound Forms	
	Modal and Pop-Up Forms	
	Open and Load Events	
	Filtering by Using Controls	
	Filtering by Using the Filter Property	243
	Filtering by Using Another Form	245
	The ApplyFilter Event	247
	Unload and Close Events	
	Working with the RecordsetClone	
	Refresh, Repaint, Recalc, and Requery Commands	
	Calling Procedures Across Forms	
	Interacting with Records on a Form	
	The Current Event	
	Deactivate and Activate Events	
	Setting the Timer Interval Property of the <i>Timer</i> Event	
	The Mouse Events	
	Editing and Undo on a Record	
	BeforeUpdate and AfterUpdate Events	
	Locking and Unlocking Controls	
	BeforeInsert and AfterInsert Events	
	The <i>Delete</i> Event	
	KeyPreview and Key Events	
	The Error Event	
	Saving Records	
Cl + 7.	·	
Chapter 7:	Using Form Controls and Events	
	Control Events	
	The Click and DblClick Events	
	The BeforeUpdate Event	
	The AfterUpdate Event	
	The GotFocus and LostFocus Events	
	Combo Boxes	
	Synchronizing Data in Controls	
	Combo Box RowSource Type	
	Combo Box Columns	
	Value List Editing	
	Table/Query Editing	

	List Boxes	
	Multiple Selections	
	Multiple Selections with Two List Boxes	
	Using the List Box as a Subform	
	The <i>TreeView</i> Control	295
	Adding the <i>TreeView</i> Control	296
	Populating the Tree	298
	Adding Graphics	301
	Expanding and Collapsing Nodes	303
	Drag-and-Drop	303
	Deleting a Node with Recursion	
	Adding Nodes	
	The <i>Tab</i> Control	
	Refreshing Between Tabs and Controls	
	The OnChange Event	
	Dynamically Loading Tabs	314
	Summary	321
Chapter 0.	Creating Reports and Events	222
Chapter 8:		
	Report Event Sequences	
	Creating Drill-Down Reports and Current Event	
	Creating a Boxed Grid with the Print Event	
	Layout Control and the Format Event	
	Report Layout Control	
	Driving Reports from a Form	
	Reducing Joins with a Combo Box	
	Programming a Report Grouping	
	Packing Address Information with a ParamArray	
	Control of Printers	335
Part 4: A	Advanced Programming with VBA Classes	
Chapter 9:	Adding Functionality with Classes	330
Chapter 5.	· · · · · · · · · · · · · · · · · · ·	
	Improving the Dynamic <i>Tab</i> Control	
	Creating a Class Module	
	The Let and Get Object Properties	
	Creating an Object with New and Set	
	Collection of Objects	
	Creating Collection Classes	
	Using Classes with the Dynamic Tab	
	Simplifying the Application with Classes	
	Creating a Hierarchy of Classes	
	Creating a Base Class	
	Derived Classes	
	Summary	377

Chapter 10:	Using Classes and Events	359
	WithEvents Processing	360
	Handling Form Events	360
	Handling Control Events	
	Asynchronous Event Processing and RaiseEvent	
	Abstract and Implementation Classes	
	Abstract Classes	
	Implementation Classes	
	Implementing an Abstract Class	
	Hybrid Abstract and Non-Abstract Classes	
	Friend Methods	
	Summary	3/9
Chapter 11:	Using Classes and Forms	381
	Opening Multiple Instances of a Form	381
	Classes and Binding Forms	
	Binding a Form to a Data Access Object Recordset	
	Binding a Form to an Active Data Object Recordset	384
	ActiveX Controls and Events	386
	Adding a Slider Control	386
	The <i>UpDown</i> or <i>Spin</i> Control	388
	Summary	391
David E. E	external Data and Office Interretion	
Part 5: E	xternal Data and Office Integration	
Chapter 12:	Linking Access Tables	395
	Linking Access to Access	396
	Using the Database Splitter	
	Linked Table Manager	398
	Automating Relinking	398
	Linking to Excel and Text Files	
	Linking to Excel	
	Linking to Text Files	
	Linking to SQL Server	
	Setting up the Sample Database	
	Creating a DSN	
	Connecting to SQL Server Tables	
	Refreshing SQL Server Linked Tables	
	Connecting to a View in SQL Server	
	Refreshing SQL Server Views	415
	SQL Azure DSN	
	Connecting to SQL Azure	
	Linking to SharePoint Lists	
	Relinking SharePoint Lists	
	Linking Access Web Databases	
	Relinking to an Access Web Database	
	Summary	435

Chapter 13:	Integrating Microsoft Office	437
	Working with Objects and Object Models	438
	Early vs. Late Binding and CreateObject vs. New	
	The GetObject Keyword	
	Opening Existing Files	442
	Connecting Access to Word	443
	Generating Documents from a Placeholder Document	
	Opening a Placeholder Document	446
	Merging Data with Bookmarks	
	Connecting Access to Excel	
	Writing Data to a Spreadsheet	
	Reading Data from a Spreadsheet	459
	Reporting with Excel Linked to Access	
	Using MS Query and Data Sources	
	Connecting Access to Outlook	
	Extracting Information from Outlook	
	Creating Objects in Outlook	
	Writing to Access from Outlook	
	Summary	
Chapter 14:	Using SQL Server	
	Introducing SQL Server	
	Programs vs. Services	
	Client-Server Performance	
	SQL Server Versions	
	SQL Express and SQL Server Products.	
	Database File Locations	
	Log Files and Recovery Models	
	Instances	
	Windows Services	
	System Databases	
	System Tables.	
	Getting Started with the SQL Server Management Studio	
	Running the Demo Database Script	
	Creating a New Database	
	Creating Tables and Relationships	
	Database Diagrams.	
	Tables, Relationships, and Script Files	
	Changing the Design of a Table	
	Using the <i>Identity</i> Property	
	Working with Views	
	Views and Script Files	
	CROSSTAB Queries	
	CUOSSIMD Quelles	

	Working with Stored Procedures	
	Introducing T-SQL	
	Defining Variables	517
	Using CAST and CONVERT	518
	Built-In Functions	519
	System Variables	520
	Controlling Program Flow	521
	Error Handling	
	Working with Triggers	
	Working with Transactions	
	Transaction Isolation Levels	
	Nesting Transactions	
	User-Defined Functions	
	Getting Started with SQL Server Security	
	Surface Area Configuration	
	SQL Server Authentication	
	Windows Authentication	
	Summary	
Chapter 15:	Upsizing Access to SQL Server	543
	Planning for Upsizing	543
	Text Data Types and UNICODE	544
	Date and Time Data	544
	Boolean Data	546
	Integer Numbers	547
	Real Numbers, Decimals, and Floating-Point Numbers	547
	Hyperlinks	547
	IMAGE, VARBINARY(Max), and OLE Data	
	Memo Data	
	Currency	
	Attachments and Multi-Value Data	
	Required Fields	
	Cycles and Multiple Cascade Paths	
	Mismatched Fields in Relationships	
	Replicated Databases and Random Autonumbers	
	Unique Index and Ignore Nulls	
	Timestamps and Row Versioning	
	Schemas and Synonyms	
	The Upsizing Wizard and the SQL Server Migration Assistant	
	The Upsizing Wizard	
	Upsizing to Use an Access Data Project	
	SSMA	
	Developing with Access and SQL Server	
	The dbSeeChanges Constant	
	Pass-Through Queries	
	Stored Procedures and Temporary Tables	

	Handling Complex Queries	
	Performance and Execution Plans	582
	SQL Server Profiler	586
	Summary	588
Chapter 16:	Using SQL Azure	589
·	Introducing SQL Azure	
	Creating Databases	
	Firewall Settings	
	Using Management Studio	
	Developing with the Browser Interface	
	Migrating SQL Databases	
	Creating a Set of Tables	
	Transferring Data with the SQL Server Import and Export Wizard	
	Backing up and Copying a Database	
	The Data Sync Feature	
	The Data Sync Agent	605
	Sync Groups and Sync Logs	
	Changing Data and Database Structure	
	Conflict Resolution in Data	
	Changes to Table Structure	613
	Planning and Managing Security	615
	Building Multi-Tenanted Applications	617
	User Tables and Views	617
	Application Tables and Views	619
	Managing Security	
	SQL Server Migration Assistant and Access to Azure	
	Summary	628
Part 7. A	Application Design	
Chapter 17:	5	
	Developing Applications	
	Application Navigation	
	Ribbon Design	
	32-Bit and 64-Bit Environments	
	Working with the Windows Registry	
	Using the Windows API	
	Completing an Application	
	Splash Screens	
	Progress Bars	
	Error Handling	
	Locking Down an Application	
	Deploying Applications.	655
	Protecting Your Design with ACCDE Files	
	Runtime Deployment	
	Single and Multiple Application Files	655

DSNs and Relinking Applications	656
Depending on References	656
Updating Applications	656
Summary	657
Using ADO and ADOX	659
ActiveX Data Objects	660
Cursors	
Asynchronous Operations	662
Forms and ADO Recordsets	
Working with SQL Server	663
Connection Strings	663
Connecting to SQL Server	664
Command Object	666
Stored Procedures	666
Multiple Active Result Sets and Performance	668
MARS and Connections	669
ADOX	672
Summary	673
Index	675
	Depending on References. Updating Applications Summary  Using ADO and ADOX.  ActiveX Data Objects. Cursors Asynchronous Operations. Forms and ADO Recordsets  Working with SQL Server Connection Strings Connecting to SQL Server Command Object Stored Procedures. Multiple Active Result Sets and Performance MARS and Connections  ADOX. Summary



#### Introduction

Microsoft Visual Basic for Applications (VBA) is an exceptional programming language and environment. The language has grown out of a need to have a programming language that would allow more business-focused individuals to write programs, but equally support the programming features that developers look for in a product. The environment is as important as the language because of its unique features, allowing code to be quickly modified while being debugged.

The Access Basic language in early product versions evolved into the VBA language, which provided a cross-product language for the Microsoft Office products. This all coincided with the revolution of an event-driven approach to programming, which was very important, because the emphasis on being a programmer shifted from writing thousands of lines of code to writing snippets of code in response to events. This also led to a change of emphasis from writing large libraries of code to understanding how to manipulate the object models in the environment—a focus which has progressed with .NET, albeit using namespaces instead of object models.

Even with the introduction of object-oriented programming, VBA has kept pace with the expectations of modern programming. The two products that have shaped VBA the most are Microsoft Excel and Microsoft Access; Excel introduced VBA and originally gained VBA programming features in advance of these becoming available within Access.

A significant strength of VBA is that it is universal to the Microsoft Office suite of programs; all the techniques we describe in this book can be applied to varying degrees within the other Office products. A major turning point for these products was the ability through OLE Automation to be able to drive one product from another, and to cut and paste code between the different environments with a minimum amount of change to the code. This was a revolutionary feature introduced with the programming language of Access Basic, conforming to the new VBA standard established in Excel. VBA suddenly provided the long-awaited platform for the simple integration of the Office products and building solutions that could easily exploit the strengths of each component product in the Office suite. The combination of Access and VBA offers an extremely productive environment within which to construct applications.

VBA has often been criticized for its simplicity as a language when compared to languages such as C++ and C#. Quite to the contrary, the big advantage of VBA is that this simplicity leads to more easily maintainable and reliable code, particularly when developed by people with a more business-focused orientation to programming. Looking toward the future, the emphasis in modern programming has moved from the language syntax to the intricacies of understanding the objects that the language manipulates, so the emphasis on the specific syntax of languages is starting to blur.

In the .NET world, the conflict between using VB.NET, which originates from VBA, and C# continues, because even though the objects being manipulated are now common, there are subtle differences between the languages, which means that developers moving from VBA to C# can often feel that they are being led out of their comfort zone, especially when they need to continue to use VBA for other applications.

Access has often been criticized for creating poor performance applications where a prototype turns into a business critical system, propagating a support nightmare for information technology departments, and leading to applications that eat up network bandwidth. It has also been stated that the product is never used for mission-critical applications. The truth is that both Access and Excel are pivotal to many organizations, but the people answering that mission-critical question are often not willing to admit to this because it is perceived as vulnerability. The problem with using Access and Excel is that Rapid Application Development (RAD) can often come to mean final application without recourse to a more structured oversight of what is being developed, and as data volumes and user communities grow, so too the inevitable flaws in not having designed a scalable solution are exposed.

This book details how Access and VBA are not a problem, although their success is often their downfall in the hands of those lacking some direction on how to effectively develop applications. The big problem with Access is that the underlying database engine is extremely efficient and can compensate for a design that normally would not scale. So if you convert your Access database data to be located in Microsoft SQL Server, Microsoft SQL Azure, or Microsoft SharePoint, you might find that the existing application design techniques for searching and displaying data need to be revised. Our advice is to take into account the mantra of Client-Server design, which is to minimize the amount of data being transferred in any operation.

In this book, we would like to make our contribution toward creating a better informed community of developers, and show how to better develop applications with VBA.

#### Who This Book Is For

This book is aimed at two types of reader. First, we want to enable the reader who has worked with Access and developed applications to move to the next level of development. We want to help that reader to more fully develop applications with a deeper understanding of what it means to program with VBA.

Our second target audience is the more experienced VBA programmer, who needs the assistance of a good instructional text to move up a gear and explore the more advanced aspects of VBA programming. As well, we have devoted a significant number of our pages to supporting you in developing with both SQL Server and cloud computing.

#### **Assumptions About You**

We make a basic assumption in this book that you are experienced either in working with Access or that you have a strong programming background, which means that you can learn VBA programming in Access very quickly. We will spend no time explaining how to create a table, form, or report, and if you cannot do this, you need to first learn these actions in more detail. We recommend our companion text *Microsoft® Access® 2010 Inside Out* by Jeff Conrad and John Viescas.

If you have some VBA Programming experience, you can skim over Chapters 1–3. If your experience level is not such that you are comfortable skipping chapters, Chapters 1–3 will, we hope, give you a key appreciation of the power of the VBA development environment.

#### **How This Book Is Organized**

This book allows you to either start at the beginning and work through each chapter or to dip into specific chapters or topics to investigate a particular feature of VBA. To enable dipping into the book, each part is designed to be self-contained.

Part 1, "VBA Environment and Language"

In Chapters 1, 2, and 3, we provide a foundation that demonstrates how to program with VBA. We start by showing you how to debug, write, and modify code (gaining confidence with the VBA environment is the first step to efficiently developing applications within it). Then we move on to an in-depth exposition of the VBA language, which can act both as a reference for coding syntax and a solid introduction to the language.

Part 2, "Access Object Model and Data Access Objects (DAO)"

Chapters 4 and 5 dig deep into programming with the objects that make up Access, including the DAO programming language, which is the bread and butter programming technique for any Access VBA developer.

Part 3, "Working with Forms and Reports"

Chapters 6, 7, and 8 illustrate how to apply VBA when working with forms, controls, and reports. This develops your core techniques in understanding how to apply VBA for building the key interface components in applications.

Part 4, "Advanced Programming with VBA Classes"

Chapters 9, 10, and 11 are for some developers more esoteric than the rest of this book, but they illustrate how you can exploit VBA to embrace the most advanced concepts of modern

computing by using object-oriented programming. There are a lot of cunning tricks and techniques in these chapters that are worth reading about, and many of the ideas in these chapters will take you forward in also handling development with .NET.

Part 5, "External Data and Office Integration"

In Chapters 12 and 13, we address the issue of how to link Access to external data and write VBA to communicate both with other Office applications and external data sources such as SOL Server and SharePoint.

Part 6, "SQL Server and SQL Azure"

Chapters 14, 15, and 16 provide a comprehensive description of how to extend the reach of Access applications by moving the back-end data into SQL Server, and then onto SQL Azure. Chapter 14 is dedicated to equipping developers with a solid understanding of how to develop code with SQL Server, during which we explain both how to use the SQL Server Management Studio and write programs using Transact SQL (T-SQL).

Chapter 15 moves on to look at converting Access Databases to SQL Server by using both the Upsizing Wizard and the SQL Server Migration Assistant (SSMA). Chapter 16 discusses how to move your databases into the cloud either by using the SQL Server Import and Export Wizard feature in the SQL Server Management Studio from a local SQL Server, or SSMA from an Access Database. We discuss how you can exploit the unique features of Office in directly constructing links to Azure, building multi-tenanted solutions and using the soon to be released new Data Sync features in SQL Azure.

Part 7, "Application Design"

The last part of this book, Chapters 17 and 18, shows you a number of ideas for helping you to create applications, including a discussion of how to design the user interface, building ribbons, utilizing the Windows API, and working with ADO and ADOX. In Chapter 17, we will step through the process of building applications. This chapter ties together all the lessons you learn throughout the book, making references back to other sections.

## Features and Conventions Used in This Book

This book uses special text and design conventions to make it easier for you to find the information you need.

#### **Text Conventions**

Convention	Meaning
Boldface type	This indicates user input that you are instructed to type; for example, "Click the Save As command, name the file <b>NewFile_01</b> , and then click OK."
Ctrl+F	Keystroke combinations are presented as Ctrl+G, which means to hold down the Ctrl key and press the letter G on the keyboard, at the same time.
Object names	When we need to draw your attention to a specific technical term, program elements, or an object in the sample database, it will be presented in italic; for example, "Open the form <i>frmSample</i> and right-click the <i>ListBox</i> control."

### **Design Conventions**

## **INSIDE OUT**

This statement illustrates an example of an "Inside Out" heading

These are the book's signature tips. In these tips, you get the straight scoop on what's going on with the software—inside information about why a feature works the way it does. You'll also find handy workarounds to deal with software problems.

#### Note

Notes offer additional information related to the task being discussed.

## About the Companion Content

You'll see references to the sample files and bonus content throughout the book. A complete list of the key database files follows (we have not listed all the smaller support files for each chapter).

We have also included in the bonus content (which is located within the file sets for Chapters 5, 7, and 18) additional application files that contain more code examples and provide useful utilities to add to your program libraries.

To access and download the companion content, visit: http://go.microsoft.com/ FWLink/?Linkid=223727.

Chapter or topic	Content
Chapter 1	VBAEnvironment.accdb
Chapter 2	<ul> <li>VBAExamples.accdb</li> </ul>
Chapter 3	<ul> <li>VBAFeaturesExamples.accdb</li> </ul>
Chapter 4	<ul> <li>AccessObjectModel.accdb</li> </ul>
Chapter 5	<ul> <li>DAOExamples.accdb</li> </ul>
	<ul> <li>CountryLibrary.accdb</li> </ul>
	Find_IT.accdb
	<ul> <li>DocDAO.accdb</li> </ul>
Chapter 6	FormExamples.accdb
Chapter 7	<ul> <li>Controls.accdb</li> </ul>
	TreeBuilder.accdb
Chapter 8	Reports.accdb
Chapter 9	<ul> <li>BuildingClasses.accdb</li> </ul>
	<ul> <li>BuildingClassesAfterExportImport.accdb</li> </ul>
Chapter 10	<ul> <li>ClassesAndEvents.accdb</li> </ul>
Chapter 11	<ul> <li>ClassesAndForms.accdb</li> </ul>
Chapter 12	Employees_be.accdb
	<ul> <li>Sample_fe.accdb</li> </ul>
	WebDatabase.accdb

Chapter or topic	Content
Chapter 13	ExcelAnalysis.accdb
	<ul> <li>OfficeApplications.accdb</li> </ul>
	<ul> <li>OutlookContacts.accdb</li> </ul>
	<ul> <li>WordQuote.accdb</li> </ul>
Chapter 14	<ul> <li>SQLServerExamples.accdb</li> </ul>
	SQL Server Script files
Chapter 15	<ul> <li>Northwind_ProblemsAndFixes.accdb</li> </ul>
	<ul> <li>SQLServerCodeExamples.accdb</li> </ul>
	SQL Server Script files
Chapter 16	<ul> <li>Northwind_ForAzure.accdb</li> </ul>
	<ul> <li>SQLAzureCodeExamples.accdb</li> </ul>
	SQL Azure Script files
Chapter 17	<ul> <li>ApplicationDevelopment.accdb</li> </ul>
	<ul> <li>ApplicationDevelopment64Bit.accdb</li> </ul>
	<ul> <li>ApplicationDevelopment_2007.accdb</li> </ul>
Chapter 18	<ul> <li>ADOExamples.accdb</li> </ul>
	<ul> <li>DocADOX.accdb</li> </ul>
	SQL Server Script files
Bonus Content	Chapter 5: Find_IT.accdb, DocDAO.accdb
	Chapter 7: TreeBuilder.accdb
	Chapter 18: DocADOX.accdb

#### **Access Versions**

All of the examples in the book are designed to run with Access 2010 32-bit.

If you are using Access 2010 64-bit, you should also be able to use the examples with the following revisions: in Chapter 17, use ApplicationDevelopment64Bit.accdb. The Bonus material databases have versions called Find\_IT64Bit.accdb, DocADOX64Bit.accdb, and DocDAO64bit.accdb. The file TreeView.accdb has no equivalent 64-bit version, as this control is not supported in the 64-bit environment.

The majority of the code examples in this book will work on older versions of Access, and we have provided a set of .mdb files for this in Access 2002–2003 file format. However, the older the version that you use, the less likely will be the compatibility. There are several topics in Chapters 4, 5, 13, and 17 which were either not present in earlier versions of Access or have undergone a significant amount of change.

In some chapters, we have inevitably had to construct examples that rely on a hardwired path; in these situations you might find it easier either to construct your own example, as described in a chapter, or move the files to a path that matches the completed example. Where possible, we have provided assistance and advice in the sample databases to overcome any path problems.

## Acknowledgments

A good technical book needs an author who is well informed and passionate, and I hope I can live up to that expectation. But it also needs contributions from a team of people to turn the idea into a reality.

First, my thanks to Kenyon Brown at O'Reilly Media; without his asking me to propose to write this book, it would have never have been started. Your diligence throughout the entire process has been splendid.

Next, I offer immense gratitude to Alan Cossey, who acted as technical reviewer on this book; having acted as a technical reviewer myself, I can greatly appreciate all of his time and recommendations made during the review process.

I would also like to thank Bob Russell at Octal Publishing, Inc., for acting as my copy editor; Bob has not only ensured that the flow of the book has a professional polish, but also caused me to reflect on the meaning of many parts of the text.

I would like to thank my good friend Jeff Conrad at Microsoft. Jeff is a great advocate for Access and helped wonderfully in answering and passing along many of my comments and questions to the Microsoft teams.

Numerous thanks also to those members of UK Access User Group for helping in testing my solutions to difficult technical issues. You can't beat a good community of developers!

My thanks also to Dianne Russell at Octal Publishing, Inc., for managing the copy editing and composition, and Betsy Waliszewski, senior marketing manager, for promotional activities.

Finally, I would like to thank my wife, Pamela, for her patience, and my son, Michael, for his assistance at various stages in helping with chapter layouts.

Andrew Couch July 2011

## Support and Feedback

The following sections provide information on errata, book support, feedback, and contact information.

#### **Errata & Support**

We've made every effort to ensure the accuracy of this book and its companion content. Any errors that have been reported since this book was published are listed on our Microsoft Press site at oreilly.com:

http://go.microsoft.com/FWLink/?Linkid=223727

If you find an error that is not already listed, you can report it to us through the same page.

If you need additional support, email Microsoft Press Book Support at *mspinput@microsoft.* com.

Please note that product support for Microsoft software is not offered through the addresses above.

#### We Want to Hear from You

At Microsoft Press, your satisfaction is our top priority, and your feedback our most valuable asset. Please tell us what you think of this book at

http://www.microsoft.com/learning/booksurvey

The survey is short, and we read every one of your comments and ideas. Thanks in advance for your input!

## Stay in Touch

Let's keep the conversation going! We're on Twitter: http://twitter.com/MicrosoftPress.

## How to Access Your Online Edition Hosted by Safari

The voucher bound in to the back of this book gives you access to an online edition of the book. (You can also download the online edition of the book to your own computer; see the next section.)

To access your online edition, do the following:

- 1. Locate your voucher inside the back cover, and scratch off the metallic foil to reveal your access code.
- **2.** Go to http://microsoftpress.oreilly.com/safarienabled.
- **3.** Enter your 24-character access code in the Coupon Code field under Step 1.



(Please note that the access code in this image is for illustration purposes only.)

4. Click the CONFIRM COUPON button.

A message will appear to let you know that the code was entered correctly. If the code was not entered correctly, you will be prompted to re-enter the code.



- 5. In this step, you'll be asked whether you're a new or existing user of Safari Books Online. Proceed either with Step 5A or Step 5B.
  - **5A.** If you already have a Safari account, click the EXISTING USER SIGN IN button under Step 2.




- **5B.** If you are a new user, click the NEW USER FREE ACCOUNT button under Step 2.
  - You'll be taken to the "Register a New Account" page.
  - This will require filling out a registration form and accepting an End User Agreement.
  - When complete, click the CONTINUE button.
- **6.** On the Coupon Confirmation page, click the My Safari button.
- 7. On the My Safari page, look at the Bookshelf area and click the title of the book you want to access.




## How to Download the Online Edition to Your Computer

In addition to reading the online edition of this book, you can also download it to your computer. First, follow the steps in the preceding section. After Step 7, do the following:

- **1.** On the page that appears after Step 7 in the previous section, click the Extras tab.
- 2. Find "Download the complete PDF of this book," and click the book title.

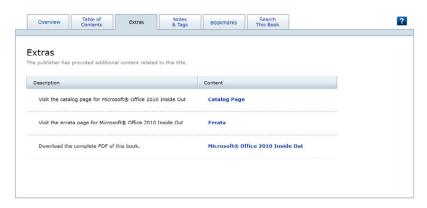

A new browser window or tab will open, followed by the File Download dialog box.




- 3. Click Save.
- **4.** Choose Desktop and click Save.
- 5. Locate the .zip file on your desktop. Right-click the file, click Extract All, and then follow the instructions.

#### Note

If you have a problem with your voucher or access code, please contact mspbooksupport @oreilly.com, or call 800-889-8969, where you'll reach O'Reilly Media, the distributor of Microsoft Press books.



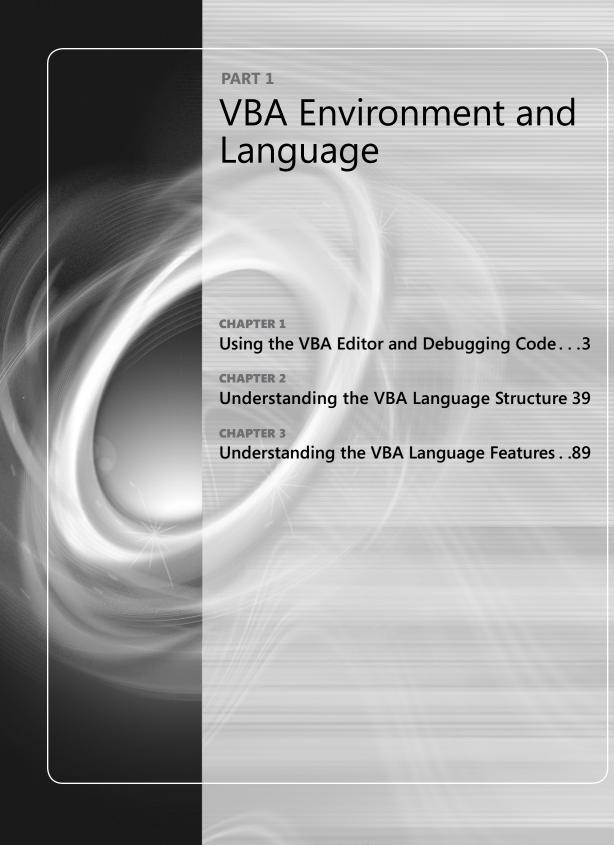





#### CHAPTER 1

# Using the VBA Editor and **Debugging Code**

Debugging Code on a Form4	Breakpointing Code	23
Creating Modules and Procedures	Using the Object Browser and Help System	35
Debugging Code in a Module		

he Microsoft Visual Basic for Applications (VBA) Editor is more than a simple editing tool for writing program code. It is an environment in which you can test, debug, and develop your programs. Understanding the unique way in which the editor allows you to make modifications to application code while the execution of the code is paused will help you to learn how to quickly develop your applications and master the techniques for debugging code.

In addition to changing code on-the-fly as it executes, you can switch across to the Microsoft Access 2010 application window while your code is paused, create a query, run the query, copy the SQL to the clipboard, and then swap back to the programming environment to paste the SQL into your code. It is this impressive flexibility during the development cycle that makes developing applications with VBA a productive and exhilarating experience.

In this chapter, you will work with examples of program code written in the VBA language. The VBA language itself is systematically explained in Chapter 2, "Understanding the VBA Language Structure," and in Chapter 3, "Understanding the VBA language Features." So, before reading this chapter (or while you're reading it) you might want to either skim read those chapters or simply refer to specific topics as they arise in this chapter. We have also included some examples of Data Access Object (DAO) programming code. In this chapter, we will be providing only limited explanations of the DAO development environment, just to place it into the context of building real applications. For more detailed information about it, see Chapter 5, "Understanding the Data Access Object Model."

To successfully work with VBA, you need an understanding of the language, the programming environment, and the objects that are manipulated by the code. Getting started means dipping into different topics as you begin to build sufficient knowledge to effectively use VBA.

By the end of this chapter, you will understand:

- The different ways that you can run and debug sections of program code.
- How to modify program code while it is paused and then resume execution.
- How to work with the different windows in the programming environment.
- Where code is stored in a VBA application.
- How procedures are created.

#### Note

As you read through this chapter, we encourage you to also use the companion content sample database, VBAEnvironment.accdb, which can be downloaded from the book's catalog page.

## **Debugging Code on a Form**

To begin, open the sample database, VBAEnvironment.accdb, which opens the startup form, *frmVBAStartsHere*, shown in Figure 1-1.



Figure 1-1 The startup form, frmVBAStartsHere.

The sample database contains program code with errors intentionally integrated into it. The *frmVBAStartsHere* form is designed to show how the code will break into Debug mode when it encounters an error. As you work through this chapter, you will fix these errors.

Click the button labeled Look At The Table Of Contacts. A pop-up window appears, as shown in Figure 1-2.




**Figure 1-2** In this Access pop-up window, you can either end the code execution or click Debug to investigate the error.

If you click the End button, the program code stops executing. But as you want to debug the code, click the Debug button.


### **Entering the VBA Editor**

When entering debugging mode, the program stops in the VBA editor and highlights the line of code at which it failed in yellow, as shown in Figure 1-3.

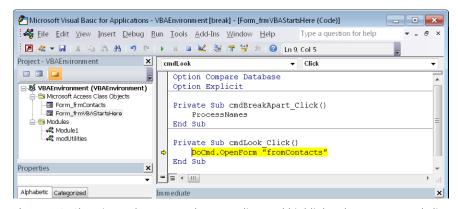


**Figure 1-3** Choosing Debug opens the VBA Editor and highlights the program code line that generated the error.

In this example, the problem is a simple spelling error. The database contains a form called frmContacts, not fromContacts. Access displays an error message that fully describes the problem. It also provides you with the opportunity to edit the text to correct the misspelling, as shown in Figure 1-4.

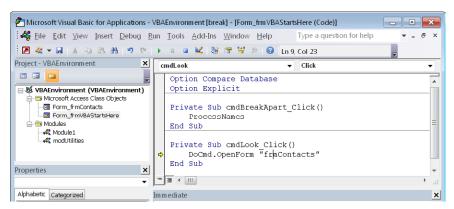

**Figure 1-4** Code stopped at the error line. Notice in the Project Explorer pane on the left that the entry form *\_frmVBAStartsHere* is highlighted. This tells you that you are viewing the form's code module.

DoCmd.OpenForm is a command that allows the program code to open the specified form. DoCmd is a shorthand way of saying, "do the macro command." After correcting the misspelling, you can either press the F5 key or click the Continue button on the toolbar to allow the program to continue execution. Figure 1-5 demonstrates the results after continuing to execute the code, which now opens the frmContacts form.



**Figure 1-5** After correcting the programming error, you can see the result of executing *DoCmd.OpenForm*, which opens the requested Access form.

#### The Application and VBA Code Windows

Notice that in your Windows task bar there are two windows open: one window containing your Access application interface, and in the second window, the VBA Editor. When working with application code you can normally switch between the Editor and the application windows, as shown in Figure 1-6.



Figure 1-6 With the VBA editor open, you have two windows for Access, and you can switch between the application window and the VBA Editor window.

If you choose to close the forms you will be prompted to save the changes that you have made to the code on the form, as shown in Figure 1-7.



**Figure 1-7** The prompt to save changes to the *frmVBAStartsHere* form.


#### CAUTION

It is very easy to click the wrong button and lose your design changes. Ensuring that you click the Save button after making any changes to code means that you always know that your changes have been saved. If your program code closes objects as part of its execution, separate dialog boxes for saving changes can pop up, and you can easily forget to save a change. In the unlikely event that the Access application crashes and you have not been saving your design changes, any unsaved changes will be lost.

# **INSIDE OUT**

Code behind a form or report is located in the class module of a form or report

The last example illustrates how program code can be located in a form's class module. Code is written behind a form ("Code Behind a Form" or CBF) to respond to events when the user interacts with the form and the form's controls, Figure 1-8 shows the relationship between controls on a form and the procedures in the form's class module.



**Figure 1-8** Code written in a form or report class module is normally related to events on the form or report, and not normally shared in any other part of the application.

The term *class module* relates to VBA classes discussed later in the book, the form's module is called a class module because it can handle events from the controls and form sections; this is a feature that you can construct within your own module classes.

When code is written behind a form's event, it is a subroutine, but it is also possible to have functions and subroutines on a form that are not directly associated with any single control. This normally occurs when you have a need for an operation to be performed by several controls. In this case, the code will be marked in the General section of the form's class module.

#### You have now learned that:

- When a code problem occurs, you can click Debug to display the code and fix the problem.
- VBA programs can be edited when the code is paused and then instructed to continue execution after you have fixed any errors.
- Regularly saving your changes after altering code is good practice.
- Program code can be stored in the class module of a form or report.


## **Creating Modules and Procedures**

In the last section, you saw that when the program code goes into Debug mode, the Editor window is displayed. However, you can access the editing environment by using several different methods, as described in the following list:

- Press Alt+F11 (this applies to all Microsoft Office products).
- Press Ctrl+G. This displays the Immediate window in the Editor and automatically opens the Editor window, if it is not already open.
- On the ribbon, on the Create tab, click Module. This creates a new module and enters the Editor.
- In a form or report, on the ribbon, on the Design tab, click the View Code icon.
- Click any of the modules shown in the Navigation window.
- Right-click a Form/Report's sections or controls, and then select Build Event, where there is code written behind an event.

If you are not already in the Editor, then open the sample database and press Alt+F11 to go there.


The VBA Editor comprises a number of windows. If you accidently close one, or need to show a window that is not already displayed, click View on the menubar to open the window, as shown in Figure 1-9.



**Figure 1-9** From the View menu, you can open different types of Editor windows. Note the Project window in the background with its expandable folders. This is a map of all the code modules in the application. Double-click any form or report to open the document's code module.

The Project pane normally contains two folders. The first folder, Microsoft Access Class Objects, contains your forms and reports (only objects with an associated code module are shown). Clicking one of these objects displays the existing code module. The term Class refers to the special nature of a Form/Report module; it handles the events for the object. These are sometimes simply called Form/Report modules. The separate Modules folder below the Form/Report modules contains general purpose program code that can be used in various parts of your application; these are sometimes called general or global modules (this folder is only shown after you have created a module).

Below the Project pane is the Properties pane for the project. You can use this window to change the name of the project or of a module (see Figure 1-10). The VBA project name property should be changed if you use the operating system to copy a database to create a new file, as the file copy operation does not change the VBA project name inside the database.



**Figure 1-10** The Project pane displays all forms and reports that have code modules. You can use the Modules tab for writing code that is not tied to a particular form or report.

### Creating a Module

You can use the Project window to create a new module. There are several different ways to add a new module; the method shown in Figure 1-11 involves right-clicking the Modules tab, and then selecting Insert | Module from the shortcut menu that appears. This method is used when you want to concentrate on setting up new modules when you are in the middle of writing and debugging code.





Figure 1-11 Creating a new module or class module from the Project pane.

When you create a new module, it is automatically assigned a default name (for example Module1). When you click the save button, you will be prompted to give the module a permanent, more meaningful name. Figure 1-12 shows the new module before it has been saved with an alternative name. You might also notice that when you save the new module, it contains two special *Option* keyword lines of text. This is explained in detail in Chapter 2, but for the moment, you can ignore this.

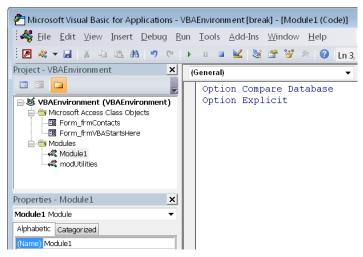

**Figure 1-12** After creating a new module, it will be displayed using a default name such as Module1, Module2, Module3, and so on.

When you click the save option on the toolbar or close the database, you are prompted to replace the default module name with something more meaningful.


#### Creating a Procedure

Modules contain *procedures*, and the procedures contain program code. Use the Insert menu to open the Add Procedure dialog box (see Figure 1-13), in which you can add a new Sub (subroutine), Function, or Property (class modules only). There is also an option to prefix the procedure with the keyword *Static*, which makes variables hold their value when repeatedly executing the procedure (static variables are described in Chapter 2).



Figure 1-13 The Add Procedure dialog box.

There is another, quicker mechanism for creating a new procedure: click any empty area, type the keyword **Sub** {name} or **Function** {name} (be sure you are not inside an existing sub or function), and then press the Enter key. The VBA environment adds an *End Sub* keyword automatically to complete the procedure block, as shown in Figure 1-14).



**Figure 1-14** Creating a new procedure by using the *Sub* keyword. The window in the background shows the keyword and the procedure name typed in; the foreground window shows the result after pressing return.

Type the word **MsgBox**, enter a space, and then type a double quotation mark. As you do this, IntelliSense assists you as you type in each part of the syntax for the *MsgBox* procedure, as shown in Figure 1-15.

```
Option Compare Database
Option Explicit

Sub TestExample()
    MsgBox "
End MsgBox(Prompt, [Buttons As VbMsgBoxStyle = vbOKOnly], [Title], [HelpFile], [Context]) As VbMsgBoxResult

(General)


Option Compare Database
Option Explicit
Sub TestExample()
    MsgBox "Test Nessage", vbInformation, "Example"
End Sub
```

**Figure 1-15** The built-in pop-up *MsgBox* procedure has three parts: the text to display; a constant that is used to indicate what buttons and images to display; and finally, the title for the window.

### **Executing a Subroutine**

The *subroutine* code you created can be executed two ways. The first way is to click the green Continue button on the toolbar menu or press the F5 key (you need to have the cursor positioned inside the procedure on any part of the code). This should then display the message box.

The second way is to type the name of the subroutine into the Immediate window, and then press Return, as demonstrated in Figure 1-16.



**Figure 1-16** You can type a subroutine name into the Immediate window, and then press the Return key to execute it.


The second type of procedure in VBA is called a *function*. The key difference between a function and a subroutine is that functions are always expected to return a value. Functions are fully explained in Chapter 2.

To create a function, you can type **Function** *{name}*, similar to the way you entered your subroutine (you should try this).

# **INSIDE OUT**

Changing a procedure type from a subroutine to a function or from a function to a subroutine.

VBA allows you to quickly change a subroutine into a function, and vice versa. After you change the first line of the procedure, the VBA Editor automatically changes the *End Sub* statement to an *End Function* (and all other *Exit Sub* statements to *Exit Function* statements), thereby converting the subroutine into a function. This is very useful if you have larger blocks of code (spotting all the changes to make would be difficult) and leads to improved productivity when developing code. Figure 1-17 shows the original subroutine in the first window (background). In the second (middle) window, you can see the word Sub has been edited to Function. Finally, as shown in the foreground window, when you click off the line of code, the VBA Editor automatically changes the code *End Sub* to *End Function*.

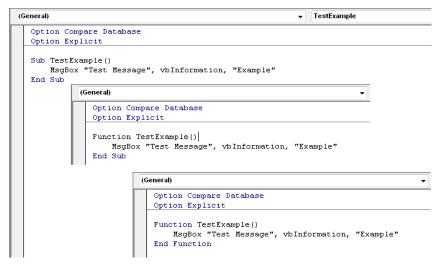

**Figure 1-17** As soon as you click off where you replaced the keyword *Sub* with *Function*, VBA changes the *End Sub* to *End Function*.

Because a function returns information, you are going to modify the program code to match Figure 1-18 so that it returns a value.

The MsgBox statement can be written in two different ways: the first is to write it when you want to display a message with an OK button (where it looks like a Sub [see Figure 1-17]); the second way is illustrated in Figure 1-18, where you want to gather input from a user (it behaves like a function).


```
Option Compare Database
Option Explicit

Function TestExample()

If MsgBox("Test Message", vbYesNo, "Example") = vbYes Then
TestExample = "Yes button was pressed"
Else
TestExample = "No button was pressed"
End If
End Function
```

**Figure 1-18** The *MsgBox* function prompts the user with two buttons (Yes and No), and then tests to see which button the user pressed.

After you have typed in a call to either a built-in procedure or your own procedure, you can right-click the shortcut menu to display information on the parameters for the procedure or get assistance with selecting constant values (see Figure 1-19). The *MsgBox* function has alternative constants for the second parameter (*vbYesNo*) shown in Figure 1-18, which control the buttons and graphics displayed in a message box. To change a constant value in the *MsgBox* routine, hover the mouse over the existing value, right-click to display the shortcut menu, and then select List Constants. This simplifies entering a new constant value.




**Figure 1-19** Accessing the shortcut menu to display information about the parameters for the procedure. Other options on this menu include providing quick information on the function.

#### **Executing a Function**


To run a function, you can press the F5 key, but this will not display the returned value. (In Chapter 2, you will see that functions can be used to assign a returned value to a variable.) You can also call the function from the Immediate window by using the "?" (question mark) symbol adjacent to the function name to display the returned value, as shown in Figure 1-20. Notice that when you execute a function you need to add parentheses "()" after the

function name; a function needs to show that it accepts parameters even when it has no parameters.



**Figure 1-20** Executing a function from the Immediate window. Use the ? (question mark) character to return a value from the function.

In this section, you have seen how program code can be written in a module that is not connected to a form or report. These code units are called *standard modules*, or sometimes general modules or global modules. Figure 1-21 illustrates how a standard module is an object that is independent of any form or report. Compare this to Figure 1-8, which showed a class module of a form or report that is attached to the Form/Report. Code written in these procedures can link to other procedures in the same or different modules. The code will normally not be specific to a single form. Form-specific code is better written inside a form's class module



**Figure 1-21** A schematic view of a module, which can contain one or more procedures. The procedures can be a combination of functions and subroutines.

You should now understand that program code can be written either in the class module of a form or report (when the code is specific to the Form/Report), or it can be written in a standard module (when it is not specific to a Form/Report).

#### Viewing and Searching Code

Module code can be viewed either showing the code for a single procedure (Procedure view) or the entire module (Full Module view), using the scrollbars to browse through its contents, as shown in Figure 1-22.

```
' equaly have used a fixed number like 255 modUtilites_GetSurname = Mid(strMixedName, 1 End If
End If
End Function

Sub modUtilities_DebugAssertExample()
' Example showing Debug.Assert
Dim IngCount As Long
For lngCount = 1 To 10
Debug.Print lngCount
Debug.Assert lngCount <> 5
Next
End Sub

Procedure View

Full Module View
```

**Figure 1-22** Using the buttons in the lower-left corner of the code window, you can display either a single procedure or a scrollable list of all the procedures in the module.

### **Split Window**

The module code window can also be switched to a Split view (see Figure 1-23). This gives you the ability to compare code in two different procedures, one above the other.




Figure 1-23 Use the Window menu to enable the Split view option.


Drag the splitter bar in the center of the screen up or down to change the proportion of the screen that is used to display each procedure. The scrollbars and the PgUp/PgDown buttons can be used independently in each window to browse through the procedures in the module. Figure 1-24 illustrates the split window view.

```
(General)
                                  ProcessNames
   Sub ProcessNames()
   ' This routine goes through all the records in the table
   ' tblCompanyContact and takes the ContactName and splits it in
   ' two new fields FirstName and Surname
   Stop
   Dim db As Database
   Dim rst As Recordset
   Set db = CurrentDb
   Dim strCombinedName As String
   Dim i As Long
   Function modUtilites GetSurname(strMixedName As String)
   ' if the name we have a space we assume that we
   ' can extract a first name like Fred Bloggs
   ' Otherwise we assume we have a first name only like fred
   Dim lngPosSpace As Long
       lngPosSpace = InStr(1, strMixedName, " ")
       If lngPosSpace <> 0 Then
= = - ....
```

Figure 1-24 Viewing two procedures at the same time in Split view mode.

Dragging the splitter bar to the very top of the screen and releasing it will remove the split view. Similarly, by moving the mouse to the top right, just above the vertical scroll bars, the mouse pointer will change shape and you can drag down the splitter bar (this can be a little tricky to do and you will find the Window menu easier to use for this).


Use the drop-down menu located on the upper-right portion of the window to select any procedure within a module (see Figure 1-25). This applies to each of the windows when using the split view, as well.



**Figure 1-25** Use the drop-down menu to quickly display any function or subroutine in a module. For standard modules the drop-down on the top left only has one available choice called General; for class modules there will be other values shown in the drop-down.


#### Note

If you click the drop-down menu in the upper-left portion of the window, you will see only the General option. However, if you are displaying a form or report class module, as shown in Figure 1-26, you will see a list of the form sections and controls, and the drop-down menu at the upper-right will now display the events for the object selected in the lefthand list.



**Figure 1-26** In a Form/Report class module, the drop-down menu on the left lists the controls and sections in the document. The drop-down menu on the right shows all possible events for the selected section or control. Events that have code associated with them are displayed in a bold font.


If you have multiple code windows open, you can use the Windows menu to change between the open windows. You also have the option to tile (horizontally or vertically) or cascade the open windows, as shown in Figure 1-27.



**Figure 1-27** The Window menu in the Editor allows multiple, open module windows to be viewed in Tile mode or Cascade mode.

## **Searching Code**

If you need to find a procedure or a piece of code, press Ctrl+F to open the Find dialog box and locate the code in the current procedure, module, project, or block of selected text (use the mouse to select and highlight the text before pressing Ctrl+F), as demonstrated in Figure 1-28.



**Figure 1-28** Use the Find dialog box to search and replace code fragments within a procedure, module, project, or selected text.

To view the definition of a variable or procedure (see Figure 1-29), position your cursor on it, right-click to open the shortcut menu, and then click Definition. Alternatively, again with your cursor on the procedure or variable, press Shift+F2 to go to the definition. If the code is in a different module, the appropriate module will be opened automatically.


```
Do While Not rst.EOF
strCombinedName = rst!ContactName
rst.Edit
rst!FirstName = modUtilites_GetFirstName(rst!ContactName)
```

Figure 1-29 Viewing the definition of a procedure or variable.

Additionally, referring still to Figure 1-29, if you click the text *modUtilites\_GetFirstName* in the subroutine *ProcessNames*, and then press Shift+F2, the body of the code for the procedure is displayed.

## **Debugging Code in a Module**

To demonstrate how code is debugged, we will use a routine that splits a person's name from a combined field in the *frmContacts* form into separate first name and surname. Figure 1-30 shows the Contact Name in the first record split into the FirstName and Surname fields.




**Figure 1-30** Using VBA code, the contact's full name, which is contained in the Contact Name field, is split into corresponding FirstName and Surname fields.

Return now to the opening *frmVBAStartsHere* form, and then press the button labeled Break Apart The Contact Name Into First Name And Surname, as shown in Figure 1-31.

```
Break apart the contact name into first name and surname
```

**Figure 1-31** Click the Break Apart The Contact Name Into First Name And Surname button on the *frmVBAStartsHere* form to trace through and debug the application code for splitting apart the Contact Name field.

The code will pause at a *Stop* statement, as depicted in Figure 1-32.

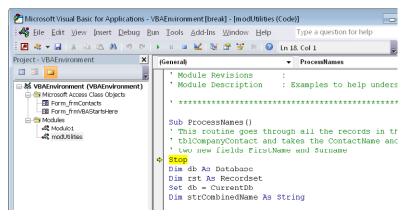

**Figure 1-32** Hardcoded (permanent) breakpoints using the *Stop* keyword are a useful reminder when developing code that it is incomplete, but they should not be included in any final application.


Notice in Figure 1-32 that the code has stopped in the *modUtilities* module, and not in the form's class module.

Figure 1-33 presents the code behind the button. This code calls the procedure *Process-Names* in the module *modUtilities*.

**Figure 1-33** The code behind the button is written in the *Click()* event. This code calls the *ProcessNames* routine, which is has been written in a module.

In Chapter 2, you will learn about naming conventions. The convention adopted in this book is to add a prefix to procedures in modules so that we can easily see in which module a procedure is defined. In the preceding example, if you had called the *modUtilities\_ProcessNames* procedure rather than *ProcessNames*, it would be easier to see how the code on the form linked to the code in the module (in this case, we have not followed the convention to illustrate the point).

There is another feature in the VBA Editor that can help display how the modules have been linked together. Selecting the Call Stack from the View menu displays the path from the forms class module to the procedure in the utilities module. Figure 1-34 illustrates that this procedure was called from a form (indicated by the "Form\_" prefix) with the name frm-VBAStartsHere, from the control called cmdBreakApart on the Click event for the control.




**Figure 1-34** The Call Stack is a visual aid that helps to establish where you are in the code. In this example, reading from top to bottom, you are in the code unit *modUtilites\_ProcessNames*, which was called from the code unit *cmdBreakApart\_Click*, which is in the form *frmVBAStartsHere*.

# **INSIDE OUT**

Creating code in a module and linking the code to the form or report

In earlier sections, you looked at how program code can be written in a form's class module, and then you saw how more general purpose code can be written in a standalone module that is not connected to a form or report. The code on the form or report can be linked to the code in a standalone module. This is shown diagrammatically in Figure 1-35.



**Figure 1-35** Code in a form or report class module can call code in a module. The module can contain code that is used in several parts of the application.

As an alternative to placing the code *ProcessNames* in a module, you can instead either write the code behind the *OnClick* event in the form or add the code as a subroutine to the form's class module. Which of these alternatives you choose depends on whether the code can be used in different parts of the form or in more than one form or report in the application. Because the *ProcessNames* routine can be called from a maintenance form or as part of a process for importing data, we have placed the code in a general purpose utilities module.

### **Debug Commands**

Debugging code involves several operations. These operations are:

- Stopping or breakpointing the code so that it pauses at the correct point for investigation.
- Examining and monitoring variables.
- Modifying and repeating the code execution.

Debug.Print is a command that displays values of program variables or expressions in the Immediate window when developing code:

```
Debug.Print strCombinedName, rst!FirstName, rst!Surname
```

There is another debug command called *Debug.Assert*, which can be used to halt the execution of program code when a specific condition is *False*. For example, the following code halts execution when *IngCount* = 5 (note that the *Debug.Assert* stops when the condition is false):

## **Breakpointing Code**

The *Stop* and *Debug.Assert* statements are hardcoded breakpoints, but you can also have soft breakpoints that you can use when you interact with a block of code and need to find out why the code is failing or behaving in a particular way.

There are three ways to enter a breakpoint. First, you need to locate the line in which you want to insert the breakpoint, and then do one the following:

- Press the F9 Key.
- On the Debug tab, click Toggle Breakpoint.
- Click in the margin next to the line of code (this is the easiest method).

Figure 1-36 shows the code paused at the *Stop* statement and a soft breakpoint highlighted farther down the page.

```
(General)
                                                               ProcessNames
  Sub ProcessNames()
  ' This routine goes through all the records in the table
  ' tblCompanyContact and takes the ContactName and splits it into
  ' two new fields FirstName and Surname
  Dim db As Database
  Dim rst As Recordset
  Set db = CurrentDb
  Dim strCombinedName As String
  Dim i As Long
  Set rst = db.OpenRecordset("tblCompanyContact", dbOpenDynaset)
  Do While Not rst.EOF
      strCombinedName = rst!ContactName
      rst.Edit
      rst!FirstName = modUtilites GetFirstName(rst!ContactName)
      rst!Surname = modUtilites_GetSurname(rst!ContactName)
      Debug.Print strCombinedName, rst!FirstName, rst!Surname
      rst.Update
      rst.HoveNext
  Loop
  End Sub
```

**Figure 1-36** The code discontinues execution at the *Stop* statement. Note the highlighted breakpoint farther down the page

Unlike *Stop* statements, which need eventually to be removed from the code, breakpoints are not remembered after you close the database. You can use the Debug menu to clear all breakpoints in the application, or you can press Ctrl+Shift+F9.

With the breakpoint set, you want the code to execute until it reaches it. Use the Continue button (see Figure 1-37) or press F5 to instruct the code to continue execution until it either completes, or reaches a breakpoint.




Figure 1-37 Three of the buttons on the Run menu are also displayed on the menu bar—Continue (F5), Break (Ctrl+Break), and Reset (which halts code execution).

Press F5 to continue the code execution to reach the breakpoint shown in Figure 1-38.


```
Set rst = db.OpenRecordset("tblCompanyContact", dbOpenDynaset)
Do While Not rst.EOF
   strCombinedName = rst!ContactName
   rst.Edit
   rst!FirstName = modUtilites_GetFirstName(rst!ContactName)
   rst!Surname = modUtilites_GetSurname(rst!ContactName)

   Debug.Print strCombinedName, rst!FirstName, rst!Surname
   rst.Update
   rst.HoveNext
Loop
```

**Figure 1-38** Code continues to execute until it either reaches the next breakpoint or completes execution.

The *ProcessNames* routine is an example of programming with a *RecordSet* object, which is discussed in Chapter 5, "Understanding the Data Access Object Model." The program code loops through each record in the table and changes the *Firstname* and *Surname* fields.

If you switch to the Access application window and open the table *tblCompanyContact*, you can investigate whether your code has worked. And as it turns out, it has not worked as desired; Figure 1-39 shows that the entire contact name has been copied into the *First-Name* field. The name was not split apart, as intended.



**Figure 1-39** With the code paused at a breakpoint, you can switch to the application window and open other Access objects (in this case a table) to see the changes made to the data. Here, you can see that the code has not split apart the Contact Name.

#### Set Next Command

If you move the cursor over the first line in the loop and then right-click, you can use the *Set Next* statement to make the code go back and repeat the operation. This is typical of how code is debugged. After identifying an error, you can move back to an earlier point in the code to investigate it.

To change the current execution point to a different line of program code, place the cursor on the line that begins with strCombinedName =, right-click to display the shortcut menu, and then click Set Next Statement, as shown in Figure 1-40.



**Figure 1-40** Changing the current execution point to a different line by using Set Next Statement.

After you click Set Next Statement, the yellow highlighted line changes, as shown in Figure 1-41. Notice also that you can display the values of the variable by hovering the mouse over it. (This is not restricted to variables in the highlighted line of code; you can hover the mouse over variables on other lines to view their values, too.)

```
Do While Not rst.EOF
strCombinedName = rst!ContactName
rst.Edit rst!ContactName = "Maria Anders"
rst!FirstName = modUttlites GetFirstName (rst!ContactName)
rst!Surname = modUttlites_GetSurname(rst!ContactName)


Debug.Print strCombinedName, rst!FirstName, rst!Surname
rst.Update
rst.JoveNext
Loop
```

**Figure 1-41** Hovering the mouse over any variables in the program code will display the variable values.

As an alternative to using Set Next Statement to change the execution point, you can also grab the yellow arrow on the side margin and drag it to a different line of code.

#### **Breakpoint Step and Run Commands**

You now know that this code has a fault, but rather than using the Continue (F5) execution method that you just saw in the previous section, you can single step through the code to locate the problem by using the Debug menu or hotkeys, as shown in Figure 1-42.



**Figure 1-42** Using the Step commands on the Debug menu, you can trace through the execution of your code.

You can do this in several ways. One way is to keep clicking the Debug menu options, but it is much faster to use the following function key combinations to step through the code:

- **F8** Follows the code execution to the next step.
- **Shift+F8** Moves over a procedure call and executes everything in the procedure, but does not show you the detailed execution steps.
- **Ctrl+Shift+F8** Indicates that you have examined the procedure in enough detail and want to complete the execution of this current procedure, but stops once you have returned to the calling code.
- Ctrl+F8 or right-clicking and selecting Run To Cursor Process all the lines until
  you reach the current position of the cursor.
- Locate a line, right click, and then select Set Next Statement.

It is important to remember that when you press either Shift+F8 or Ctrl+Shift+F8, both operations cause any code to execute. If you do not want the code to execute, then locate the next line that you do want to execute, and then use Set Next Statement to change the execution point.

For the purposes of this example, keep pressing the F8 key until you arrive at the point shown in Figure 1-43.

Figure 1-43 shows the unmodified code and the mouse hovering over the variable. The displayed value for the variable leads you to spot the logical error.

**Figure 1-43** Pressing F8 repeatedly brings you to this point in the code. Notice the displayed value for the variable.

The bug in this code occurs because of a space in a name. The position of the space could be represented by a value of IngPosSpace 6, yet the code states that when IngPosSpace <> 0, we have found the entire name. So the logical test is the wrong way around. The following line needs to be changed from:

```
If lngPosSpace <> 0 Then
to:
If lngPosSpace = 0 Then
```

The problem with the code in Figure 1-43 is that it has branched into the wrong part of the processing. You would have expected the code to branch into the statements after the *Else* keyword. The mistake here is in testing for <> when you should be testing for =. You need to now fix the code.

To fix the code, edit the <> to an = sign, as shown in Figure 1-44. Then right-click the line containing the *IF* statement and select Set Next Statement (this means that we can repeat the last action). Figure 1-44 shows the modified code and the result of selecting Set Next Statement to change the execution point back to the line containing the coding error.

```
Function modUtilites GetFirstName(strNivedName is String)
 if the name we have a space we assume that we
' can extract a first name like Fred Bloggs
 Otherwise we assume we have a first name only like fred
Dim lngPosSpace As Long
   lngPosSpace = InStr(1, strMixedName, " ")
        so no space found and W Cut
      is the first name
      modUtilites_GetFirstName
   So what we need to wan modUtilites_GetFirstName Object Browser
                                          the space
IngPosSpace - 1)
End Function #I Run To Cursor
Function modUtilites_GetSurname(s SetNext Statement
 if the name we have a space we
can extract a first name like | Show Next Statement
  Otherwise we assume we have a s
Dim lngPosSpace As Long
                             Hide
```

**Figure 1-44** After changing the <> operator to =, right-click the mouse over the line where you changed the code and select Set Next Statement to go back and repeat executing the step from the code line that has now been corrected.

As before, press F8 to follow the code execution (you will also need to fix a similar coding error in the procedure *modUtilites\_GetSurname*). Figure 1-45 shows how the code execution point has branched to the correct point to extract the first name.

```
Function modUtilites_GetFirstName(strMixedName &s String)
' if the name we have a space we assume that we
' can extract a first name like Fred Bloggs
' Otherwise we assume we have a first name only like fred
Dim lngPosSpace &s Long

lngPosSpace = InStr(1, strMixedName, "")
If lngPosSpace = O Then
' so no space found and we assume the entire name
' is the first name
modUtilites_GetFirstName = strMixedName
Else
' So what we need is all the characters up to the space
modUtilites_GetFirstName = Left(strMixedName, lngPosSpace - 1)
End If

End Function
```

**Figure 1-45** This time, pressing F8 to step through the code takes the program to the correct processing statements.

There are a number of ways to see the result of evaluating an expression. The easiest method is to hover the mouse pointer over the expression, but you can also paste a code fragment into the Immediate window and see the result before executing the line of code (this is useful when you want to see the values for different parts of a complex expression).

#### Displaying Variables in the Locals Window

The Locals window gives you an instant view of the values in your program variables. This is particularly useful for complex variables that have many components, such as a *Recordset*. Figure 1-46 displays the local variables in your procedure.




Figure 1-46 You can use the Locals window to both display and change values in variables.

In either the Locals window or the Immediate window, you can directly edit the values in variables, as shown by the highlighted value in Figure 1-47.





Figure 1-47 Variables can also be assigned values in the Immediate Window.

### Tracing Procedures with the Call Stack

The Call Stack shows you where you are once your code has moved through several layers of execution (see Figure 1-48). You can also use it to move to any of the procedures shown by just clicking on the procedure itself in the Call Stack dialog box and then pressing the Show button.



**Figure 1-48** You can use the Call Stack to help find where you are in your code, or you can use it to move directly to a procedure.

In Figure 1-48, the top line in the Call Stack dialog box shows the current routine that is executing. Below that is the succession of routines that were called to take the execution to its current point. Double-click any routine in the call stack to display that routine's code (note that the execution point remains unchanged if you do this).

### Watching Variables and Expressions

The Watches window is particularly useful for monitoring values as you iterate in a loop. With the Watches window displayed, you can right-click and add an expression or variable to be monitored. Figure 1-49 shows the shortcut menu to add a *Watch* variable.





Figure 1-49 The Watches window is particularly useful when debugging repeating loops in code.

# **INSIDE OUT**

Investigating values in variables with complex structures

Normally, *Watch* variables are simple values, but if you add a more complex type of object (in this case a field from a *Recordset*), you get a lot more information. Figure 1-50 shows the result of adding a *Recordset*'s field value to the Watches window. This kind of variable is discussed in Chapter 5, and at this point, we only want to illustrate how more complex objects can be examined by using the Watches window.

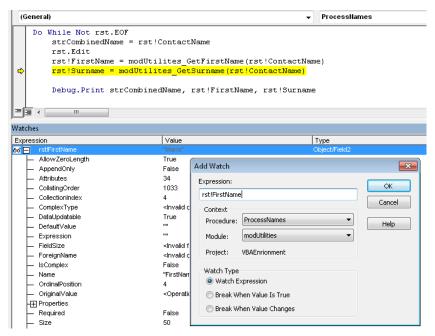

**Figure 1-50** A *Recordset* variable is an object variable; rather than holding a single value, it has a more complex structure, shown here being added to the Watches window.

Figure 1-51 demonstrates how more complex variables can be directly edited in the Watches window. You might find this easier than changing values in the Immediate window.



Figure 1-51 The values for watched variables can be directly edited.

The ability to drill up and down into more complex structures is also a feature shared by the Locals window.

#### **Adding Conditional Watch Expressions**

Rather than use *Debug.Assert* or modify your code with a *Stop* statement, you can add expressions to conditionally pause the execution of your code when an expression is *True* or when a value changes. Figure 1-52 shows the inclusion of a *Watch* variable that will cause the code to break execution when a specific condition holds.




Figure 1-52 Adding a Watch expression to break the execution of the code.

One last word regarding the Watches window: be aware that the settings are not permanent. They are cleared once you exit the application.

### Working with the Immediate Window

The Immediate window is a scratch pad for performing calculations as well as a powerful tool to display and modify properties of tables, queries, and forms as they are executing. Figure 1-53 presents some examples that you should try typing into the Immediate window. Type a question mark beside the item that you want to calculate, and then press Enter.

The Immediate window will continuously scroll as more information is displayed and there is no option to clear the window (to clear the window, you highlight all text in the window and press the Delete key).

```
Immediate

?forms.Count
1
?forms(0).Name
frmWBAStartsHere
?forms(0).Caption
Lets get started
?currentdb.TableDefs.Count
17
?currentdb.TableDefs("tblCompanyContact").RecordCount
91
```

Figure 1-53 The Immediate window is a combination scratch pad and a tool to display and modify properties of tables, queries, and forms.

### Changing Code On-the-Fly

Throughout this chapter, you have seen how to change your program code while it is executing, and you might wonder if there are limitations on doing this? The answer is yes, but it doesn't often get in the way of your development.

In the example shown in Figure 1-54, we have defined a new variable while the code is executing.

```
Sub ProcessNames()

' This routine goes through all the records in the table

' tblCompanyContact and takes the ContactName and splits it into

' two new fields FirstName and Surname

Stop

Dim db As Database

Dim rst As Recordset

Set db = CurrentDb

Dim strCombinedName As String

Dim i As Long
```

Figure 1-54 The new variable 'i' has been added while code is executing.

If you try deleting (or changing) variables while the code is executing, you will be presented with a warning that this will cause the code to stop executing (you might decide to add a comment after the variable to remind yourself to delete it later when the code is no longer executing).

For example, if we now decide that we have made a mistake and want to change the name of our new variable in Figure 1-54 from 'i' to something different, then you will see the warning shown in Figure 1-55. This means that you either must ignore your change (select Cancel and fix it later) or stop code execution.





Figure 1-55 A warning appears if you attempt to delete variables while the code is executing.

# Using the Object Browser and Help System

In this section, you will look at how you can configure the behavior of the Help system and the use of the Object Browser as an alternative method for locating help on objects.


## Configuring the Help System

VBA has an excellent Help system. To use it, simply click a word that you do not understand, and then press F1. However, it's best to have the Help system set to work with Show Content Only From This Computer; otherwise, many of the help topics might not easily locate help for a particular keyword, function, or method. Figure 1-56 shows this setting being changed at the bottom of the figure.

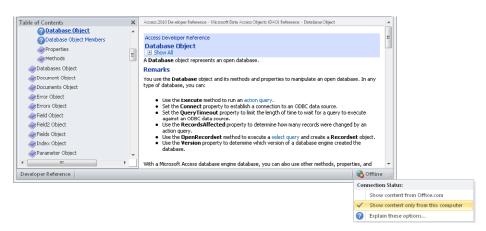

**Figure 1-56** With the Help screen open, setting the Help system to Show Content Only From This Computer can offer better identification of keywords.


Access comes with an extensive Help system, and by highlighting a keyword in code (for example *CurrentDb*) and pressing F1, you can display help on the statement or object, as shown in Figure 1-57.

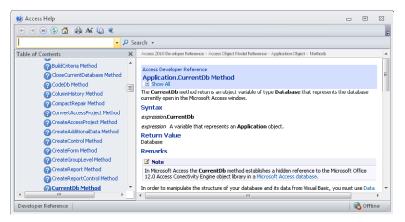

**Figure 1-57** Press F1 when you have the cursor on a VBA keyword to locate the keyword in the VBA Help system.


### Working with the Object Browser

As you move into more advanced programming (as well as progress through this book), you will see that when you work with objects outside of the Office suite, getting help by pressing F1 will not always display the help information for the object. In this case, you can use the Object Browser (Figure 1-58) either by using the toolbar or pressing the F2 key. Later in this book, we add references to other libraries (for example Microsoft Excel). Help is then also available on these external libraries through the object browser.



**Figure 1-58** You can use the object browser to locate objects and help on your project code and the built-in features in Access.

The object browser can be used for code units designed in your application, external referenced programming units, and Office components including Access (Figure 1-59) where we have searched for the text *Currentdb*.

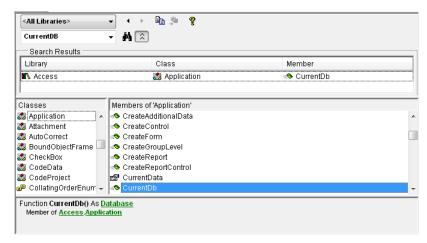

**Figure 1-59** When you have located an item in the object browser, press F1 to display the help file that describes the object.

## Summary

The VBA Editor and debugging environment in Access offers many useful features to assist you and enhance your productivity in developing applications. Among these features are:

- VBA allows you to significantly modify program code while it is executing. The features for stepping backwards and forwards through the code while it is paused permits you to very quickly isolate logic errors in your code and rectify them. There are minor restrictions on the changes that you can make to the code without the need to restart the code.
- The ability to have both code executing and being able to redesign associated objects such as queries and forms (other than the form that is currently executing the code) is another useful productivity feature.
- The Immediate window is one of the most productive features of the VBA environment. With it, you can test and modify properties of the executing form while the form is executing code.
- The search features that allow you to locate code either by pressing Shift+F2 on an
  executing procedure or Ctrl+F for general searching. Again, these tools offer unique
  productivity.

We end this chapter with some general comments on developing within the VBA environment.

#### Mixed Versions of Access

Since Access 2007, you might experience problems if you are developing with multiple versions of the Office products on a single computer. This is because different versions of the product require different core libraries to be loaded when switching between the versions. Although it is possible to develop with multiple versions on a single computer, it is not recommended, and we would suggest that for all versions prior to Access 2007, you can use a single computer, but for versions including and after Access 2007, you should consider having separate virtual or physical computers. There is a switch over feature to support different versions on a single computer, but you might find that either it takes an unacceptable amount of time to switch or you easily become vulnerable to any issues if library references are not correctly switched over.

#### **Expression Builder**

The Expression Builder is an indispensible tool when building applications to find the correct syntax when referring to controls on a form. Unfortunately, the VBA environment does not have an Expression Builder option. The easiest way to get around this problem is to go into the Query design tool, create a dummy query, and then go to the Criteria and right-click, selecting Build, which will bring up the Expression Builder (Chapter 4, "Applying the Access Object Model," discusses this in more detail).

#### **Object Browser**

When using 32-bit Microsoft ActiveX controls in a 64-bit operating system, the controls might appear to work well, but there appear to be problems that cause Access to crash when using the Object Browser to display the associated help information.

#### **Debugging Modal Forms**

When a user is interacting with a modal form, he or she cannot interact with other objects on the desktop. Debugging code on modal forms is more challenging because you cannot easily interact with other Access objects, such as checking data values in a table or query. The best advice here is to remove the modal property when debugging the form and then set it back to modal once you have resolved any problems in your code.



# Understanding the VBA Language Structure

VBA Language Settings	Functions and Procedures66
Working with Constants and Variables 49	Control Statements and Program Flow

he popularity of Microsoft VBA as a programming language comes from the simplicity and productivity that the language offers. You will easily pick up the general principles and syntax of VBA; the more complex part of programming is in understanding the use of the language to control how your code interacts with other objects, such as tables, queries, forms, and reports that make up your application.

With Microsoft Access/VBA, you can often solve a problem by using several different techniques. It is this flexibility that is so valuable when you have a difficult problem that you cannot easily solve by using one method; you can often take an alternative approach to solving the problem. Deciding on the best approach to solving a problem can be challenging, and as you gain experience with the language, you will find your own preferred methods for solving different types of problems.

Chapter 1, "Using the VBA Editor and Debugging Code," focused on familiarizing you with the programming environment. In this chapter, you're going to look at a large number of VBA code examples that take you through the structure of the language. If you are new to VBA, you should review this chapter in conjunction with Chapter 1 to strengthen your understanding of both the language and environment.

After reading this chapter, you will:

- Have an overview of all the key language features and know where to refer back to when you need help with syntax.
- Understand how application code is structured and how you should plan to organize and develop your own code.
- Feel confident in writing program code and following the code written by other programmers.

#### Note

As you read through this chapter, we encourage you to also use the companion content sample database, VBAExamples.accdb, which can be downloaded from the book's catalog page.

# **VBA Language Settings**

In this section, we discuss the different settings in the VBA environment that affect how the language operates. You can customize how the VBA Editor behaves as you write code by making adjustments in the Options dialog box. There are also some options that have a more subtle impact on your development. To access the Options dialog box, click Tools | Options, as shown in Figure 2-1.




Figure 2-1 VBA Editor Options are available from the Tools menu.

From the perspective of writing code, one option that some developers choose to switch off is Auto Syntax Check. With this option enabled, the VBA Editor monitors the syntax of your code as you type. When it detects an error, it displays a warning message box. Some developers find that this slows them down, thus they switch off the option. But even when this option is disabled, syntax errors are still highlighted in colored code; only the message boxes are not shown. We would recommend that when starting out you leave this option active and later evaluate whether it helps or hinders your entering code.

#### Comments

Comments that you add either at the beginning of a line or after a code statement are indicated by a single quotation mark before the comment. The line will then appear colored green. To remove the comment, remove the single quote. Comments are used extensively in this book to document operations, but you can also use a comment quotation mark to disable a line of code.

VBA also has a feature for defining blocks of code as comments without the need to repeatedly enter the single quotation mark on each line. To do this, first highlight the lines of code that you want to mark as a comment, right-click the Editor menu bar, and then select the Edit menu bar option. The new menu bar has two buttons: one for commenting, and the other for uncommenting blocks of code.

## **Setting** Option Explicit

You can use the VBA Editor Options dialog box shown in Figure 2-2 to alter the behavior of the environment.





Figure 2-2 Selecting the Require Variable Declaration option will reduce programming errors.

When Require Variable Declaration is selected and a new module is created, the *Option Explicit* directive is added at the top of a module (*Option Compare Database* is explained in the next section):

Option Compare Database Option Explicit

Looking in the *modUtils* module, the *Option Explicit* keyword at the top of the module is commented out (this simulates what happens when you do not have the Require Variable Declaration option selected when creating a module) to demonstrate how difficult it can be to spot errors when this option is not selected, as shown in Figure 2-3.

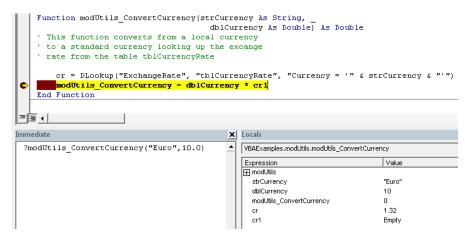


**Figure 2-3** Because you are not forcing all variables to be declared, any typing mistakes are assumed to be referencing new variables.

Notice how the function can be tested from the Immediate window and always returns the incorrect value, 0. Looking at the Locals window, you can see that there are two currency rate variables, one called cr and the other cr1.

This is an error: cr1 was typed when it was supposed to be cr, but this is difficult to spot.

If you now uncomment the *Option Explicit* statement at the top of the module and try to run the code, a warning appears indicating that the variable cr is not defined. Then, after adding a *Dim* statement that declares the variable cr and trying again to run or compile the code, another warning displays, this time indicating that the variable cr1 has not been declared, as shown in Figure 2-4; this would allow the programming error to be spotted and corrected.



**Figure 2-4** Uncommenting *Option Explicit* forces the declaration of the variable *cr*, which renders the *cr1* typing error easily detected.

Once you have added *Option Explicit* to the module, rather than running the code to see the problem, you only need to select Debug | Compile from the menus to find any undefined variables.

The combination of forcing variables to be declared and regularly compiling your code (which is explained in the next section) during development will help you avoid many programming errors.

## **Selecting Option Compare**

In the previous section, you saw that the first line in any module is *Option Compare Database*. This line determines how VBA performs string comparisons, which are carried out character by character, reading from the left, as shown in the following:

```
Option Compare {Binary | Text | Database}
```

The following gives a brief description of each of the properties for the *Option Compare* declaration:

- **Binary** Specifies that "AAA" is less than "aaa", the letter 'A' comes before 'a' (case sensitive A...Z, then a...z).
- **Text** Specifies that "AAA" = "aaa" when comparing a string (case insensitive).
- **Database** This is unique to Access. It means use local settings for comparisons (behaves similar to the Text option for most systems).

Comparing "a" with "ab" will give the answer that "a" is less than "ab" (when all characters match, the shorter string is less than a longer string), and "abc" is less than "ac" (because b comes before c).

In modOption, we have provided a function called modOption\_OrderWords. To test this procedure, comment out the appropriate Option Compare statement at the top of the module, and then type the examples shown in Figure 2-5 into the Immediate window (the first result is shown with Option Compare Binary, the second with Option Compare Text).

```
Immediate

?modOption_OrderWords("AB,a,ab,B,c,C")
AB,B,C,a,ab,c
?modOption_OrderWords("AB,a,ab,B,c,C")
a,ab,AB,B,C,c
```

**Figure 2-5** The *modOption\_OrderWords* function uses the *Split string* function to split apart a string into an array of words.

There is also a string function called *StrComp* that can be used to perform string comparisons without needing to change the *Option Compare* for the entire module, if you need to use different comparison techniques.

## **Compiling Code**

VBA is an interpreted computer language; this means that the program code is not preconverted into machine-dependent executable code. The code is written in a text form and then prepared in a tokenized form called *p-code* (once compiled) the p-code is processed for execution at runtime. This has the advantage of allowing great flexibility in debugging and altering code as it executes.

Compiling the code prepares the p-code prior to runtime, which means that the code will execute a little bit faster. But the biggest bonus is that it allows you to detect and correct errors at an early point during development.

One keyword, *Option Explicit*, performs a valuable task when you compile the code in your application. If you have *Option Explicit* in all your modules and you compile the code, it will stop at every instance where you have used a variable but have not declared the variable; this action is available on the Debug menu, as shown in Figure 2-6. If the option is grayed out, this means that all the code in the your database is compiled.




Figure 2-6 Regularly compiling your code ensures that errors are quickly identified.

Another option that you might consider is *Compile On Demand* (click Tools | Options (General)). If you leave this option selected, when you run a procedure in a module (the default is on), only that procedure is checked; other procedures will be checked as they are demand loaded (required to be used). If you had another procedure in the same module with an undeclared variable, this would not be detected. Clearing the option means that all the procedures in the current module are checked when you attempt to run any procedure in that module. Some developers prefer to not to use this option; however, if you regularly use the Debug | Compile option, then all code in the application is compiled anyhow, which renders the decision to enable or disable the *Compile On Demand* option as not important.

The following application property can be used to check whether an application is in a compiled state:

application. Is Compiled

# **INSIDE OUT**

#### The /Decompile command line switch

Over a period of time, Access databases can bloat (which means the database size increases more than expected). Regularly compacting and repairing a database reduces the database bloat. There is an additional bloat that can occur in the VBA code, and one method for reducing this bloat is to decompile and then recompile the database. Advice as to when and whether you should regularly decompile a database varies, but a good rule-of-thumb is to only decompile if you believe you have significant bloat, or if the application is behaving in an unexpected way. This can assist in resolving an obscure problem.

To decompile a database, you need to open the database by using a link for Access that includes the */Decompile* command line switch, as shown in the following:

"C:\Program Files (x86)\Microsoft Office\Office14\MSACCESS.EXE" /Decompile

You can create a shortcut on the desktop to do this by browsing to the installed directory of Microsoft Office and right-clicking and dragging the MSACCESS.EXE program into an appropriate folder (selecting to create a shortcut). Next, right-click this new shortcut, select Properties, and then edit the Target property to include the /Decompile switch. Launching Access by using the shortcut then means that the first database that you open will automatically be decompiled. You can then compile, and then compact and repair the database.

#### **Conditional Compilation**

Keywords prefixed with a # symbol (#Const, #If, #Else, #End If) are called compiler directives. These special keywords allow you to include or exclude blocks of code based on a flag.

One use for these directives is if you are building an application that needs to run in different versions of Access and you want a simple method for setting a flag to ensure that code that is only available in a particular product version is compiled. This saves you from having to manually comment out code that might not be available in that particular product version.

An example of this is the *RecordSet2* object, which handles attachment data and is not available in versions prior to Access 2007. In these earlier versions, you would need to use the older *RecordSet* object.

Another use for compiler directives is to switch on debugging statements to help when resolving code problems, as demonstrated in the following:


```
#Const Pre2007Version = False
#Const Debugging = True
Sub modCompiler_OpenRecordSet()
   Dim db As Database
    #If Pre2007Version Then
       Dim rst As DAO.Recordset2
    #Else
       Dim rst As DAO.Recordset
    #End If
    Set db = CurrentDb
    Set rst = db.OpenRecordset("Customers")
    #If Debugging Then
        Debug.Print "Recordset opened: "; rst.Name
    #End If
    rst.Close
   Set rst = Nothing
   db.Close
   Set db = Nothing
End Sub
```

#### References

References inform Access about the core libraries of objects that will be used in the VBA project. With different versions of Access, you get different default references. This is because different versions of Access need different versions of the libraries (and also in part because Microsoft has changed default recommendations concerning which libraries you should be using; notably Data Access Objects (DAO), which is the default in older versions and newer versions after Access 2003, and ActiveX Data Objects (ADO), which is the default in Access 2000/2002, when the default was changed).

Later in this book, we will be adding new entries to the references when we work with external libraries, such as ADO, ActiveX, and the other Office products.


In the VBA Code Editor, click Tools | References to see your current references. They should appear as shown in Figure 2-7.



**Figure 2-7** The standard references that are added when you create a new database with Access 2010.

References can be changed and alternative libraries can be loaded. You need to take care when doing this, but if you do make a mistake, then references can be added back in.

If you save your .accdb file in an .mdb format (assuming you have no new product features that prevent you from doing this), then the references will be changed as older libraries are loaded, as is shown in Figure 2-8.



**Figure 2-8** References when converting an .accdb to .mdb format or creating an .mdb file with Access 2010.

The references shown in Figure 2-7 are now replaced with those shown in Figure 2-8, which means that the new Access database engine object library is replaced with the older DAO library, and an additional reference to Visual Basic for Applications Extensibility is added (which we would recommend that you consider removing by clearing the reference if moving the database to older environments)

If you move a database to an environment that does not have a required reference library, the library is tagged as missing. The easiest way to detect a missing library is to try to compile the code in the new environment. If you need to programmatically check references, the following code can be used:

In this example, the *IsBroken* property is used to detect a broken or missing reference. Missing or broken references can be a serious problem that you need to resolve.

# **INSIDE OUT**

#### **Visual Basic for Applications Extensibility**

Oddly, as of this writing, a reference to Visual Basic for Applications Extensibility is only added to a project when you convert an .accdb to an .mdb, yet it is only applicable on a computer that has Access 2010 installed; if the .mdb was transferred to a computer with an older version of Access, the reference would be missing.

It is a tribute to the flexibility of VBA that this library, which appears in the object browser as VBIDE, provides a programmable interface to the VBA integrated developer environment (IDE), as shown in Figure 2-9.

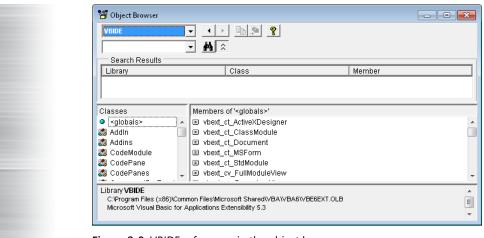


Figure 2-9 VBIDE references in the object browser.

# **Working with Constants and Variables**

In this section, you will be looking at the use of constants and variables in your application.


# **Improving Code Quality with Constants**

Access contains built-in constants, and when you start typing a function such as *strComp* (string comparison function), IntelliSense assists you with its completion, as shown in Figure 2-10.

```
?strcomp (| String1, String2, [Compare As VbCompareMethod = vbBinaryCompare])
```

**Figure 2-10** IntelliSense provides assistance for built-in procedures as well as your own procedures.

As you continue to type (often you need to type a space, comma, or bracket), Access presents a drop-down list of constants. In this example, once you reach the third parameter position, you see the constant values shown in Figure 2-11.



**Figure 2-11** After you've completed typing a procedure, right-click it and select Quick Info to view the IntelliSense displayed for the procedure call.

When you right-click while the mouse pointer is over different parts of an existing function, the shortcut menu displays the same IntelliSense assistance that you receive when you type the code, as is illustrated in Figure 2-12.



#### List Properties/Methods



List Constants



Quick Info



Parameter Info

Figure 2-12 You can use the shortcut menu to display IntelliSense assistance.

Constants make your program code easier to read and subsequently maintain. For example, if you want to test a string to ensure that there are fewer than the 40 characters for a known database text field, you can use an expression such as the following:

```
Function modUtils_CheckCompanyName(strInputString As String) As Boolean
   If Len(strInputString) > 40 Then
        modUtils_CheckCompanyName = False
        Else
        modUtils_CheckCompanyName = True
   End If
End Function
```

But if at some later point you want to extend the allowable length to 50 characters, then you would need to search and replace this in the program code. Not only is this a tedious job, but you risk changing other occurrences of the number 40 in your code that might be used for a different purpose. So, instead of having the number 40 in the program code, we could use a *constant*, as shown here:

```
Const lngMaxCompanyName = 40
Function modUtils_CheckCompanyName(strInputString As String) As Boolean
    If Len(strInputString) > lngMaxCompanyName Then
        modUtils_CheckCompanyName = False
        Else
        modUtils_CheckCompanyName = True
    End If
End Function
```

Constants need to be declared either at the top of a module before any procedures or inside a procedure. If you define the constant inside a procedure, then it cannot be used outside of that procedure.

If you want a constant that can be referenced outside of the module in any part of your system, then add the *Global* keyword:

```
Option Compare Database
Option Explicit
Global Const lngMaxCompanyName = 40 ' Available in any part of the application
```

Or you can use the *Public* keyword rather than *Global*, which are interchangeable terms in this context (*Global* is an older VBA syntax, but it is still very popular):

```
Public Const lngMaxCompanyName = 40 ' Available in any part of the application
```

In the previous examples, you have not been completely rigorous when defining your constants (but this is commonly what VBA developers do); with the constant *IngMaxCompanyName*, you imply that this is a long number by using the *Ing* prefix. However, if you want to be accurate in how you make this definition, you should also explicitly include the variable type:

```
Public Const lngMaxCompanyName as long = 40
```

Whether a constant is available only inside a procedure (defined at the top of the procedure), at any place in the module (defined at the top of the module), or in any module in the application (defined at the top of the module with the *Global* or *Public* keyword) is called the *scope* of the constant. Some developers choose to prefix a global constant with the letter g to indicate global scope, for example *glngMaxCompanyName*.

A general principle that is regarded as good software engineering practice is to give your definitions a minimum scope. This would suggest that you restrict a constant to being defined in a procedure if that is the only place where it is used. However, many developers will define all their constants at the top of a module so that they are all in one place.

Sometimes, developers prefer to keep all of their constants in a special module and declare them as global/public. This way, they can easily see them all in one place. This is a good idea, but in some circumstances, you might prefer to keep the constants in the same module as the code that uses them, because then if you import the module into another application, it has all its constants defined within the module. This comes back to the general idea of scope—designing self-contained modules has a lot of advantages because they can be more easily tested and moved between applications.

Scope is not unique to constants, though; variables and procedures also work within the construct of scope.

#### The Enum Keyword

You have seen that for built-in functions, IntelliSense can provide a list of available constant names. You can add this feature to your own applications by using the *Enum* keyword

(enumerate), and it will automatically integrate with the IntelliSense, as shown in both the following sample and Figures 2-13 and 2-14.

```
Enum enumCustomerStatus

ucActive = 1

ucInactive = 2

ucPending = 3

End Enum

Function modEnum_getCustomersForStatus(lngCustomerStatus as en)

Entities

Entities

Entity

Function modEnum_getCustomerStatus

Error

Error
```

Figure 2-13 IntelliSense displaying the *Enum* structure when creating a procedure.



Figure 2-14 IntelliSense displaying values defined for your *Enum* structure.

#### Variables and Database Field Types

Variables are placeholders that can either contain or refer to information. If you are using the *Option Explicit* keyword, then each variable must be defined before it can be used.

Variables are defined by using the *Dim* (Dimension) keyword, followed by an appropriate data type. If no type is specified, the variable will be of a special type called the *variant data type*.

A large amount of programming in databases relates to manipulating the data held in the database fields. In many situations, choosing a data type for a variable involves specifying a data type that is compatible with the field's data type, as described in the following table:

Database field type	Variable type	
Text	String	
Мето	String	
Number (Byte, Integer, Long Integer, Single, Double, Replication Id, Decimal)	(Byte, Integer, Long, Single, Double, String)	
Date/Time	Date	
Currency	Currency	

Database field type Variable type	
Yes/No	Boolean
OLE Object	Object
Hyperlink	String
Attachment	Attachment Object
Calculated	To match calculated result type

Declaring one variable per line makes the code easier to read and helps to highlight problems if you have inadvertently omitted the data type, as is demonstrated in the line that contains *strCompany* in the code that follows:

```
Sub modUtils_VariableDefinitions()
Dim strCompanyName As String ' string
Dim lngCompanyNo As Long ' long
Dim varCompanyCode As Variant ' variant
Dim unknown ' variant is the default
' the following is dangerous because strCompany
' will be a variant data type
Dim strCompany, strAddress As String
End Sub
```

Variant variables are not bad, but they can hide errors that would otherwise be spotted.

## Handling NULL Values, IsNull and Nz

When you read a data value from a field into a variable, you need to take care in how you handle the value *NULL*, which indicates that the field does not contain a value. The only type of variable that can hold the value of *NULL* is a variant variable. You could make all your variables variant, but this can mean that without very careful programming, you can miss errors when the variants end up holding values other than what was intended. For example, a variant variable that holds a date will automatically change to holding a string if you add some text to the variable value. It can be very difficult to keep track of what kind of data is held in your variant variable and debug subsequent problems. To help sort it all out, you can use the *VarType* function, which returns an integer indicating the current type of data held in a variant variable:

```
Sub modUtils_Variants()
    Dim varChanging As Variant
    varChanging = 1
    Debug.Print "Numeric value : " & VarType(varChanging)
    varChanging = #1/1/2010#
    Debug.Print "Date value : " & VarType(varChanging)
    varChanging = varChanging & " is a date"
    Debug.Print "String value : " & VarType(varChanging)
End Sub
```

We would suggest that you restrict the use of variant variables to special circumstances.

This still leaves the problem of what to do when you have a *NULL* value in a database field when you attempt to read the value into a variable.

There are two possible actions: either test the field and only assign the value to the variable when it is *NOT NULL*, or use the *Nz* function to convert a *NULL* to a safe value for the variable. When working with the *Nz* function, you can either accept the functions default choice for replacing a null value, or you can specify what default should be used. The following examples can be found in the procedure called *modNULLsReadingData* (protecting the *Boolean* is not essential as this is never *NULL*; Access treats this as false when a value has not been explicitly assigned):

```
' Protecting with the Nz function accepting a default
strTextField = Nz(rst!NullText)
lngNumberField = Nz(rst!NullNumber)
boolYesNoField = Nz(rst!NullYesNo)
dtDateTimeField = Nz(rst!NullDateTime)
Debug.Print strTextField, lngNumberField, boolYesNoField, dtDateTimeField
' Protecting with the Nz function and specifying the default
strTextField = Nz(rst!NullText, "")
lngNumberField = Nz(rst!NullNumber, 0)
boolYesNoField = Nz(rst!NullYesNo, False)
dtDateTimeField = Nz(rst!NullDateTime, #12:00:00 AM#)
Debug.Print strTextField, lngNumberField, boolYesNoField, dtDateTimeField
' Protecting by not setting a value
If Not IsNull(rst!NullText) Then strTextField = rst!NullText
If Not IsNull(rst!NullNumber) Then lngNumberField = rst!NullNumber
' A Yes/No field when null always appears false
If Not IsNull(rst!NullYesNo) Then boolYesNoField = rst!NullYesNo
If Not IsNull(rst!NullDateTime) Then dtDateTimeField = rst!NullDateTime
Debug.Print strTextField, lngNumberField, boolYesNoField, dtDateTimeField
```

*NULL* means no value, and this is different from an empty string or 0. For example, suppose that you have a field that holds a customer's business value to an organization for which a value of *Zero* means you have not engaged in any business with the customer, and *NULL* means you don't yet have a figure for the business value. For circumstances such as this, when performing calculations, you might need to carefully consider how *NULL* and *Zero* values are treated.

When calculating the average value of sales for your customers, if you have 5 customers with sales values of (100, 200, 0, NULL, NULL), to calculate the average, first sum all the

sales for customers and then divide by the number of customers. The question is how do you treat a customer with *NULL* or *Zero* business value?

You could calculate an answer using three different calculations, as follows:

```
(100 + 200 +0) / 5
or
(100 + 200 + 0) / 3 or (100+200) / 2.
```

The SQL aggregate function (AVG) and Domain function (DAVG) ignore NULL values, and would use the calculation (100 + 200 + 0) / 3.

If you wanted to include the *NULL* values and treat these as 0, then you can use AVG(Nz([Turnover], 0)), where the *Nz* function converts *NULL* to 0 and gives the answer (100+200+0+0+0)/5.

If you wanted to exclude both *Zero* and *NULL* values, then you can use an *IIF* function to convert 0 to *NULL* by using AVG(IIF([Turnover] = 0, NULL, [Turnover])), which gives the answer (100+200)/2.

# **Using Static Variables**

In the previous examples in which variables are defined inside a procedure, the values held in the variables only exist as long as the procedure is executing. Once the procedure completes execution, the internal variables lose their values.

However, there will be circumstances for which you want to persist these values after the procedure has finished execution. For these situations, you can use the *Static* keyword, as shown in the following:

```
Sub modNULLs_ExampleOfAStaticVariable()
    Static lngCallCount As Long
    lngCallCount = lngCallCount + 1
    Debug.Print lngCallCount
End Sub
```

If you execute this code several times from the Immediate window, you can see how the variable maintains its previous value on each subsequent execution of the procedure, as shown in Figure 2-15.

```
Sub modNULLs_ExampleOfAStaticVariable()
Static lngCallCount # s Long
lngCallCount = lngCallCount + 1
Debug.Print lngCallCount
End Sub

Static Sub modNULLs_ExampleOfAStaticVariable2()
Dim lngCallCount # s Long
lngCallCount = lngCallCount + 1
Debug.Print lngCallCount
End Sub

| modNULLs_ExampleOfAStaticVariable
1
modNULLs_ExampleOfAStaticVariable
2
modNULLs_ExampleOfAStaticVariable
2
modNULLs_ExampleOfAStaticVariable
3
```

**Figure 2-15** Each time you call the procedure with the *Static* variable it remembers its previous value; the *Static* keyword preservers the contents of variable.

The *Static* keyword can also be used before declaring the procedure name: *Static Sub...*, in which case all of the variables in the procedure will be *Static*. (This is not an often-used feature in VBA.)

Although this variable exists for as long as the application is running (it has an application lifetime) it has local scope and is only visible inside the procedure.

## **Using Global Variables**

Global variables are variables to which you want to assign application scope and lifetime (you can equally use the term public rather than global when defining this variable type). As with constants, developers often gather up all the global variables into a single module for ease of maintenance, as illustrated here:

```
Global userName As String

Sub modGlobal_SetUsername()
    userName = "Andrew"

End Sub

Sub modGlobal_GetUsername()
    Debug.Print userName

End Sub

Sub modGlobal_GenerateError()
' generates a divide by 0 error, this causes the
' global variable to lose its value
    Dim lngCount As Long
    lngCount = 5 / 0

End Sub
```

This example demonstrates one drawback of global variables: if the program generates an error condition (that is not handled by an error handler), then the global variables lose their values. Figure 2-16 shows how the last call to *modGlobal\_GetUsername* does not return a value, as would be expected.

```
Immediate

modGlobal_SetUsername

modGlobal_GetUsername

Andrew

modGlobal_GenerateError

modGlobal_GetUsername
```

**Figure 2-16** Global variables lose their value if an error occurs. Here, there is no value shown when calling *modGlobal\_GetUserName* because a program error was generated by the *modGlobal\_GenerateError* procedure.

To prevent this from causing a problem, you can consider not working directly with the global variable, but instead using a function to retrieve the value from the global variable. You can also have the function test to verify that the global variable has a valid value; if it does not, then reload the global variable, as shown in the following:

```
Sub modGlobal_GetUsername2()
    If userName = "" Then
        modGlobal_SetUsername
    End If
    Debug.Print userName
End Sub
```

## Variable Scope and Lifetime

You have seen that variables and constants can be defined inside a procedure, and when they are, by default, their scope is limited to within the procedure, and their lifetime can be regarded as the duration of the procedure execution.

These constraints, however, are not set in stone. A variable defined in a procedure can have its lifetime extended to that of the application by using the keyword *Static* when defining the variable.

You can extend the scope and lifetime of both variables and constants by defining them at the top of a module. The scope is then opened up to all procedures defined within the module, and these procedures can now refer to the module-level definitions. The lifetime for module-level definitions depends upon the type of module within which they are defined. In a Form/Report class module, they exist for as long as the Form/Report is open. For other modules, the lifetime is that of the application, because these modules are demand loaded into memory.

Using the *Public* or *Global* keywords when making a definition at the top of a module gives the variable an application lifetime and application scope. In a Form/Report class module you cannot use the keyword *Global*, but you can use the keyword *Public* for a variable (this allows the variable on the form to be referenced like a property of the Form); constants on a Form/Report class module cannot be made either *Public* or *Global*.

# **INSIDE OUT**

#### A summary of scope rules

There are two concepts that you need to understand about these rules. First, a Form/ Report class module is *not* the same as a module (this is described in the following sections).

Second, the terms Public/Global and Private/Dim are to some extent interchangeable (but this is not always the case). Global and Dim are best used when you want to explicitly control the scope of a variable, whereas Public/Private are more appropriately used when defining the scope of procedures (except in a Form/Report when you want to expose a variable as a property of the Form/Report). This is described in the table that follows.

	Dim/Private	Static	Global/Public	
Procedure	Procedure Scope and Procedure lifetime	Procedure Scope and Application lifetime when defined in a Module or Form/ Report lifetime when defined in a Form/ Report class module	These definitions are allowed but it would be considered as unconventional to define global variables inside a Procedure when contained in a Module (see below for rules in a Form/Report Class Module).	
Module level	Module Scope and Application lifetime	Not Allowed	Application Scope and lifetime	
Form/Report class module level	Module Scope and Form/Report lifetime	Procedure Scope and Form/Report lifetime	Only allowed a Public variable with Application scope and Form/Report lifetime.	

Variables that have the same names and same level of scope are not allowed, but variables with different levels of scope can have the same name. VBA understands that you mean to refer to the variable with local scope. The results of running these tests are shown in Figure 2-17.

```
Dim strCompanyName As String
    Sub modScope2 TestingVariableScope()
        ' this sets the global variable strCompanyName
        modScope SetGlobalVariable
        strCompanyName = "Module Scope"
        Debug.Print "Module Level : " & strCompanyName
        modScope2 LocalProcedure
    End Sub
    Sub modScope2 LocalProcedure()
        Dim strCompanyName As String
        strCompanyName = "Procedure Scope"
        Debug.Print "Procedure Level :" & strCompanyName
= = 1
Immediate
 modScope2_TestingVariableScope
 Module Level : Module Scope
 Procedure Level : Procedure Scope
 ?strCompanyName
 Global Scope
```

Figure 2-17 The same variable defined in three different places illustrates the scope rules.

In this example, we have defined a global variable called *strCompanyName* in another module (*mod\_Scope*), and the call *modScope\_SetGlobalVariable* assigns a value to the global variable.

Code in the local procedure sees the local scope variable; other procedures in the module see the module-level variable; and procedures outside this module see the global variable value.

You might find it useful to use the convention of adding the prefix letter "m" for module scope variables and "g" for global scope variables.

# **Working with Arrays**

Arrays can be used when you need to have a set of similar variables; for example, if you need to hold a list of all states in memory, you could define a set of variables called *strStateCA*, *strStateCO*, and so on, or *strState1*, *strState2*, and so forth. But this would be very difficult to work with, so VBA gives you the option to define an array, which acts like a list of values.

First, you create a query that displays a unique list of [State/Province] field values in the *Customers* table by using the following SQL, with the results shown in Figure 2-18:

```
SELECT DISTINCT Customers.[State/Province]
FROM Customers
WHERE ((Not (Customers.[State/Province]) Is Null));
```




Figure 2-18 A query or table with one column is like a simple array of single values.

Next, the following code shows how you can load this list of states into an array in memory:

```
Sub modArray_StatesInAnArray()
    ' loads a list of states into an array of fixed size
    Const lngArraySize = 20
    Dim IngCounter As Long
    Dim varAState As Variant ' needs to be a variant for
    ' use in the ForEach loop
    Dim strState(lngArraySize) As String
    Dim db As Database
    Set db = CurrentDb
    lnaCounter = 0
    Dim rst As Recordset
    Set rst = db.OpenRecordset("SELECT DISTINCT [State/Province] " & _
                " FROM Customers WHERE [State/Province] IS NOT NULL", _
                               dbOpenDynaset)
    Do While Not rst.EOF
        If lngCounter > lngArraySize Then
            'this would cause a problem
            Stop
        End If
        strState(IngCounter) = rst![State/Province]
        lngCounter = lngCounter + 1
        rst.MoveNext
    Loop
    For Each varAState In strState
        If varAState <> "" Then
            Debug.Print varAState
       End If
    Next
    Debug.Print "Lower bound : " & LBound(strState)
    Debug.Print "Upper Bound : " & UBound(strState)
    rst.Close
   Set rst = Nothing
    db.Close
    Set db = Nothing
End Sub
```

Near the top of this procedure, you define the array as having a fixed size of 20 items (0, 1, 2 ... 19).

#### **Note**

All arrays in Access are 0-based, which means that they start counting at 0.

#### **Dynamic Arrays**

It is also possible to have arrays that can change size and the number of dimensions by using the *ReDim* statement. These arrays can also maintain existing data when they change size by using the *Preserve* keyword. The following code starts with an estimate of there being eight states in the dataset and then changes the array size, adding more items as required:

```
Sub modArray_StatesInADynamicArray()
   ' loads a list of states into an array of dynamic size
   Dim lngArraySize As Long
   Dim IngCounter As Long
   Dim strAState As Variant ' needs to be a variant for
   ' use in the ForEach loop
   Dim strState() As String
   lngArraySize = 8
   ReDim strState(lngArraySize)
   Dim db As Database
   Set db = CurrentDb
   lngCounter = 0
   Dim rst As Recordset
   Set rst = db.OpenRecordset("SELECT DISTINCT [State/Province] " & _
                        " FROM Customers WHERE [State/Province] IS NOT NULL", _
                               dbOpenDynaset)
   Do While Not rst.EOF
       If lngCounter > lngArraySize Then
            'this would cause a problem
            ' allocatate 5 more values and save existing values
           lngArraySize = lngArraySize + 5
           ReDim Preserve strState(lngArraySize)
       End If
        strState(IngCounter) = rst![State/Province]
        lngCounter = lngCounter + 1
        rst.MoveNext
   Loop
```

Arrays that are going to be dynamically changed in size *cannot* be defined with a fixed size; you either need to define the array initially with no size and then *ReDim* the array when you come to use it:

```
Dim strState() As String
```

Or, you can use the *ReDim* statement when you first define the array dynamically with a variable:

```
lngArraySize = 8
ReDim strState(lngArraySize) As String
```

VBA allows you to define arrays with up to 60 dimensions.

#### **Multi-Dimensional Arrays**

Arrays can have more than one dimension. A two-dimensional array, for example, is like a spreadsheet; the columns are one dimension, the rows are a second dimension, and each cell holds a single value.

In the next example, you construct a one-dimensional array of states, and a second one-dimensional array of cities. The procedure then defines a two-dimensional array indexed by the State and then the City. This is a sparsely populated array (most array elements have no value), but it is relatively easy to index when constructed in this manner. To find an item, you look up the state in the *States* array (and retrieve an index), then to find a City, you look it up in the *Cities* array (and retrieve a second index). Then you can index the element in the main array by using the values obtained from the lookup, as demonstrated in the following code:

Sub modArray\_TwoDimensionalArray()

```
' First we create our array of states
```

- ' Then we create an array of city names
- ' Then we have a two dimensional array which counts the
- ' Customers in each city for each state

```
Const lngStates = 30
Const lngCities = 100

Dim lngCounter As Long
Dim strState(lngStates) As String
Dim strCity(lngCities) As String
Dim lngStateIndex As Long
Dim lngCityIndex As Long

' The following will be a very sparsely populated array
Dim lngCustomers(lngStates, lngCities) As Long

Dim db As Database
Set db = CurrentDb
lngCounter = 0
```

```
Dim rst As Recordset
    Set rst = db.OpenRecordset("SELECT DISTINCT [State/Province] " & _
               " FROM Customers WHERE [State/Province] IS NOT NULL", _
                               dbOpenDynaset)
    Do While Not rst.EOF
        strState(IngCounter) = rst![State/Province]
        lngCounter = lngCounter + 1
        rst.MoveNext
    Loop
    rst.Close
    lngCounter = 0
    Set rst = db.OpenRecordset("SELECT DISTINCT [City] " & _
                               " FROM Customers WHERE [City] IS NOT NULL", _
                               dbOpenDynaset)
    Do While Not rst.EOF
        strCity(lngCounter) = rst![City]
        lngCounter = lngCounter + 1
        rst.MoveNext
    Loop
    rst.Close
    lngCounter = 0
    ' Now we index our multi-dimensional array using
    ' the other two arrays
    Set rst = db.OpenRecordset("SELECT [ID], [City],[State/Province] " & _
                  " FROM Customers WHERE [State/Province] IS NOT NULL" & _
                               " AND [City] IS NOT NULL", _
                               dbOpenDynaset)
    Do While Not rst.EOF
        ' For each customer, lookup the state index
        For lngStateIndex = 0 To lngStates - 1
            If strState(lngStateIndex) = rst![State/Province] Then
                Exit For
            End If
       Next
        ' Next lookup the city index
        For lngCityIndex = 0 To lngCities - 1
            If strCity(lngCityIndex) = rst![City] Then
                Exit For
            End If
       Next
        lngCustomers(lngStateIndex, lngCityIndex) = _
lngCustomers(lngStateIndex, lngCityIndex) + 1
        rst.MoveNext
    Loop
    ' Now summariese the results
    For lngStateIndex = 0 To lngStates - 1
        For lngCityIndex = 0 To lngCities - 1
            If lngCustomers(lngStateIndex, lngCityIndex) > 0 Then
                Debug.Print strState(lngStateIndex), strCity(lngCityIndex), _
                 lngCustomers(lngStateIndex, lngCityIndex)
            End If
       Next
```

```
Next
rst.Close
Set rst = Nothing
db.Close
Set db = Nothing
End Sub
```

The preceding example illustrates a rather subtle point about arrays; although an array can actually hold a complex structure of data at each array point (for example, you can have a multi-dimensional array of type structures), the indexing into the array is always through a simple numerical value.

# **INSIDE OUT**

#### Determining the dimensions of an array

There is no feature in the VBA language for determining dynamically the number of dimensions in an array, but you can establish this by using an error handler in a routine that returns the array dimension, as follows:

```
Function modArray_Dimensions(ar() As Variant) As Long
    ' determine the dimensions of an array using an error trap
    ' set the constant at least 1 more than maximum dimensions
    ' to be checked
    Const lngMaxDimensions As Long = 20
    Dim lngDimensions As Long
    Dim lngDim As Long
   On Error GoTo Err Handler
    For lngDimensions = 1 To lngMaxDimensions
        lngDim = UBound(ar, lngDimensions)
   Next
    ' code will never get here
   Stop
    Exit Function
Err Handler:
   modArray_Dimensions = IngDimensions - 1
End Function
Sub modArray_TestDimensions()
   Dim lngDimensions As Long
    Dim ar() As Variant
    ReDim ar(5, 5)
    lngDimensions = modArray_Dimensions(ar)
    Debug.Print "Array dimension is " & IngDimensions
    ReDim ar(5, 5, 5)
    lngDimensions = modArray_Dimensions(ar)
    Debug.Print "Array dimension is " & IngDimensions
End Sub
```

#### **Option Base**

All arrays and collections in Access are 0-based, but if you are working with Microsft Excel, you will find that all the collections are 1-based. It is possible to change in a module the base that Access uses. We don't recommend doing this without a very good reason, but you will find this referenced in the documentation. The following code example demonstrates how the base can be changed. The line that attempts to print the value of *strState(0)* will generate an error because you are now working with a 1-based array:

```
Option Compare Database
Option Explicit
Option Base 1

Sub modArray2_ChangedBase()
   Dim strState(2) As String
   strState(1) = "MA"
   strState(2) = "MN"
   Debug.Print strState(0)

End Sub
```

## **Type Structures**

A type structure allows you to construct a record-like structure in memory. These are often used when working with the Windows API where external procedure calls require you to define a structure. Another use is when you need to hold multiple data values for an array; here you can define an array of types:

If you define a type in a form's class module, you need to explicitly state *Private Type* when making the definition (but most types would not be defined in a form or report class module).

## **Functions and Procedures**

VBA code is written in terms of procedures that are stored in modules. There are two kinds of procedures: the subroutine and the function.

Functions are different from subroutines with respect to where they can be used; a function can be called from the query grid and a macro command (you can't do any of this with a subroutine). Functions return a value (even if you don't explicitly state what the return type is); subroutines do not. As a result, the syntax for calling a function is slightly different from that for calling a subroutine. The following code example demonstrates a function and subroutine that perform the same operation:

```
Sub modProcParam_Sub(strName As String)
    strName = UCase(strName)
End Sub

Function modProcParam_Funct(strName As String) As String
    modProcParam_Funct = UCase(strName)
End Function
```

The function returns a value, so you use the following syntax:

```
Dim strName As String
strName = "andrew"
strName = modProcParam_Funct(strName)
```

There are two possible forms for the syntax to call a subroutine (*Call* is the less used and older form of the syntax):

```
strName = "andrew"
modProcParam_Sub strName
Call modProcParam_Sub(strName)
```

If you are using the *Call* syntax, then the parameters are enclosed in brackets; if you do not use the *Call* syntax, then the parameters are not enclosed in brackets.

Subroutines are automatically created when you choose to build code in response to a built-in event on a form or report.

# **INSIDE OUT**

Variations on standard rules for calling functions and procedures

There are two unusual variations of the calling syntax for functions and subroutines (although we wouldn't recommend using them).

It is possible to use the *Call* syntax with a function (although for a function returning a value, you would not capture the return value, as follows:

```
Call modProcParam_Funct(strName)
```

If a subroutine has only one parameter, then you are allowed to have parentheses surrounding the single parameter, as shown here:

```
modProcParam_Sub (strName)
```

## **Managing Code with Subroutines**

Traditionally, subroutines allow complex and large processing blocks of code to be broken down into smaller steps. Breaking down one large block of code into several smaller blocks of code (subroutines) offers a number of advantages. One advantage is that you can often then identify similar blocks of code that can be generalized by using parameters to reduce the total amount of code that you need to produce. A second advantage is that it makes the code look simpler and more structured, which eases maintenance.

In the *modSub\_ProcessSQL* procedure, we have an example of a program that breaks apart simple SQL statements:

```
Sub modSub_ProcessSQL(strSQL As String)
   ' Break apart an SQL string into component parts
   ' Extracts SELECT and WHERE clauses
   ' SQL order of keywords is
    ' SELECT..FROM...WHERE..GROUP BY.. HAVING
    ' Does not handle UNION or nested SELECT statements
   ' Extract the SELECT part of the SQL
   Dim strSelect As String
   Dim strWhere As String
   Dim lngPosSelect As Long
   Dim lngPosWhere As Long
   Dim lngPosEnd As Long
   lngPosSelect = InStr(1, strSQL, " FROM ")
   If lngPosSelect = 0 Then
        Exit Sub
   E1se
        strSelect = Trim$(Mid(strSQL, 1, lngPosSelect))
   End If
   Debug.Print strSelect
   lngPosWhere = InStr(lngPosSelect + 6, strSQL, " WHERE ")
   If lngPosWhere = 0 Then
       Exit Sub
   End If
```

```
lngPosEnd = InStr(lngPosWhere + 6, strSQL, " GROUP BY ")
If lngPosEnd = 0 Then lngPosEnd = 255
strWhere = Trim$(Mid(strSQL, lngPosWhere, lngPosEnd))
Debug.Print strWhere
End Sub
```

Looking at this procedure, you can see that the idea of searching for a pattern is repeated twice. If you extend this routine to look for other patterns, you would be repeating more similar code units. Breaking this into two subroutines allows a more structured approach to developing the code, as demonstrated in the following:

```
Sub modSub_SliceOutString(strSQL As String, _
                            strFromPattern As String, _
                            strToPattern As String, _
                            strSlice As String)
   ' look for a substring strPattern searching
   ' after IngStartPos and return the substring
   Dim IngEndPos As Long
   Dim lngStartPos As Long
   lngStartPos = InStr(1, strSQL, strFromPattern)
   If lngStartPos = 0 Then
       strSlice = ""
       Exit Sub
   End If
   If strToPattern = "" Then
        lngEndPos = Len(strSQL)
   E1se
       lngEndPos = InStr(lngStartPos, strSQL, strToPattern)
   End If
   If lngEndPos <> 0 Then
        strSlice = Trim$(Mid(strSQL, lngStartPos, _
                    lngEndPos - lngStartPos + 1))
   End If
End Sub
Sub modSub_ProcessSQL2(strSQL As String)
   ' Break apart an SQL string into component parts
   ' Extracts SELECT and WHERE clauses
   ' SQL order of keywords is
   ' SELECT..FROM...WHERE..GROUP BY.. HAVING
   ' Does not handle UNION or nested SELECT statements
   ' Extract the SELECT part of the SQL
   Dim strSelect As String
   Dim strWhere As String
   modSub_SliceOutString strSQL, "SELECT ", " FROM ", strSelect
   If strSelect = "" Then
       Exit Sub
   End If
   Debug.Print strSelect
   modSub_SliceOutString strSQL, " WHERE ", "", strWhere
```

```
If strWhere = "" Then
    Exit Sub
End If
Debug.Print strWhere
End Sub
```

The initial cost in terms of lines of code is slightly higher than the original code, but as we added more different kinds of searching, we would see a dramatic reduction in the total amount of code. In addition, the main processing code is now easier to read.

The second type of procedure is the function, which is traditionally used to perform an operation and then return a result.

Apart from the restrictions described earlier regarding where a function or subroutine may be called, you can make subroutines and functions perform similar jobs, so deciding on which to use might cause some confusion.

Looking back at our previous example (modSub\_SliceOutString), you can see that the sub-routine returns a single result in the variable strSlice. This would be a good candidate for using a function; instead, and we could rewrite this as follows:

```
Function modSub_SliceOutStringFn(strSQL As String, _
                            strFromPattern As String,
                            strToPattern As String) As String
    ' look for a substring strPattern searching
    ' after IngStartPos and return the substring
    Dim lngEndPos As Long
    Dim IngStartPos As Long
    lngStartPos = InStr(1, strSQL, strFromPattern)
    If lngStartPos = 0 Then
       modSub_SliceOutStringFn = ""
        Exit Function
    End If
    If strToPattern = "" Then
        lngEndPos = Len(strSQL)
    E1se
        lngEndPos = InStr(lngStartPos, strSQL, strToPattern)
    End If
    If lngEndPos <> 0 Then
        modSub_SliceOutStringFn = Trim$(Mid(strSQL, lngStartPos, _
                    lngEndPos - lngStartPos + 1))
    End If
End Function
```

If you look at *modSub\_ProcessSQL3*, which calls the function, you will see the following syntax is used:

```
strWhere = modSub_SliceOutStringFn(strSQL, " WHERE ", "")
```

Another advantage of a function is that you can use the value it returns to indicate whether it encountered a problem. This then allows the calling code to more easily handle errors. Using a function in this way means that the function can also be used to perform the traditional approach performed by subroutines of breaking down a program into more manageable chunks, as shown in the following:

```
Function modProcParam Funct2(strName As String) As Boolean
    On Error Resume Next
    strName = UCase(strName)
    If Err <> 0 Then
        modProcParam_Funct2 = False
        Exit Function
    End If
    modProcParam_Funct2 = True
End Function
Sub modProcParam_Calling2()
    Dim strName As String
    strName = "andrew"
    If Not modProcParam_Funct2(strName) Then
        ' we have a problem and need some kind of action
    End If
End Sub
```

In the previous function, you could have structured the IF statement to read as follows:

```
IF modProcParam_Funct2(strName) = False
Then
```

But because the function returns a *Boolean* result, you can avoid the need to explicitly test this against *True* or *False*.

Sometimes, the decision as to whether to use a function or a subroutine can be a difficult. If a procedure only returns a single result of its processing and is in some way calculative in its operation, then a function is often a better choice.

#### Defining ByRef and ByValue Parameters

Both functions and subroutines can be passed values called *parameters* (or *arguments*) the procedure then uses these parameters to assist with the processing. By using parameters, you can use procedures flexibly in different parts of the application.

Depending on how the parameters have been defined, a procedure can alter the values of parameters; this is a way of passing back changes to several parameters to the calling program.

# **INSIDE OUT**

# Default referencing of parameters in subroutines and functions

VBA uses the call-by-reference convention, which means that if your procedure alters a parameter value, then after control returns to the calling program, the calling program will see the altered value. One reason for using call-by-reference is that it improves efficiency because it passes a reference and not a copy of the data.

You can also use call-by-value (unless you are passing an object as a parameter, which always uses *ByRef*). This means that the procedure receives a copy of the parameter values, and any changes the procedure makes to these values will *not* be seen by the calling program because the copies are discarded when the procedure is finished. Although it is not as efficient as call-by-reference, you can consider call-by-value to be safer, because it is not possible for you to overlook a subtle side-effect where the procedure alters the parameters used by the calling program.

VBA does not force you to explicitly state *ByVal* or *ByRef* when defining parameters; the default is *ByRef*. Most VBA developers tend to disregard making this choice when declaring parameters.

If at some later point in time you intend to copy your VBA code into VB.NET, then you will find that VB.NET demands that you have used *ByVal* or *ByRef* for all parameters on functions and subroutines. You will also need to remove the *Call* keyword when calling any procedures.

In *modProc*, you see three different methods for defining a function, with Figure 2-19 showing the results:

```
Function modProc_VerySimple(IngFirst As Long, _
                                    IngSecond As Long) As Long
    ' Not specifying a parameter ByVal or ByRef
    ' means let access decide on what to do
   lngFirst = lngFirst + 3
   modProc_VerySimple = IngFirst + IngSecond
End Function
Function modProc_VerySimpleByVal(ByVal lngFirst As Long, _
                                    ByVal IngSecond As Long) As Long
    ' the ByVal, says pass a copy of the parameter
    ' so any changes to the copies are lost once the procedure ends
   lngFirst = lngFirst + 3
   modProc_VerySimpleByVal = IngFirst + IngSecond
End Function
Function modProc_VerySimpleByRef(ByRef IngFirst As Long, _
                                    ByRef lngSecond As Long) As Long
```

```
' the ByRef, says pass a refernce to the parameter
' so any changes to the copies effect the parameter
lngFirst = lngFirst + 3
modProc_VerySimpleByRef = lngFirst + lngSecond
End Function
```

Immediate		
TestingAverySimpleFunction		
Function modProc_VerySimple(10,50)		
Local variables after call :	13	50
Function modProc_VerySimpleByRef(10,50)		
Local variables after call :	13	50
Function modProc_VerySimpleByValue(10,50)		
Local variables after call :	10	50
Function modProc_NoTypes(10,50)		
Local variables after call :	13	50

**Figure 2-19** Use the ByVal keyword to prevent the calling program's Local variable from being changed by the function call.

Figure 2-19 shows that if you do not specify any setting or use *ByRef*, the subroutine or function is able to change your parameter values (the variable in the outer program has a value of 10, which then is changed to 13).

If you are not going to explicitly state *ByVal* or *ByRef*, then it can be useful to copy any parameter that you do not intend to change into a local variable so that any changes you make to the values will not affect the original parameters, as demonstrated in the following:

Isolating a problem caused by a function or subroutine that changes a parameter value by mistake can prove to be very difficult.

#### Private and Public Procedures

It could be argued that VBA encourages a sloppy programming style; it is possible to let yourself be a little lazy and not be precise about defining variables, variable data types, and the use of *ByVal* and *ByRef* settings on parameters. But because VBA is so forgiving, developers who would otherwise find a more formal programming languages difficult to work with can be more productive (although the more liberal your programming style, the more likely you are to suffer from unexpected side effects.) Another important point regarding VBA is that it has evolved over time, and preferences, standards, and programming styles

have also evolved. But it is important that VBA allows older program code to run in newer environments. VBA might not be perfect, but it is extremely productive and intuitive to use.

With variables, you saw that the concept of scope allowed for local and global/public variable definitions. Functions and subroutines also have similar scope rules; these are specified by using the keywords *Public* or *Private*.

By default, when you create a procedure in a VBA module, that procedure is given a global scope (application-wide scope), which is the same as using the *Public* keyword. And if you define a procedure in the class module of a form or report, its scope is local, and thus visible only to other procedures in the same module, which is equivalent to using the *Private* keyword.

The best practice is to always define procedures with local scope or *Private*, and only change this to *Public* when you explicitly want to open up the procedure to be referenced by other modules in the application.

You are allowed to have a procedure with the same name in two different modules, as long as the procedure name is declared as *Private*. This means that if you are developing a module that will be imported into other applications, marking most of your procedures as *Private* will avoid conflicts with any similarly named procedures in the application into which you import the module.

## **Optional and Named Parameters**

The *modProcParam* module contains examples of using both *named parameters* and *optional parameters*.

Using named parameters is not part of how the function or subroutine is defined, but it is related to how you call the procedure. Named parameters mean that you can pass the parameters in any order. When passing each parameter you must specify which parameter you mean for each value by using a := in the syntax, as illustrated in the following:

It is only when you begin to use optional parameters that using named parameters starts to offer a benefit in terms of the flexibility you have when calling procedures.

Optional parameters are part of the procedure definition; when declaring a parameter as optional you have the choice to provide a default value, which is used when the optional parameter is not supplied.

```
Function modProcParam_OptionalParameters _
    (strFirstName As String, _
    strSurname As String, _
    Optional boolAddSpace As Boolean = False, _
    Optional boolCapitalLetters As Boolean = False) As String
    Dim strResult As String
    If boolAddSpace Then
        strResult = Trim(strFirstName & " " & strSurname)
    E1se
        strResult = Trim(strFirstName & strSurname)
   Fnd Tf
    If boolCapitalLetters Then
        strResult = UCase(strResult)
    End If
    modProcParam OptionalParameters = strResult
End Function
Sub modProcParam_TestOptional()
    Debug.Print modProcParam_OptionalParameters _
        ("Andrew", "Couch", True)
    Debug.Print modProcParam_OptionalParameters _
        (strSurname:="Couch", _
         strFirstName:="Andrew", boolAddSpace:=True)
    Debug.Print modProcParam_OptionalParameters _
        ("Andrew", "Couch", , True)
End Sub
```

When you are not using named parameters, insert a space for any optional parameters that you are not going to provide. You also omit any optional parameters declared at the end of the procedure call.

For example, you are *not* able to write the following:

```
Debug.Print modProcParam_OptionalParameters("Andrew", "Couch", ,)
```

Instead, you write this without any of the optional parameters being specified, as follows:

```
Debug.Print modProcParam_OptionalParameters("Andrew", "Couch")
```

But if you only want to specify the last optional parameter, you write:

```
Debug.Print modProcParam_OptionalParameters("Andrew", "Couch", , True)
```

# **INSIDE OUT**

#### Specifying default values for optional parameters

If you intend to copy your VBA code into VB.NET, you will find that VB.NET demands that you provide a default value for any optional parameter. VBA, conversely, does not demand that you give optional parameters a default value. Therefore, you might find it useful to follow the convention of placing all optional parameters at the end of your list of parameters and giving every optional parameter a default value.

## The ParamArray Qualifier

ParamArray is a qualifier that can be applied to the last parameter defined in the list of parameters for a procedure. This indicates that what follows will be a list of variant values of undefined length (this is why it needs to be defined after any fixed parameters):

```
Sub modProcParam_ParamArray(ParamArray varParameterArray())

' ParamArray must be the last defined parameter

Dim lngCount As Long

For lngCount = 0 To UBound(varParameterArray)

Debug.Print lngCount, varParameterArray(lngCount) _

; VarType(varParameterArray(lngCount))

Next

End Sub

Sub modProcParam_ParamArray_Test()

modProcParam_ParamArray Date, 100, "A Text String"

End Sub
```

If you are planning to pass an array as one of these parameters, you need to be quite careful about the syntax; the array will be passed as a single variant parameter array, as shown in the following:

```
Sub modProcParam_ParamArray2(ParamArray varParameterArray())

' ParamArray must be the last defined parameter

' Because we are passing an array we have an array

Dim lngCount As Long

For lngCount = 0 To UBound(varParameterArray)

Debug.Print lngCount, varParameterArray(lngCount) _

; VarType(varParameterArray(lngCount))

Next

End Sub

Sub modProcParam_ParamArray_Test2()

modProcParam_ParamArray2 Date, 100, "A text string"

End Sub
```

## **Organizing Code in Modules and Class Modules**

Program code can be placed in any of the three different kinds of modules, and then linked together, as shown in Figure 2-20.

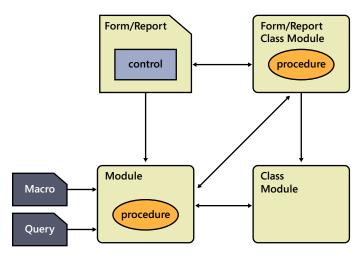


Figure 2-20 Code can be placed in three different types of modules.

The following describes the type of code that is typically contained by each of the modules:

- **Form/Report Class Module** Each Form/Report can have an optional code module that contains code specific to that Form/Report.
- **Module** Code that is either not specific to a form or that will be used in many parts of an application can be placed in a module.
- **Class Module** Object-oriented code (this is discussed later).

Code can be activated from several parts of Access.

- Macros The RunCode macro command can call a Public VBA function held in a module. An example would be during startup, where an AutoExec macro calls startup code.
- **Queries** An expression can call a *Public* VBA function.
- Form/Reports Controls and events on forms and reports can directly link to Public VBA procedures.
- A Form/Report class module can call Public code in either a module, class module, or in another Form/Report module (if the other Form/Report is open).

#### Note

Normally, forms do not call code on other forms. However, there are certain circumstances when a form opens another form for which it is desirable to call code on the target form. To see an example of this, read Chapter 5, "Understanding the Data Access Object Model."

## **Control Statements and Program Flow**

The examples in this section illustrate the use of conditional statements in your program code to control the program flow.

#### IF... Then... Else... Statements

The simplest form of an *IF* statement involves testing a condition and then executing a single action based on the result of that test, as illustrated here:

```
Sub modIF_IF_Simple(Rating As Long)
    If Rating = 1 Then Debug.Print "Approved, first class company to deal with"
    If Rating = 2 Then Debug.Print "Approved, good company to deal with"
End Sub
```

When an *IF* statement requires more than one resulting action, you use the *End If* statement to indicate the end of a set of actions. You are at liberty to use *End If* even when you have only one action:

```
Function modIF_IF(Rating As Long) As String
   ' Use of IF statement
   ' Return appropriate text for a rating
   If Rating = 1 Then
       modIF_IF = "Approved, first class company to deal with"
        Exit Function
   End If
   If Rating = 2 Then
       modIF_IF = "Approved,good company to deal with"
       Exit Function
   End If
   If Rating = 3 Then
       modIF_IF = "Approval required before signing contract"
        Exit Function
   modIF_IF = "Company rating is not specified"
End Function
```

The advantage of the code above is that it is very easy to read; the disadvantage is that it does not communicate how the different branches are related to each other.

A more structured approach is to nest the logical path by using the *Else* statement, as shown in the following:

```
Function modIF IF1(Rating As Long) As String
    ' Use of IF statement
    ' Return appropriate text for a rating
    If Rating = 1 Then
       modIF_IF1 = "Approved, first class company to deal with"
    E1se
        If Rating = 2 Then
            modIF_IF1 = "Approved, good company to deal with"
        Else
            If Rating = 3 Then
                modIF_IF1 = "Approval required before signing contract"
            Else
                modIF_IF1 = "Company rating is not specified"
            End If
        End If
    End If
End Function
```

The preceding code uses a simple *Else* keyword to show the reader where the logic flows when the condition is not *True*. An alternative to *Else* is the *Elself* statement, which cascades the logic with fewer statements; the final *Else* statement is reached only if all preceding tests fail:

```
Function modIF_IF2(Rating As Long) As String
  ' Use of IF statement nested
  ' Return appropriate text for a rating
  If Rating = 1 Then
        modIF_IF2 = "Approved, first class company to deal with"
  ElseIf Rating = 2 Then
        modIF_IF2 = "Approved, good company to deal with"
  ElseIf Rating = 3 Then
        modIF_IF2 = "Approval required before signing contract"
  Else
        modIF_IF2 = "Company rating is not specified"
  End If
End Function
```

#### **IIF** Statements

The last example of the *IF* structure involves using the *IIF* statement, which can be nested. You might have seen this technique used in calculations on queries:

End Function

# **INSIDE OUT**

#### Evaluating all parts in an IIF statement

Using an *IIF* statement in VBA code produces an interesting side effect: all parts of the *IIF* statement are evaluated during execution. Thus, the code that follows will generate a divide by zero error, even when the expression should not appear to need the result:

```
Sub modIF_IIF_Gotcha()
  ' All parts of the IIF get evaluated, so this
  ' code will generate a divide by zero error
  Dim lngTotal As Long
  Dim lngDivisor As Long
  Dim dblResult As Double

lngTotal = 10
 lngDivisor = 0
  dblResult = IIf(lngDivisor = 0, 0, lngTotal / lngDivisor)
  Debug.Print dblResult
End Sub
```

You might be surprised to learn that if you had used this on a Query grid, you would not have the same problem (if converting an existing *IIF* expression in the Query grid to use a custom VBA function, care needs to be taken with this statement, a solution using an *IF* statement would not have this problem).

#### **Choose Statements**

As the number of ways that your code can branch increases, *IF* structures begin to become more difficult to read, so you might choose other equivalent structures. The *Choose* structure is an alternative to the *IIF* for use directly in queries, and is demonstrated in the following code example:

```
If modIF_Choose = "" Then
    modIF_Choose = "Company rating is not specified"
End If
End Function
```

#### Select Case Statements

The Select Case structure is an excellent choice when you have a larger number of choices. It is always a good idea to add a Case Else statement at the end of this structure to accomodate the possibility that none of the conditions hold; otherwise, your code will generate an error:

```
Function modIF Select(Rating As Long) As String
    ' Use of SELECT CASE statements
    ' Return appropriate text for a rating
   Select Case Rating
       Case 1: modIF_Select = "Approved, first class company to deal with"
       Case 2: modIF_Select = "Approved, good company to deal with"
       Case 3: modIF Select = "Approval required before signing contract"
       Case Else: modIF_Select = "Company rating is not specified"
   End Select
End Function
Function modIF_Select2(Rating As Long) As String
   ' Use of SELECT CASE statements
   ' Return appropriate text for a rating
   Select Case Rating
       Case 1: modIF_Select2 = "Approved, first class company to deal with"
       Case 2: modIF_Select2 = "Approved, good company to deal with"
       Case 3: modIF_Select2 = "Approval required before signing contract"
       Case Is > 3: modIF_Select2 = "Company rating is not specified"
   End Select
End Function
```

## TypeOf Statements

The last example of conditional logic shows you how to use the *TypeOf* keyword, which can be used with controls on a form to take different actions, based upon the type of the control. This can be important because the different controls can have some different properties:

```
Sub modIf_TypeOf()
  ' This is a very special variation on the IF statement
  ' used to determine the type of a control on a form
  Dim ctrl As Control
  ' open the form
  DoCmd.OpenForm "frmCustomers"
  ' set a variable to point at a control on the form
  Set ctrl = Forms!frmCustomers.Controls!Company
```

```
If TypeOf ctrl Is TextBox Then Debug.Print "Textbox"
If TypeOf ctrl Is ListBox Then Debug.Print "ListBox"
If TypeOf ctrl Is CommandButton Then Debug.Print "CommandButton"

DoCmd.SelectObject acForm, "frmCustomers"
DoCmd.Close
End Sub
```

#### For and For Each Loops

The second part of program control flow involves repeating an operation multiple times. The *modLoop* module contains examples of the code that you use to do this. These examples demonstrate working with a *Recordset* object. The *Recordset* allows you to scan through a set of records and perform an operation. In the example that follows, you use the *RecordCount* property to determine how many times you need to repeat the operation.

#### Note

Using Recordsets and the RecordCount property are explained in detail in Chapter 5.

```
Sub mod Loop FOR()
    Const lngMaxRecords = 100
    Dim IngCount As Long
    Dim rc As Long
   Dim db As Database
    Dim rst As Recordset
    Set db = CurrentDb
    Set rst = db.OpenRecordset("SELECT * FROM Customers", dbOpenDynaset)
    If Not rst.EOF Then
        ' process the data
        ' make sure we know how many records we have
        rst.MoveLast
        rc = rst.RecordCount
        rst.MoveFirst
        For lngCount = 1 To rc
            If Not IsNull(rst!Rating) Then
                Debug.Print rst!Company & " has a rating " & rst!Rating
            End If
            If lngCount > lngMaxRecords Then
                Exit For
            End If
            rst.MoveNext
    End If
    rst.Close
    Set rst = Nothing
    db.Close
    Set db = Nothing
End Sub
```

The preceding code also includes a test to limit the number of times that you move around the loop by using an *Exit For* statement.

When you are repeating an operation for each object in a collection, you can use a *For Each* Loop, as shown in the following:

## Do While and Do Until Loops

Often, you don't know exactly how many times you need to perform an operation, but you do know conditions under which you want to perform the processing. In this situation, you can use a *Do While* loop, as presented in the following example:

```
Sub mod Loop DO()
    ' example using a DO loop
    Dim db As Database
    Dim rst As Recordset
    Set db = CurrentDb
    Set rst = db.OpenRecordset("SELECT * FROM Customers", dbOpenDynaset)
    Do While Not rst.EOF
        ' process the data
        If Not IsNull(rst!Rating) Then
            Debug.Print rst!Company & " has a rating " & rst!Rating
             If rst!Rating = 1 Then Exit Do
        End If
        rst.MoveNext
    Loop
    rst.Close
    Set rst = Nothing
    db.Close
    Set db = Nothing
End Sub
```

The *Do While* loop can either test for the exit condition at the top of the loop, or as shown in the following code, at the bottom of the loop:

```
Sub mod_Loop_DOa()
  ' example using a DO loop
  Dim db As Database
  Dim rst As Recordset
  Set db = CurrentDb
```

```
Set rst = db.OpenRecordset("SELECT * FROM Customers " & _
        "WHERE ID IS NULL", dbOpenDynaset)
   ' This is a dangerous processing loop in this case
   ' because if the recordset had no records it would fail
   ' because a loop like this always executes at least once
   Do
        ' process the data
       If Not IsNull(rst!Rating) Then
           Debug.Print rst!Company & " has a rating " & rst!Rating
            If rst!Rating = 1 Then Exit Do
       End If
        rst.MoveNext
   Loop While Not rst.EOF
   rst.Close
   Set rst = Nothing
   db.Close
   Set db = Nothing
End Sub
```

When testing at the bottom of a loop, the loop always executes once. In the preceding example, we added *WHERE ID IS NULL* to the SQL being used to open the *Recordset* to better illustrate a potential problem with always executing the loop at least once: in a situation in which there is no data to process, an error is generated, as shown in Figure 2-21.



Figure 2-21 An error message appears because the code attempts to refer to data in a *Recordset* when the *Recordset* is empty.

You can also use the keyword *Until*, which means to continue the loop until a specific condition holds and then stop the loop. The preceding example included the following loop condition:

Do While NOT rst.EOF

You could equally use the following:

Do Until rst.EOF

The ability to prefix the test with the keyword *NOT* means that these statements are interchangeable.

It is also possible to use a *While* ... *Wend* structure (in the sample *mod\_Loop\_While*) instead of a *Do* loop, as shown here:

#### **Exit Statements**

Both the *For* loop and the *Do While* Loop have corresponding *Exit* statements (*Exit For* and *Exit Do*) that you use to discontinue the loop. These statements are useful for preventing an infinite loop (a loop that never ends). The following code shows an example of the *Exit Do* statement:

```
Sub mod Loop DO2()
    ' example using a DO loop protecting against
    ' an infinite loop
    Const lngMaxCount = 100
    Dim db As Database
    Dim rst As Recordset
    Set db = CurrentDb
    Set rst = db.OpenRecordset("SELECT * FROM Customers", dbOpenDynaset)
    Dim IngCount As Long
    lngCount = 0
    Do Until rst.EOF
        ' process the data
        If Not IsNull(rst!Rating) Then
            Debug.Print rst!Company & " has a rating " & rst!Rating
             If rst!Rating = 1 Then Exit Do
        End If
        lngCount = lngCount + 1
        If lngCount > lngMaxCount Then
            MsgBox "infinite loop detected"
            Exit Do
        End If
         rst.MoveNext
    Loop
    rst.Close
    Set rst = Nothing
    db.Close
    Set db = Nothing
End Sub
```

In the preceding example, the *rst.MoveNext* statement is commented out; this means that loop will never reach the end of file *EOF*. By adding a counter and setting a maximum number of times the loop can be executed, you can prevent an infinite loop.

For functions, you can use the *Exit Function* statement to exit a procedure without executing any remaining code; for subroutines, use the *Exit Sub* statement.

#### The With Statement

The With ... End With statement helps to improve the readability of your code. Within the statement, you can use the . (period) or ! (exclamation) characters to refer to the object's properties and methods without fully stating the object's name. The following example shows how to manipulate a Recordset object by using the With statement:

```
Sub modWith RecordsetExample()
    Dim db As Database
    Dim rst As Recordset
    Set db = CurrentDb
    Set rst = db.OpenRecordset("Customers", dbOpenDynaset)
    rst.MoveLast
    Debug.Print rst.RecordCount
    rst.MoveFirst
    Do While Not rst.EOF
        Debug.Print rst!Company
        rst.MoveNext
    Loop
    ' using a with statement
    With rst
        .MoveLast
        Debug.Print .RecordCount
        .MoveFirst
        Do While Not .EOF
            Debug.Print !Company
            .MoveNext
        Loop
    End With
    rst.Close
    Set rst = Nothing
    db.Close
    Set db = Nothing
End Sub
```

#### GoTo and GoSub

You can use the *GoTo* and *GoSub* statements to set an unconditional branch to another part of your code, as demonstrated here:

```
Sub modGoTo_GoTo(strName As String)
    If Len(strName) = 0 Then
        ' Executing a simple GoTo
        GoTo ExitPointLabel
    End If
    If Len(strName) > 255 Then
        ' Executing a simple GoTo
        GoTo ExitPointLabel
    End If
Exit Sub
ExitPointLabel:
    MsgBox "String value not acceptable"
End Sub
```

VBA also supports *On* ... *GoSub* or *On* ... *GoTo* keywords, which were needed in early versions of the BASIC programming language; these statements are now rarely used, with the exception of *On* ... *GoTo* for error handling purposes.

#### **Line Continuation**

Long lines of VBA code can be difficult to read. The "\_" (underbar) character is the line continuation character that allows you to break an unwieldy line of code into several shorter lines to make it easier to read. In the following example, we have placed each parameter of the function on a separate line, using the line continuation character to make the procedure easier to read.

```
Function modProcParam_OptionalParameters _
    (strFirstName As String, _
    strSurname As String, _
    Optional boolAddSpace As Boolean = False, _
    Optional boolCapitalLetters As Boolean = False) As String
End Function
```

#### **Splitting SQL Over Multiple Lines**

This second example shows how to format a block of SQL that has been pasted into the VBA code. Note the "&" (ampersand) and "\_" (underbar) characters are used together to split the SQL over several lines:

```
Sub modstr LineContinuation()
    ' example showing line continuation character
   ' used with a SQL string
   Dim strSQL As String
   strSQL = "SELECT Customers.Company, " & _
                "Customers.[Last Name], " & _
                "Customers.[First Name] " & _
                "FROM Customers " \& _
                "WHERE (((Customers.[Job Title])='owner'))"
```

End Sub

In the preceding example, the tab character aligns each line of code to the same starting point (if you try to do this on the first line, Access will autocorrect your indentation, as shown in the code).

## Summary

In this chapter, you were introduced to the VBA programming language structure. The following points summarize key areas with which you should now be familiar:

- The importance of forcing all variables to be declared before use, and how the references manage the libraries that are used when writing program code.
- The different types of variables and constants that can be used in your code and the concepts of scope and lifetime of variables.
- How functions and subroutines are defined and organized into modules, and how scope and lifetime also apply to these procedures.
- The language statements for controlling the flow of program logic.





#### **CHAPTER 3**

# Understanding the VBA Language Features

Using Built-In Functions90	Creating Maintainable Code
Domain Functions	VBA and Macros
SQL and Embedded Quotes	Error Handling11
Objects and Collections	

n Chapter 2, "Understanding the VBA Language Structure," we focused on the core Microsoft VBA language structures that deal with constants, variables, procedures, and controlling the flow of program logic. In this chapter, you look at specific language features, including the use of built-in functions and working with SQL in code.

You will also see how to build upon our structural understanding of the VBA language by incorporating error handling and planning to develop code to improve the maintainability of your applications.

After reading this chapter, you will:

- Be able to use the built-in functions to enhance your application.
- Understand the differences between working with ordinary variables and object variables.
- Understand the benefits of using appropriate naming conventions to make your application development easier to maintain.
- Be able to write effective error handling routines.

#### Note

As you read through this chapter, we encourage you to also use the companion content sample database, VBAFeaturesExamples.accdb, which can be downloaded from the book's catalog page.

## **Using Built-In Functions**

VBA has more than 120 built-in functions. You will look at some of the more popular of these, which we have split into logical groups.

#### **Date and Time Functions**

The family of date and time functions allow you to retrieve values for dates and times, extract the values, and add or subtract values (see the *modDates* module for examples), as demonstrated in the following code, with the results of executing these statements shown in Figure 3-1:

```
Sub modDates Examples()
   Debug.Print "Date function: " & Date
   Debug.Print "Time function: " & Time
   Debug.Print "Now function: " & Now
   Debug.Print "DateAdd function : " & DateAdd("d", 5, Now)
   Debug.Print "DateDiff function: " & DateDiff("d", Now _
                            , DateAdd("d", 5, Now))
   Debug.Print "DatePart function : " & DatePart("w", Date)
   Debug.Print "DateSerial function: " & DateSerial(2015, 6, 3)
   Debug.Print "DateValue function : " & DateValue("1 january 2015")
   Debug.Print "Weekday function : " & Weekday(Date)
   Debug.Print "WeekdayName function : " & WeekdayName(5)
   Debug.Print "Day function : " & Day(Date)
   Debug.Print "Month function : " & Month(Date)
   Debug.Print "MonthName function: " & MonthName(2)
   Debug.Print "Year function : " & Year(Date)
   Debug.Print "Hour function : " & Hour(Now)
   Debug.Print "Minute function: " & Minute(Now)
   Debug.Print "Second function: " & Second(Now)
End Sub
```

```
Immediate
 Date function: 1/26/2011
 Time function: 9:26:21 AM
 Now function: 1/26/2011 9:26:21 AM
 DateAdd function : 1/31/2011 9:26:21 AM
 DateDiff function: 5
 DatePart function: 4
 DateSerial function: 6/3/2015
 DateValue function: 1/1/2015
 Weekday function: 4
 WeekdayName function : Thursday
 Day function: 26
 Month function : 1
 MonthName function : February
 Year function: 2011
 Hour function: 9
 Minute function: 26
 Second function: 21
```

Figure 3-1 Examples of the various date and time functions.

Time values also have a default date value; the 30th December, 1899 is used to indicate that time-only information is being stored in a *Date* variable or database field type, which is shown in Figure 3-2. When viewing data in tables and queries, Microsoft Access hides this value and only shows the time component. There is no Time data type.

```
Immediate

?format(#15:30#,"hh:mm:ss dd mamma yyyy")
15:30:00 30 December 1899
```

Figure 3-2 Time-only data has the default date 30 December 1899 assigned.

# **INSIDE OUT**

Default dates representing time-only data and moving data between database systems

Care must be taken when moving time-only data from Access into other data storage systems. For example, the earliest date in Microsoft SharePoint is 1 January 1900, which means that before moving the time data from Access to SharePoint, you need to change the date, 30 December 1899, to 1 January 1900 (you also need to check that you have no date data before this date). For SQL Server, the earliest date that can be held in a *DateTime* data type is 1 January 1753, so when entering time-only data, SQL Server will take 1 January 1900 to represent time-only data.

You can perform direct arithmetic operations on date data, as illustrated in Figure 3-3.

Figure 3-3 VBA supports direct date arithmetic and also provides functions for these operations.

Although VBA understands that when you add or subtract one from a date, you are adding or subtracting one day, you might prefer to use built-in functions, such as *DateAdd*, *Date-Diff*, and *DateSerial* for directly manipulating dates. For example, the first parameter of the *DateAdd* function is the interval, which can take a value in seconds, hours, quarters, days, and other increments, and then add the value to a date.

## **String Functions**

VBA supports a rich variety of string functions. The simplest string operation is adding, or concatenating, strings together, as demonstrated in the following, with the results shown in Figure 3-4:

```
Sub modStr ConcatenateStrings()
    Dim varFirstName As Variant
    Dim varSurname As Variant
    ' above represent field values from a table
    varFirstName = "Andrew"
    varSurname = Null
    ' note using + can be dangerous as "a string" + null = null
    Debug.Print "Using the &", varFirstName & varSurname
    Debug.Print "Using a plus", varFirstName + varSurname
    Debug.Print "Safer Checking ", Trim(Nz(varFirstName) & _
                " " & Nz(varSurname))
End Sub
 modStr ConcatenateStrings
 Using the & Andrew
 Using a plus Null
 Safer Checking
                          Andrew
```

Figure 3-4 The results of string concatenation.

Note that when you concatenate strings, you are more likely to use the "&" (ampersand) character rather than the "+" (plus) character because this prevents *NULL* values from propagating through string expressions, making the overall result *NULL* (unless, of course, you want to have *NULL*s propagate through the calculation; adding *NULL* to a string sets the result to NULL and also requires the use of a variant variable to hold the result).


The *Nz* function will convert *NULL* values to a safe value (in this case an empty string), and this is often combined with the *Trim* function to remove any leading or trailing spaces.

The following is a summary of important string functions:

- **Left**, **Right**, **Mid** String extraction.
- **Len** Sets the length of a string.
- Trim, LTrim, and RTrim Removes spaces.
- Space and String Adds space characters (Space) or a number of repeating characters (String).
- **Upper**, **Lower**, and **StrConv** (supports proper case) Changes case.
- InStr, InStrReverse Searches for a string inside another string.
- **Replace** Replaces a substring with another string.
- Split Breaks a string into words.
- **Join** Reassembles words that were broken up by *Split* back into strings.
- ASC and Chr Get the ASCII code for a character (ASC), or make the character from the ASCII code (Chr).
- Format Formats a string.
- **StrComp** Compares strings.
- vbCR, vbCRLF, vbLF, vbTab Constants for formatting.

# INSIDE OUT Functions that return variant or string data

You might notice that many of the string functions (and some other VBA functions such as the *Format* function) have two forms; for example, *UCase* and *UCase*\$. This is to large extent historical (beginning on page 113, we discuss the use of a \$ symbol at the end of a variable name to indicate the data type); the *UCase* function has an advantage over the *UCase*\$ function in that it can return *NULL* values. The current Help system does not mention the older forms such as *UCase*\$ (but if you search in the object browser you will find these functions). The result from using *UCase*\$ with *NULL* is shown in Figure 3-5.



**Figure 3-5** An error message appears because the older *UCase*\$ function cannot handle *NULL* values.

#### The Format Function

You use the *Format* function to display numeric, date/time, and string data, by using built-in and custom formatting (there is an extensive description of this function in the Help system). For numeric data, the *Format* function supports separate formatting options when values are positive, negative, zero, or null; for formatting dates there are options for the *FirstDayOfWeek* and *FirstWeekOfYear*.

#### The ASC Function

The ASC function returns an integer representing a character code. In the following example, the ASC function removes all characters in a string, except letters and digits:

```
Function modStr_ProcessCharacters()
   ' removing characters from a string
   Dim strInput As String
   Dim strOutput As String
   Dim lngStrLength As Long
   Dim lngCount As Long
   Dim strChar As String
   Dim lngChar As Long
   strInput = "An 'example' of #(a string."
   lngStrLength = Len(strInput)
   strOutput = ""
   For lngCount = 1 To lngStrLength
       strChar = Mid(strInput, lngCount, 1)
       lngChar = Asc(strChar)
        ' space is 32
        ' 0 to 9 is character codes 48 to 57
        ' A to Z is character codes 65 to 90
        ' a to z is character codes 97 to 122
```

#### The Mid Function

The *Mid* string function is one of the string extractors (*Mid*, *Left*, *Right*). It has a unique property that is not shared by the *Left* and *Right* string functions; you can use the *Mid* string function to directly replace values inside a string, as demonstrated in the following:

```
Function modStr_Mid()
  ' Example showing the use of the Mid function
  ' to change parts of a string
  Dim strInput As String
  strInput = "vba PROGRAMMING language"

  Mid(strInput, 1, 3) = UCase(Mid(strInput, 1, 3))
  Debug.Print strInput
  Mid(strInput, 6, 12) = LCase(Mid(strInput, 6, 12))
  Debug.Print strInput
  Mid(strInput, 17, 8) = "xxxxxxxxx"
  Debug.Print strInput
  ' Changes the string to the following
  ' VBA Programming xxxxxxxxx
End Function
```

## **Domain Functions**

Domain functions allow you to quickly get information without expending a lot of effort on writing program code, but be warned: if you abuse these functions, it can result in a performance hit. The following code presents examples of the *DLOOKUP* and *DCOUNT* functions, with the result shown in Figure 3-6:

```
Sub modDom_Basic()
  ' Find the name of company with ID =1
  Debug.Print DLookup("Company", "Customers", "[ID] = 1")

  ' How many companies contain the letter A in their name
  Debug.Print DCount("*", "Customers", "[Company] like '*A*'")
  ' The following also works but is more complex as it uses a double quote
  ' as the string delimiter
  Debug.Print DCount("*", "Customers", "[Company] like ""*A*""")
End Sub
```



Figure 3-6 A procedure calling a Domain function.

Each domain function consists of three parts:

- Expr What you want back
- **Domain** Which table or query to look in
- Criteria What criteria to use to locate the record

Domain functions are not restricted to use in code; they can also be used to display data on a control on a form, as shown in Figure 3-7, or used in part of an expression in a query, as shown in Figure 3-8.




Figure 3-7 Using a Domain function on an unbound control on a form.

Exercise care when using Domain functions to calculate a column on the Query grid or in a continuous form because the function will be called repeatedly as each record is displayed, which can lead to performance issues, as demonstrated in Figure 3-8.

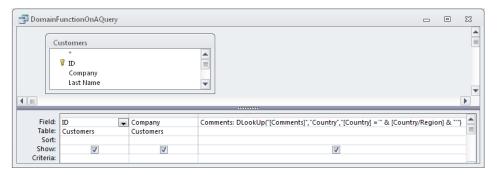


Figure 3-8 An inefficient use of a Domain function on a query.

## Constructing Where Clauses

Specifying the criteria for a domain function involves observing a set of rules. These rules apply equally to any *Where* clause or SQL that you generate in program code, as described in the following list:

- All date values need to be enclosed within # symbols and must be formatted to the date format used in the United States (mm/dd/yyyy)—even for international users of VBA.
- All strings need to be enclosed within single quotation marks (you can use double quotes, but double quotes need to be doubled up embedding in strings).
- Numbers do not need to be enclosed within any extra characters.

The following code presents examples of working with dates (see the *modDom\_Dcount* module for full details in this example):

```
' example showing syntax when searching on a date value
' note US date format is required in the where clause
Dim dtStartDate As Date
Dim dtEndDate As Date
dtStartDate = "1 January 2010"
dtEndDate = "20 january 2010"
' using an explicit date
intRc = DCount("*", "[Customers]",
        "[LastContactedDate] BETWEEN #1/1/2010# AND #1/20/2010#")
' using variables to load the dates
intRc = DCount("*", "[Customers]", _
            "[LastContactedDate] BETWEEN #" & _
            Format(dtStartDate, "mm/dd/yyyy") & "#" & _
            " AND #" & Format(dtEndDate, "mm/dd/yyyy") & "#")
' building a where clause for the citeria
strWhere = "[LastContactedDate] BETWEEN #" & _
            Format(dtStartDate, "mm/dd/yyyy") & "#" & _
            " AND #" & Format(dtEndDate, "mm/dd/yyyy") & "#"
intRc = DCount("*", "[Customers]", strWhere)
```

The use of the "\*" characters in the *DCount("\*")* operates like the SQL aggregate, *Count("\*")*. Use "\*" to count by the primary key. If you use *Count("[ID]")* rather than "\*" (and *[ID]* was the primary key), it would give the same answer. If you choose another field such as *[E-mail Address]*, it would not necessarily give the same answer, because a *Count* or *DCount* ignores *NULL* values.

The following code presents examples of using a string in the criteria, surrounded by single quotation marks:

When searching on a numeric, you do not need to add any delimiters:

The preceding examples introduced the *DCount* and *DLookup* functions. You have also seen the *DMin*, *DMax*, *DAvq*, *DSum*, *DFirst*, *DLast*, *DStDev*, *DStDevP*, *DVar*, and *DVarP* functions.

## **SQL** and **Embedded Quotes**

Embedded single quotes occur in proper names, such as O'Reilly, and in other parts of text, and it is only once you start to manipulate SQL in code that these names prove to be a serious problem and can cause code to fail.

The problem is rooted in the WHERE clause, and how this clause is constructed to handle a text string comparison in which you need to have embedded single quotes surrounding the text value. When you have an additional embedded quote in the criteria, the quotation marks then become unbalanced (for every open quote, there should be a close quote).

There are two ways to solve this problem. Either you need to replace a single embedded quote with two embedded quotes, or you need to use double quotes as delimiters, as shown in the following code (the results are presented in Figure 3-9):

```
Sub modQuotes_Embedded()
  ' this simulates what happens when a user
  ' types the value into a control
```

```
Dim strMatch As String
   Dim strCriteria As String
   Dim lngID As Long
   strMatch = "0'Reilly"
   strCriteria = "[Last Name] = '" & strMatch & "'"
   Debug.Print strCriteria
   On Error Resume Next ' skip the error that the next line generates
   lngID = Nz(DLookup("[ID]", "Customers", strCriteria))
   If Err <> 0 Then
        Debug.Print Err.Description
   End If
   Debug.Print lngID
   strMatch = "O'Reilly"
   ' replace an embedded single quote with two single quotes
   strMatch = Replace(strMatch, "'", "''")
   strCriteria = "[Last Name] = '" & strMatch & "'"
   Debug.Print strCriteria
   lngID = Nz(DLookup("[ID]", "Customers", strCriteria))
   Debug.Print lngID
     ' replace an embedded single quote with two single quotes
   strMatch = "0'Reilly"
   strCriteria = "[Last Name] = """ & strMatch & """"
   Debug.Print strCriteria
   lngID = Nz(DLookup("[ID]", "Customers", strCriteria))
   Debug.Print lngID
End Sub
```

```
Immediate

modQuotes_Embedded
[Last Name] = 'O'Reilly'
Syntax error (missing operator) in query expression '[Last Name] = 'O'Reilly''.
0
[Last Name] = 'O''Reilly'
4
[Last Name] = "O'Reilly"
4
```

Figure 3-9 Searching for embedded quotes in strings.

In the preceding example, the first attempt to handle the embedded quote causes the program to fail. (For the purposes of demonstration, we have added an *On Error Resume Next*, to prevent this from stopping the code execution) The second part of the code, which uses a replace function to replace a single quote with two single quotes, is a solution to this problem.

The third solution—using outer double quotes—works, but it will fail if it encounters text containing an embedded double quote. In this case, you need to replace an embedded double quote with two double quotes.

Therefore, the rule is that if you delimit with single quotes, double up any embedded single quotes, and if you delimit with double quotes, then double up any embedded double quotes.

# **INSIDE OUT**

DFirst and DLast functions can give inconsistent results after compacting a database

DFirst and DLast can in certain circumstances have an unusual side effect; after you compact and repair a database, you can get a different answer when using these functions (DMin and DMax do not have this problem). Figure 3-10 shows a new date value entered in the table.




Figure 3-10 Entering a new date value record to the end of the table.

The table in Figure 3-10 defines the ADate field as the primary key. After typing in a new record DLast, it will give the last entered record. Figure 3-11 shows the value returned in the Immediate window.




Figure 3-11 DLast returning the last record.

If you close and re-open the table, you see the records re-ordered, as shown shown in Figure 3-12, but the value given by DLast is unchanged (because it represents the last record added).




Figure 3-12 Records are now re-ordered as the date field is part of the primary key.

However, after we compact and repair the database, the value for DLast will then be changed (because a side effect of compaction is to re-order the physical rows by primary key), the result of which is shown in Figure 3-13, where DLast now returns a different value.

```
Immediate

2DLast("[ADate]","tb1DLastTest")
1/1/2010
```

Figure 3-13 Following compaction, the value that *DLast* returns will now be different.

A database function that can return different results depending on whether the database has been compacted could cause problems in your program code.

## **Using VBA Functions in Queries**

One advantage that functions have over subroutines is that they can be incorporated directly into the Query grid. This means that you can directly call both custom and built-in functions from the Query grid in expressions to create columns, and in *Where* clauses to filter data.

As demonstrated in the code example that follows, when using a function in an expression on the Query grid, it will be called for every record returned in the grid; as long as the function is not too complicated, acceptable performance should be achieved:

When designing this function, we chose to define the parameters to be of a *Variant* data type to allow for the possibility of null values in the fields (this is often a very important point to consider). The function is shown in Figure 3-14, used as an expression on the Query grid. Suitable VBA functions can also be used in criteria on the grid.




Figure 3-14 Adding a call to a custom VBA function on the Query grid.

Another circumstance for which this approach can be effective is when you have very complex expressions using nested IIF functions; if the logic of the nested IIF functions is difficult to follow, the functions can be simplified by using VBA conditional logic.

#### The *Eval* Function

The Eval function allows you to build VBA expressions dynamically at runtime and then execute the expression, which can return a string or numeric (Eval can also return a date data type):

```
Sub modEval_Arithmetic()
    Dim strExpression As String
    strExpression = "20 / 1.2"
    Debug.Print "Numeric calculation gives: " & Eval(strExpression)
    strExpression = "Format(DateAdd('d', 5, Date()), 'dd mmmm yyyy')"
    Debug.Print "Date calculation gives " & Eval(strExpression)
    strExpression = "Forms.Count"
    Debug.Print "Number of open forms is " & Eval(strExpression)
End Sub
```

## Shell and Sendkeys

Use the Shell command to start an external program asynchronously (control might return to your program before the program you start has finished execution).

With the SendKeys action, you can send a series of keystrokes to the active window. SendKeys can be used in conjunction with the Shell command to send keystrokes to an external application, as shown in the following example:

```
Sub modShellSendkeys RunCalculator()
   ' Shift +, Ctrl is ^ and Alt is %
   Shell "notepad.exe", vbNormalFocus
   SendKeys "This is being written in notepad" & vbCrLf, True
   ' display the file menu
   SendKeys "%F", True
End Sub
```

This second example starts a copy of Access, which opens a database with the *Decompile* command switch:

```
Sub modShellSendkeys_DecompileAccess()
    ' shell a copy of access with the decompile switch
    Dim strCommand As String
    strCommand = "msaccess.exe " & _
                 Application.CurrentProject.Path & _
                 "\NewDatabase.accdb /Decompile"
    Shell strCommand, vbNormalFocus
End Sub
```

#### The DoEvents Command

The DoEvents command instructs the operating system to process other events and process any keystrokes generated by the SendKeys action before then returning execution to your program. This command is useful when you want to ensure that time is being allowed for repainting and updating information being displayed to the user, and to allow other applications time to undertake processing operations.

To see how this works, open the frmDoEvents form, which displays a status message text box and has a button to update the status messages. If you click the button, you will see the status message "Phase 1 completed" displayed. Now if you comment out the DoEvents statements, when you click the button, you only see the last message displayed; with the DoEvents command enabled, you see the status message change as the processing progresses:

```
Private Sub cmdDoEvents_Click()
    Const lngLoopMax = 1000
   Dim IngCounter As Long
   Dim lngRecordCount As Long
   Me.txtStatus = "Starting Processing"
    DoEvents
    For lngCounter = 1 To lngLoopMax
        lngRecordCount = DCount("*", "Customers")
    Me.txtStatus = "Phase 1 completed"
    DoEvents
    For lngCounter = 1 To lngLoopMax
        lngRecordCount = DCount("*", "Customers")
    Me.txtStatus = "Completed Processing"
End Sub
```

## Objects and Collections

As you read through this book you will learn about many different objects and how to manipulate them. You will also find that objects are sometimes gathered together and held inside other objects called collections; a collection object holds a set of objects which are of a similar type. For example a Recordset contains a Fields collection and the Fields collection contains the set of Field objects in the Recordset.

Objects can have a number of properties and methods. A property is a characteristic that can be read or written; a method is something that you can call to manipulate the object.

#### Note

A quick way to determine that you are working with an object is to enable IntelliSense and then type in the name and press the "." (period) key. If it is an object, IntelliSense displays a list of methods and properties associated with it.

Collections, by contrast, only have a few properties and methods.

Key Collection Properties:

• **Count** Counts how many objects are in the set.

Collections in Access are 0-based: Collection(0), Collection(1)...Collection(Count-1). But in products like Microsoft Excel, collections are 1-based: Sheet(1), Sheet(2)... Sheet(Count).

Key Collection Methods:

- **Add** Adds an object.
- **Delete** or **Remove** Removes an object.

As an example, the TableDefs collection is the collection that contain all the tables in the database (both real tables and linked tables). Figure 3-15 shows some of the TableDef properties.

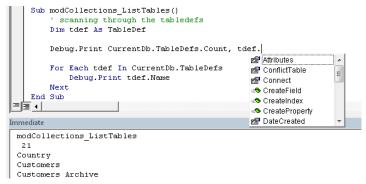


Figure 3-15 A TableDef has properties such as Attributes, DateCreated and Connect. It also has methods such as CreateField, CreateIndex and CreateProperty.

Objects are normally given singular names such as a TableDef, and the collections have plural names such as the TableDefs collection.

## **Object Variables**

To refer to objects, we use object variables. In the preceding section, we defined a TableDef object, and we used the For ... Each loop to run through the TableDefs collection getting a reference to each object in the collection.

Unlike a normal variable, which acts like a slot in memory in which values are held, an object variable is a reference in memory to an object (it is not a copy of the object); in many computer languages, this is called a pointer (because it points to an object).

If you need to create an object variable which points to a single object or collection, use the SET command. The code below uses two object variables, the db object variable references the current database and the tdef object variable is set to point at a specific table:

```
Sub modObject_SingleObjectReference()
    ' getting a reference to a TableDef object
   Dim tdef As TableDef
   Dim db As Database
    Set db = CurrentDb
    Set tdef = db.TableDefs("Customers")
    Debug.Print tdef.Name
    Set tdef = Nothing
    db.Close
    Set db = Nothing
End Sub
```

# **INSIDE OUT**

#### Tidying up object variables after use

Once the program code has finished execution, it is considered good practice to set any object variables to Nothing, which clears the reference in memory, some objects also have a Close method, and again it is considered good practice in this case to close the object variable.

Using the Close method and setting the variable to Nothing are not normally essential operations because once the code completes execution and the variables go out of scope, any tidy-up operations should be automatically taken care of; you might find that programmers omit these final tidy-up operations.

The New keyword which can be used to create a new object in memory, in the example below the New keyword is used to create a new table with a single field. Creating objects

can be more complicated as there can be other rules to be observed, in this example once you have created objects, you need to save them (append) into collections:

```
Sub modObject_CreatingAnObject()
    ' create a table with a single field
    ' if re-running this code you will
    ' need to check that the table does not already exist
    Dim tdef As TableDef
    Dim fld As Field
    Dim db As Database
    Set db = CurrentDb
    Set tdef = New TableDef
    tdef.Name = "NewTable"
    Set fld = New Field
    fld.Name = "CustomerID"
    fld.Type = dbLong
    fld.Attributes = dbAutoIncrField
    tdef.Fields.Append fld
    db.TableDefs.Append tdef
    Set fld = Nothing
    Set tdef = Nothing
    db.Close
    Set db = Nothing
    Application.RefreshDatabaseWindow
End Sub
```

## Is Nothing, IsEmpty, IsObject

Object variables that have not been assigned to a valid object have a value of Nothing. You can use Is Nothing to determine whether the variable has been assigned a value, or an assignment failed. IsObject can be used to determine if a variable is an object variable, or if a variant variable has a *vbObject* type (error trapping is often required with this test). Examples of these functions are shown in the following code, with the results shown in Figure 3-16:

```
Sub modNothingIsNothing()
   Dim db As Database
    Dim strName As String
    If db Is Nothing Then
        Debug.Print "Is Nothing Test is True"
    E1se
         Debug.Print "Is Nothing Test is False"
    End If
    If IsObject(strName) Then
        Debug.Print "IsObject Test is True"
    E1se
         Debug.Print "IsObject Test is False"
    End If
    Set db = CurrentDb
```

```
If db Is Nothing Then
        Debug.Print "Is Nothing Test is True"
    E1se
         Debug.Print "Is Nothing Test is False"
    End If
    Set db = Nothing
End Sub
```

```
Immediate
 modNothingIsNothing
 Is Nothing Test is True
 IsObject Test is False
 Is Nothing Test is False
```

Figure 3-16 Is Nothing can be used to detect when an object variable has not been assigned a value.

The previous example demonstrates how when you have finished using an object variable, you explicity set the variable to Nothing. This is considered to be good practice rather than assuming that the variable will be set to Nothing once it goes out of scope when the procedure ends.

Variant variables can be tested with the IsEmpty function to establish whether they have been assigned a value, the results of the following code are shown in Figure 3-17:

```
Sub modNothing_IsEmpty()
   Dim strCustomer As String
   Debug.Print "Variable declared but not initialized, " & _
        "IsEmpty() : " & IsEmpty(strCustomer)
   strCustomer = "Test Customer"
   Debug.Print "Variable assigned a value, IsEmpty() : " & _
        "IsEmpty(strCustomer)"
   Dim varCustomer As Variant
   Debug.Print "Variant declared but not initialized, " & _
        "IsEmpty() : " & IsEmpty(varCustomer)
   varCustomer = "Test Customer"
   Debug.Print "Variant assigned a value, IsEmpty() : " & _
        IsEmpty(varCustomer)
   Debug.Print "Variant contains data : " & VarType(varCustomer)
   If VarType(varCustomer) = vbString Then
       Debug.Print "Variant variable contains a string"
   End If
   varCustomer = 1
   Debug.Print "Variant contains data : " & VarType(varCustomer)
End Sub
```

```
Immediate
 modNothing IsEmpty
 Variable declared but not initialized, IsEmpty() : False
 Variable assigned a value, IsEmpty() : IsEmpty(strCustomer)
 Variant declared but not initialized, IsEmpty() : True
 Variant assigned a value, IsEmpty() : False
 Variant contains data: 8
 Variant variable contains a string
 Variant contains data: 2
```

Figure 3-17 The results from using IsEmpty and VarType on variant variables.

The preceding shows that using *IsEmpty* on a variable that is not a variant always returns false. The example also shows the use of the VarType function to determine what kind of data is contained in the variant variable. Note that assigning a different item of data to a variant variable can change the variant type.

## Creating Maintainable Code

The topic of how you should name objects and variables in VBA is one that always attracts controversy amongst developers. There is no enforced rule on how best to do this. In this section, we want to give you some suggestions and reasoned arguments as to why people adopt different naming conventions. The best advice we can give is to find a convention that suits your development style and try to stick to the convention so that your code is consistent.

#### Naming Access Document Objects

In an Access application, the first objects that need to be named are Form, Report, Table, and Query. Developers tend to name objects by functional area; for example, in the order processing part of a system, you could have forms named such as OrderList, OrderDetails, OrderList ForExport, and so on, where the Order prefix indicates the order processing function in the system.

The advantage of this naming convention is that the Order forms are all naturally sorted alphabetically together. Other useful conventions with forms are to group them by behavior. For example, some forms are used for data maintenance, and others are pop-ups (the forms used for making selections prior to generating a report). With this convention you could have frmOrders, and dlgOrders, and rptOrders. This is a two-level classification for which the prefix rpt, frm, and dlq indicates the behavior of the form, and then you use the functional area (in this case Orders) for a sub-classification. Another popular convention is to name a form's subform as frmOrdersSubOrderDetails, using the word Sub or SubForm as part of the name.

Tables and queries are sometimes displayed in a single combined list in Access; typically when specifying a RecordSource for a form. This has led to a convention of using tbl or gry as a prefix to distinguish between the two types of objects.

Modules can be prefixed with mod. This is useful when you start prefixing the procedures with the module name. This then draws the distinction between code on a form (without a module prefix) and code in a general module (with a prefix).

Many developers adopt camel notation. This is when you capitalize the first letter of each word in the name, such as OrderDetails. Spaces are often avoided, and using the \_ (underbar) character is used to break words apart. The table that follows presents some common naming strategies.

Object type	Prefix	Examples
Form	frm, dlg, rpt	frmOrders, dlgOrders, rptOrders
SubForm	frm{}Sub{}	frmOrdersSubDetails
Report	rpt	rptOrderList
SubReport	rpt{}SubRep	rptOrderListSubOrderDetails
Table	tbl{}	tblOrders, tblOrderDetails
Query	qry{}	qryOrdersUK
Macro	mcr{}_Name	mcrOrders_SaveOrder
Module	mod	mod_Utilities
Procedure in a Module	mod_procname	mod_Utilities_ReplaceString

Events for controls on a form and the form itself have underbars added by Access; for example, CompanyName\_OnClick().

#### Naming Database Fields

Most developers name database fields with a simple functional name such as ProductDescription and ProductCode, or Product Description and Product Code. Here again, the camel notation is very popular.

You should avoid using spaces and special characters such as %, and &; names such as R&D Budget or Sales% might look meaningful, but they can be very painful to fix at some later date when you try to publish a database to SharePoint, for example.

Where names have spaces (which is not recommended because it inevitably makes things difficult with some other technologies), you often need to use square brackets to refer to the names in program code; for example, a field called Company Name could be referenced in a Recordset as rst![Company name].

## Naming Unbound Controls

When a field is added to a form, unless the field already exists on the form, Access assigns the control a name to match the field name. When naming unbound controls, such as command buttons or calculated expressions, using a standard prefix is important, because once you add code behind the control, if you have not named the control, then it is very difficult to figure out what a control does—say for example, one named *Text0*. The table that follows lists some common controls and the prefixes that are typically used when naming them.

Control	Prefix
Command Button	cmd
Text	txt
Combo Box	cbo
List Box	lst
Check Box	chk
Group Control	grp

Other problems that you need to be aware of can occur after you have named a control and attached code. If you change the control name, then existing code becomes orphaned and no longer executes. This is because Access concatenates the control name and an " " (underbar) character with the event name, such as CompanyName\_OnClick().

When you copy and paste controls between Access objects, any associated code is not copied. One very attractive feature of embedded macros and controls is that when you copy and paste them between forms the embedded macro code is copied along with the control (except when working with web forms, where paste operations are not supported).

## Naming Variables in Code

Some developers prefer to use a convention when naming variables. For example, a string variable for CompanyName might be called strCompanyName, and for a numeric long integer ID, the name might be *IngID*.

One argument against using this convention is that you might find the code more difficult to read. Another argument is the loss of meaning as the number of different types of objects that you work with increases. In .NET, where you have hundreds of objects, the prefix can become either meaningless or difficult to consistently assign. However, the bulk of VBA Access code manipulates a small number of different types of objects, and much of the naming prefix convention has grown up historically with the product.

The first argument for using a prefix on variable types is that you are less likely to make an error in program code by passing a string variable on a function call that expects a long value parameter. This argument spurs the question, is your development environment clever enough to spot this mistake at runtime?

Fortunately, a modern environment such as VBA can spot this mistake at an early stage when compiling the code (even if the error message is sometimes difficult to fully understand), as shown in Figure 3-18.




Figure 3-18 VBA recognizes an attempt to pass the wrong kind of parameter on a function call.

However, the following code, which does not specify a variable type for the function parameters, would pass compilation and not be detected as a potential conflict because the parameter types are not specified in the function definition; they are assumed to be variants, and a string value is a valid variant value:

```
Function modParam_CalculateSum(lngAddFirst, _
                               lngAddSecond) As Long
    modParam_CalculateSum = lngAddFirst + lngAddSecond
End Function
Sub modParam CallCalculate()
    Dim TheValue As String
    Dim TheNewValue As Long
    TheNewValue = modParam_CalculateSum(TheValue, TheValue)
End Sub
```

The preceding code will fail with a type mismatch inside the function when it attempts to add the string and numeric data types together.

The second argument for using prefixes is that if, for example, you have a form with a bound control called Company, using a variable called Company will cause confusion, as

illustrated in Figure 3-19, whereas having a variable called strCompany cannot be confused with the control name.

```
Microsoft Visual Basic for Applications
Private Sub Company AfterUpdate()
    Debug.Print Company
    Dim Company As
End Sub
                                                      Compile error:
                                                      Duplicate declaration in current scope
                                                                  OK
                                                                                 Help
```

Figure 3-19 The compiler recognizes that the name Company would conflict with the control called Company.

However, depending on how the code is written this might not be detected. For example, if you change the order of what is written to that shown in Figure 3-20, you end up with code that compiles without detecting the potential error.

```
Private Sub Company AfterUpdate()
    Dim Company As String
   Debug.Print Company
```

Figure 3-20 Re-ordering the code means this code compiles without detecting the error, and the value printed will be an empty string.

Here are some suggestions for naming the built-in data types. The popular approach is to use a three-character prefix:

Data Type	Prefix
String	str
Long	Ing
Double	dbl
Boolean	bl or bln or bool

For a more formal approach to naming objects (one that is very popular in the VBA community), we recommend searching online for contributions from Greg Reddick or Stan Leszynski (try starting here: http://en.wikipedia.org/wiki/Leszynski naming convention). The examples in this book follow a consistent, standard naming convention that is close to the spirit of this convention.

In summary, it is possible to write 100% reliable code without having any convention for naming variables, but you need to be careful when doing this. Using a simple convention to prefix a variable with the variable type can save a lot of problems.

# **INSIDE OUT**

#### Using Me to reference controls in program code

In the example shown in Figure 3-20, because we have not referred to the bound control by name, the compiler cannot spot the problem and thinks the value of Company is an empty string. But if we had used Me.Company this would show that the control actually has a value that is not an empty string. On forms and reports, controls on the object can be referred to using the "Me" object. This also has the advantage of invoking IntelliSense when typing control names, and thus reducing typing errors.

## **Indenting Code**

Indenting your program code makes it easier to read and maintain. The VBA Editor allows you to highlight a block of code and then use the Tab key to right-indent the block by a tab stop (position) or the Shift+Tab key to indent back a tab stop. Figure 3-21 shows a block of code highlighted and indented one tab stop.

```
Sub modCollections_ListTables()
End Sub
```

Figure 3-21 Highlighting code and using the Tab or Shift+Tab keys to indent the code forward or backward by one tab position.

## Other Variable Naming Conventions

Historically, there was a convention for ending a variable with a special symbol to indicate the data type. For strings, this symbol was the "\$" (dollar) character, so Customer\$ indicated a string variable name; for Integers, the "%" (percent) symbol was used. We would not advise using this as a convention because it does not appear to be very popular. The Locals window in Figure 3-22 shows the resulting inferred data types.




Figure 3-22 The Locals variable window shows how the \$ symbol has been implicitly regarded as a string variable.

One of the oldest conventions that you might come across is using the letters I, J, or K for counters in loops. The roots of this convention go back to languages like Fortran, where these variable names were used for integer values in loops.

#### **VBA** and Macros

Access has grown up with two different approaches to programming: using macros and using VBA programming code. Macros are designed to be an easy to use programming environment in which people without VBA programming skills can add functionality to an application. Although macros are easy to use, managing macro code, debugging the code, and error handling are more challenging. Although error handling for macros in Access 2010 has been vastly improved, and debugging using local and temporary variables has been added, it is unlikely that these enhancements alone will encourage those using VBA to move away from the standard. Access 2010 has received a significant reworking of the Macro Editor and the macro environment, which includes the addition of Data Macros and support for macro programming in web objects (where VBA is not supported).

#### **Access Basic**

Access started out with a language called Access Basic, which evolved from the even more primitive language of BASIC. VBA was a later step that was initially incorporated into Excel and then extended into the other Microsoft Office products.

Because VBA needs to be universal to the entire Office family of products, it cannot incorporate directly all the features of Access into the language. This is why some of the most commonly encountered actions in Access, such as opening a form, do not have an obvious VBA function but use the *DoCmd* object.

#### Converting Macros to VBA

Macros can be converted to VBA. To do this, locate the macro in the Navigation window, and then on the File tab, in BackStage view, save the object as VBA code, as shown in Figure 3-23.



Figure 3-23 Converting a macro to VBA code.

```
Function MacroToBeConverted()
   DoCmd.OpenForm "frmCustomers", acNormal, "", "", , acNormal
   MsgBox "Click close to close this window", vbOKOnly, "Close the window"
   DoCmd.Close acForm, "frmCustomers"
End Function
```

When converting the macro, you are also given options to add error handling and include macro comments.

# **Error Handling**

VBA supports an On Error statement to indicate how errors should be handled.

The simplest way to understand how errors can occur is to generate an error and then look at the strategies for handling it. The following code contains an error:

```
Sub modErrorHandler_SimpleError()
' Example of a zero divide error
   Dim lngTotalTurnover As Long
    Dim IngCompanyCount As Long
    Dim lngAverageTurnover As Long
    lngCompanyCount = 0
    lngTotalTurnover = 20
    lngAverageTurnover = lngTotalTurnover / lngCompanyCount
End Sub
```

When you execute the code, it generates the error message illustrated in Figure 3-24.




Figure 3-24 The error message displayed as the result of an untrapped error in program code.

This is probably not the kind of interaction that you would like your user to have with your application.

#### On Error Resume Next

This is a useful, yet possibly dangerous technique—it is dangerous if you fail to very carefully add lines of code to test for when an error has occurred. In the following example, you set this at the beginning of a procedure, which means that after a line executes, any error allows the execution to continue. When this is complete, you need to test the Err object to see if an error occurred and to display the message box shown in Figure 3-25:

```
Sub modErrorHandler_SimpleError_Handler2()
' Example of a zero divide error, and how to ignore an error
' but take some action based on the error
   On Error Resume Next
   ' This causes any error to be ignored
   Dim lngTotalTurnover As Long
   Dim IngCompanyCount As Long
   Dim lngAverageTurnover As Long
   lngCompanyCount = 0
   lngTotalTurnover = 20
   lngAverageTurnover = lngTotalTurnover / lngCompanyCount
   If Err <> 0 Then
       MsgBox "Contact support, Err No : " & Err & ", " & Err.Description, _
           vbCritical, "Help"
   End If
   On Error GoTo O
End Sub
```




Figure 3-25 Using On Error Resume Next to trap an error.

This method can be used to perform special error handling for individual lines, but wherever it is used, you should test to see if the error has occurred and then take appropriate action.

# **INSIDE OUT**

Taking care when using On Error Resume Next and On Error Resume

The last line of code in the previous example contains an On Error GoTo 0 statement. This disables any further error handling and suspends the action of the On Error Resume Next statement. You can also mix these blocks inside more sophisticated error handlers. So in the following code, we override the main error handler (On Error GoTo ErrorHandler:) to perform some specialist error processing (within the On Error resume Next area), and then resume the main error handler once we are finished (by restating the On Error Goto Error Handler:):

```
On Error Goto ErrorHandler:
On Error Resume Next
..... IF Err.....
On Error Goto ErrorHandler
```

It is worth emphasizing that just adding On Error Resume Next at the top of a procedure is a very dangerous practice, and if you are setting this around a block of code, you should test for any errors, and then use On Error Goto ErrorHandler: to either switch back on the main error handler, or On Error GoTo 0 to switch off error handling.

There is another alternative to using the On Error Resume Next, which is On Error Resume, which simply means try again. On its own, you are unlikely to use On Error Resume, but if you trap the error, you could ask the user if he wants to retry an operation several times (ensuring that they can escape from any program loop you create).

### **Err Object**

When an error occurs, the error object can be used to display the error number and error description. You can also clear the error object by using the Err.Clear operation to ensure that subsequent errors are correctly managed, as shown in the following example (see for example in modErrorHandler\_SimpleError\_Handler2a):

```
lngAverageTurnover = lngTotalTurnover / lngCompanyCount
Debug. Print Err. Number, Err. Description
If Err.Number <> 0 Then
    ' take appropriate action
    ' clear the error
    Err.Clear
End If
```

#### On Error GoTo

This mechanism is the preferred way to handle errors because it allows you to define a unique error handling block of code for every procedure, which can then take a specific action of passing the error to a general purpose piece of code. The following code shows the general structure of this error handling code:

```
Sub modErrorHandler_SimpleError_Handler3()
' Example of a zero divide error
    On Error GoTo ErrorHandler:
    ' This allows better control of the error
    Dim lngTotalTurnover As Long
    Dim IngCompanyCount As Long
    Dim lngAverageTurnover As Long
    lngCompanyCount = 0
    lngTotalTurnover = 20
    lngAverageTurnover = lngTotalTurnover / lngCompanyCount
    Exit Sub
ErrorHandler:
Stop
' We can now take several possible actions
' 1 ignore the error and exit the subroutine or function
' 2 do something and try again using Resume
'Resume
' 3 skip forwards and continue processing
   using Resume Next
' 4 Activate a custom error handler to log the error
   alert the user and take some action
' 5 Log the error and get the user to decide on what action to take
End Sub
```

#### **Developing a General Purpose Error Handler**

In this section, we outline a general purpose routine for recording the errors and allowing the user to decide what to do after an error occurs. The label Errorhandler shown in the code that follows can have the same name in all procedures. To start, you need to decide on what options a user should be presented with:

- Try again
- Skip and Continue
- Exit

```
Sub modErrorHandler_SimpleError_Handler4()
' Example of a zero divide error
   On Error GoTo ErrorHandler:
   Dim lngTotalTurnover As Long
   Dim IngCompanyCount As Long
   Dim lngAverageTurnover As Long
   lngCompanyCount = 0
   lngTotalTurnover = 20
   lngAverageTurnover = lngTotalTurnover / lngCompanyCount
   Exit Sub
ErrorHandler:
   Select Case modErrorHandler_ErrorLogging(Err.Number, _
                                             Err.Description, _
                                             "modErrorHandler_SimpleError_Handler4")
       Case 1: Resume Next
       Case 2: Resume
       Case Else
   End Select
End Sub
```

The error handler in the preceding code calls a library routine, and then depending on the user's interaction with that routine, takes appropriate action.

```
Function modErrorHandler_ErrorLogging(lngErrorNo As Long, _
                                        strErrorText As String, _
                                        strCallingcode As String) As Long
' This is an example of a generic error handler
' It logs the error in a table and then allows the calling procedure
' to decide on the action to take
   Dim db As DAO.Database
   Dim rst As Recordset
   Set db = CurrentDb
   Set rst = db.OpenRecordset("tblErrorLog", dbOpenDynaset)
   With rst
        .AddNew
        !ErrorNo = lngErrorNo
        !ErrorMessage = strErrorText
        !ErrorProc = strCallingcode
        ' Also very useful to log the id of the user generating the error
        !WindowsUserName = modErrorHandler_GetUserName()
        .Update
   End With
```

```
' now allow the user to decide what happens next
    DoCmd.OpenForm "frmError", , , , acDialog, strErrorText
    ' now as this is a dialog form our code stops here
    ' we will use a global variable to work out
    ' what action the user wants to happen
   modErrorHandler_ErrorLogging = global_lngErrorAction
End Function
```

The code is split into three parts. The first part uses Data Access Objects (DAO) programming to log the error in an error recording table (see Figure 3-26). It also uses a special function called modErrorHandler\_GetUserName(), which retrieves the users logon name. This uses a Windows API call. Note that this API call will work only in Office 32-bit; it would need to be modified to work in Office 64-bit. This is shown in the sample database and discussed in Chapter 17, "Developing Applications."

```
Declare Function CSM_GetUserName Lib "advapi32.dll" Alias "GetUserNameA" _
(ByVal lpBuffer As String, nsize As Long) As Long
Function modErrorHandler_GetUserName() As String
    Dim USER As String
    USER = Space(255)
    If CSM_GetUserName(USER, Len(USER) + 1) <> 1 Then
        modErrorHandler_GetUserName = ""
    Else
        USER = Trim\$(USER)
        USER = Left(USER, Len(USER) - 1)
        modErrorHandler_GetUserName = USER
    End If
End Function
```

tblErrorLog					0 0	23
∠ ErrorLogId →	ErrorNo	- ErrorMessage -	ErrorDateTime -	ErrorProc	- WindowsUserNam	e 🔺
8		11 Division by zero	12/1/2010 12:23:23 AM	modErrorHandler_SimpleError_Handler4	Andrew	
9		11 Division by zero	12/13/2010 2:05:46 AM	modErrorHandler_SimpleError_Handler4	Andrew	
10		11 Division by zero	12/13/2010 2:06:41 AM	modErrorHandler_SimpleError_Handler4	Andrew	•
Record: H ← 1 of 8	→ H → <u>□</u>	K No Filter Search	1	III		•

Figure 3-26 A custom error log file.

Figure 3-27 illustrates an example of a form that you can display to log and then take appropriate action when an error occurs (see modErrorhandler\_SimpleError\_Handler4 to view the code).



Figure 3-27 A form that provides potential actions for a user to take when an error occurs.

When you open a target form as a dialog form, your program code pauses until the dialog is closed. Yet the dialog form can also still have its own code that executes even when the calling code is paused. This is a very subtle feature.

### OpenArgs and Dialog Forms

Chapter 4, "Applying the Access Object Model," shows examples of writing values into the controls of a form after opening the form, and in Chapter 6, "Using Forms and Events," there are examples showing how to call public code on a form after opening the form. But when the form is opened as a dialog form these techniques cannot be used to manipulate the form that you are opening because the code on the calling form will stop execution after opening the dialog form.

For a dialog form, you can make use of the *Open Argument Parameter* (variant) when using the DoCmd.OpenForm action (this method is a general technique that can also be used when opening forms other than as a dialog). The following code demonstrates an example of code passing this parameter to a form (in this example, the "|" character separates the parameters):

```
Sub modOpenArgs_MultipleArgs()
' example opening the form frmUsingOpenArgs
   Dim varArgs As Variant
   varArgs = "Text value|1.998|1st january 2011"
   DoCmd.OpenForm "frmUsingOpenArgs", , , , acDialog, varArgs
   MsgBox "Control returns to calling program"
End Sub
```

The sample form called frmUsingOpenArgs (see Figure 3-28) then contains the following code on the open event, which uses the *Split* function to break apart the parameters:

```
Private Sub Form_Open(Cancel As Integer)
    ' reads the OpenArgs
    Dim varArgs As Variant
   Dim lngArgs As Long
    If Not IsNull(Me.OpenArgs) Then
        varArgs = Split(Me.OpenArgs, "|")
        For lngArgs = 0 To UBound(varArgs)
            Me.Controls("txtParameter" & lngArgs) = varArgs(lngArgs)
       Next
    End If
End Sub
```

frm Using Open Arg	gs	23
Parameter 0	Text value	
Parameter 1	1.998	
Parameter 2	1st january 2011	
1		

Figure 3-28 An example form showing the OpenArgs being displayed in a set of controls.

Notice that the message box in the calling code is not executed until you close the dialog form.

An alternative method to solving this problem is to load a set of global variables before opening the form, and then read the values of these variables in the form's Open event.

#### Err.Raise

This is a feature of VBA that you are more likely to use if you decide to create your own VBA classes. Classes are complex objects, and as such, they cannot simply return an error code like a function can. An additional problem with classes is that they need have their own internal error handling but still be able to pass an error back to the program code that uses the class. The error code range 513-65535 is available for you to use for raising error numbers, as demonstrated in the code that follows:

```
Sub modErrorHandler_RaiseAnError()
    ' procedure which raises a custom error number
    On Error GoTo Err handler
    Dim i As Long
    i = 56 / 0
    Exit Sub
```

```
Err handler:
    Err.Raise 516, "modErrorHandler_RaiseAnError", "Division by zero"
End Sub
Sub modErrorHandler_RaiseAnErrorTest()
    ' test procedure to trap a custom error
   On Error GoTo Err_handler
    modErrorHandler_RaiseAnError
    Exit Sub
Err handler:
    ' At this point we can manage the custom error
   Debug.Print Err.Number, Err.Description, Err.Source
    Stop
End Sub
```

# **INSIDE OUT**

#### The vbObjectError constant

There is some confusion with respect to a constant called vbObjectError (which has the value -2147221504). The Help system and other sources emphasize that you should add this number to your own error number, but this is not normally required.

# Summary

In this chapter, you were introduced to the VBA Programming Language features. The following points summarize key areas with which you should now be familiar:

- The use of built-in function libraries
- How object variables are used in program code
- The benefits of having conventions for naming objects in your application
- The principles of defining error handling in program code





PART 2

# Access Object Model and Data Access Objects (DAO)

**CHAPTER 4** 

Applying the Access Object Model ..... 127

**CHAPTER 5** 

**Understanding the Data Access Object Model 161** 



# CHAPTER 4

# Applying the Access Object Model

The Application Object Methods and Properties 128	Manipulating the Forms and Reports Collections 143
The CurrentProject and CurrentData Objects 134	Using the Screen Object
The DoCmd Object	Enhancing the User Interface

t helps to think of Microsoft Access as being an object that contains other objects and collections of objects. When you open a form in the application, each control on the form is an object that is contained in a controls collection for that form object. The open form is contained in the *Forms* collection of the *Application* object (until you close the form). The *Forms* and *Reports* collections are very important for programming Access and contain open forms or reports.

If you want to look at all forms in an application (regardless of whether they are open), they reside in the *CurrentProject* object, in a collection called *AllForms*. The *CurrentProject* object is contained in the *Application* object.

Similar objects are held in an object collection, and an object can contain several of these collections. The Access *Application* object has more than 70 methods and over 40 properties, and many of these properties are themselves objects that contain further collections. In this chapter, you look into some of the more important objects and collections that are contained in the Access *Application* object, as shown in Figure 4-1.




Figure 4-1 A simplified view of part of the Access Application object.

After reading this chapter, you will:

- Be able to use the Forms and Reports collections to manage how different parts of an application can control other objects by using these important collections
- Understand how to use other important parts of the Access Application object in your applications

#### Note

As you read through this chapter, we encourage you to also use the companion content sample database, AccessObjectModel.accdb, which can be downloaded from the book's catalog page.

# The Application Object Methods and Properties

In this chapter, there are separate sections to deal with the more complex application objects. To begin though, we look at a variety of the simpler Application object's methods and properties.

#### Note

When working with these methods and properties, you can omit the "Application" prefix. For example, you can type Run rather than Application.Run. Using the prefix is useful, however, when you want full assistance from IntelliSense.

#### The Run Method

Using Application. Run, you can execute a custom Microsoft VBA procedure. The following example demonstrates how to dynamically execute a procedure and pass parameters to the procedure:

```
Sub modRun_PromptUser(strmsg As String)
    MsgBox strmsg
End Sub
Sub modRun DynamicRun()
```

- ' example showing the use of Run to
- ' dynamically execute code and pass parameters

```
Dim strProc As String
    Dim strMessage As String
    strMessage = "Operation Completed"
    strProc = "modRun PromptUser"
    Run strProc, strMessage
End Sub
```

In the next example, we have copied the subroutine into another Access database. The code then opens the second Access database and runs the *Public* code:

```
Sub modRun_DynamicRunInAnotherAccessDatabase()
   ' example showing the use of Run to
    ' dynamically execute code and pass parameters
   ' to another Access application
   Dim strProc As String
   Dim strMessage As String
   Dim strTarget As String
   strTarget = CurrentProject.Path & "\NewDatabase.accdb"
   strMessage = "Operation Completed"
   strProc = "modRun PromptUser"
   Dim objAccess As Access.Application
   Set objAccess = GetObject(strTarget, "Access.Application")
   objAccess.Run strProc, strMessage
   Set objAccess = Nothing
End Sub
```

#### The RunCommand Method

The Application.RunCommand mimics the actions that a user can perform by using the built-in Access menus. To invoke a specific menu action, you need to have a suitable context; for example, to display a find dialog, you need to have a form that contains controls that can be searched, and to perform an Undo record, the record needs to have been changed.

The sample form frmRunCommand includes some button examples, which are illustrated in the following code:

```
Private Sub cmdFind_Click()
    RunCommand acCmdFind
End Sub
Private Sub cmdSave_Click()
    If Me.Dirty Then
       RunCommand acCmdSaveRecord
    End If
End Sub
Private Sub cmdUndo Click()
    If Me.Dirty Then
       RunCommand acCmdUndo
    End If
End Sub
```

Unfortunately, the built-in Help system does not provide a good description of how and when to use the different commands. But you can pick up the use of the different commands by examining code snippets in this book and by searching online. If you search online for a specific command, such as acCmdSaveRecord, you will find sites that are dedicated to explaining the different commands.

### Simplifying Filtering by Using BuildCriteria


The BuildCriteria method of the Application object is a tool that is designed to assist you in constructing valid Where clause syntax. The method call involves passing the FieldName, FieldType, and Criteria. This method can be combined with InputBox commands or dialog forms to build Where clauses for code and filters.

The frmEmployeesList form contains a button that uses an input box to apply a filter. If you enter an "\*" (asterisk) character at the end of the name, the BuildCriteria method constructs an appropriate Where clause by using the like keyword, as demonstrated in the following:

```
Private Sub cmdFilterByLastname_Click()
   Dim strLastname As String
    Dim strFilter As String
    strLastname = InputBox("Enter employees last name", _
                           "Last Name Filter", "")
    If strLastname = "" Then
       Me.FilterOn = False
   Else
        strFilter = BuildCriteria("[Last Name]", dbText, strLastname)
       Me.Filter = strFilter
       Me.FilterOn = True
   End If
End Sub
```

### The ColumnHistory and Append Only Memo Fields

In Table design, if you scroll to the very last property of a memo field, you will find the Append Only property, as shown in Figure 4-2.



**Figure 4-2** The Append Only property of a memo field in Table design, for the field Notes in the table *Customers*.

With Append Only set to Yes, each time the field is edited, the previous contents are recorded in the column history. To display the column history information (see Figure 4-3), right-click the memo field in Datasheet or Form view, and then choose Show Column History from the shortcut menu.




Figure 4-3 Displaying the column history for an Append Only memo Field.

There is no feature to trim down or edit the column history information for a table. To clear the history you need to create a new field, update the existing data, remove the old field, and then rename the new field.

To display the column history by using an unbound control on a form or in a query, you can use a custom VBA function, as shown in the following:

```
If Not IsNumeric(strKeyValue) Then
    ' this could be extended for other data types
   strQueryString = strQueryString & "'" & strKeyValue & "'"
E1se
    strQueryString = strQueryString & strKeyValue
modApp_ColumnHistory = Application.ColumnHistory(strTableName, _
                                                strColumnName, _
                                                strQueryString)
```

End Function

This function can be enhanced to handle different types of primary key values and provide more sophisticated formatting by parsing the string for the appropriate version information tags, as shown in Figure 4-4.

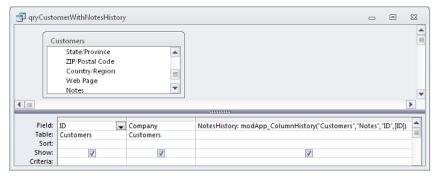


Figure 4-4 Using a custom VBA function to display the column history information.

## Examining TempVars

Unlike VBA, when programming by using macros, you cannot define variables to hold values of controls and other settings. There are many circumstances in macro programming in which you need to save a temporary value for later re-use. You can use the TempVars collection to create these temporary variables. This collection also allows you to share values between macro and VBA code.

Using the following VBA code, you can quickly dump a list of the temporary variables to the Immediate window:

```
Sub modApp_ListTempvars()
   ' Set some example temporary variables
   TempVars!FormName = "frmScreenForm"
   TempVars.Add "Current User", Application.CurrentUser
   ' list all values for temporary variables
   Dim tv As TempVar
   Debug.Print "Listing TempVars" & TempVars.Count
   Debug.Print "
```

```
For Each tv In TempVars
       Debug.Print tv.Name, tv.Value
    Next
End Sub
```

In VBA and macro programming, when you attempt to use a TempVar that has not already been used, it is automatically added to the TempVars collection. The collection supports methods to Add, Remove, and RemoveAll items (corresponding to the SetTempVar, RemoveTempVar, and RemoveAllTempVars macro commands).

### **Invoking the Expression Builder**

The Expression Builder is an extremely useful tool to have when writing code that needs to refer to forms and reports. In the VBA Code Editor, there is no button to display the Expression Builder; it can only be displayed when you are in the Design mode of an Access object, such as a form, or in the Query grid.

This means developers often find themselves needing to go into a query or form in Design mode to display the Expression Builder.

It is possible to mimic this action by specifying a function key that will display the Expression Builder with a single keystroke, as demonstrated here:

```
Function modApp_InvokeBuilder()
   ' Create an Autokeys Macro using F6 to activate this code
   DoCmd.OpenForm "frmLaunchExpressionBuilder", acDesign
   ' This command launches the expression builder
   RunCommand acCmdTnvokeBuilder
End Function
```

This function opens a form called frmLaunchExpressionBuilder in Design mode (see Figure 4-5) and then sends the acCmdInvokeBuilder command. This command can only be executed when you have an appropriate object open in Design view.




Figure 4-5 A dummy form with no controls can be used to launch Expression Builder.

To prevent a pop-up from appearing that prompts you to choose between displaying the Expression Builder, Macro Builder, or writing code, we have added an expression to the form's default load event.

We next create an AutoKeys macro (see Figure 4-6) that ties the F6 key to executing the VBA code.




Figure 4-6 Using a Submacro name that corresponds to a keycode and saving the macro with the special name AutoKeys redefines how function keys and other keys operate.

Now, when you display the Access interface you can launch Expression Builder by pressing the F6 key, as shown in Figure 4-7.



Figure 4-7 A quick technique for launching Expression Builder.

# The CurrentProject and CurrentData Objects

The CurrentProject object contains a number of useful properties, such as the CurrentProject.Path(), which returns the path to your database. It also contains collections called AllForms, AllReports, AllMacros, and AllModules, which hold the Access Objects in your application.

The CurrentData object contains the AllTables and AllQueries collections for the tables and queries in the application.

When looking at the objects in these collections, you need to use an Access Object. For an example of using this, see the section on object dependencies, beginning on page 137.

The Application object contains two very important collections called the Forms and Reports collections. These collections contain the currently open forms or reports in your application and are used extensively in VBA programming.

## **Retrieving Version Information**

The Access Application object and associated objects provide product version information, as shown in Figure 4-8. In some cases, you need to look at different parts of the object hierarchy to locate the information you need.

```
Sub modApp VersionInformation()
          displays version information
         Debug.Print "Database Version : " & CurrentDb.Version
Debug.Print "Database Version : " & DBEngine.Version
Debug.Print "Application.Version : " & Application.Version
         Debug.Print "Application.Build :" & Application.Build
         Debug.Print "Application.BrokenReference :" & Application.BrokenReference
         Debug.Print "Application.IsCompiled :" & Application.IsCompiled
         Debug.Print "CurrentProject.Path :" & CurrentProject.Path
         Debug.Print "CurrentProject.ProjectType: " & CurrentProject.ProjectType
Debug.Print "CurrentProject.Connection: " & CurrentProject.Connection
         Debug.Print "CurrentProject.BaseConnectionString:" & CurrentProject.BaseConnectionString
         Debug.Print "CurrentProject.FileFormat :" & CurrentProject.FileFormat
    End Sub
Ξ≣⊓
Immediate
 modApp_VersionInformation
Database Version : 14.0
Database Version : 14.0
 Application.Version
 Application.Build:4750
 Application.BrokenReference :False
 Application.IsCompiled :True
 CurrentProject.Path :C:\ASCO8\AccessInsideOutVBA\CodeExamples\Chapter3
 CurrentProject.ProjectType :2
 CurrentProject.Connection:Provider=Microsoft.&CE.OLEDB.12.0:Hser ID=Admin:Data Source=C:\&SCO8\&c
 CurrentProject.BaseConnectionString :PROVIDER=Microsoft.ACE.OLEDB.12.0;DATA SOURCE=C:\ASCO8\Access
 CurrentProject.FileFormat :12
```

Figure 4-8 Displaying popular properties by using different parts of the object hierarchy.

# **INSIDE OUT**

#### Version numbers and functionality

Notice that when you create a new Access 2010 database, the value of CurrentDB. Version is 12.0, and DBEngine(0)(0). Version is 14.0.

If you were to create a table with a calculated field—for example, you add a field called ADate and then a calculated field Year([ADate])—then when you look at CurrentDB. Version, it will have changed to become 14.0.

This change means that your database will no longer be compatible with an earlier version of Access because it contains an Access 2010-specific feature.

If you want to revert your database and restore its compatibility, you might find that removing the calculated field is not sufficient. If this is the case, you need to create a new database, and then import the objects from the old database (where you have removed the new feature) to ensure compatibility.

For more information about the DBEngine object and CurrentDb, see Chapter 5, "Understanding the Data Access Object Model."

The CurrentProject object contains information about your Access project. One of the most useful properties of this object is the Path property, which displays the windows folder path where your Access project resides, regardless of how a user launches the application, as presented in the following code:

```
Sub modApp_ListFilesInCurrentDirectory()
    ' list all files in the application directory
    Dim strPath As String
    strPath = CurrentProject.Path
    Dim strFileName As String
    strFileName = Dir(strPath & "\")
    Do While strFileName <> ""
        Debug.Print strFileName
        strFileName = Dir
    Loop
End Sub
```

#### **Changing Form Datasheet View Properties**

Sometimes you want to run through all your reports and forms and make a global change to a property. This can be achieved by using some code to open each form, make the change, and then save the changes. The key to achieving this is to use the OpenForm or OpenReport command with the acDesign option.

In the example that follows, you want to change the presentation properties of the Datasheet view. Note that these properties are not available in Design mode and require VBA code to set them:

```
Sub modCreate_ChangeDataSheetProperties()
    ' Uses the AllForms collection to change
    ' datasheet presentation settings for a form
    ' Available settings are
        'DatasheetFontItalic
        'DatasheetFontHeight
        'DatasheetFontName
        'DatasheetFontUnderline
        'DatasheetFontWeight
        'DatasheetForeColor
        'DatasheetBackColor
        'DatasheetGridlinesColor
        'DatasheetGridlinesBehavior
        'DatasheetCellsEffect
    Dim objfrm As Object
    Dim frm As Form
    Dim prop As Property
    Dim strProperty As String
    strProperty = "DatasheetFontName"
    strProperty = "DatasheetFontItalic"
    Dim varPropertyValue As Variant
    varPropertyValue = "Calibri"
```

```
varPropertyValue = True
    For Each objfrm In CurrentProject.AllForms
        ' open the form in design view
        DoCmd.OpenForm objfrm.Name, acDesign
        Set frm = Forms(objfrm.Name)
        Set prop = frm.Properties(strProperty)
        prop.Value = varPropertyValue
        DoCmd.Close acForm, objfrm.Name, acSaveYes
End Sub
```

## **Object Dependencies**

You can list object dependencies by using the GetDependencyInfo function. This function returns an object that contains collections of those objects on which the selected object depends, and those objects that depend on the selected object.

If you want to return dependency information on a table or a query, the Access object is found in the CurrentData.AllTables or CurrentData.AllQueries collections. If you want to return information on a form or report, use the CurrentProject.AllForms or CurrentProject. AllReports collections:

```
Sub modDep_DepInfo()
   Dim objDep As AccessObject
   Dim objAccess As AccessObject
   Dim depInfo As DependencyInfo
   Set objAccess = CurrentData.AllTables("Customers")
   ' AllTables, AllQueries
   Set depInfo = objAccess.GetDependencyInfo()
   Debug.Print "Object Dependants for Table Customers"
   Debug.Print "*************************
   For Each objDep In depInfo.Dependants
       Debug.Print objDep.Name
   Next
   Set objAccess = CurrentProject.AllForms("Order Details")
    ' AllTables, AllQueries
   Debug.Print "Object Dependencies for Form Order Details"
   Debug.Print "***********************
   Set depInfo = objAccess.GetDependencyInfo()
   For Each objDep In depInfo.Dependencies
       Debug.Print objDep.Name
   Next
End Sub
```

# **INSIDE OUT**

#### Dependency checking and embedded macros

If you run the example in the sample database, when it analyses the form called [Order Details], you see error messages such as "MISSING: Shipper Details". This indicates that the dependency checker has been able to search through an embedded macro and spot that a DblClick event on the [Shipping Information] tab on the [ShippingID] control references a form called [Shipper Details], which is not present in the database.

The dependency checker can spot problems with macros that refer to objects that do not exist in a database, but because of the flexibility in VBA code, it will not spot missing objects inside VBA code.

# The *DoCmd* Object

The DoCmd object allows VBA to use the set of 65 macro commands in Access. A number of these commands are not often used because there are equivalent commands or techniques in VBA.

In the modDoCmd module, we have listed all the commands and also grouped them into a number of categories. In this section, we will look at the essential commands with which you should become familiar.

## Controlling the Environment

There are three macro commands that you can use to great effect to enhance a user's experience when interacting with an application.

- **DoCmd.Echo** When *Echo* is set to *True* (the default), the user sees everything that happens in the interface. Be aware that this setting might entail some performance issues, such as screen flicker when forms open and close and other operations are performed by your code. To preclude this, set the Echo to False. You need to remember to switch the Echo back to True. If you become stuck with the Echo switched off, press Ctrl+G, and then type **DoCmd.Echo True** into the Immediate window.
- **DoCmd.Hourglass** This command changes the mouse pointer to an hourglass, which is useful for signaling to a user to wait until an operation is complete. As with DoCmd. Echo, you need to switch this back to False when you have completed the operation (or if an error occurs).

**DoCmd.SetWarnings** This is potentially a very dangerous command. The main reason that people use this command to turn warnings off is because they use the OpenQuery command to execute Action Queries; configuring SetWarnings to False prevents a user from seeing a message box to confirm making changes to the data when each OpenQuery command is executed. It is a better idea to use CurrentDb. Execute to run an action query, because then you do not see the warnings being displayed, so you don't need to switch the warnings off. The reason why the Set-Warnings command is dangerous is because if your code fails and never switches the warnings back on, the next time you go into a form and make a design change and then click close, Access does not ask you if you want to save your changes. It just closes the form, and you lose any unsaved design changes. Once you have lost some work this way, you will appreciate why when you use this command, you need to be very careful.

The following code demonstrates the *DoCmd.Echo* and *DoCmd.Hourglass* macros:

```
Sub modDoCmd_EchoExample()
    ' example showing how Echo can control
    Dim lngCount As Long
    DoCmd.Hourglass True
    DoCmd.Echo False
    DoCmd.OpenTable "Customers"
    For lngCount = 1 To 5000
        DoEvents
    Next
    DoCmd.Echo True
    DoCmd.Hourglass False
End Sub
```

### **Controlling Size and Position**

The four macro commands described in this section are used to control the size and position of forms and reports on the screen. The macros are:

- **DoCmd.Maximize** Enlarges a form or report to the full size of the screen.
- **DoCmd.Minimize** Reduces a form or report to a minimal size on the screen.
- **DoCmd.Restore** Restores a maximized or minimized window to previous size.
- **DoCmd.MoveSize** Positions a form or report to an absolute screen position. Positional units are twips (there are 1,440 twips per inch [567 per cm]).

The following code is from the frmCustomersBriefDetails form, which contains examples of these commands:

```
Private Sub cmdMaximize Click()
    DoCmd.Maximize
End Sub
Private Sub cmdMinimize_Click()
    DoCmd.Minimize
End Sub
Private Sub cmdRestore Click()
    DoCmd.Restore
End Sub
Private Sub cmdPosition Click()
    Const lngTwipsPerInch = 1440
    Const lngTwipsPerCm = 567
    Dim lngRight As Long
    Dim lngDown As Long
    Dim lngWidth As Long
    Dim IngHeight As Long
    ' determine position based on metric or imperial measurement
    If modInternational_IsUSSystem() Then
        ' inches
        lngRight = 2 * lngTwipsPerCm
        lngDown = 2 * lngTwipsPerCm
        lngWidth = 12 * lngTwipsPerCm
        lngHeight = 6 * lngTwipsPerCm
    E1se
        lngRight = 5 * lngTwipsPerCm
        lngDown = 5 * lngTwipsPerCm
        lngWidth = 30 * lngTwipsPerCm
        lngHeight = 15 * lngTwipsPerCm
    End If
    DoCmd.MoveSize lngRight, lngDown, lngWidth, lngHeight
End Sub
```

#### **Application Navigation**

There are several important commands that can be used to build the navigation experience for users when opening and closing forms and reports and other objects. These commands are:

- **DoCmd.OpenForm** Opens a form and displays filtered data.
- **DoCmd.OpenQuery** Opens a query or runs an action query.

- **DoCmd.OpenReport** Opens a report and displays filtered data.
- **DoCmd.OpenTable** Open a table of data.
- DoCmd.SelectObject Selects an object (often then followed by the DoCmd.Close to close the selected object).
- **DoCmd.Close** Closes an object.
- **DoCmd.Quit** Quit the application.

The following code is from the frmNavigation form, which contains examples of using these commands. Note that when using OpenReport, if you do not specify to preview the report; by default it will be printed:

```
Private Sub cmdOpenForm_Click()
   Dim strWhere As String
   strWhere = "[State/Province] = 'CA'"
   DoCmd.OpenForm "frmCustomers", , , strWhere
End Sub
Private Sub cmdOpenQuery_Click()
   DoCmd.OpenQuery "qryCustomersInCA"
End Sub
Private Sub cmdOpenreport_Click()
   Dim strWhere As String
   strWhere = "[State/Province] = 'CA'"
   DoCmd.OpenReport "rptCustomers", acViewPreview, , strWhere
End Sub
Private Sub cmdOpenTable Click()
   DoCmd.OpenTable "Customers"
End Sub
Private Sub cmdQuit_Click()
   If MsgBox("Do you want to quit the application?", _
           vbYesNo, "Quit") = vbYes Then
       DoCmd.Ouit
   End If
End Sub
Private Sub cmdSelectAndClose_Click()
   DoCmd.OpenForm "frmCustomers"
   If MsgBox("Would you like to close the Customers form ?", _
           vbYesNo, "Select and Close") = vbYes Then
       DoCmd.SelectObject acForm, "frmCustomers"
       DoCmd.Close
   End If
End Sub
```

### Data Exchange

The macro commands described in this section allow data to be imported, exported, printed, and sent as an email. Some of the commands only apply to tables and queries, whereas others can be used with forms, reports, and other objects.

- **DoCmd.TransferDatabase** Imports and exports database objects in different database formats. This is used often to import and export between Access databases.
- DoCmd.TransferSharePointList Imports or links to data in Microsoft SharePoint (as a linked table).
- DoCmd.TransferSpreadsheet Imports or exports data in spreadsheet formats (from tables or queries).
- DoCmd.TransferText Imports or exports text file formats (from tables or queries).
- **DoCmd.SendObject** Sends objects and attachments in an email.
- **DoCmd.OutputTo** Outputs data from database objects in different formats.
- **DoCmd.PrintOut** Prints output from different database objects.

The following code is from the frmImportExport form, which contains examples of these commands:

```
Private Sub cmdSendObject_Click()
'acFormatHTML, acFormatRTF, acFormatSNP, acFormatTXT, acFormatXLS
'acFormatXLSB, acFormatXLSX, acFormatXPS, acFormatPDF
    On Error Resume Next
    DoCmd.SendObject acSendTable, "Customers", acFormatXLS, , , , "Test", _
        "Customers table attached", True
    If Err <> 0 Then
       MsgBox Err.Description, vbInformation, "Data Not Sent"
    End If
End Sub
Private Sub cmdTransferSpreadsheet_Click()
    DoCmd.TransferSpreadsheet acExport, acSpreadsheetTypeExcels, _
        "qryCustomersInCA", CurrentProject.Path & "\CaCustomers.xls", True
    MsgBox "Data export completed", vbInformation, "Completed"
Private Sub cmdTransferText_Click()
    DoCmd.TransferText acExportDelim, , "Customers", _
        CurrentProject.Path & "\Customers.txt", True
   MsgBox "Data export completed", vbInformation, "Completed"
End Sub
```

# Manipulating the Forms and Reports Collections

In this section, you will focus on the Forms collection. What you will see described applies equally to the Reports collection, but because most programming effort is against forms, this is where we will focus your attention.

The Forms collection is one of the most powerful concepts in Access VBA programming. When you start Access and have no forms open, the forms collection is empty, as shown in the following:

```
?Application.Forms.Count
?Forms.Count
```

#### Note

In the interest of convenience, we will omit the "Application" prefix and refer to this collection simply as Forms.

If you open the Employee List form and switch to the Immediate window, you will see that the Forms collection contains one entry.

#### Note

As with all collections in Access, the collection presented in this example is a zerobased collection.

```
?Forms.Count
?Forms(0).Name
Employee List
?Forms("Employee List").Controls.Count
?Forms![Employee List].RecordSource
Employees
```

You can refer to the form either by its index in the collection as Forms(0), by its name Forms("Employee List"), or by using the "!" as Forms![Employee List] (you need square brackets in this case, because the name has a space in it).

## Using the Expression Builder

To launch Expression Builder, use either the technique described in the previous section, or create a dummy query, as shown in Figure 4-9.



Figure 4-9 Launching Expression Builder from the Query grid.

Using Expression Builder, you can browse into the list of loaded forms (forms open in the application) and drill down to various properties, controls, and subforms, as shown in Figure 4-10.




Figure 4-10 Expression Builder is particularly useful when referencing subforms, where the syntax is more complicated.

This ability to link either queries or VBA code to the forms or reports in your Access application is one of the keystones of Access programming. While we have the Employee List form open, type the following in the Immediate window:

Forms![Employee List].Caption = "My Employee List"

You will then see that the form's Caption property has been changed, as shown in Figure 4-11.



**Figure 4-11** Form properties, control values, and control properties can be changed by manipulating the objects in the *Forms* collection.

Referencing controls on a main form uses the form's controls collection. The two syntax examples that follow show how the "!" character is used to reference an item in a collection:

```
?Forms![Employee List]![Last Name]
?Forms![Employee List].Controls("[Last Name]")
```

### Referencing Controls on a Subform

The syntax to reference controls on the main form is fairly simple, but for complex forms with subforms, the syntax becomes a little more complicated. Even for experienced programmers, remembering just how the syntax changes can be difficult. For circumstances such as this, Expression Builder can guide you through the reference syntax, which you can then copy to the clipboard and add to your code.

To see an example of this, look at the Order Details form depicted in Figure 4-12 to see how you can refer to the Qty field.

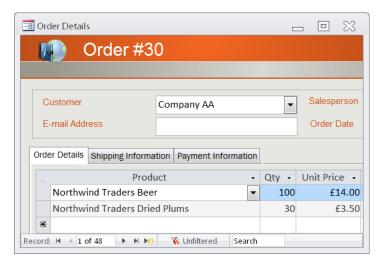


Figure 4-12 The Order Details form with subforms in a tab control.

Using Expression Builder, you browse to the subform, as shown in Figure 4-13.




Figure 4-13 Browsing to the subform to get the correct syntax.

The syntax to refer to the quantity is as follows:

Forms![Order Details]![sbfOrderDetails].Form![Quantity]

This syntax deserves some explanation: if you have a form called *FormName*; the part Forms!FormName references the form; then adding !Subform references the control called Subform, but because this is control is a form, you need to add the special keyword Form to indicate this; then Form!Field references the field on the form. This leads to the full syntax: Forms!FormName!Subform.Form!Field.

The ! (exclamation) character is used to make a reference to an object in a collection, and the . (period) character refers to a property. Therefore, this reads as: in the Forms collection, find the form called [Order Details], and then in the Controls collection (or shorthand form's default property, which is the Controls collection) of the form, find the control sbfOrderDetails, and because this is a subform, use the special syntax Form. Then in the subforms Controls collection, find the control called Quantity.

Figure 4-14 shows equivalent ways to refer to the control:

```
Immediate
 ?Forms![Order Details]![sbfOrderDetails].Form![Quantity]
 ?Forms![Order Details].Controls("sbfOrderDetails").Form![Quantity]
 ?Forms![Order Details].Controls("sbfOrderDetails").Form.Controls("Quantity")
  100
```

Figure 4-14 Referencing a control on a subform.

## **INSIDE OUT**

### Syntax when using a VBA class module

There is yet one additional way to manage the syntax, which is a bit more subtle. It relies on the form having some program code behind it (HasModule property set to Yes, Access sets this property automatically when you add code, or you can manually change the property). When this is set, the form gets a class module with which you can then reference the controls.

Now, you can refer to the form by using the syntax in the Immediate window: ?[Form\_ Order details].name, rather than ?Forms![Order Details].name. You need to look closely at the syntax here. Forms! refers to the forms collection, whereas Forms\_ refers to the class module. If you use the Forms! syntax, then the form must already be open, but if you use the Form\_ syntax, it will automatically open the form if it is not already open; the form will not be visible and you require [Form\_Order Details]. Visible = True to make the form visible.

When you refer to a subform control, use the following syntax: ?Forms! [Order Details]![sbfOrderDetails].Form![Quantity], but if the subform has a code module, you can shorten the syntax and use: ?[Form\_Order Subform for Order Details].Quantity.

The advantage of using the Form syntax is improved IntelliSense support, the disadvantage is that if you build using the Expression Builder, it does not construct expressions using this syntax.

There are some very interesting properties of the CurrentProject collections that provide further information on all the forms and reports in your database, as shown in Figure 4-15.




Figure 4-15 The CurrentProject collections.

Figure 4-16 shows the Count property for the total number of saved forms, and the IsLoaded property, which indicates whether a form is open.

```
Immediate
 ?Application.CurrentProject.AllForms.Count
 ?Application.CurrentProject.AllForms("Order Details").IsLoaded
 True
```

**Figure 4-16** Referencing properties in the *CurrentProject* collections.

You know that a form has a Caption property, so if you look inside the AllForms (just like the Forms) collection, you might be surprised to see that this property is not available, as is revealed by the lack of IntelliSense in Figure 4-17.




Figure 4-17 The AllForms collection does not expose the objects and properties inside individual forms.

This is because the AllForms collection acts as a set of documents; you can see what documents you have, but you cannot look inside the documents. However, when you work with the Forms collection, the document is open, so you can look inside each document to see what it contains.

### **Creating Access Objects in Code**

The application object supports CreateForm, CreateControl, CreateReport, CreateReport-Control, and CreateGroupLevel methods, which you can use to create reports and forms by using VBA code, as shown in the following:

```
Sub modCreate AccessForm()
   Const lngTwipsPerInch = 1440
   Const lngTwipsPerCm = 567
' Create a new Access form
   Dim frmPrompt As Form
   Set frmPrompt = Application.CreateForm
   With frmPrompt
        .Caption = "Prompt for user input"
        ' Name is read-only so can not be changed here
        '.Name = "frmUserPrompt"
   End With
   Dim ctrl As Control
   Set ctrl = Application.CreateControl(frmPrompt.Name, _
           acTextBox, acDetail, , , 2 * lngTwipsPerCm, 2 * lngTwipsPerCm, _
           lngTwipsPerCm * 5, lngTwipsPerCm * 1)
   ctrl.Name = "txtPrompt"
    ' SendKeys for saving the form and press enter key
   ' False ensures no waiting to process the
   ' keystrokes
   SendKeys "frmUserPrompt{Enter}", False
   RunCommand acCmdSave
   ' select and close the object
   RunCommand acCmdClose
End Sub
```

Because the form's Name property is read-only, at the end of this procedure, you use the SendKeys action to push keystrokes into the keyboard buffer, which will then be processed when the RunCommand action saves the form.

As an alternative to using the Sendkeys, which is very difficult to debug, you can consider using the following code to replace the last three lines in the subroutine:

```
DoCmd.Save
DoCmd.Close
DoCmd.Rename "frmUserPrompt1", acForm, "Form1"
```

The preceding technique can also be used to generate Reports by using program code. In Chapter 5, we will see how Tables and Queries can be created by using the Data Access Objects (DAO) model.

## Using the Screen Object

The Screen object can be used to change the mouse pointer shape and assist in writing code in a module that responds to the Active Form or Report and the Active Control.

### **Changing the Mouse Pointer Shape**

The Application. Screen object represents the active screen; you can use the MousePointer property to read or set the mouse cursor, as shown in Figure 4-18.




Figure 4-18 Use the frmScreenObject form to change the mouse pointer when you click any of the options in the list box.

```
Private Sub lstMousePointer_Click()
    Screen.MousePointer = Me.lstMousePointer.Column(0)
End Sub
```

The Screen object represents the currently active form or report in an application (through the ActiveForm, ActiveReport, and ActiveControl properties). You can use it to develop code that can be called for any form or report in an application, and you can identify the name of the form/report and control that is active when the code is called. Notice that with objects in the Application object, you do not need to use the "Application" prefix, which means you can shorten Application. Screen Object to just Screen Object.

#### Note

In older versions of Access, it was very difficult to debug code by using the Screen object because at breakpoint, the Screen object would no longer refer to the Active Window executing the code. Although in Access 2010 this is no longer a problem, it is still useful in program code to define variables and set the variables to the Screen object.

The example database contains a function called modApp ScreenObject() in a module. This is linked to the AfterUpdate event of the unbound control shown in Figure 4-19.



Figure 4-19 An unbound control.

Figure 4-20 illustrates how a reference to the function has been added to the AfterUpdate event.




Figure 4-20 The AfterUpdate event calls a function without the need to create additional code behind the event for the control.

### Working with the ActiveForm and ActiveControl

You can use the Screen object to manipulate both the active form and the active control, as shown in the following:

```
Function modApp ScreenObject() As Variant
    ' ActiveForm, ActiveControl, ActiveReport, ActiveDatasheet
    ' Demonstrates the use of the Screen object
   Dim ctrl As TextBox
   Dim frm As Form
   Set ctrl = Screen.ActiveControl
   Set frm = Screen.ActiveForm
   Debug.Print "The active form is called " & frm.Name
   Debug.Print "The active control is called " & ctrl.Name
   ctrl.BackColor = vbRed
   Stop
End Function
```

In this example, you want to set the BackColor on any text control that has been edited on a form to the color red, so you need to define the active screen control to be a TextBox control.

You can use the following definition if you want to call the code from any kind of control:

Dim ctrl as Control

You could have referred directly to Screen. Active Control, but because not all controls have a BackColor property, IntelliSense would show only common control properties when working with the control object type. By using an explicit TextBox object, you get IntelliSense for the required property.

## **INSIDE OUT**

### Calling code directly from a control's event

If you look at the control called txtName on the frmScreenObject form, you can see that the control does not have code behind the event, but instead refers to the code to execute by using a property on AfterUpdate (AfterUpdate as =modApp\_ScreenObject()). The advantage of this approach is that when you copy and paste the control, it takes the code reference with it.

## **Enhancing the User Interface**

This section looks at some of the features of the Application object that can be used to enhance the user interface.

### **Setting and Getting Options**

The Application. Set Option command can be used to modify the application options, and the Application. Get Option command can be used to read option settings.

In the demonstration database, there is a table called tblOptionTabItems (containing 98 options) and a routine for reading the current values in the application into this table. This uses a DAO Recordset (described in detail in Chapter 5), as presented in the following example:

Sub modApp GetOption()

- ' Updates the table tblOptionTabItems for current
- ' application settings

Dim db As Database

Set db = CurrentDb

Dim rst As Recordset

```
Dim varSetting As Variant
    Set rst = db.OpenRecordset("tblOptionTabItems", dbOpenDynaset)
    Do While Not rst.EOF
        rst.Edit
        rst!CurrentSetting = Nz(Application.GetOption(rst!Option))
        rst.Update
        rst.MoveNext
    Loop
    rst.Close
    Set rst = Nothing
    db.Close
    Set db = Nothing
    MsgBox "Options Read"
End Sub
```

As an example, to read the value for the Compact On Close option (on the current database options accessible from the options in Backstage view), you use GetOption("Auto Compact"). The SetOption command can be used to change the option setting, as shown in the following:

```
Sub modApp SetOption()
    ' change the auto compact option
   Debug.Print GetOption("Auto Compact")
    SetOption "Auto Compact", -1
    Debug.Print GetOption("Auto Compact")
End Sub
```

It's interesting to note that the Application object does not have a properties collection, and the CurrentProject object has a Properties collection with no defined properties. If you look in the CurrentDB object, this contains 48 properties, of which, 10 match the options available through the Set/Get option commands (see the query qryCurrenDBPropertiesMatched-ToOptions for the matched options). The following example includes code that reads the CurrentDB properties and writes them to a table called tblProperties:

```
Sub modApp_ReadCurrentDatabaseOptions()
   CurrentDb.Execute "DELETE * FROM tblProperties"
   Dim db As Database
   Set db = CurrentDb
   Dim rst As Recordset
   Set rst = db.OpenRecordset("tblProperties", dbOpenDynaset)
   Dim prop As Property
   For Each prop In CurrentDb.Properties
       rst.AddNew
        rst!ObjectName = "CurrentDB"
       rst!PropertyName = prop.Name
       On Error Resume Next
       rst!PropertyValue = prop.Value
       On Error GoTo 0
        rst.Update
       Debug.Print prop.Name
```

```
Next
    ' note there are no properties in the
    ' following collection
    For Each prop In CurrentProject.Properties
        rst.AddNew
        rst!ObjectName = "CurrentProject"
        rst!PropertyName = prop.Name
        On Error Resume Next
        rst!PropertyValue = prop.Value
        On Error GoTo 0
        rst.Update
        Debug.Print prop.Name
    Next
    rst.Close
    Set rst = Nothing
    db.Close
    Set db = Nothing
    MsgBox "Properties Read"
End Sub
```

### **Locking Down Access**

The CurrentDB object contains a number of very important options that can be set to control what the user is able to do in an application, including displaying the database window. One property that you might want to add to your database is AllowBypassKey. This property prevents a user from pressing the Shift key while opening a database to bypass any startup code. The following routine is used to set a database property, or create and append the property if it does not already exist:

```
Function modApp_SetProperty(strPropertyName As String, _
                            blSetting As Boolean) As Boolean
    ' This function sets or clears boolean properties
    ' if the property does not exist it creates the property
    Dim prop As Property
    Dim db As Database
    Set db = CurrentDb
    On Error Resume Next
    Set prop = db.Properties(strPropertyName)
    If Err <> 0 Then
        ' Create the property
        On Error GoTo Err Handler
        Set prop = db.CreateProperty(strPropertyName, dbBoolean, blSetting)
       db.Properties.Append prop
    E1se
        On Error GoTo Err_Handler
        prop.Value = blSetting
    modApp_SetProperty = True
    Exit Function
Err Handler:
    modApp_SetProperty = False
End Function
```

You then create a function that can set or clear the desired properties:

```
Function modApp_UnlockApplication(blEnable As Boolean)
    ' Call to unlock or lock down the application
   If Not modApp_SetProperty("StartUpShowDBWindow", blEnable) Then Stop
   If Not modApp_SetProperty("AllowShortcutMenus", blEnable) Then Stop
   If Not modApp_SetProperty("AllowFullMenus", blEnable) Then Stop
   If Not modApp_SetProperty("AllowSpecialKeys", blEnable) Then Stop
   ' Prevents Shift key operation when opening the database
   ' This property will be added to the properties collection
   If Not modApp SetProperty("AllowBypassKey", blEnable) Then Stop
   If blEnable Then
       MsgBox "Application unlocked, close and re-open the database"
   E1se
       MsgBox "Application locked, close and re-open the database"
   End If
End Function
```

It's a good idea to first prepare a routine or a hotkey to unlock everything before you implement a lockdown; otherwise, you can find yourself unable to easily get back into the application. In the demonstration database, we used the F4 key in an AutoKeys macro to provide a call to unlock the application.

To lock down the application, call the function, passing the parameter as False modApp UnlockApplication(False). After unlocking or locking a database with these options, you need to close and re-open the database to see the effect of the changes.

### Monitoring Progress with SysCmd

The SysCmd object can provide a progress meter on the status bar (shown in the example frmSysCmd form and in the code that follows). The Access Status bar is displayed when two options are set to True in the Access Options in Backstage view. The option in both cases is called Status Bar; the first option is located in Current Database settings, and the second place this occurs is in the Client Settings (both are set *True* by default):

```
Private Sub cmdShowProgress_Click()
   Const lngRange = 10
   Dim varReturn As Variant
   Dim lngStep As Long
   varReturn = SysCmd(acSysCmdInitMeter, "Showing progress", lngRange)
   For lngStep = 0 To lngRange Step 2
       varReturn = SysCmd(acSysCmdUpdateMeter, lngStep)
       MsgBox "Next Step " & IngStep
   varReturn = SysCmd(acSysCmdSetStatus, "Processing last step")
   MsgBox "Change status on left"
   ' clear status bar text
   varReturn = SysCmd(acSysCmdSetStatus, " ")
End Sub
```

Figure 4-21 shows the resulting progress bar.



Figure 4-21 Calling SysCmd with the acSysCmdInitMeter and acSysCmdUpdateMeter displays a progress bar in the lower-right corner of the screen.

Figure 4-22 shows the status message being displayed.



Figure 4-22 Calling SysCmd with acSysCmdSetStatus clears the progress bar and displays a status message instead (this is displayed in the lower-left corner of the screen, not the lower-right).

### **Custom Progress Bars**

You might prefer to create your own pop-up progress bar by using a form. The demonstration database includes an example of this that uses the form called frmProgress and a module called modBars. The progress bar consists of ten colored rectangles. Figure 4-23 shows the form in Design mode with the set of colored rectangles.




Figure 4-23 The frmProgress form contains colored rectangles and an unbound text box for displaying text information.

Figure 4-24 presents the rectangles as stacked on top of each other to create the custom progress bar.




Figure 4-24 For this custom progress bar, the colored rectangles are stacked on top of each other. To create an increasing bar, we control the visibility of the rectangles.

Figure 4-25 shows the progress bar when the sample action is 50% complete.




Figure 4-25 The progress bar displaying 50% completion.

The following is an example of how to implement the custom progress bar:

```
Sub Testing()
   Dim lngItem As Long
   modBars_Open 200, "Processing 200 Items...please wait"
    For lngItem = 1 To 200
        Bars_ShowProgress IngItem, "Processing Item " & IngItem & "...."
       If lngItem = 100 Or lngItem = 200 Then
            Stop
        End If
    Next
    modBars_Close
End Sub
```

### Selecting Files with the Office FileDialog

Use the Application. FileDialog (shown in Figure 4-26, followed by sample code) to present users with a professional pop-up dialog, from which they can select a file.

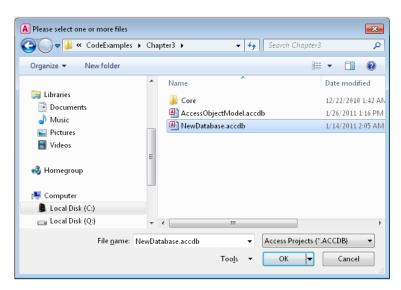


Figure 4-26 You can use FileDialog to give user the ability to specify different filters and select multiple files.

```
Sub modApp_FileDialog()
' Requires reference to Microsoft Office 14.0 Object Library.
  Dim fDialog As Office.FileDialog
  Dim varFile As Variant
   ' Set up the File Dialog.
  Set fDialog = Application.FileDialog(msoFileDialogFilePicker)
  With fDialog
      ' Allow user to make multiple selections in dialog box
      .AllowMultiSelect = True
      ' Set the title of the dialog box.
      .Title = "Please select one or more files"
      ' Clear out the current filters, and add our own.
      .Filters.Clear
      .Filters.Add "Access Databases", "*.MDB"
      .Filters.Add "Access Projects", "*.ADP"
      .Filters.Add "Access Projects", "*.ACCDB"
      .Filters.Add "All Files", "*.*"
      ' Show the dialog box. If the .Show method returns True, the
      ' user picked at least one file. If the .Show method returns
      ' False, the user clicked Cancel.
      If .Show = True Then
         'Loop through each file selected and add it to our list box.
         For Each varFile In .SelectedItems
            Debug.Print varFile
         Next
```

```
Else
MsgBox "You clicked Cancel in the file dialog box."
End If
End With
End Sub
```

Notice in the comments at the top of the preceding code that you need to provide a reference to the Microsoft Office 14.0 Object Library, as shown in Figure 4-27.




Figure 4-27 Adding a reference into your Access project.

In the VBA Editor, click Tools | References, scroll down the list of references until you find the appropriate reference, and then click the check box to include the reference. The references help Access to understand what value the constant *msoFileDialogFilePicker* has (which is 3), as well as to understand the object *Office.FileDialog* and provide IntelliSense assistance.

You can avoid the need to add a reference by substituting the value 3 for the constant (msoFileDialogFilePicker) and defining the FileDialog as an object:

```
Dim fDialog As Object
```

Doing this would avoid the need for adding the reference and use a technique called Late Binding (described in Chapter 13, "Integrating Microsoft Office"), which some developers prefer because it avoids the need to add the reference.

### Summary

In this chapter, you learned about the Access Application object. But because you do not need to explicitly state, for example, Application.DoCmd, and instead can use the shorthand reference, DoCmd, it is not always clear that you are using the Application object.

You also saw how this object, its methods, properties, and collections support a very wide and rich set of features that are essential to Access programming. When getting started with VBA programming, you will find the DoCmd and RunCommand methods are among the most useful features with which to become familiar.

The second most important area in which to gain familiarity is working with the Forms and Reports collections, which allow you to manipulate and work with data on a form or report.

# Understanding the Data Access Object Model

The DAO Model	Working with Queries in Code	215
Working with Databases	Investigating and Documenting Objects	222
Manipulating Data with Recordsets	Sample Applications	224

n Chapter 4, "Applying the Access Object Model," you looked at the Microsoft Access Object and learned how you can make forms and reports interact in an application.

There are other object models that can be used to construct your application, and in this chapter, you will look in detail at the Data Access Object (DAO) model, with which you can manipulate the database structure and content by using program code. An overview of the DAO structure is presented in Figure 5-1.




Figure 5-1 The DAO model structure.

Chapter 18, "Using ADO and ADOX," presents an alternative object model called ActiveX Data Objects (ADO). ADO can be regarded as either an alternative or complementary approach to manipulating data. Historically, DAO was the only method for the detailed manipulation of data under program control. Later, ADO became available and was regarded by some people as a better choice because it offered slightly better performance. However, ADO failed to become the dominant choice because DAO was, by then, well established. More recently, emphasis has shifted back to DAO as the Access Database Engine (ACE)—which was previously called Joint Engine Technology (JET)—has gained a new lease on life.

After completing this chapter, you will:

- Be able to understand how the DAO is organized, and how to manipulate the objects it contains.
- Be able to manipulate data by using SQL, queries, and *Recordsets* in program code.

#### Note

As you read through this chapter, we encourage you to also use the companion content sample database, DAOExamples.accdb, which can be downloaded from the book's catalog page.

### The DAO Model

In Chapter 4, "Applying the Access Object Model," you were introduced to the concept that Access consists of objects, and we emphasized that being able to manipulate the Forms and Reports collections was a bread and butter programming skill for a Microsoft VBA programmer with Microsoft Access. In this chapter, you are going to focus on a new set of objects called the DAO; this is also a bread and butter programming skill.

The VBA programming environment is a technology into which you can add other technologies by using references. In fact, the DAO fell out of favor a few years ago, and by default, when you created a database with some earlier versions of Access, the libraries didn't get loaded. Time has moved on, and the DAO is again the key technology for an Access Database. If, however, you decide to use an Access Data Project (ADP) (which is discussed in Chapter 15, "Upsizing Access to SQL Server"), you will find that it does not have the DAO technology but uses the ADO technology.

With an Access database file, many of the key objects in the DAO are automatically created for you. It is instructive to look at the references to see where the DAO resides. This is shown in Figure 5-2.




Figure 5-2 DAO references, now called the Access Database Engine Objects.

If you look farther down the list of references, you see older explicit references to the DAO libraries, as shown in Figure 5-3.



Figure 5-3 Previous DAO libraries were called "DAO Object Library."

In the examples in this and following chapters, you will notice that we do not show the code for closing objects and setting the objects to *Nothing*. The reason for this is to save space in the book, although whether you choose to do this in your own code is a matter of preference for programming style (best practice would be to close all objects and set the object variables to *Nothing*; see Chapter 2, "Understanding the VBA Language Structure," and Chapter 3, "Understanding the VBA Language Features," for examples of this).

### DAO, ADO, and References

Beginning on page 188, you will be working with an object in the DAO called a *Recordset*, and in Chapter 18, you will work with the ADO object model, which also has an object called a *Recordset*. When a new database is created with Access 2010, the default library loaded in the references is the DAO Library, and you can refer to a *Recordset* in either of the two following ways:

Dim rstDAO As DAO.Recordset Dim rst As Recordset

If we added a new ADO library to the references, then we would define an ADO Recordset object as follows:

Dim rstADO As ADODB.Recordset

Because the DAO library is listed in the references as coming before the entry for the ADO library, the DAO code that refers to the rst object will be taken from the order of the references as meaning the DAO Library. However, it is possible to take out and then add back in references and the order could then be changed so that the ADO library came before the DAO library. In this case, the reference in the DAO code to rst would now be taken to mean the ADO library; this would cause problems in the code because they are not the same kind of object. It is also possible that you are working with an older Access database in which the references occurred in a different order.

# **INSIDE OUT**

Correctly referring to an object when both ADO and DAO Libraries are present

You can easily determine which kind of object the rst variable represents by typing rst. Edit (for a DAO RecordSet this method will be displayed by IntelliSense, but not for ADO, which does not have this method for a Recordset object).

If you are likely to be working with both ADO and DAO in the same project, then you either need to ensure that the references are always ordered correctly, or use the DAO prefix when referring to DAO objects and the ADODB prefix when referring to ADO objects to prevent you from referring to the wrong object.

## Working with Databases

We should probably apologize in advance for presenting this section (which is a bit heavy to read in advance of the rest of this chapter) rather than allowing you to dig in to what is definitely the richest aspect of the Access product. So, if you want to move on to getting your hands dirty with real programming code, feel free to indulge yourself and skip on to the next section "Manipulating Data with Recordsets," beginning on page 188.

You could read this section and only take away the benefit of one line in VBA, which is to get a reference to the current database. But if you really want to understand how the DAO architecture fits together and how you can push your understanding of this to an advanced level of DAO programming, then at least skimming through this section will prove to be essential. At some point, you need to dig in deeper to the DAO, and we hope this section will explain some of those deeper aspects.

### The *DBEngine* Object

The DBEngine is the root of the DAO hierarchy; you never need to create this object as it is always available.

Inside the DBEngine object is the Workspaces collection. Each workspace is a transactional unit acting as a logon/session, and like the DBEngine, which was created for us, we also get a default workspace created that is referred to as Workspaces(0).

Inside each Workspace is a Databases collection, and in Workspaces(0) we have the current database, Database(0).

Whenever you start Access, you log on (even though you are not normally prompted), you get a workspace, and because you are in a database, you also get a database object.

The DBEngine object contains the Workspaces collection, which in turn contains the Databases collection open in each Workspace.

This leads to the expression:

DBEngine.Workspaces(0).Databases(0)

Or, a shorthand for this is:

DBEngine(0)(0)

Typing this into the Immediate window yields the following result:

?DBEngine.Workspaces(0).Name #Default Workspace# ?DBEngine(0)(0).NameC:\ASC08\AccessInsideOutVBA\CodeExamples\Chapter4\DA0Examples.accdb

Understanding this might look like it is complicated, because we have the idea of a database engine that contains workspaces, each of which can contain open databases. But this is really a preamble to getting down to work, although understanding what comes next in the hierarchy will give you a valuable insight into how Access works. If all you want to do is get on with the most common programming tasks, then you can skip the explanation of Workspaces and Databases (until you need to use some of these features) and move on to Recordsets.

### The Workspace Object

The last section described how when you start Access, you get a workspace for free, which is Workspaces(0). The Workspace object acts like a user session, with code able to force an additional logon to create a new workspace, if required. The second feature of a workspace will be discussed beginning on page 166, when we look at transactions.

The reasons for creating a new workspace would be either to gain fine control of how transactions behave, or to log on to an Access database as a different user connected to the same security Workgroup (although with .accdb files, WorkGroup security is no longer supported; it is only available in an .mdb file).

To get a reference to the default workspace, which is called #Default Workspace#, you can use the following code:

```
Sub modWorkspace_ListWorkspaceInformation()
   Dim wks As Workspace
   Set wks = DBEngine.Workspaces(0)
   ' An alternative syntax is shown below
   ' Set wks = DBEngine(0)
   Debug.Print "Workspace name :" & wks.Name
   ' dbUseODBC for ODBCDirect workspaces are no longer supported
   Debug.Print "Workspace type (2 - JET) : " & wks.Type
   Set wks = Nothing
End Sub
```

Any references to ODBCDirect (workspace type dbUseODBC) are no longer valid; this is an older technology that is no longer supported.

To create a new workspace, you use the following syntax:

```
Sub modWorkspace_CreateANewWorkspace()
   Dim wks As Workspace
   ' options are dbUseJet or dbUseODBC
   Set wks = DBEngine.CreateWorkspace("Access2", "Admin", "", dbUseJet)
   Debug.Print "Workspace count : " & DBEngine.Workspaces.Count
   DBEngine.Workspaces.Append wks
   Debug.Print "Workspace count : " & DBEngine.Workspaces.Count
   Set wks = Nothing
End Sub
```

Because workspaces are not permanent objects, once the program code finishes execution we are again left with only one workspace (the default workspace). The line of code that appends the newly created workspace to the workspaces collection is to some extent redundant because workspaces are temporary sessions and can be used without adding to the workspaces collection.

### Transactions

Transactions serve two purposes in a database. The first purpose is to ensure that changes made to several tables (or several records in a single table) are either all completed or none of the changes are applied (if the transaction fails, then any partially completed work is discarded or rolled back). The second reason for using a transaction is to improve performance.

If you have multiple changes being made to data, and you need to ensure that the changes are consistently applied, then you should consider using a transaction to wrap around the sequence of operations.

An example of where transactions are required is a stock management system that verifies that all the products for a given order are in stock when preparing to dispatch the order and ship the goods. The associated tables and relationships are shown in Figure 5-4.

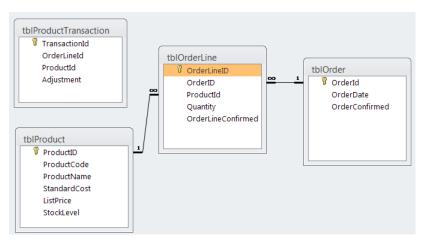


Figure 5-4 Each order has several orderlines for different products.

When you process an order, you want to complete the operation only when all stock is available. The OrderConfirmed flag (in tblOrder) is set once all the stock is available for an order, and on each line item, you have an OrderLineConfirmed flag that you can set to indicate that the orderline is completed. Completing an orderline involves adjusting the stock level and recording the change in a table called *tblProductTransaction*.

The unit for transactions is the workspace. When making a change to several pieces of data, you can Begin a transaction, make the changes, and then either Commit (complete) or Rollback (undo) the transaction. In the following code example, if you are unable to complete any part of the process or an error occurs, then the RollbackStockAdjustment is called to undo the transaction. The ExitProcessing step is called in all situations to tidy up the object variables:

Function modTrans ProcessAnOrder(lngOrderId As Long) As Boolean

- ' Confirm an order and all orderlines
- ' Adjust stock levels and record in transaction table

On Error GoTo RollbackStockAdjustment

Dim db As Database

Dim wks As Workspace

Dim rstOrderLine As Recordset

Dim rstProduct As Recordset

```
Dim rstTrans As Recordset
    Dim strOrderLines As String
    strOrderLines = "SELECT * FROM tblOrderLine " & _
                    "WHERE OrderId = " & lngOrderId & _
                    " AND OrderLineConfirmed = False"
    Set wks = DBEngine(0)
    wks.BeginTrans
        Set db = wks.Databases(0)
        Set rstOrderLine = db.OpenRecordset(strOrderLines, dbOpenDynaset)
        Set rstProduct = db.OpenRecordset("tb1Product", dbOpenDynaset)
        Set rstTrans = db.OpenRecordset("tb1ProductTransaction", dbOpenDynaset)
        Do While Not rstOrderLine.EOF
            ' Update stock item
            rstProduct.FindFirst "ProductId = " & rstOrderLine!ProductId
            If Not rstProduct.NoMatch Then
                If Nz(rstOrderLine!Quantity) <= Nz(rstProduct!Stocklevel) Then</pre>
                    ' Adjust stock
                    rstProduct.Edit
                    rstProduct!Stocklevel = rstProduct!Stocklevel - _
                                      rstOrderLine!Quantity
                    rstProduct.Update
                    ' Confirm Orderline
                    rstOrderLine.Edit
                    rstOrderLine!OrderLineConfirmed = True
                    rstOrderLine.Update
                    ' Log Transaction
                    With rstTrans
                        . AddNew
                        !OrderLineId = rstOrderLine!OrderLineId
                        !ProductId = rstOrderLine!ProductId
                        !Adjustment = rstOrderLine!Quantity
                        .Update
                    End With
                Else
                     ' problem no stock available
                    GoTo RollbackStockAdjustment
                End If
            F1se
                  problem stock item not found
                GoTo RollbackStockAdjustment
            End If
   rstOrderLine.MoveNext
        Loop
        ' Confirm the Order
        db.Execute "UPDATE tblorder SET OrderConfirmed = True " & _
                    "WHERE OrderId = " & lngOrderId
    wks.CommitTrans dbForceOSFlush
    modTrans_ProcessAnOrder = True
ExitProcessing:
    ' Tidy up
    rstOrderLine.Close
    Set rstOrderLine = Nothing
```

rstProduct.Close Set rstProduct = Nothing db.Close Set db = Nothing wks.Close Set wks = Nothing Exit Function

RollbackStockAdjustment: wks.Rollback modTrans\_ProcessAnOrder = False GoTo ExitProcessing End Function

If you are going to write transaction-based code, you will need to undertake careful testing to see that your code can handle different scenarios when multiple users engage the activities. In the sample database, the tables and code are in a single database, but to test this, you would need to put the tables in a separate database and link two front-ends to the shared tables. Then you can easily mimic what happens when two users try to make changes at the same time.

Access logs transactions in a temporary file that is located in the windows TEMP profile setting, and when committing a transaction it is advisable to use the dbForceOSFlush option to ensure that the changes are written to the database.

If you pause the execution of the code after it has updated a stock item and look in the tables, you will not see the resulting changes (because these are pending inside the transaction). You will find that the record has been row-level locked (which prevents any changes while the transaction is running).

## **INSIDE OUT**

More than one transaction inserting on the same table will fail

Care needs to be taken if you are using Access transactions to perform inserts on a table, because while a transaction is inserting data in a table and a second transaction also attempts to insert into the same table, the second transaction will fail and generates a trappable error that would need to be handled in code.

The second use of transactions is to improve performance. Transactions help an Access application to reduce disk access by buffering updates and then writing to disk. To do this, you need to decide on how big the blocks are and then issue the commands to begin and commit each transaction block. You should also consider the implications on locking when doing this, because data that has been changed inside a transaction will block other users from changing any records on locked pages.

Access allows you to perform a dirty read—that is, you can view data that has been changed by a pending transaction. This is different for Microsoft SQL Server, for example, which prevents dirty reads on uncommitted data (default isolation level).

When you connect Access to SQL Server, transactions can also improve performance, but in a different way. If you run the SQL Server profiler and compare when using and not using transactions, you will see a lot less activity when using transactions. For example, for 91 edits, without transactions there are 829 events; with a transaction, 291 events. This reason for this difference is that when you work without transactions, Access issues additional instructions to COMMIT each row as they are individually passed to SQL Server.

## **INSIDE OUT**

Transactions on a continuous form allow multiple edits with an option to roll back the changes

Access transactions lack many of the features found in SQL Server transactions in terms of handling concurrent transactions, but they do offer the scope to perform some very clever user interface operations. The frmCustomersTransactions form illustrates a technique on a continuous form that permits a user to edit multiple records and then when closing the form, roll back or commit the changes. This shows that it is possible to bind the transactional model to a form, as shown in the following code:

```
Option Compare Database
Option Explicit
Dim blInTransaction As Boolean
Private Sub Form_Dirty(Cancel As Integer)
    ' user starts an edit, and start a transaction if required
   If Not blInTransaction Then
        ' if not in a transaction then start one
        DBEngine.BeginTrans
    End If
    blInTransaction = True
End Sub
Private Sub Form_Open(Cancel As Integer)
    Dim db As DAO.Database
    Dim rs As DAO.Recordset
    Set db = CurrentDb
    Set rs = db.OpenRecordset("SELECT * FROM Customers", dbOpenDynaset)
    Set Me.Recordset = rs
    blInTransaction = False
End Sub
```

```
Private Sub Form_Unload(Cancel As Integer)
    If blInTransaction Then
       If MsgBox("Do you want to commit all changes?", vbYesNo) = vbYes Then
            DBEngine.CommitTrans dbForceOSFlush
       Else
            DBEngine.Rollback
       End If
    End If
End Sub
```

#### The *Errors* Collection

In Chapter 3, you learned both how to handle errors in code and how to use the Err object to retreive an error number and description. The DAO has its own errors collection, called Errors, which can handle multiple error messages. When an error occurs you will normally find that the Errors collection contains one error.

Notice that if you generate a code error, such as division by zero using variables, you will get a value in the Err object, but nothing in the Errors collection. This is because this collection only records the DAO errors. But when you get a DAO error, the last error in the collection is reflected in the Err object.

To handle errors, test Err.Number, and then look at Err.Description. The sample code that follows is an example of working with the Errors collection.

If you are only working with Access data, you are unlikely to ever see more than one error in the collection. But as soon as you start working with a product like SQL Server, you are going to see multiple errors.

The following code is working with a Linked SQL Server table called Customers, and the code attempts to generate a duplicate primary key (the code can be found in the in the sample database, SQLServerExamples.accdb, which is provided with Chapter 14, "Using SQL Server"):

```
Sub modErrors_DAOMultipleErrors()
    ' generates a duplicate primary key
    Dim db As Database
    Dim rst As Recordset
    Dim errorDAO As Error
    Set db = CurrentDb
    Set rst = db.OpenRecordset("Customers")
    rst.AddNew
    rst!CustomerID = "ANATR"
    On Error Resume Next
```

```
rst.Update
    If Err <> 0 Then
        For Each errorDAO In Errors
            Debug.Print errorDAO.Number, errorDAO.Description, errorDAO.Source
        Next
    End If
    Debug.Print Err.Number, Err.Description, Err.Source
    rst.Close
    Set rst = Nothing
    db.Close
    Set db = Nothing
End Sub
```

When this code generates an error, you see the error message shown in Figure 5-5.




Figure 5-5 The error message displayed by Access is the message from the Err object; what you need is the message in *Errors*.

# **INSIDE OUT**

The error message normally displayed when you are working with SQL Server is not the error message that you are interested in

If you look in the Err object, you will see the following error number, message, and source:

ODBC--call failed. 3146 DAO.Recordset

But if you look in the *Errors* collection, you will see three error messages:

515 [Microsoft][ODBC SQL Server Driver][SQL Server]Cannot insert the value NULL into column 'CompanyName', table 'Northwind.dbo.Customers'; column does not allow nulls. INSERT fails. ODBC.Recordset [Microsoft][ODBC SQL Server Driver][SQL Server]The statement has 3621 been terminated. ODBC.Recordset 3146 ODBC--call failed. DAO.Recordset

The error message that you want to record and/or display is always:

Errors(0).Number and Errors(0).Description.

In the demonstration database for Chapter 14, we have included the following error handling code that logs errors from the Err object, except when there is a DAO error, in which case it uses Errors(0), as shown in the following:

```
Function modErrors_ErrorLogging(ByVal lngErrorNo As Long, _
                                        ByVal strErrorText As String, _
                                        ByVal strCallingcode As String)
' To make this handler allow for multiple error messages
' include the following code
   If Errors.Count > 1 Then
        ' use the first DAO Error
        strErrorText = Errors(0).Description
        lngErrorNo = Errors(0).Number
' This is an example of a generic error handler
' It logs the error in a table and then allows the calling procedure
' to decide on the action to take
   Dim db As DAO.Database
   Dim rst As Recordset
   Set db = CurrentDb
   Set rst = db.OpenRecordset("tb1ErrorLog", dbOpenDynaset)
        .AddNew
        !ErrorNo = lngErrorNo
        !ErrorMessage = strErrorText
        !ErrorProc = strCallingcode
        ' Also very useful to log the id of the user generating the error
        !WindowsUserName = modErrors_GetUserName()
        .Update
   End With
' now allow the user to decide what happens next
   DoCmd.OpenForm "frmError", , , , acDialog, strErrorText
   ' now as this is a dialog form our code stops here
   ' we will use a global variable to work out
   ' what action the user wants to happen
   modErrors_ErrorLogging = global_lngErrorAction
End Function
```

### The *Database* Object

As with Workspace(0), upon starting Access, the current database is registered as Databases(0).

To obtain a reference to the current database, use the following code:

```
Sub modDatabase DefaultDatabase()
   Dim db As Database
   Set db = DBEngine.Workspaces(0).Databases(0)
```

```
' equivalent syntax is shown below
    'Set db = DBEngine.Workspaces(0)(0)
    'Set db = DBEngine(0)(0)
    Debug.Print db.Name
End Sub
```

To open a link to another Access database, use the following:

```
Sub modDatabase_OpenNewDatabase()
   Dim db As Database
   ' open a path to another access database in the current workspace
   Set db = DBEngine(0).OpenDatabase(CurrentProject.Path & "\DocDAO.accdb")
   'Set db = DBEngine.OpenDatabase(CurrentProject.Path & "\DocDAO.accdb")
   Debug.Print "Databases count : " & DBEngine(0).Databases.Count
   db.Close
   Set db = Nothing
End Sub
```

It is worth noting that we do not append this new database object into the Workspace(0). Database collection because it is automatically created here when we open the database object. Like workspaces, these database references are not permanent, and once the code finishes execution, they are removed from the collection.

As an example of what you can do by using a Database reference, the following routine lists out the contents of a table in another database:

```
Sub modDatabase ListInformation()
   Dim db As Database
   Dim rst As Recordset
   ' open a path to another access database in the current workspace
   Set db = DBEngine(0).OpenDatabase(CurrentProject.Path & "\DocDAO.accdb")
   'Set db = DBEngine.OpenDatabase(CurrentProject.Path & "\DocDAO.accdb")
   Debug.Print "Tables in the database : " & db.TableDefs.Count
   Set rst = db.OpenRecordset("tblReport", dbOpenDynaset)
   Do While Not rst.EOF
       Debug.Print rst!ReportID, rst!ReportName
       rst.MoveNext
   Loop
   db.Close
   Set db = Nothing
End Sub
```

In this chapter, you are going to see how the DAO is an extremely powerful tool that you can use to create objects and modify data in the current database. By using the reference to another database that was shown in the preceding example, you can also perform all these operations on other Access databases.

The sample database file DocDAO.accdb uses this technique to read the design of other Access databases into a set of tables; this is a useful tool if you want to have a central data dictionary that records the structure of several Access databases.

### CurrentDB, DBEngine, and CodeDB

In the last section, you saw how to get a reference to a database with the *Database* object. In programming the DAO, you will come across a couple of standard programming lines of code that get a reference to the current database. There are two ways to do this:

```
Dim db As Database
Set db = DBEngine(0)(0)
Or:
Dim db As Database
Set db = CurrentDb
```

When you refer to DBEngine(0)(0), you get a reference back to the Workspaces(0).Databases(0) object (you saw how Access creates this for you). When you refer to CurrentDB, Access will create an object that is guaranteed to be up to date with any newly created objects.

If you look at CurrentDB. Version, you get a value of 12.0, and if you look at DBEngine(0)(0). Version you get a value of 14.0, which is enough for you to see that these objects are not identical.

## **INSIDE OUT**

#### Choosing between using CurrentDB and DBEngine(0)(0)

Because a CurrentDB reference involves creating an object, technically, it is slower than when working with DBEngine(0)(0). However, because this happens extremely quickly and a single reference is made at the beginning of a code block, you will not see any appreciable delay. Some developers argue for creating a global variable to reference the current database; if you're using CurrentDB, this can be justified, but less so if you're using DBEngine(0)(0) because this does not incur the same performance overhead. In general, you can use whichever method you prefer, although there are circumstances for which it is better to use CurrentDb; for example, when designing wizards.

The following code demonstrates that if an object is created by using CurrentDB, then that object cannot be seen in DBEngine(0)(0) until the database is re-opened or the appropriate collections refreshed. However, an object created in DBEngine(0)(0) can be seen immediately in CurrentDB. Executing this code displays the message "Using CurrentDb: DBEngine-Test", but not the message "Using DBEngine: CurrentDBTest":

```
Sub modDatabase_GetTheCurrentDatabase()
    Dim db1 As Database
    Set db1 = DBEngine(0)(0)
```

```
Dim db2 As Database
    Set db2 = CurrentDb
    Debug.Print "DBEngine(0)(0): " & db1.Name
    Debug.Print "Currentdb : " & db2.Name
    db1.CreateQueryDef "DBEngineTest", "SELECT * from Customers"
    db2.CreateQueryDef "CurrentDBTest", "SELECT * from Customers"
    On Error Resume Next
    Debug.Print "Using CurrentDb : " & db2.QueryDefs("DBEngineTest").Name
    Debug.Print "Using DBEngine: " & db1.QueryDefs("CurrentDBTest").Name
    db1.Close
    Set db1 = DBEngine(0)(0)
    Debug.Print "Using DBEngine(2): " & db1.QueryDefs("CurrentDBTest").Name
    db2.Close
    Set db1 = Nothing
    Set db2 = Nothing
    Application.RefreshDatabaseWindow
End Sub
```

After running this code, close and then re-open the database. You will see the newly created objects in the Navigation window as a result of having executed the RefreshDatabaseWindow command (see Figure 5-6). Both of the new objects will be available when using CurrentDB, but not with DBEngine until you execute DBEngine(0)(0).QueryDefs.Refresh.



Figure 5-6 Objects created in code are not automatically refreshed in the Navigation window until you execute the RefreshDatabaseWindow command.

#### **CodeDB**

Building code libraries in VBA it not something that most developers undertake, but it is a very nice little feature that can be exploited across the range of Microsoft Office products (and it is very simple to use). In this next example, you will use a database called Country Library.accdb to look up ISO country codes (this is used in many of the sample applications). The database contains a local table (see Figure 5-7) that maps country names to ISO country codes, and a suitable function for performing a lookup.

# **INSIDE OUT**

### Techniques when writing VBA libraries

In addition to CurrentDB and DBEngine, there is a third way to reference a database when writing DAO code: CodeDB().

The need to use CodeDB arises only if you are developing Access libraries or wizards. A library or wizard can contain tables, and, for example, when code in a library executes, it needs to draw a distinction between CurrentDB and DBEngine, which will refer the database into which the library has been linked, and referring to a local "in the library table," where it needs to use CodeDB.




Figure 5-7 A lookup table listing ISO country codes that you will use in a VBA Library

This database contains functions that can look up an ISO code from this table, as demonstrated in the following:

```
Function modCountry_LookupISOCode(strCountryName As String) As String
    ' Test function looking up the ISO Code for a country
    ' Demonstrates difference between CodeDB and CurrentDB
   Dim db As Database
   Dim rst As Recordset
   Dim strSQL As String
   Set db = CodeDb
   MsgBox "The value for CurrentDb is " & CurrentDb.Name & _
            " the value for CodeDB is " & CodeDb.Name, _
           vbInformation, _
           "CodeDB vs. Currentdb"
   strCountryName = Replace(strCountryName, "'", "''")
   strSQL = "SELECT ISOCode FROM [tblCountryCodes] WHERE [Country] = '" & _
                strCountryName & "'"
   Set rst = db.OpenRecordset(strSQL, dbOpenDynaset)
   If Not rst.EOF Then
       modCountry_LookupISOCode = rst!ISOCode
```

```
E1se
        ' indicates not found
        modCountry_LookupISOCode = ""
    End If
    rst.Close
    Set rst = Nothing
    db.Close
    Set db = Nothing
End Function
```

You would probably want to place this database in a folder that is accessible to all of your other Access applications. The companion content contains a sample application called UsesCountryLibrary.accdb that uses this shared library. To create your own version of this, create a new database and call up the references in the VBA Editor, select the Browse option (change the default drop-down for Files Of Type to show \*.accdb files), and then browse to the location of the shared file (in the example, this is CountryLibrary.accdb, which is located in the Chapter5 samples folder), as shown in Figure 5-8.




Figure 5-8 Use the Browse button to locate the library to be added, and then change the file type selection.

After adding this into your project, the project window will now look like Figure 5-9.




Figure 5-9 The library has now been added to the VBA project.

This shows how a VBA project is actually designed to allow multiple project libraries to be loaded.

Now we can add the following code to our project, which will use the shared routine in the loaded library:

```
Sub TestLibraryCall()
    Debug.Print modCountry_LookupISOCode("Australia")
End Sub
```

Executing this code should not only return the appropriate ISO code, but it should also displays a message box showing the value for *CurrentDB* and *CodeDB* in the executing code.

This illustrates why the library code needs to use *CodeDB* to work with a local table, because *CurrentDB* references the current project and not the code library.

### The TableDefs Collection and Indexes

The *TableDefs* collection contains Table Definition objects; these are all the physical tables, linked tables, and system tables in the Access database. With this collection, you can create tables (in this or other Access Databases) and manage links to tables in other data sources, including Access, Microsoft SQL Server, Microsoft SharePoint, and so on.

The following code lists all of the tables and linked tables in the database:

Tables that are held in another data source will have a Connect property that reflects the path to the linked data. If the path to the associated data source is changed, you can use the TableDefs collection to change this and refresh the link.

The sample database contains linked tables, as shown in Figure 5-10.





Figure 5-10 Linked data sources need to be relinked if the file locations are changed.

These files will not have been installed in the same folder as you have used, so you need to run the following code to relink the tables:

```
Sub modTableDef_RelinkTables()
' This routine expects to find the Northwind 2007.accdb file in
' the current folder
    Dim db As Database
    Dim tdef As TableDef
    Dim strTargetPath As String
    Dim strSourcePath As String
    strTargetPath = CurrentProject.Path
    strSourcePath = "C:\ASC08\AccessInsideOutVBA\CodeExamples\Chapter4"
    'Excel connect : Excel 12.0 Xml; HDR=YES; IMEX=2; ACCDB=YES; DATABASE=...
    'Text file connect : Text; DSN=Customers Link Specification....
    'Access connect : ;DATABASE=....
    Set db = DBEngine(0)(0)
    For Each tdef In db.TableDefs
        If Left(tdef.Name, 4) <> "MSys" Then
            If tdef.Connect <> "" Then
                tdef.Connect = Replace(tdef.Connect, _
                    strSourcePath, strTargetPath)
                tdef.RefreshLink
            End If
            Debug.Print tdef.Name, tdef.Connect
        End If
    Next
    db.Close
    Set db = Nothing
End Sub
```

In the next example, you see how to create a table and primary key index by using the TableDefs collection. The companion content contains a table called tblFieldList that has a list of fields to be created, as shown in Figure 5-11.



**Figure 5-11** The list of fields to be created in a table.

The code starts by creating the TableDef. Next, it creates each field and appends the fields into the Fields collection of TableDef. If the table has a primary key, then we create an index for the primary key and create new fields that are appended into the Indexes Fields collection. The final step is to append the new index into the *Index* collection of *TableDef*. The objects involved in these steps are shown in Figure 5-12, with the sample code provided thereafter.

```
- 🛂 TableDefs
⊟------ TableDef
      indexes
          i Index
                Ė------ Fields
                          - III Field
        ------ Fields
           Field
```

Figure 5-12 An overview of the objects that need to be created for the table.

```
Sub modTableDef CreateATable()
   Dim db As Database
    Set db = CurrentDb
    Dim tdef As TableDef
    Dim fld As Field
   Dim ifld As Field
    Dim idx As Index
   Dim rst As Recordset
    Dim strTableName As String
    strTableName = "Companies"
    Set db = DBEngine(0)(0)
   On Error Resume Next
    Set tdef = db.TableDefs(strTableName)
    If Err = 0 Then
       MsgBox "Table already exists", vbInformation, strTableName
        Exit Sub
    End If
   On Error GoTo 0
    Set rst = db.OpenRecordset("tblFieldList", dbOpenDynaset)
    Set tdef = New TableDef
```

```
tdef.Name = strTableName
' create the fields and save them in the tabledefs
' fields collection
Do While Not rst.EOF
    Set fld = New Field
    fld.Name = rst!NewFieldName
    fld.Type = rst!NewDataType
    If rst!Autonumber Then
        fld.Attributes = fld.Attributes Or dbAutoIncrField
    If rst!PrimaryKey Then
        Set ifld = New Field
        ifld.Name = rst!NewFieldName
        ifld.Type = rst!NewDataType
        If idx Is Nothing Then
            Set idx = New Index
            idx.Primary = True
            idx.Name = "idx" & strTableName
        End If
        idx.Fields.Append ifld
    End If
    tdef.Fields.Append fld
    rst.MoveNext
Loop
If Not idx Is Nothing Then
    tdef.Indexes.Append idx
rst.MoveFirst
' Now save the table
db.TableDefs.Append tdef
Set tdef = Nothing
Set db = Nothing
Application.RefreshDatabaseWindow
```

End Sub

When creating these DAO objects, you will find that this is a two-step process, in which an object like a field is created, and then the object must be appended into a collection. You will also notice in the code that to detect whether the table already exists, you attempt to set a reference to the object. This portion of the code is protected with an On Error Resume Next to detect the error, and an On Error GoTo 0 after testing to ensure any other errors in the code are not ignored.

## **INSIDE OUT**

Missing decimal precision when examining fields properties using the DAO

If you use a Decimal data type when you create the field, a precision (total number of digits in the number) and scale (number of decimal places) are specified. When using the DAO Field2 object, the property, called Decimal Places, always gives a value of 255. It is only possible to find the actual precision by using ADOX, which is described in Chapter 18.

#### The Data Definition Language

Access also supports Data Definition Language (DDL) instructions, which is part of the SQL Standard. These can be used to create and drop tables, indexes, and other DDL objects. Sometimes, you might find it simpler to use DDL than the DAO to manage database objects:

```
Sub modDDL_CreateTable()
    ' BINARY, BIT, TINYINT, COUNTER, MONEY, DATETIME, UNIQUEIDENTIFIED
    ' DECIMAL, REAL, FLOAT, SMALLINT, INTEGER , IMAGE, , TEXT, CHARACTER
    ' Synonyms such as CURRENCY, BOOLEAN, LOGICAL etc.
    ' constraint naming is optional
    Dim db As Database
    Dim qdef As QueryDef
    Dim strSQL As String
    Set db = CurrentDb
    Set qdef = db.CreateQueryDef("")
    strSQL = "CREATE TABLE tblParent( " & _
                "ParentID COUNTER CONSTRAINT pk_tblParent PRIMARY KEY," & _
                "ParentDesc TEXT(20)" & _
                ")"
    qdef.SQL = strSQL
    ' To remove a table we could use the DROP statement
    'strSQL = "DROP TABLE tblParent"
    qdef.Execute
    strSQL = "CREATE TABLE tblChild( " & _
                "ChildID COUNTER PRIMARY KEY," & _
                "ParentId LONG," & _
                "ChildDesc TEXT(20)" & _
                ")"
    qdef.SQL = strSQL
    ' To remove a table we could use the DROP statement
    'strSOL = "DROP TABLE tblParent"
    qdef.Execute
    Application.RefreshDatabaseWindow
Fnd Sub
```

### **Managing Datasheet Properties**

When you display a table of data in your datasheets, the properties associated with the RowHeight, Fonts, and Colors are defined in each TableDef. The sample database includes the frmTableDefProperties form (see Figure 5-13), which you can use to open a table, in which you can change the layout of the datasheet and display the properties. On this form, we have added some individual unbound controls that show some example properties as well as a list box that displays all of the table's properties (using a bubble sort to order in alphabetic order).

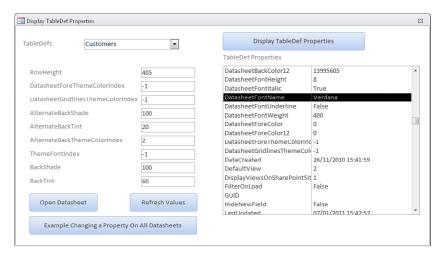


Figure 5-13 After selecting a TableDef, open the datasheet and use the ribbon menus to change the colors in the datasheet. Close and save the datasheet, and then refresh the TableDefs properties to see which properties have changed.

Behind the Example Changing A Property On All Datasheets button, there is sample code that changes the font on all the datasheets in the database. Because not all the datasheets will have a DataSheetFontName property, you might need to create this property and append it into the *Properties* collection of *TableDefs*:

```
Private Sub cmdChangeProperty_Click()
    Dim strTableDefs As String
    Dim db As Database
    Set db = CurrentDb
    Dim tdef As TableDef
    Dim strProp As String
    strProp = "DatasheetFontName"
    Dim strPropvalue As String
```

```
Dim prop As Property
    strPropValue = "Calibre"
    strPropvalue = "Verdana"
    For Each tdef In db.TableDefs
        If Left(tdef.Name, 4) <> "MSys" And _
            Left(tdef.Name, 4) <> "USys" Then
            On Error Resume Next
            tdef.Properties(strProp) = strPropvalue
            If Err <> 0 Then
                Set prop = tdef.CreateProperty(strProp, dbText, strPropvalue)
                tdef.Properties.Append prop
            End If
        End If
    Next
    Set tdef = Nothing
    db.Close
    Set db = Nothing
    MsgBox "Changed " & strProp & " to value " & strPropvalue, _
    vbInformation, "Datasheets Changed"
End Sub
```

The form contains an unbound combo box for listing all the TableDefs, the RowSourceType has been set to Value List, and the following code is used to load the list of TableDefs into the control's RowSource when the form loads:

```
Private Sub Form Load()
   Dim strTableDefs As String
   Dim db As Database
    Set db = CurrentDb
    Dim tdef As TableDef
    Dim strcbo As String
    ' initialise list of tables
   strcbo = ""
    For Each tdef In db.TableDefs
        If Left(tdef.Name, 4) <> "MSys" And _
            Left(tdef.Name, 4) <> "USys" Then
            If strcbo <> "" Then strcbo = strcbo & ";"
            strcbo = strcbo & tdef.Name
        End If
    Next
    Me.cboTableDefs.RowSource = strcbo
    Set tdef = Nothing
    db.Close
    Set db = Nothing
End Sub
```

When assembling the properties in the list box, they are placed into an array, which is then sorted alphabetically by using a bubble sort in the *modSort* module.

The bubble sort is a simple method for sorting items by which items "bubble up" a list (the algorithm here is not a very efficient, but it is very simple):

```
Sub modSort BubleSort(ByRef strArray() As String)
    ' perform a bubble sort on an array
    Dim IngLower As Long
    Dim IngUpper As Long
    Dim lngArrayItem As Long
    Dim strTemp As String
    lngLower = LBound(strArray)
    lngUpper = UBound(strArray)
    Dim blSorted As Boolean
    Do While Not blSorted
        blSorted = True 'assume array sorted
        For lngArrayItem = 0 To lngUpper - 1
            If strArray(lngArrayItem) > strArray(lngArrayItem + 1) Then
                ' swap with next item
                strTemp = strArray(lngArrayItem + 1)
                strArray(lngArrayItem + 1) = strArray(lngArrayItem)
                strArray(lngArrayItem) = strTemp
                blSorted = False
            End If
        Next
    Loop
End Sub
```

### Relationships

In addition to creating tables by using DAO code, you might also choose to create relationships in code. The most common problem encountered when doing this is putting the tables in the wrong order when you create the relationship, for example tblOrder, tblOrder-Line will work, but tblOrderLine, tblOrder will not work:

```
Sub modTableDef_CreatingARelationship()
    ' create a relationship between tblOrder and tblOrderLine
    ' using the OrderId field
    Dim db As Database
    Dim rel As Relation
    Dim fld As Field
    Set db = CurrentDb
    ' attribute values are logically OR'ed together to turn on
    ' bits in the attribute
    ' create the relation
    On Error Resume Next
    Set rel = db.Relations("reltbl0rderLinetbl0rder")
    On Error GoTo 0
    If Not rel Is Nothing Then
        Debug.Print "Relationship already exists reltblOrderLinetblOrder"
        Set db = Nothing
       Exit Sub
    End If
```

```
Set rel = db.CreateRelation("reltbl0rderLinetbl0rder", _
                     "tblOrder", "tblOrderLine", _
                    dbRelationUpdateCascade Or dbRelationDeleteCascade)
    ' create all fields used in the relation
    Set fld = rel.CreateField("OrderId")
    fld.ForeignName = "OrderId"
    ' save the fields
    rel.Fields.Append fld
    ' save the relation
    db.Relations.Append rel
    Set fld = Nothing
    Set rel = Nothing
    Set db = Nothing
End Sub
```

## **INSIDE OUT**

#### Creating relationships by using DDL

You can create relationships by using DDL; however, there appears to be inconsistent information on the Internet regarding support for ON UPDATE CASCADE and ON UPDATE DELETE, which are not presently supported in DDL. It is also important to create the relationship from the correct table. In the example that follows, the relationship is created from the child table tblChild. Attempting to create the relationship from tblParent will not work (notice that this is the opposite order in terms of what was chosen when using the *CreateRelation* method call in the previous example):

```
Sub modDDL CreateRelationship()
    ' creating a relationship
    Dim db As Database
    Dim qdef As QueryDef
    Dim strSQL As String
    Set db = CurrentDb
    Set gdef = db.CreateQueryDef("")
    strSQL = "ALTER TABLE tblChild ADD CONSTRAINT reltblParenttblChild " & _
             "FOREIGN KEY ([ParentId]) REFERENCES tblParent([ParentId]) "
    ' no unique index found for referencing field of the primary table
    'strSQL = "ALTER TABLE tblParent ADD CONSTRAINT reltblParenttblChild " & _
             "FOREIGN KEY ([ParentId]) REFERENCES tblChild ([ParentId])"
    ' to drop the relationship
    strSQL = "ALTER TABLE tblChild DROP CONSTRAINT reltblParenttblChild "
    qdef.SQL = strSQL
    gdef.Execute
End Sub
```

## Manipulating Data with *Recordsets*

You have already seen examples of *Recordsets* being used in code. In this section and those that follow, you will look at *Recordsets* in greater detail.

A Recordset is like looking at a datasheet with your code: you can look across a record at each field (using the Fields collection) or move through the Recordset looking at different rows of data. Recordsets can also be referred to as Cursors.

There are three different kinds of *Recordsets*:

- **dbOpenDynaset** This is the most flexible type of *Recordset*. It can be updated, and once opened, if other users add new records, these records are not seen until you Requery the Recordset (changes made by other users are visible in the Recordset; records deleted by other users are marked as deleted). You can open dbOpenDynaset on tables, queries, and SQL statements.
- **dbOpenTable** This is the fastest kind of *Recordset*. It can be updated, but it is more restrictive because searches must be on indexed fields, and it can only operate on local tables in the database. Note you cannot use dbOpenTable for linked Access tables.
- **dbOpenSnapShot** This provides a read-only snapshot of data. If used on large tables, this can take time to prepare because a copy of all records are required. You can open dbOpenSnapShot on tables, queries, and SQL statements.

A good policy for deciding on the type of Recordset to use is to always choose a dbOpen-Dynaset, unless you specifically need a fixed static view of the data.

## **INSIDE OUT**

#### Choosing between Recordset and Recordset2 Objects

There are two types of Recordset objects: one is called Recordset, and the other Recordset2. Associated with these are the object types Field and Field2. The Recordset2 and Field2 are newer additions to Access and have more features, including support for the Attachments data types and multi-value data.

### Searching

The following code example shows an example of using a dbOpenTable Recordset and searching on both a single index and composite indexes:

```
Sub modRST TableRecordset()
' Example of a table recordset
    Dim db As Database
    Dim rst As Recordset2
    Set db = DBEngine(0)(0)
    Set rst = db.OpenRecordset("Customers", dbOpenTable)
    ' comparisons allowed are <, <=, =, >=, or >
    ' upto 13 key values can be searched
    With rst
        .Index = "PrimaryKey"
        rst.Seek "=", 9
        If Not .NoMatch Then
            Debug.Print !ID, !Company
        End If
    End With
    With rst
        .Index = "idxContact"
        rst.Seek "=", "Thomas", "Axen"
        If Not .NoMatch Then
            Debug.Print !ID, !Company
        End If
    End With
End Sub
```

The following example shows a snapshot Recordset in which the Find and FindNext methods are used to locate records:

```
Sub modRST_SnapshotRecordset()
' Example of a snapshot recordset
   Dim db As Database
   Dim rst As Recordset2
    Set db = DBEngine(0)(0)
    Set rst = db.OpenRecordset("Customers", dbOpenSnapshot)
   With rst
        .FindFirst "[Job Title] like '*Accounting*'"
       Do While Not .NoMatch
            Debug.Print !ID, !Company
            .FindNext "[Job Title] like '*Accounting*'"
        Loop
    End With
End Sub
```

The next example shows a *Dynaset*. With either a snaphot or *Dynaset*, if you know the search criteria, it will be more efficient to open the Recordset by using the criteria:

```
Sub modRST_DynasetRecordset()
' Example of a dynamic recordset
   Dim db As Database
    Dim rst As Recordset2
    Set db = DBEngine(0)(0)
```

```
Set rst = db.OpenRecordset("SELECT * FROM Customers " & _
                                "WHERE [Job Title] like '*Accounting*'" _
                                 , dbOpenDynaset)
    With rst
        Do While Not .EOF
            Debug.Print !ID, !Company
            rst.MoveNext
        Loop
    End With
End Sub
```

You can move through a Recordset by using MoveFirst, MoveNext, MovePrevious, MoveLast, and Move (this is a relative movement from the current cursor position and can be offset from a bookmark). You can also use AbsolutePosition and PercentPosition, both of which can display the current positional information and move to an absolute position, based on a row number or percentage of total rows.

The Recordset also has a RecordCount property, but you need to ensure that you perform a MoveLast before relying on its value to represent the total number of records in the Recordset. This is because the Recordset does not normally read to the end of the dataset when it is opened (in order to maintain good performance).

When you open a *Recordset*, if it has no records, then the *BOF* and *EOF* properties are *True*, if the Recordset contains data, BOF is true only when you MovePrevious on the first record, and EOF is true only if you MoveNext of the last record (you can think of BOF and EOF as parking spots beyond the beginning and ending records; when the cursor (current position) is on BOF or EOF you cannot refer to any field values in the Recordset row):

```
Dim db As Database
Sub modRST_Movement()
   Dim rst As Recordset2
    Set db = DBEngine(0)(0)
    Set rst = db.OpenRecordset("Customers", dbOpenDynaset)
    Debug.Print "Number of records: " & rst.RecordCount
    rst.MoveLast
   Debug.Print "Number of records : " & rst.RecordCount
    ' Relative movement of the cursor
    rst.MoveFirst
    rst.MoveNext
    rst.MovePrevious
    rst.MoveLast
    Debug.Print "EOF: " & rst.EOF, "BOF: " & rst.BOF
    ' now move off the last records
    rst.MoveNext
    Debug.Print "EOF: " & rst.EOF, "BOF: " & rst.BOF
    rst.MoveFirst
    rst.MovePrevious
    Debug.Print "EOF: " & rst.EOF, "BOF: " & rst.BOF
```

```
' Absolute positioning
    rst.MoveFirst
    Debug.Print rst.AbsolutePosition
    rst.AbsolutePosition = 10
    Debug.Print "Company ID is " & rst!ID & " using AbsolutePosition"
    rst.PercentPosition = 50
    Debug.Print "Company ID is " & rst!ID & " using PercentPosition"
    rst.Move 10 ' move forwards 10 rows
    Debug.Print "Company ID is " & rst!ID & " using relative movement"
End Sub
```

#### **Bookmarks**

Bookmarks are defined as variables that you can use to mark a position and then later return to that same position. The values are valid only as long as the *Recordset* is held open. They can be held in string or variant variables. There is also a property called Bookmarkable, with which you can check whether the Recordset supports bookmarks (linked tables to Microsoft Excel, TextFiles, and SQL Server are normally bookmarkable):

```
Sub modRST_Bookmarks()
' examples of recordset movement using bookmarks
   Dim db As Database
   Dim rst As Recordset2
   Set db = DBEngine(0)(0)
   Set rst = db.OpenRecordset("Customers", dbOpenDynaset)
   ' Bookmarks
   Dim bk As String
   rst.FindFirst "[Job Title] like '*Accounting*'"
   Debug.Print "Company ID is " & rst!ID
   bk = rst.Bookmark
   rst.FindFirst "[Job Title] like '*owner*'"
   Debug.Print "Company ID is " & rst!ID
   rst.Bookmark = bk
   Debug.Print "Company ID is " & rst!ID & " using the bookmark"
   rst.Close
   Set rst = db.OpenRecordset("Customers_InTextFile", dbOpenDynaset)
   Debug.Print rst.Bookmarkable & " Bookmarkable for linked text file"
End Sub
```

### **Field Syntax**

In this section, you will see the different forms of syntax that can be used when working with fields in a Recordset.

# **INSIDE OUT**

#### Syntax for referencing a field in a Recordset

When referencing a field that includes a space in its name, enclose the name in square brakets [...]. When referencing a field in a Recordset, you can use either the "." (period) or "!"(exclamation) character if you are specifying the field by name. For example, the Company field in the Recordset rst could be referenced by using the following syntax:

- rst!Company
- rst.Company
- rst.Fields(IngFieldNo)
- rst.Fields("Company")
- rst.Fields(strFieldName)

```
Sub modRST FieldSyntax()
' Example of field syntax
    Dim db As Database
    Dim rst As Recordset2
    Dim strField1 As String
    Dim strField2 As String
    Dim fld As Field
    strField1 = "ID"
    strField2 = "[Company]"
    Set db = DBEngine(0)(0)
    Set rst = db.OpenRecordset("qryCustomersInCA", dbOpenDynaset)
        Do While Not .EOF
            Debug.Print !ID, !Company
            Debug.Print ![ID], ![Company]
            Debug.Print .[ID], .[Company]
            Debug.Print .Fields(0), .Fields(1)
            Debug.Print .Fields("[ID]"), .Fields("Company")
            Debug.Print .Fields(strField1), .Fields(strField2)
            rst.MoveNext
        Loop
    End With
    rst.MoveFirst
    For Each fld In rst.Fields
        If fld.Type <> dbAttachment Then
            Debug.Print fld.Name, fld.Value
        End If
    Next
End Sub
```

In the last part of the code, where you loop through the Fields collection of the record, the Attachment field data type is excluded because this would be more complex to display.

### Filter and Sort Properties

The *Filter* and *Sort* properties of a *Recordset* might not be what you imagine them to be. The properties do not change the data in the Recordset; instead, they change the properties that will be applied when you open another Recordset, based on the current Recordset (note that these properties are not applied when you clone a Recordset).

In the following example, rst2 is opened with the Filter and Sort properties specified on rst:

```
Sub modRST_FilterAndSort()
   ' example using Filter and Sort properties
   Dim db As Database
   Dim rst As Recordset2
   Dim rst2 As Recordset2
   Set db = CurrentDb
   Set rst = db.OpenRecordset("Employees", dbOpenDynaset)
   ' Apply a filter and sort
   rst.Filter = "[ReportsTo] = 2"
   rst.Sort = "[Lastname] DESC"
   ' next demonstrating sort and filter properties
   Set rst2 = rst.OpenRecordset
   rst2.MoveFirst
   Do While Not rst2.EOF
       Debug.Print rst2!Lastname
        rst2.MoveNext
   Loop
End Sub
```

### Adding, Editing, and Updating Records

When adding a new record, you call the AddNew method on the Recordset, and then you call the Update method to save the new record. A useful additional statement is to set the Bookmark for the Recordsets to the LastModified property; this resynchronizes the cursor to point of the newly added record.

When updating a record, you call the *Edit* method. To save the changes, call the *Update* method.

To delete a record, call the *Delete* method. Note that the cursor will not be pointing at a valid record following this operation; therefore, you might need to use a *Move* command to set the cursor to a valid position:

```
Sub modRST AddEditDelete()
' examples of Add, Edit and Delete with a Recordset
   Dim db As Database
    Dim rst As Recordset2
```

```
Set db = DBEngine(0)(0)
    Set rst = db.OpenRecordset("Customers", dbOpenDynaset)
    Stop
    ' Add a new record
    rst.AddNew
    rst!Company = "Company Z"
    rst.Update
    ' reposition the cursor on the newly added record
    rst.Bookmark = rst.LastModified
    ' Update a record
    rst.Edit
    rst![Last Name] = "Bedecs"
    rst.Update
    ' cursor will still be on this record
    ' Delete a record
    rst.Delete
    ' cursor is now in valid
End Sub
```

### Multiple-Values Lookup Fields

When you define a lookup field, you have the option to hold multiple values. This is a very clever internal and hidden feature in DAO, whereby a single field appears to be able to pack in more than one value.

In Table Design setting, the Allow Multiple Values for a combo box creates a multi-value field, as shown in Figure 5-14.

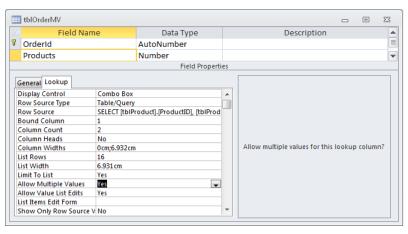


Figure 5-14 Defining a multi-value field in Table Design.

If you have used the Lookup Wizard to create this field, it will have created a relationship for you, and you can edit the relationship to add referential integrity, as shown in Figure 5-15.




Figure 5-15 After creating a multi-value field, referential integrity can be added.

The fact that you can add referential integrity to a field indicates that this field is actually behaving like a table; in fact, a multi-value field creates a hidden table (which you cannot list in the TableDefs).

You will realize that a multi-value field is special because in the relationships diagram, we appear to have two items: the field called *Products*, and something called *Products.Value*.

In VBA code, you cannot directly manipulate the multi-value field, but instead, you need to open a Recordset on its Value property and treat it as a child Recordset, as shown in the following:

```
Sub modMV_ListValues()
    ' displays all the multivalues in a multivalue field
   Dim db As Database
   Dim rst As Recordset2
    Dim rstMV As Recordset2
    Set db = CurrentDb
    Set rst = db.OpenRecordset("tblOrderMV", dbOpenDynaset)
    Do While Not rst.EOF
        Debug.Print "Order Id : " & rst!OrderId
        ' Note you can not do the following
        'Debug.Print rst!products
        Set rstMV = rst!products.Value
        Do While Not rstMV.EOF
            Debug.Print "Product Id : " & rstMV!Value
            rstMV.MoveNext
        Loop
        rst.MoveNext
    Loop
End Sub
```

## **INSIDE OUT**

#### Using multi-value fields

Multi-value fields can model a many-to-many relationship and provide a quick and easy method for storing multiple values without creating additional tables; Access creates hidden system tables for holding multi-value data.

The concept of multi-value fields has been around in computing for a long time, and these were introduced in Access 2007 to map to SharePoint data types. Because multivalue fields support referential integrity and also support this when mapped to a web database in SharePoint, they can be a shorthand notation for creating a table of lookup values; as such, they are designed to save you time when designing a database.

If you intend to convert your database to SQL Server, remember that SQL Server does not support multi-value fields, and the fields will need to be normalized into real tables before you can do this. Also, any SQL using multi-value fields will not be easy to convert to SQL Server.

Querying against a multi-value field introduces more than one possibility for specifying the SQL syntax and returning appropriate results. Figure 5-16 shows how to return one row per record for the multi-value data, and Figure 5-17 shows the resulting data.




Figure 5-16 Selecting the multi-value field results in one row per record, with the field values packed and separated by commas.




Figure 5-17 The result of selecting the multi-value field displaying two records.

Alternatively, by selecting the value of the multi-value field, as shown in Figure 5-18, you get multiple rows with one row for each multiple value, as shown in Figure 5-19.




Figure 5-18 Selecting the value field splits the results into one row per value.




Figure 5-19 Results showing one row per multiple value.

#### **Attachment Fields**

Attachment data types were introduced into Access for compatibility with SharePoint. They can be used as an alternative to the older *OLE* data type for storing, images, spreadsheets, databases, and other documents. In addition to their compatibility with SharePoint, Attachment data types offer better storage performance because the documents are compressed.

## **INSIDE OUT**

#### Limitations when using Attachment data types

If you are creating an append query, then you must exclude any Attachment data types or multi-value fields from the list of fields, which means that having code to copy Attachment data types between tables is useful. If you are constructing a UNION query, then Attachment, OLE, multi-value, and Memo data types are not supported. Data macros have similar limitations when working with Attachments.

Attachment data types are not compatible with standard SQL Server data types and normally need converting to OLE data types when migrating data directly to SQL Server tables.

When you look at an Attachment field in query design, you will see that in addition to selecting the Attachment field itself, you can also select the inner components of an Attachment FileData (the attachment data), FileName (the file name), and FileType (the file type). If you select these fields, you will get one record for each attachment. If you query to select specific attachments, use these fields for the query criteria. When working with image data, the attachment normally shows the image, and when working with other data types it displays the appropriate icon.

Selecting an Attachment field (see Figure 5-20) displays one record per row in the original table, as shown in Figure 5-21.




Figure 5-20 Displaying the Attachment field on the Query grid.


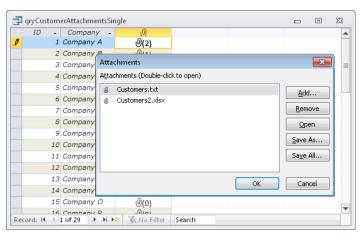


Figure 5-21 Right-click the Attachment field (shown with the paper-clip icon), and then select to manage the attachment from the shortcut menu.

It is also possible to select the inner parts of an attachment (see Figure 5-22), which displays one record for each attachment, as shown in Figure 5-23.

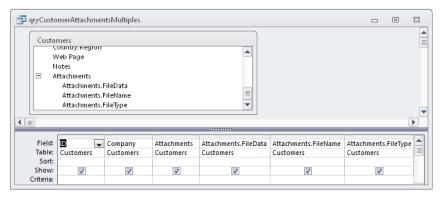

**Figure 5-22** If you select the attachment attributes on the Query grid, you generate one row per attachment value.

If you select this, one row for each attachment is displayed. As long as you include the Attachment field, you will also be able to manage the attachments, and you will see the file details for each attached piece of data.

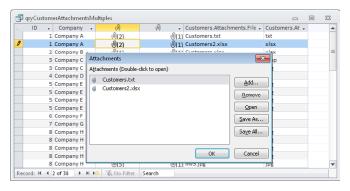


Figure 5-23 One row is displayed for each attachment value.

To get the most out of working with attachments, you will find that DAO code using the *RecordSet2* and *Field2* objects is required. One big advantage of *Attachment* data types when compared against *OLE* data types is support for the *SaveToFile* and *LoadFromFile* methods, which make saving and importing attachments very easy.

The sample application includes two forms, frmCustomersAttachmentsMultiples (one record per attachment, multiple records for each customer) and frmCustomersAttachmentsSingle (one record per customer displaying multiple attachments), which show how DAO code can be used for managing attachments. Figure 5-24 displays the form frmCustomersAttachments Single, which displays the first attachment and provides navigation buttons to display the other attachments, the second form, frmCustomersAttachmentsMultiples, is almost identical,

except that it displays one record for each attachment. The code described in this section can be found on both the sample forms.

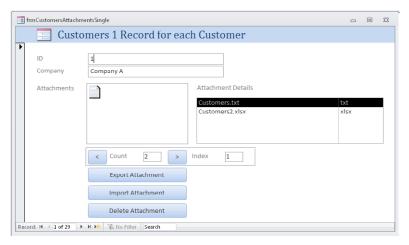


Figure 5-24 Buttons and informational fields can be added to a form to assist in managing the attachments.

Buttons are provided on both the sample forms for moving through and displaying each of the attachments. This code uses the Forward and Back methods of the Attachment control, such as in the following:

```
Private Sub cmdNextAttachment_Click()
    Me.Attachments.Forward
End Sub
```

#### **Displaying Information**

On each form's Current event, the subroutine DisplayAttachmentInfo is executed (contained in the forms module) to populate the list box with details of all attachments on the record:

```
Sub DisplayAttachmentInfo()
    If IsNull(Me.ID) Then
        Exit Sub
    End If
    Dim db As Database
    Dim rst As Recordset2
    Dim rstAttach As Recordset2
    Dim afld As Field2
    Dim strListBox As String
    Me.txtAttachmentCount = Me.Attachments.AttachmentCount
    If Me.Attachments.AttachmentCount > 0 Then
        Set db = CurrentDb
```

```
Set rst = db.OpenRecordset("SELECT * FROM Customers" & _
                                " WHERE ID = " & Me.ID)
       Set afld = rst!Attachments
        Set rstAttach = afld.Value
        strListBox = ""
       Do While Not rstAttach.EOF
            If strListBox <> "" Then strListBox = strListBox & ";"
            strListBox = strListBox & """" & rstAttach!FileName & """;"""
            strListBox = strListBox & rstAttach!FileType & """"
            rstAttach.MoveNext
       Loop
       Me.lstAttachmentInfo.RowSource = strListBox
       Me.lstAttachmentInfo.Selected(0) = 1
       Me.lstAttachmentInfo = Me.lstAttachmentInfo.ItemData(0)
       Me.txtAttachmentIndex = 1
        lngAttachment = 1
       Me.cmdExportAttachment.Enabled = True
       Me.cmdDeleteAttachment.Enabled = True
       Me.cmdImportAttachment.Enabled = True
        ' resynchronises after deletes and inserts
        lstAttachmentInfo_AfterUpdate
    E1se
       Me.lstAttachmentInfo.RowSource = ""
       Me.txtAttachmentIndex = Null
        lngAttachment = 0
       Me.cmdExportAttachment.Enabled = False
       Me.cmdDeleteAttachment.Enabled = False
       Me.cmdImportAttachment.Enabled = True
    End If
End Sub
```

This following code opens the Recordset rst for the current record. Note that the Field2 variable, aField, is set to the attachment field rst!Attachments:

```
Set rst = db.OpenRecordset("SELECT * FROM Customers" &
                       " WHERE ID = " & Me.ID)
Set afld = rst!Attachments
```

Then, a new child Recordset rstAttach is opened on the attachment field:

```
Set rstAttach = afld.Value
```

Because the attachment control does not expose a property that indicates which of the available attachments is being displayed, you have a variable, IngAttachment, which is used to work out which attachment to display; clicking any attachment file name in the list box updates the attachment control to display the selected object.

#### Delete

The following code behind the button that deletes attachments opens the child attachment Recordset and deletes the row. This also requeries the form and uses the forms Recordset-Clone to ensure that the user's record position in the position in the underlying Recordset remains unchanged (so the user is still viewing the same record after the attachment is deleted):

```
Private Sub cmdDeleteAttachment_Click()
   Dim db As Database
   Dim rst As Recordset2
   Dim rstAttach As Recordset2
   Dim afld As Field2
   Dim lnga As Integer
   Dim Ingkey As Long
   Set db = CurrentDb
   Set rst = db.OpenRecordset("SELECT * FROM Customers" & _
                            " WHERE ID = " & Me.ID)
   Set afld = rst!Attachments
   Set rstAttach = afld.Value
   ' now use out index to find the appropriate attachment
   For lnga = 1 To lngAttachment - 1
       rstAttach.MoveNext
   If MsgBox("Delete " & rstAttach!FileName & "?", vbYesNo, _
       "Delete Attachment") = vbYes Then
       rstAttach.Delete
        ' requery the form and relocate the current record
       lngkey = Me.ID
       Me.Requery
       Me.RecordsetClone.FindFirst "[ID] = " & lngkey
       Me.Bookmark = Me.RecordsetClone.Bookmark
   End If
End Sub
```

#### SaveToFile

The code for exporting an attachment again opens the child Recordset and uses the Save-ToFile method. This also uses the Kill command to delete the file if it already exists:

```
Private Sub cmdExportAttachment_Click()
   Dim db As Database
    Dim rst As Recordset2
    Dim rstAttach As Recordset2
    Dim afld As Field2
    Dim strSavepath As String
    Dim lnga As Integer
    strSavepath = Application.CurrentProject.Path
    Set db = CurrentDb
```

```
Set rst = db.OpenRecordset("SELECT * FROM Customers" & _
                            " WHERE ID = " & Me.ID)
    Set afld = rst!Attachments
    Set rstAttach = afld.Value
    ' now use out index to find the appropriate attachment
    For lnga = 1 To lngAttachment - 1
        rstAttach.MoveNext
    Next
    strSavepath = strSavepath & "\" & rstAttach!FileName
    If MsgBox("Save to " & strSavepath & "?", vbYesNo, _
                "Save Attachment") = vbYes Then
        On Error Resume Next
Save:
        rstAttach!FileData.SaveToFile strSavepath
       If Err = 3839 Then
            Err.Clear
            If MsgBox("Over-write existing file ?", vbYesNo, _
                    "File Exists") = vbYes Then
                Kill strSavepath
                GoTo Save:
            End If
        Else
            MsgBox "Attachment Saved", vbInformation, _
                    "Attachment Saved"
        End If
    End If
End Sub
```

#### LoadFromFile

The code for importing attachments uses the LoadFromFile method and the Windows FileDialog for selecting the file. There is one very special point to note: before you issue the rstAttach.AddNew command, you must first have the parent Recordset in edit mode by using rst.Edit:

```
Private Sub cmdImportAttachment_Click()
    Dim db As Database
   Dim rst As Recordset2
    Dim rstAttach As Recordset2
    Dim afld As Field2
    Dim strLoadpath As String
    Dim lnga As Integer
    Dim lngkey As Long
    strLoadpath = Nz(modApp_FileDialog())
    If strLoadpath = "" Then
        Exit Sub
    End If
    Set db = CurrentDb
    Set rst = db.OpenRecordset("SELECT * FROM Customers" & _
                            " WHERE ID = " & Me.ID)
```

```
Set afld = rst!Attachments
    Set rstAttach = afld.Value
    ' note we must put the parent recordset into edit mode
    rst.Edit
    rstAttach.AddNew
    On Error Resume Next
    rstAttach!FileData.LoadFromFile strLoadpath
    If Err <> 0 Then
       MsgBox Err.Description, vbInformation, strLoadpath
        Exit Sub
    End If
    rstAttach.Update
    rst.Update
    ' update the attachments
    ' requery the form and relocate the current record
    lngkey = Me.ID
   Me.Requery
   Me.RecordsetClone.FindFirst "[ID] = " & lngkey
    Me.Bookmark = Me.RecordsetClone.Bookmark
End Sub
```

#### Copying Attachments

Because you cannot include attachments in Append queries, you will find it useful to have some code that can append attachments. The following code illustrates how to copy attachments between tables and records. Notice that only two of the available Attachments fields, FileData and FileName, are copied. This is because the other fields are read-only:

```
strSourceKeyName As String,
                             lngSourceKeyValue As Long, _
                             strSourceAttachmentName As String, _
                             strTargetTable As String, _
                             strTargetKeyName As String, _
                             lngTargetKeyValue As Long, _
                             strTargetAttachmentName As String) As Boolean
' copies the attachments between records in the same
' or different tables
' Note only works for single part primary key
' Note assumes primary key is numeric but could be easily extended
' to other key value types
Dim db As Database
Dim sourcerst As Recordset2
Dim targetrst As Recordset2
Dim strSourceSQL As String
Dim strTargetSQL As String
Dim fldSource As Field2
Dim fldTarget As Field2
Dim childsourcerst As Recordset2
Dim childtargetrst As Recordset2
```

Function modAttach\_AppendAttachments(strSourceTable As String, \_

```
Set db = CurrentDb
    strSourceSQL = "SELECT [" & strSourceKeyName & "], " & _
                    "[" & strSourceAttachmentName & "]" & _
                    " FROM [" & strSourceTable & "]" & _
                    " WHERE [" & strSourceKeyName & "] = " & \_
                    1ngSourceKeyValue
    strTargetSQL = "SELECT [" & strTargetKeyName & "], " & _
                    "[" & strTargetAttachmentName & "]" & _
                    " FROM [" & strTargetTable & "]" & _
                    " WHERE [" & strTargetKeyName & "] = " & \_
                    lngTargetKeyValue
    Set sourcerst = db.OpenRecordset(strSourceSQL, dbOpenDynaset)
    Set targetrst = db.OpenRecordset(strTargetSQL, dbOpenDynaset)
    If sourcerst.EOF Or targetrst.EOF Then
        ' no rows to copy between
        modAttach AppendAttachments = False
        Exit Function
    End If
    Set fldSource = sourcerst(strSourceAttachmentName)
    Set fldTarget = targetrst(strTargetAttachmentName)
    Set childsourcerst = fldSource.Value
    Set childtargetrst = fldTarget.Value
    If childsourcerst.EOF Then
        ' nothing to copy
        modAttach_AppendAttachments = False
        Exit Function
    End If
    ' put parent recordset into edit mode
    targetrst.Edit
    Do While Not childsourcerst.EOF
        childtargetrst.AddNew
        childtargetrst!FileData = childsourcerst!FileData
        childtargetrst!FileName = childsourcerst!FileName
        childtargetrst.Update
        childsourcerst.MoveNext
    Loop
    targetrst.Update
    ' should clean up variables before exit
End Function
Sub modAttach_Test()
    Dim blResult As Boolean
    Dim strSourceTable As String
    Dim strSourceKeyName As String
    Dim lngSourceKeyValue As Long
    Dim strSourceAttachmentName As String
    Dim strTargetTable As String
    Dim strTargetKeyName As String
    Dim lngTargetKeyValue As Long
    Dim strTargetAttachmentName As String
    strSourceTable = "Customers"
    strSourceKeyName = "ID"
```

```
lngSourceKeyValue = 1
strSourceAttachmentName = "Attachments"
strTargetTable = "CustomersForAppend"
strTargetKeyName = "ID"
lngTargetKeyValue = 1
strTargetAttachmentName = "Attachments"
blResult = modAttach_AppendAttachments(strSourceTable, _
                                         strSourceKeyName, _
                                         lngSourceKeyValue, _
                                         strSourceAttachmentName, _
                                         strTargetTable, _
                                        strTargetKeyName, _
                                         lngTargetKeyValue, .
                                         strTargetAttachmentName)
```

Debug.Print blResult End Sub

### The OLE Object Data Type

The OLE Object data type can be used to store documents (spreadsheets, binary files, images, and so on) in your database tables. When compared with the Attachment data type, OLE Object data types offer the advantage that the data can be converted to SQL Server IMAGE or VARBINARY(MAX) data types.

## **INSIDE OUT**

#### Importing and exporting OLE Objects

There are two ways to transfer data into an OLE Object. The first (and probably not the most popular choice) is to perform a binary transfer of a file. The disadvantage of this method is that Access cannot launch the OLE Object by double-clicking it. The advantage of a binary transfer, however, is that in addition to importing data, the OLE data can also be easily exported. The data is displayed as Long Binary data.

The second method is to use the familiar approach of inserting an object, which can then be viewed by double-clicking the object; provided the computer has the appropriate OLE Server installed. One disadvantage of this approach is that although the objects can be loaded under program control, exporting the data back to a file under program control can be very difficult. This is because once the data is imported, it is held with additional header information, which you would need to remove if you want to export the data.

#### **Using Binary Transfer**

After performing a binary transfer, when the data is loaded, it is displayed as Long Binary data, as shown in Figure 5-25. The advantage with this is that you can export the data to an external file.




Figure 5-25 When you work with Long Binary data types, you cannot double-click to display the information.

When you load a binary file, it is read in blocks into a data buffer. Before reading blocks of data, the buffer is prepared by filling with space characters. A calculation is also performed to read exactly any leftover bytes from the block calculation, as illustrated in the following:

Const lngBlockSize = 32768 ' blocksize for copying data

```
Function modOLEBinary_LoadFromFile(fld As Field, _
                                    strSourceFile As String)
' reads strSourceFile into OLE Field
   On Error GoTo Err Handler
   Dim lngBlocks As Long
   Dim lngCount As Long
   Dim IngExtraBytes As Long
   Dim lngFileSize As Long
   Dim strBuffer As String
   Dim lngFileId As Long
   On Error GoTo Err_Handler
   ' Open strSourceFile
   lngFileId = FreeFile ' gets next available file id
   Open strSourceFile For Binary Access Read As lngFileId
   lngFileSize = LOF(lngFileId)
   ' Find number of blocks and extra bytes
   lngBlocks = lngFileSize \ lngBlockSize
   lngExtraBytes = lngFileSize Mod lngBlockSize
   ' allocate space in the buffer
   strBuffer = Space(lngBlockSize)
   For lngCount = 1 To lngBlocks
        Get lngFileId, , strBuffer
       fld.AppendChunk (strBuffer)
   Next
```

' resize the buffer for any extra data

Err\_Handler:

```
If lngExtraBytes <> 0 Then
        strBuffer = Space(lngExtraBytes)
        Get lngFileId, , strBuffer
        fld.AppendChunk (strBuffer)
    End If
    Close IngFileId
    modOLEBinary_LoadFromFile = True
    Exit Function
Err_Handler:
Stop
    modOLEBinary LoadFromFile = False
    Exit Function
End Function
A similar function can be constructed to write the data to a file:
Function modOLEBinary_SaveToFile(fld As Field, _
                                    strTargetFile As String) As Boolean
' write to strSourceFile from OLE Field
    On Error GoTo Err_Handler
    Dim lngBlocks As Long
    Dim lngCount As Long
    Dim lngExtraBytes As Long
    Dim lngFileSize As Long
    Dim strBuffer As String
    Dim lngFileId As Long
    On Error GoTo Err Handler
    ' Open strSourceFile
    lngFileId = FreeFile ' gets next available file id
    Open strTargetFile For Binary Access Write As lngFileId
    lngFileSize = fld.FieldSize()
    ' Find number of blocks and extra bytes
    lngBlocks = lngFileSize \ lngBlockSize
    lngExtraBytes = lngFileSize Mod lngBlockSize
    ' allocate space in the buffer
    strBuffer = Space(lngBlockSize)
    For lnaCount = 1 To lnaBlocks
        strBuffer = fld.GetChunk((lngCount - 1) * lngBlockSize, _
                                lngBlockSize)
        Put lngFileId, , strBuffer
    Next
    ' resize the buffer for any extra data
    If lngExtraBytes <> 0 Then
        strBuffer = Space(lngExtraBytes)
        strBuffer = fld.GetChunk(lngBlocks * lngBlockSize, lngExtraBytes)
        Put lngFileId, , strBuffer
    End If
    Close InaFileId
    modOLEBinary_SaveToFile = True
    Exit Function
```

```
Stop
    modOLEBinary_SaveToFile = False
    Exit Function
End Function
```

The following is a test routine for reading and then writing the data:

```
Sub modOLEBinary_Test()
    ' example reading and then writing a binary file
    Dim strSourceFile As String
    Dim strTargetFile As String
    Dim db As Database
   Dim rst As Recordset
    Set db = CurrentDb
    Set rst = db.OpenRecordset("tbloLEObjects", dbOpenDynaset)
    rst.AddNew
    rst!Comments = "Binary Transfer Test"
    strSourceFile = CurrentProject.Path & "\DocDAO.accdb"
    rst!FileName = strSourceFile
    If modOLEBinary_LoadFromFile(rst!OLEDocument, strSourceFile) Then
        Debug.Print "File written"
    Else
        Debug.Print "File Write Failed"
    End If
    rst.Update
    rst.Bookmark = rst.LastModified
    strTargetFile = CurrentProject.Path & "\DocDAOCopy.accdb"
    ' remove the file if it exists
    If Dir(strTargetFile) <> "" Then
        Kill strTargetFile
    End If
    If modOLEBinary_SaveToFile(rst!OLEDocument, strTargetFile) Then
        Debug.Print "File written"
    Else
        Debug.Print "File Write Failed"
    End If
    rst.Close
    db.Close
End Sub
```

#### **Inserted Documents**

To load an OLE document, you create a form with the OLE Object as a bound control. OLE Objects can then be loaded into the control by using a few lines of VBA code. When OLE Objects are loaded in this manner, they are registered and can then be opened by doubleclicking the object (assuming the OLE Server is available), which is shown in Figure 5-26 and demonstrated in the code that follows for the frmOLEObjects form.

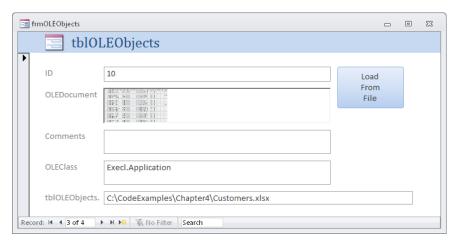


Figure 5-26 When OLE Objects are loaded from a file, they are displayed as an icon or graphic and can be double-clicked to display the document.

```
Private Sub cmdLoadFile_Click()
   RunCommand acCmdRecordsGoToNew
   ' code to read an OLE Object From file
   Dim strFileName As String
   strFileName = CurrentProject.Path & "\Customers.xlsx"
   Me.FileName = strFileName
   Me.OLEDocument.Class = "Excel.Application"
   Me.OLEDocument.OLETypeAllowed = acOLEEmbedded
   Me.OLEDocument.SourceDoc = Me.FileName
   Me.OLEDocument.Action = acOLECreateEmbed
   Me.Dirtv = False
End Sub
```

To load a document in this way, you need to provide the OLE Class for the object. During the loading process, additional data is added to the object, which then makes exporting the data back to a file a very difficult task. But as long as you intend to keep the data in a database, OLE Objects are a great feature to work with.

#### Calculated Fields

Calculated fields provide a way for simple expressions in a table design to display a calculation based upon other fields in the same table and a limited set of built-in expressions. These fields are deterministic (the values only change if the dependent data changes) in that you cannot use functions such as Date() or Now() as part of the calculation; therefore, as an example, you cannot create a calculated field to show an employee's age based on holding their date of birth and knowing the current date. Calculated fields cannot be indexed and cannot use custom VBA functions. This field type has been constructed to be compatible with SharePoint calculated fields, and the values are only updated when the

dependent field values change, which offers improved performance when filtering and sorting data.

In VBA, a calculated field can be manipulated by using the Field2 object. The Field2. Type property is a standard type, such as dbText, and indicates the return type from the Field2. Expression property that contains the expression. To create a calculated field in code you provide a value for the Expression property.

In a typical example, you can use a calculated field to concatenate an employee's FirstName and LastName by using the expression Trim([FirstName] & " " & [LastName]). This saves you from having to enter this calculation in other parts of a system.

For more information on string concatenation and string functions such as Trim, see Chapter 3.

In the following example, we use DAO code to add a calculated field to a table that takes a contract number and adds a text prefix and pads additional leading 0's to the contract number (1 becomes CN-000001). This is an example of using a calculated field to save having to add a calculation in several other parts of the system, it also has the advantage of ensuring that if the calculation needs to change, it only needs to be changed at one point in the system:

```
Sub modTableDef_AddACalculatedColumn()
   ' Example adding a calculated field to a table
   Dim db As Database
   Dim tdef As TableDef
   Dim fld As Field2
   Dim strFieldName As String
   Set db = CurrentDb
   strFieldName = "ContractNo"
   Set tdef = db.TableDefs("ContractEmployees")
   On Error Resume Next
   Set fld = tdef.Fields(strFieldName)
   On Error GoTo 0
   If Not fld Is Nothing Then
       Debug.Print "Field already exists " & strFieldName
       Set fld = Nothing
       Set tdef = Nothing
       Exit Sub
   End If
   Set fld = tdef.CreateField(strFieldName, dbText, 200)
   fld.Expression = "'CN-' & String(6-Len([ContractId]),'0') & [ContractId]"
   tdef.Fields.Append fld
   Set fld = Nothing
   Set tdef = Nothing
End Sub
```

### Cloning and Copying Recordsets


Rather than create a new Recordset, it is sometimes more useful to create a clone of an existing Recordset. The code example that follows defines a table that contains a list of employees with a ReportsTo field that lookups the manager in the same table (self-joined).

Cloning a Recordset is more efficient than creating a second Recordset and also has the benefit that Bookmarks are shared between the two Recordsets.

In the following example, a new record is inserted in the clone, a bookmark is recorded, and the existing *Recordset* is repositioned at the cursor defined inside the clone:

```
Sub modRST_Clone()
    ' example using a recordset clone
    ' and shared bookmarks
    Dim db As Database
    Dim rst As Recordset2
    Dim rst2 As Recordset2
    Dim bk As String
    Set db = CurrentDb
    Set rst = db.OpenRecordset("Employees", dbOpenDynaset)
    'clone the recordset
    Set rst2 = rst.Clone
    rst.FindFirst "[EmployeeId] = 2"
    bk = rst.Bookmark
    Debug.Print rst!EmployeeId
    ' Move the cloned recordset to same position
    rst2.Bookmark = bk
    Debug.Print rst!EmployeeId
    With rst2
        .AddNew
        !ReportsTo = 2
        !FirstName = "Fred"
        !Lastname = "Bloggs"
        .Update
        .Bookmark = .LastModified
        bk = rst2.Bookmark
    End With
    rst.Bookmark = bk
    Debug.Print rst!FirstName
End Sub
```

In some applications, records need to be copied between very similar structures; for example, copying employee details onto a contract where a snapshot of the employee information needs to be preserved for contractual reasons (see Figure 5-27). This would be an alternative method to using append queries; whereas append queries are more efficient for copying a large number of records, this approach reduces the number of queries required in the application.

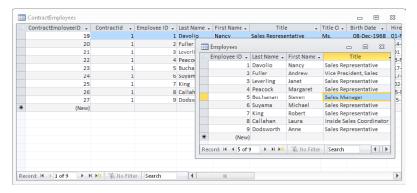

**Figure 5-27** The set of employee records are copied into the *ContractEmployees* table with the addition of the *ContractID* field.

If you have complex multi-value fields or attachments, then when copying between *Recordsets*, you need to copy the child records in the multi-value fields, as shown in the following:

```
Sub modRST_CopyRecords(rstSource As Recordset2, _
                        rstTarget As Recordset2, _
                        strNewKeyName As String, _
                        varNewKeyValue As Variant)
    ' Copies each record from sourceRST to targetRST
    ' also we need to add a value for the NewKeyName
    ' in the target recordset
    Dim fldSource As Field2
    Dim fldTarget As Field2
    If rstSource.EOF Then Exit Sub
    Do While Not rstSource.EOF
        ' copy a record
        rstTarget.AddNew
        For Each fldSource In rstSource.Fields
            Select Case fldSource.Type
                Case dbAttachment, dbComplexByte, dbComplexInteger, _
                     dbComplexLong, dbComplexSingle, dbComplexDouble, _
                     dbComplexGUID, dbComplexDecimal, _
                     dbComplexText: modRST_CopyComplexField fldSource, _
                                        rstTarget(fldSource.Name)
                Case Else
                    If fldSource.Expression <> "" Then
                        ' calculated field so skip copy
                    Else
                         ' simple data type
                        rstTarget(fldSource.Name) = fldSource.Value
                    End If
            End Select
```

```
Next
        rstTarget(strNewKeyName) = varNewKeyValue
        rstTarget.Update
        rstSource.MoveNext
    Loop
End Sub
Sub modRST_CopyComplexField(fldSource As Field2, _
                            fldTarget As Field2)
    ' copy a complex type field
    Dim rstComplexSource As Recordset2
    Dim rstComplexTarget As Recordset2
    Dim fldComplexSource As Field2
    Set rstComplexSource = fldSource.Value
    Set rstComplexTarget = fldTarget.Value
    If rstComplexSource.EOF Then
        ' no multiple values
        rstComplexSource.Close
        rstComplexTarget.Close
        Exit Sub
    End If
    Do While Not rstComplexSource.EOF
        rstComplexTarget.AddNew
        For Each fldComplexSource In rstComplexSource.Fields
            If fldSource.Type = dbAttachment Then
                ' don't copy any readonly fields
                ' fields to copy are FileData and FileName
                If fldComplexSource.Name <> "FileFlags" And _
                    fldComplexSource.Name <> "FileURL" And _
                    fldComplexSource.Name <> "FileType" And _
                    fldComplexSource.Name <> "FileTimeStamp" Then
                    rstComplexTarget(fldComplexSource.Name) = fldComplexSource
                End If
            Else
                ' other multi-value fields
                rstComplexTarget(fldComplexSource.Name) = fldComplexSource
            End If
        Next
        rstComplexTarget.Update
        rstComplexSource.MoveNext
    rstComplexSource.Close
    rstComplexTarget.Close
End Sub
Sub modRST CopvRecordsTest()
    Dim lngContractId As Long
    lngContractId = 1
    Dim db As Database
    Dim rstEmployee As Recordset2
    Dim rstContractEmployee As Recordset2
```

```
Set db = CurrentDb
    ' copies all the employee records
   Set rstEmployee = db.OpenRecordset("Employees", dbOpenDynaset)
   Set rstContractEmployee = db.OpenRecordset("ContractEmployees",
                                dbOpenDynaset)
   modRST_CopyRecords rstEmployee, rstContractEmployee, _
        "ContractID", 1
End Sub
```

In the preceding example, a significant part of the code deals with copying multi-value fields. If you are not copying these field types, the code can be significantly simplified.

### Reading Records into an Array

You can use the GetRows method of the Recordset object to dynamically allocate a two dimension array, where the first dimension is the field, and the second dimension is the row. Multiple rows can then be read into the array with a single command, as demonstrated in the following:

```
Sub modRTS_GetRows()
    Dim db As Database
    Dim varRowArray() As Variant
    Set db = CurrentDb
    Dim rst As Recordset
    Dim strSQL As String
    Dim lngCount As Long
    ' exclude selecting complex types or including Memo and Long Binary fields
    strSQL = "SELECT ID, Company, [Last name] from Customers"
    Set rst = db.OpenRecordset(strSQL, dbOpenDynaset)
    ' this will generate a 2 dimensional array, where
    ' first element is the column and the second element the row
    ReDim varRowArray(rst.Fields.Count - 1, 1) explicit dimensioning
    varRowArray = rst.GetRows(1) ' array will be dynamically sized
    Debug.Print UBound(varRowArray)
    For lngCount = 0 To rst.Fields.Count - 1
       Debug.Print varRowArray(lngCount, 0)
    rst.Close
    db.Close
End Sub
```

## Working with Queries in Code

Using the DAO, we can create temporary queries, create saved queries, execute queries, change the SQL in saved queries, and open Recordsets on queries. We can also manipulate queries with Parameters. Working with QueryDefs is an area in which you will probably spend a lot of time.

Inside the Database object, you will find the QueryDefs collection (see Figure 5-28). This collection holds all the queries in your application.



Figure 5-28 The QueryDefs and Parameters collections.

The following code loops through the entire QueryDefs collection and displays basic information about each object:

```
Sub modQueryDefs_ListQueries()
   ' Example listing queries in the current database
    ' Also displays a list of any query parameters
   Dim db As DAO.Database
   Dim qdef As DAO.QueryDef
   Dim param As DAO.Parameter
   Set db = CurrentDb
   For Each qdef In db.QueryDefs
       Debug.Print "**********************
       Debug.Print gdef.Name & " : " & gdef.SQL
       If qdef.Parameters.Count > 0 Then
               Debug.Print "-----"
       End If
       For Each param In qdef.Parameters
           Debug.Print vbTab & param.Name, param.Type
       Debug.Print "*********************
   Next
   db.Close
   Set db = Nothing
   Debug.Print "Completed : modQueryDefs_ListQueries"
End Sub
```

#### Temporary QueryDefs

The first type of QueryDef to investigate is the temporary QueryDef. If you want to execute a block of SQL, there are several techniques that can be used.

# **INSIDE OUT**

#### Different methods for executing SQL

Access provides a number of different methods for executing SQL. It is possible to use a pre-saved query and execute the query by using either *DoCmd.OpenQuery* "qryname" (which we don't recommend because you need to switch warnings off to prevent messages, and you can easily forget to switch them back on), or you could use *CurrentDB*. *Execute* "gryname".

As an alternative you can construct the SQL in program code and then execute the code by using either *CurrentDB.Execute strSQL* or *DoCmd.RunSQL strSQL*, as shown in the following:

QueryDefs provide another method for executing SQL, and they can create temporary and permanent queries. Recordsets can also be opened on the QueryDef objects.

It is also possible to create a temporary *QueryDef* to perform this operation. The advantage of doing this is that you can then manipulate other more advanced query properties. For example, when working with SQL Server, you can create a temporary pass-through *QueryDef* to execute SQL against SQL Server, a simpler example is shown here:

```
qdef.Close
    db.Close
    Set qdef = Nothing
    Set db = Nothing
    Debug.Print "Completed : modQueryDefs_TempActionQuery"
End Sub
```

If you look at the *qdef.Name* property during execution, you will see it has the value #Temporary QueryDef#.

### QueryDefs and Recordsets

It is also possible to create a temporary QueryDef by using a SQL statement or saved query, and then open a Recordset on the temporary object. This again becomes a very powerful technique when you are working with external sources of data, such as SQL Server:

```
Sub modQueryDefs_TempSelectQuery()
    ' example showing how a temporary query can be created and
    ' a recordset opened on the query
    Dim db As DAO.Database
    Dim qdef As DAO.QueryDef
    Dim strSQL As String
    Dim rst As DAO.Recordset
    Set db = CurrentDb
    Set gdef = db.CreateQueryDef("")
    strSQL = "SELECT * FROM Customers " & _
             "WHERE [State/Province] = 'MA'"
    qdef.SQL = strSQL
    Set rst = qdef.OpenRecordset(dbOpenDynaset)
    Do While Not rst.EOF
        Debug.Print rst!Company
        rst.MoveNext
    Loop
    rst.Close
    qdef.Close
    db.Close
    Set rst = Nothing
    Set qdef = Nothing
    Set db = Nothing
    Debug.Print "Completed : modQueryDefs_TempSelectQuery"
End Sub
```

### Creating QueryDefs

New QueryDefs can be created in program code by using the CreateQueryDef method of the database, as illustrated in the following:

```
Sub modQueryDefs CreateQueryDef()
    ' example creating a querydef in code
    Dim db As DAO.Database
    Dim gdef As DAO.QueryDef
    Dim strSQL As String
    Set db = CurrentDb
    Set qdef = db.CreateQueryDef("qryCreatedInCode")
    qdef.SQL = "SELECT * FROM Customers"
    qdef.Close
    db.Close
    Set gdef = Nothing
    Set db = Nothing
    Application.RefreshDatabaseWindow
    Debug.Print "Completed : modQueryDefs_CreateQueryDef"
End Sub
In addition to creating QueryDefs, you can also modify the SQL in existing QueryDefs, as
follows:
Sub modQueryDefs ChangeTheSQL()
    ' Example show that changes you make to the SQL in a query
    ' change the actual SQL stored in the saved query
    ' Notice that we do not need to perform a save as this
    ' happens automatically
    Dim db As DAO.Database
    Dim gdef As DAO.QueryDef
    Set db = CurrentDb
    Set qdef = db.QueryDefs("qryListCustomersChangedInCode")
    qdef.SQL = "SELECT Customers.Company, Customers.[State/Province] " & _
                "FROM Customers " \& _
                " WHERE (((Customers.[State/Province])='IL'))"
    Stop
    ' Now open the query in design, look at the sql, then close the query
    qdef.SQL = "SELECT Customers.Company, Customers.[State/Province] " & _
                "FROM Customers " &
                " WHERE (((Customers.[State/Province])='WA'))"
    Stop
    ' Now open the query in design, look at the sql, then close the query
    ' Now we try and enter some incorrect SQL, this will cause an error
    gdef.SQL = "SELECTxxxx Rubbish"
    Stop
    ' but the following will work even when a table does not exist
    qdef.SQL = "SELECT Rubbish"
    ' Access will syntax check your SQL but not check that the objects exist
    db.Close
    Set db = Nothing
    Debug.Print "Completed : modQueryDefs_ChangeTheSQL"
End Sub
```

# **INSIDE OUT**

Changes to the SQL in a QueryDef need to use valid SQL, but not necessarily reference a valid object, and changes are automatically saved

When you change the SQL in a QueryDef, you do not need to save your changes, because they are automatically saved for you. In the previous example, you will see that if you try to change the SQL to invalid syntax, it will fail, but if you reference objects that do not exist it will not fail (until you execute or use the query).

## QueryDef Parameters

The example that follows shows how you can populate parameter values in an existing parameterized query:

```
Sub modQueryDefs_ActionQuery()
    ' example showing how an existing parameterised query
    ' can be executed by program code
    Dim db As DAO.Database
    Dim gdef As DAO.QueryDef
    Set db = CurrentDb
    Set qdef = db.QueryDefs("qrySetZipForStateToNull")
    ' There are several equivalent ways to set a parameter
    qdef.Parameters!TheStateProvince = "MA"
    qdef.Parameters(0) = "MA"
    qdef.Parameters("TheStateProvince") = "MA"
    qdef.Execute
    qdef.Close
    db.Close
    Set gdef = Nothing
    Set db = Nothing
    Debug.Print "Completed : modQueryDefs_ActionQuery"
End Sub
```

In a similar manner to referencing fields in a Recordset, there are several equivalent ways to refer to a parameter in a QueryDef.

# **INSIDE OUT**

## Creating parameters in a QueryDef by using program code

If you want to create parameters in program code, you do this in the SQL and *not* with the *Parameters* collection (which is indicated as read-only in the Help system in so far as you cannot add or remove parameters, but only set the parameter value), as illustrated in the following example:

```
Sub modQueryDefs ActionQueryParameters()
    ' example showing how create parameters
    ' can be executed by program code
    Dim db As DAO.Database
    Dim qdef As DAO.QueryDef
    Set db = CurrentDb
    Set qdef = db.CreateQueryDef("")
    gdef.SQL = "PARAMETERS TheStateProvince Text ( 255 ); " & _
                " UPDATE Customers SET Customers.[ZIP/Postal Code] = Null" & _
                " WHERE (((Customers.[State/Province])=[TheStateProvince]));"
    ' There are several equivalent ways to set a parameter
    qdef.Parameters!TheStateProvince = "MA"
    qdef.Execute
    qdef.Close
    db.Close
    Set qdef = Nothing
    Set db = Nothing
    Debug.Print "Completed : modQueryDefs_ActionQueryParameters"
End Sub
```

The sample database contains a query called *qryCustomersForCountry*, which has a parameter tied to a control on the *frmCustomersForCountry* form. The following code shows how to programmatically use this query and supply the parameter from the form that is open:

```
Next
    Set rst = qdef.OpenRecordset()
    Do While Not rst.EOF
        Debug.Print rst!Company
        rst.MoveNext
    Loop
End Sub
```

## **Investigating and Documenting Objects**

In this section, you look at using the DAO to examine the forms, reports, macros, and modules in an application.

## **INSIDE OUT**

The DAO Containers collections and Application objects

The DAO object hierarchy contains Containers collections, and inside each Container is a Documents collection. Each Document corresponds to the objects inside your database.

This information is also available through an alternative set of collections in Application.CurrentProject object. Information about queries and tables can be accessed through either the DAO QueryDefs and TableDefs collections or through the Application.CurrentData object.

#### **Containers and Documents**

The AllForms, AllReports, AllModules, and AllMacros properties of the CurrentProject object can provide limited information on your saved design objects, as shown in the following:

```
Sub modDocuments_AllForms()
   ' Note for all of these we must use a generic object
   ' we can not use a Form or Report object
   Dim objfrm As Object
   Dim Prop As Property
   For Each objfrm In CurrentProject.AllForms
       Debug.Print objfrm.Name
   Next
   Dim objrpt As Object
   For Each objrpt In CurrentProject.AllReports
       Debug.Print objrpt.Name
   Dim objmcr As Object
```

```
For Each objmcr In CurrentProject.AllMacros
       Debug.Print objmcr.Name
   Next
   Dim objmd As Object
   For Each objmd In CurrentProject.AllModules
       Debug.Print objmd.Name
   Next
End Sub
```

However, you can extract more information by looking inside the Containers collections in the DAO (we have not shown all the available document properties in the sample code):

```
Sub modDocuments_Containers()
   Dim db As DAO.Database
   Dim cont As DAO.Container
   Dim doc As DAO.Document
    Set db = CurrentDb
    For Each cont In db.Containers
       Debug.Print "+++++++++Container++++++++"
       Debug.Print cont.Name, cont.Documents.Count
       For Each doc In cont.Documents
           Debug.Print doc.Name, doc.LastUpdated, doc.DateCreated
       Debug.Print "+++++++++++++++++++++++++++++
    Next
End Sub
```

The nine containers are described in Table 5-1.

Table 5-1 Summary of Container Usage

Container	Description	Use
Database	MSysDb, SummaryInfo, UserDefined	Internal
Forms	Forms	Documenting an application
Reports	Reports	Documenting an application
Scripts	Macros	Documenting an application
Modules	Modules	Documenting an application
Relationships	Relationships	Better to use the Relationships collection
SysRel		Internal
Tables	Tables, including system tables, Queries, and compiled queries and compiled SQL for forms and reports	Better to use the TableDefs and QueryDefs collections
DataAccessPages	Old DataAccessPages	No longer used

If you look in the Tables collection, there are some interesting objects; for example, in the sample database, there is ~sq\_ffrmCustomers (and a form called frmCustomers). There is also ~sq rrptCustomers (and a report called rptCustomers). These internal queries contain the SQL for the form/report RecordSource and the RowSource for combo and list boxes, when these objects do not use a pre-saved query, but use SQL or a table reference in the RecordSource or RowSource property.

## **Object Properties**

In this chapter, you have seen many examples of working with the properties of objects. The properties for an object can be listed, and the properties themselves also have properties (Value, Name, Type, and Inherited), as demonstrated in the following:

```
Sub modProp ListDatabaseProperties()
   ' list the database properties
   Dim prop As Property
   Dim propprop As Property
   Dim db As Database
   Set db = CurrentDb
    On Error Resume Next
   ' printing out some properties in this manner can generate
    ' some errors if printing the property value when it
   ' returns an object
   For Each prop In db.Properties
       Debug.Print prop.Name, prop.Value
   Next
   On Error GoTo 0
   ' a property can also have properties
   Debug.Print "Properties of a Property"
   Debug.Print "***************
   Set prop = db.Properties("Transactions")
   For Each propprop In prop.Properties
       Debug.Print propprop.Name, propprop.Value
   Next
   Set prop = Nothing
End Sub
```


## Sample Applications

We have included two sample applications that can be used as a foundation for constructing your own utilities to document and search for information in a database.

## Documenting a Database by Using the DAO

This sample database DocDAO.accdb shown in Figure 5-29 is an application that you can use as a starting point in developing your own utility for documenting the contents of an Access database. The application contains a table, tblDatabaseObject, which can contain

a list of design objects in multiple databases; the table contains fields that can record whether objects have been added or deleted since a database was last analyzed. The techniques used in this application are based around the methods described in this chapter.

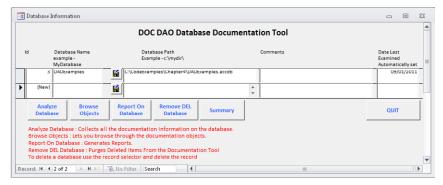

**Figure 5-29** The utility for documenting a database structure by using the DAO objects. To run the sample database, use the button represented by the disk icon to browse and change the path to the sample database.

## Finding Objects in a Database by Using the DAO

The sample database Find\_IT.accdb (see Figure 5-30) can be used to search applications for keywords in controls, forms, program code, and other objects.

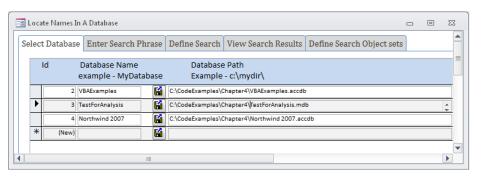


Figure 5-30 Find IT search results when searching objects in an Access database for keywords.

This tool is able to search through module code by using the technique illustrated in the following code examples. Here, a global variable, *dbTarget*, is set to open a connection to a target database. The code examples are located in the database Find\_IT.accdb:

```
Set dbTarget = DBEngine.OpenDatabase(strPath)
    If Err <> 0 Then
        MsgBox Err.Description, vbCritical, "Unable To Open Database"
        mod Search LinkToTargetDatabase = False
        Exit Function
    mod_Search_LinkToTargetDatabase = True
End Function
```

The subroutine modSearch\_ModuleForm then opens each form in Design mode and checks to see if the form has a module. If the form has a module, the subroutine opens the forms module code using the prefix "Form\_" for the name of the module:

```
Dim tmod As Module
For Each doc In dbTarget.Containers("Forms").Documents
    ' need the error trap incase the module is already open
    appAccess.DoCmd.OpenForm doc.Name, acDesign
    ' Continue if it has a module.
    If Not appAccess.Forms(doc.Name).HasModule Then
        ' close the form and move on
        appAccess.DoCmd.SelectObject acForm, doc.Name
        appAccess.DoCmd.Close
       GoTo SkipFormAsNoCode
    End If
    appAccess.DoCmd.OpenModule "Form_" & doc.Name
    Set tmod = appAccess.Modules("Form " & doc.Name)
```

Module objects have a rich number of properties, and the code that follows shows how we process the declaration lines of the module. The CountOfDeclarationLines properties is used to cycle through each line of code in the procedure, and the Lines method is used to read the line of each code into a string, which can then be searched:

```
lngCountDecl = tmod.CountOfDeclarationLines
lngCount = tmod.CountOfLines
strProcName = "Declarations"
lngMatchCount = 0
If Not boolOnlyNameMatch Then
    For lngI = 1 To lngCountDecl
        strline = Trim(tmod.Lines(lngI, 1))
        If InStr(1, strline, strPhrase) <> 0 Then
            With rstResults
                .AddNew
                !SearchId = lngSearchId
                !SearchAreaId = lngSearchAreaId
                !ResultInformation1 = doc.Name
                !ResultInformation2 = strProcName
                !ResultInformation3 = strline
                !Exact = False
                .Update
```

```
End With
            lngMatchCount = lngMatchCount + 1
           If lngMatchCount >= lngMaxModuleMatches Then
                rstResults.Bookmark = rstResults.LastModified
                rstResults.Edit
                rstResults!ResultInformation4 = _
                    "Maximum matches reached for this module " \& _
                    lngMaxModuleMatches
                rstResults.Update
                GoTo SkipRestOfModule
            End If
       End If
   Next
End If
```

## Summary

In this chapter, you looked into the DAO, which has long been the most popular object library for those programming with Access. The two key features of the DAO that developers use extensively are:

- Working with Recordsets to manipulate data in a similar manner as to working with a DataSheet, but by using VBA.
- Writing, executing, and modifying SQL, either by using temporary objects or presaved queries.

In addition to working with these objects, the DAO offers a rich hierarchy of objects that handle almost everything you might want to do with the objects in your database.





PART 3

# Working with Forms and Reports

Using Forms and Events	231
CHAPTER 7 Using Form Controls and Events	273
Creating Reports and Events	323



# CHAPTER 6

# **Using Forms and Events**

Displaying Records233	Interacting with Records on a Form
Filtering by Using Controls	Editing and Undo on a Record

t this point in the book, you should understand the important role of objects, and you have seen examples of how they can be created and interact with each other. In this chapter, we introduce how to work with events.

Events are opportunities to implement an action when a user interacts with an application or an application interacts with other objects and the external environment. Controlling the behavior of your forms involves understanding the events that can occur and writing code in response to these events. Sometimes, when a user performs a single operation, such as attempting to delete a record, a sequence of different events is set into motion.

After reading this chapter, you will:

- Understand that form events occur in specific sequences, and you will know how to program using the event sequences.
- Know how to control the presentation of objects on a form as a user browses through the data.
- Be able to control filtering on forms by using different techniques.

#### Note

As you read through this chapter, we encourage you to also use the companion content sample database, FormExamples.accdb, which can be downloaded from the book's catalog page.

The properties for a specific section of the form can be displayed either by using the Selection Type drop-down menu or by clicking in the area of the form for which you want information, as shown in Figure 6-1.




Figure 6-1 You can display form properties by clicking the small square (upper-left part of the form window) or by using the Selection Type drop-down menu.

Most programming is done in the Form section, which offers a rich set of events. The Detail, Form Header, and Form Footer sections offer only Paint, OnClick, OnDblClick, OnMouse-Down, OnMouseUp, and OnMouseMove events; however, it is quite rare to program against these events.

When a user interacts with a form and the objects on a form, her actions trigger a sequence of several events. In the following sections, we describe the most common event sequences and the programming techniques that can be used against events in these sequences.

To demonstrate the event sequences, the frmCustomers form has program code written behind each form event (see Figure 6-2). This lets you see the different event sequences as you interact with the form. Open it and try moving through records and updating data to see some of the event sequences. You can revisit the form when reading through a particular event sequence described in the chapter.

```
Form
                                      Current
  Private Sub Form Current()
      modEventLog_FormEvent "Form_Current", Me.Name, "", "'
  Private Sub Form DataChange(ByVal Reason As Long)
      modEventLog_FormEvent "Form_DataChange", Me.Name, "", ""
  Private Sub Form DataSetChange()
      modEventLog_FormEvent "Form_DataSetChange", Me.Name, "", ""
  End Sub
  Private Sub Form DblClick(Cancel As Integer)
      modEventLog_FormEvent "Form_DblClick", Me.Name, "", ""
  End Sub
```

Figure 6-2 The frmCustomers form contains code behind the key events that calls a routine to populate a table with details of the events.

This form contains a subform that is updated to show the event sequence as you perform different operations; the results are presented in a table, as shown in Figure 6-3.




Figure 6-3 The embedded subform displays the event sequences as you interact with the form.

## **Displaying Records**

In this section, you look at the key events that are used to control how the form displays data when it is opened and closed. From there, you will look at a number of different techniques that you can use to control how the data on a form is filtered.

#### **Bound and Unbound Forms**

Forms have a Record Source property, which can contain the name of a table, query, or an explicit piece of SQL that is used to determine the data to be made available to the form. Figure 6-4 shows the Record Source property bound to a table.



**Figure 6-4** An example of a bound form, with the Record Source property bound to a table. Bound controls on the form refer to columns from the Record Source.

Where a Record Source is specified, we describe the form as being bound to the data; forms without a Record Source are described as unbound. Unbound forms are very common. They are used to collect information from users and then take appropriate actions. Sometimes developers choose to create a form that starts life as a bound form. They then unbind the form and set the form's data source on the *Open* event to obtain better control over the data that is displayed in the form.

Controls on a form can be bound or unbound (if the form is bound). Examples of unbound controls include displaying calculations based on other control values. On an unbound form, all controls are unbound. When designing an unbound form, you normally choose to hide the navigation buttons and record selectors, and because these forms are often small, it is common to set the Scroll Bars to *Neither* and Auto Center to *Yes*.

# **INSIDE OUT**

Updateability of a Record Source when using DISTINCT and **DISTINCTROW** 

When creating a Record Source for a form that is based on multiple tables, DISTINCTROW can be used to permit updateability for situations in which DISTINCT would limit updateability.

If you use SQL on an [Orders] table to select only the [OrderID] and [Order Date], but you want to join this table to [Order Details] such that we only include [Orders] that have [Order Details], then you would get multiple records (one corresponding to each row in the [Order Details], as shown in the following:

```
SELECT [Orders].[Order ID], [Orders].[Order Date]
FROM Orders INNER JOIN [Order Details]
ON Orders.[Order ID] = [Order Details].[Order ID];
```

If you want to eliminate the duplicates, you can set the query property Unique Values to Yes. This adds the keyword DISTINCT to the SQL (SELECT DISTINCT ...), but the rows will now be read-only.

Microsoft Access has a special query property called Unique Records. This property adds the keyword DISTINCTROW to the SQL (SELECT DISTINCTROW ...) statement, which permits the rows to be updated. This keyword is special to Access and is not supported as part of the SQL Standard.

As an alternative to using DISTINCTROW, you can rewrite the SQL in a different way and still preserve uniqueness and updateability, as shown in the code that follows:

```
SELECT Orders.[Order ID], Orders.[Order Date]
FROM Orders
WHERE Orders.[Order ID] In (SELECT [Order ID] FROM [Order Details]);
```

## Modal and Pop-Up Forms

To enable a form to pop up, you set the forms Pop Up property to Yes. Pop-up forms can overlap other pop-up forms. To enable overlapping forms, you need to change the default setting in the Backstage view. To do so, in Backstage view, click Current Database | Document Windows Option, and then select the Overlapping Windows option.

Pop-up forms are great for drawing a user's attention to a specific operation, such as entering data in an unbound form that is used to generate a report. Often, you do not want a

Chapter 6

user to be able to switch away from the pop-up form. To prevent this, set the form's Modal property to Yes. When creating a pop-up and/or modal form, a popular choice is to set the form's Border Style to *Dialog*, and possibly the forms Control Box property to *No*.

## Open and Load Events

When a form is opened, it goes through the following event sequence:

```
Open \rightarrow Load \rightarrow Resize \rightarrow Activate \rightarrow Current
```

Even if the form is opened for data entry, the Current event will fire. This event will also fire on an unbound form.

The Open event is called before the user sees the data, but the data will already be prepared and ready for display. The difference between Open and Load events is that the form can be closed during the *Open* event by setting the *Cancel* argument on the event to *True*. Typical activities to program on these events are setting filters or setting the form's Record Source.

The form frmCustomersBindOnOpenEvent is an unbound form that uses the Open event to bind the form's Record Source.

When testing the sample forms, notice that swapping a form between Design view and Form view might result in some noticeable flicker because you can see the controls being bound. You can avoid this flicker by opening the form directly. The form's Open event sets the *RecordSource*, as shown in the following:

```
Private Sub Form_Open(Cancel As Integer)
   Me.RecordSource = "SELECT * FROM Customers " & _
                   " WHERE [State/Province] = 'WA'"
End Sub
```

Another alternative to this approach is to have a bound form and set the forms Filter property on the Open event, as demonstrated in the following code for the sample form frmCustomersFilter:

```
Private Sub Form_Open(Cancel As Integer)
   Me.Filter = "[State/Province] = 'WA'"
    Me.FilterOn = True
End Sub
```

In Access 2007, two new form properties, FilterOnLoad and OrderByOnLoad, were added. The FilterOnLoad property (default False) sets a form to remember the last used filter, which

is stored in the form's Filter property. This can create a useful effect, improving performance by setting a filter when the form first retrieves the data to be displayed, but it can also cause issues when combined with other filtering techniques. You will find that if you need to clear the Filter property, then you can do this in the form's Open event, but not in the Close event, which can cause problems if the FilterOnLoad property is True.

## Filtering by Using Controls

In this example, you will add a combo box control to the form's header that will allow a user to choose a single value for filtering the data on the form. The demonstration form is called frmCustomersFilterChoice.

Start by adding an unbound control to the form header section, selecting the Customers table as the source of data and choosing the State/Province field, as shown in Figure 6-5.


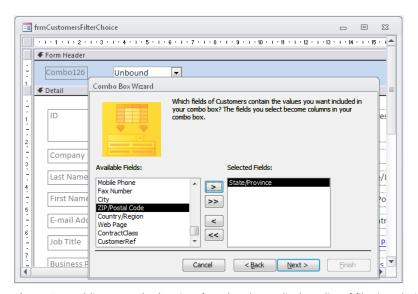


Figure 6-5 Adding a combo box in a form header to display a list of filtering choices.

When you reach the last item in the combo box, select Remember The Value For Later Use (this makes the field an unbound field). Figure 6-6 shows the page in the wizard after you select the required field. Note that in this example, you do not want to select the ID field, but the wizard does not allow this to be removed. You will remove this later.

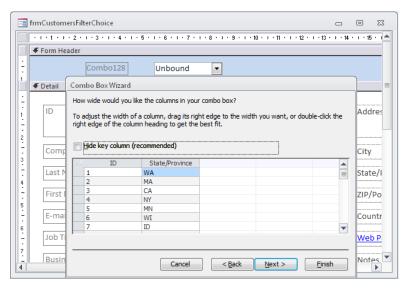

**Figure 6-6** Selecting the fields to be displayed in the combo box by using the Combo Box Wizard.

Once you have added the control, give it a meaningful name and save the form. Figure 6-7 shows the new control name, which in this example, includes the prefix "cbo" to indicate that it is a combo box.





Figure 6-7 After the control has been added, change its name so that it is meaningful.

Note that when you run the form, the new combo box displays the list of states, as expected, but you also see duplicate values (one value for each record in the Customer table). To remove the duplicates, modify the Row Source of the combo boxes by using the Build button (...), as shown in Figure 6-8.



**Figure 6-8** By clicking the build button adjacent to Row Source, you can change the SQL in the Query designer.

Click the Build button adjacent to the Row Source property.

There are several changes that you want to make to the SQL: delete the ID column, add an Is Not Null filter, and finally, in the Queries Properties, set Unique Values to Yes. The result should look like Figure 6-9.

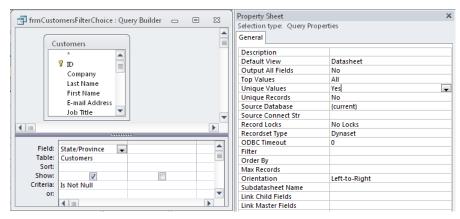


Figure 6-9 Change Unique Values to Yes in the Queries Properties to add the DISTINCT keyword to the SQL.

At this point, you can also view the results of the SQL by using the ribbon menu and then clicking the Close button. Click Yes to save the changes, as shown in Figure 6-10.




Figure 6-10 The prompt to save your changes when exiting the Query designer.

Now save the form. The SQL behind the combo box is as follows:

```
SELECT DISTINCT Customers.[State/Province] FROM Customers
   WHERE (((Customers.[State/Province]) Is Not Null));
```

Because the wizard added the ID field (and you just removed that), you also need to change the Column Count from 2 to 1 and remove the first column width. The exact width for the column is not that important; what is important is to only have 1 column width to match the 1 column count, as shown in Figure 6-11.





Figure 6-11 Adjusting the column widths to match the column count.

When you display your form, a drop-down menu appears, presenting a choice of states. Press Ctrl+G and switch to the Immediate window so that you can print out the value of the unbound control (Forms!frmCustomersFilterChoice.cboStateFilter), as shown in Figure 6-12.

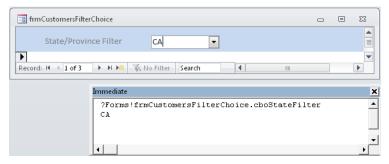

**Figure 6-12** The Immediate window next to the form window (this appears in the separate VBA Editor Window).

The next step is to change the form's Record Source so that it uses the *cboStateFilter* control value to filter the data. To do this, click the Build button (Figure 6-13) next to the form's Record Source.



**Figure 6-13** Click the Build button adjacent to Record Source to display the result in the Query grid.

Select all the fields by using the '\*' on the Query grid, select the State/Province field, and then clear the Show box (it is important not to include the same field to be shown more than once on the Query grid). Right-click the Query grid, and then select the Build option, as shown in Figure 6-14.




Figure 6-14 To access Expression Builder, right-click the mouse while the cursor is in the criteria field, in the State/Province column.

Use Expression Builder to locate the new, unbound control on the form by clicking FormExamples.accdb | Forms | LoadedForms | frmCustomersFilterChoice. When you locate the cboStateFilter, double-click it, as shown in Figure 6-15.




Figure 6-15 Double-click either the control name or Value.

Click OK to select the expression, close and save the changes to the Record Source, and then save the changes to the form. The Record Source then contains the following SQL:

You now need to ensure that when a user makes a selection from the combo box, it forces the data in the form to call *Requery*. The event to use for this is the *AfterUpdate* event on the *cboStateFilter* control.

Locate the AfterUpdate event property for the control, as shown in Figures 6-16.





Figure 6-16 Locating the AfterUpdate event for the cboStateFilter control.

Press the Build button and then choose the Code Builder option from the Choose Builder pop-up, as shown in Figure 6-17.

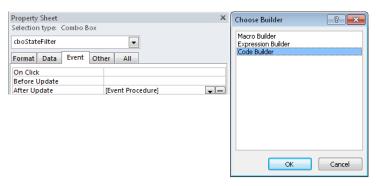

**Figure 6-17** Alternatively, you can select [Event Procedure] from the drop-down menu on the event, and then click the Build button.

Add the following code behind the event. This code ensures that after a user updates the filter choice, the form is requeried, and because the form's Record Source is tied to the control, it will filter the data to match the choice made in the combo box.

```
Private Sub cboStateFilter_AfterUpdate()
    Me.Requery
End Sub
```

With this approach, the form opens with a NULL value in the control, which means that no data is displayed. The code that follows could be added to the form's *Open* event to set a default value and requery the data. ItemData(0) sets the combo box to display the first available data item, as shown here:

```
Private Sub Form_Open(Cancel As Integer)
    If Me.cboStateFilter.ListCount <> 0 Then
        Me.cboStateFilter = Me.cboStateFilter.ItemData(0)
    End If
   Me.Requery
End Sub
```

# **INSIDE OUT**

Managing NULL values when referring to controls in a form's **Record Source** 

One disadvantage to this technique becomes apparent when you start to add multiple controls for filtering. This can be achieved by following the steps that were previously presented to add more field references to the RecordSet SQL. But this assumes that the user makes a choice from all available filter controls. If only some of the available filters were selected, other controls could have NULL values. We can illustrate this by showing how to change the Record Source SQL so that it will allow a NULL value in the filter to show all records, as shown in the following:

```
SELECT Customers.* FROM Customers WHERE (((Customers.[State/Province])=
IIf([Forms]![frmCustomersFilterChoice]![cboStateFilter] Is Null,
[State/Province], [Forms]! [frmCustomersFilterChoice]! [cboStateFilter])));
```

As an alternative to using the IIF statement, a more compact way to write this would be to utilize the ability of the NZ function to return a value that you can define when the field value is NULL (in this case it returns [State/Province] and the WHERE clause becomes [State/Province] = [State/Province], which is always true for a NULL values in the control):

```
SELECT Customers.*
FROM Customers
WHERE (((Customers.[State/Province])=
Nz([Forms]![frmCustomersFilterChoice]![cboStateFilter],[State/Province])))
```

If you have several filtering controls, the SQL will start to become unmanageably complex. Another problem with this approach is that the criteria in the forms Record Source is hardwired to refer to the form by name. This means that if you make a copy of the form, these references need to be changed. In the next section, you see a better way to avoid both of these problems.


## Filtering by Using the Filter Property

The next method uses the natural *Filter* property of the form to provide a more flexible approach to filtering the data. This is shown in the completed sample, *frmCustomersFilter Choice2*. You can create and name your own form to use as a sample as you follow through the technique.

As with the last example, you start by adding a combo box to the form, changing the *RowSource* of the combo box to display unique values for the state. But rather than changing the form's *RowSource* to connect it to a control, you create a filter function.

Add the following function to the forms code module:

Next, change the *AfterUpdate* Event on the *cboStateFilter* control to reference this function, as shown in Figure 6-18.



**Figure 6-18** Type **= FilterResults()** for the event property. The *cboStateFilter* control now directly calls the code when the event is activated.

# **INSIDE OUT**

#### Referencing a VBA function from a control's event property

The ability to have a control directly reference any public function from the controls event property normally finds greatest use with command buttons. For example, if you have a Close button on your forms, rather than continually typing the code for DoCmd. Close() behind each button, you could create a Public function called modUtils\_Form Close(), and then on the buttons OnClick event, type =modUtils\_FormClose(). Now, whenever you copy and paste the Close button onto a new form, it will already have the code reference copied with it.

You can also pass references to other controls as arguments on a function call in a similar manner to that which would be used when creating the ControlSource for a calculated field.

You can also add the following code to the form's Open event to set a default value, and then call the filtering function:

```
Private Sub Form_Open(Cancel As Integer)
    On Error Resume Next
    Me.cboStateFilter = Me.cboStateFilter.ItemData(0)
    Dim dummy As Variant
    dummy = FilterResults()
End Sub
```

The code On Error Resume Next has been added to handle the situation in which the control does not contain any value, and the use of *ItemData(0)* gets the first choice available in the combo box. Note that this would be a less elegant alternative to the example in the previous section in which we tested (Me.cboStateFilter.ListCount <> 0) before conditionally setting the control to ItemData(0). To call the FilterResults() function, we need to define a dummy variant variable (Access will allow you to call the function without a dummy variable, but we prefer to make it explicit in the code that we are calling a function). Because a function without a specified return type will be variant, we had to use a function to be allowed to bind it directly to the control, as was previously shown in Figure 6-18.


It's simple to extend this technique to use multiple controls for filtering. For example, the demonstration form includes the [Job Title] as an additional filter. After adding the control to the form and hooking up the AfterUpdate event for that control to call the routine Filter Results(), all that remains is to modify the FilterResults() routine to include the new field, as shown in the following code:

This approach is extremely easy to maintain: each time you add a control, set the controls *AfterUpdate* property, and then add some logic to the *FilterResults()* function. As an alternative to filtering whenever a control changes, you can add a command button; rather than calling the *FilterResults()* function on each control, only call it once when the user presses the command button after filtering.

In more advanced programming situations, you might need to take into account whether the user is going to be allowed to use the built-in features in Access to apply other filters. This can be handled by using the *ApplyFilter* event, described on page 247.

## Filtering by Using Another Form

Another popular technique is to design a pop-up form that can then open the form showing the main data and apply a filter, as shown in the sample form *frmCustomersFilterPopup*. Start by creating a blank, unbound form. Set the form's properties to match those shown in Figure 6-19.



**Figure 6-19** Set the properties for a new, unbound form (Pop Up = Yes, Modal = Yes, Auto Center = Yes, Record Selectors = No, Navigation Buttons = No).

Next, add the controls that you want to use for filtering, as shown in Figure 6-20.




Figure 6-20 The form containing combo boxes for the user to select filter values and command buttons for filtering.

# **INSIDE OUT**

## Opening a form by using a Where clause

One of the most simple and yet most powerful techniques used in creating applications is to open a form from another form/report but restrict the data by choices that have been made in the first form. This can then be used to open reports or forms to show records, based upon a set of choices made in controls on the driving form.

One of the simplest applications of this technique is when you have a continuous form that lists records. You can add a button to the continuous form, either in the footer or in the detail section next to each record, which when clicked, displays a pop-up that contains the complete details for that particular record.

For example, in a form listing customers for which the numeric primary key is [ID] and the detail form is called frmCustomerDetails, the code would read as follows:

```
DoCmd.OpenForm "frmCustomerDetails",,,"[ID] = " & Me.[ID]
DoCmd.OpenForm "frmCustomerDetails",,,,"[Code] = '" & Me.[Code] & "'"
```

In the second example, we surround the field with single quotation marks because the primary key is a text field.

You do not program the AfterUpdate event, but you write code similar to that which was used in the FilterResults() function behind the Display Customer Results command button. This time, however, you use this as a parameter on the DoCmd.OpenForm command (it doesn't matter whether the target form is already open; this still works):

```
Private Sub cmdDisplayResults_Click()
   Dim strCriteria As String
   strCriteria = ""
```

```
If Nz(Me.cboStateFilter) <> "" Then
       strCriteria = "[State/Province] = '" & _
               Me.cboStateFilter & "'"
   End If
   If Nz(Me.cboJobTitle) <> "" Then
       If strCriteria <> "" Then
           strCriteria = strCriteria & " AND "
        strCriteria = strCriteria & _
               "[Job Title] = '" & _
               Me.cboJobTitle & "'"
   End If
   DoCmd.OpenForm "frmCustomers2", , , strCriteria
   DoCmd.SelectObject acForm, Me.Name
   DoCmd.Close
End Sub
```

You can also add a command button on the frmCustomers2 form that pops up the unbound filter selection form to allow users to change filter criteria, as shown in the following:

```
Private Sub cmdFilter_Click()
    DoCmd.OpenForm "frmCustomersFilterPopup"
End Sub
```

## The ApplyFilter Event

When a filter is applied, this then results in the event sequence shown in the following (the Current event is called twice):

```
ApplyFilter \rightarrow Current \rightarrow Current
```

It is very common for developers to open a form with a filter or a Where clause and still allow users to take advantage of the built-in filtering features of Access. However, you might want to ensure that a user cannot remove the filtering that your code has applied (see the frmCustomersFilterApplyFilter form). You can do this by setting Cancel to True when the ApplyType is 0, as shown in the code that follows:

```
Private Sub Form_ApplyFilter(Cancel As Integer, ApplyType As Integer)
   ' 0 -- acShowAllRecords (removes filter)
   ' 1 -- acApplyFilter (applies new filter)
   ' 2 -- acCloseFilterWindow (no filter applied)
   If ApplyType = 0 Then
        ' prevent user removing the filter on this form
        Cancel = True
   End If
   MsgBox "ApplyType : " & ApplyType
End Sub
```

```
Private Sub Form_Open(Cancel As Integer)
   Me.Filter = "[State/Province] = 'WA'"
   Me.FilterOn = True
End Sub
```

#### **Unload** and **Close** Events

When you close a form, it goes through the following event sequence:

```
Unload → Deactivate → Close
```

The forms Unload event can be used to ensure that users can only close a form after completing appropriate actions, as demonstrated in the following (see the frmCustomers2 form in the samples database):

```
Private Sub Form_Unload(Cancel As Integer)
   If MsgBox("Close this form ?", vbYesNo,
            "Confirmation Required") = vbNo Then
       Cancel = True
   End If
End Sub
```

Note that any changes to the record will already have been saved by the time this code executes, so the Dirty property will be False. If you want to provide validation with respect to data changes, use the form's *BeforeUpdate* event (described on page 262).

## Working with the RecordsetClone

For many people, their first encounter with the RecordsetClone of a form was when they created a combo box (on a bound form) for use in record navigation (see Figure 6-21). In previous versions of Access, the Combo Box Wizard generated RecordsetClone VBA code, but in Access 2010, the wizard generates a SearchForRecord macro. In this section, we will outline the required VBA to perform this operation.




Figure 6-21 The option to locate a record generates macro code in Access 2010.

Rather than use the feature just described, you start by adding a combo box into the header or footer section of a bound form (for an example, look at the demonstration form, frmRecordsetClone, which shows the result of this). The combo box has two fields: the ID (hidden) and the CompanyName (visible). You can write the following code to provide navigation in VBA, similar to the SearchForRecord macro:

```
Private Sub cboCompany AfterUpdate()
   Me.RecordsetClone.FindFirst "[ID] = " & Me.cboCompany.Column(0)
   If Not Me.RecordsetClone.NoMatch Then
       Me.Bookmark = Me.RecordsetClone.Bookmark
   End If
End Sub
```

In the previous example, we illustrated a classic technique that involves using a form's RecordsetClone, which can be easily extended and applied to different problems. You could have also used the following simpler piece of code:

```
Me.Recordset.FindFirst "[ID] = " & Me.cboCompany
```

# INSIDE OUT

Synchronizing bookmarks with the form and the RecordsetClone and avoiding write conflicts

The RecordsetClone is a property of a form which is a clone of the underlying Recordset that supports the form. This means that we can use VBA Recordset code and treat this as a proper Recordset. Bookmarks are shared between the form (which has a special Bookmark property) and the RecordsetClone. Thus, we search and locate a record in the clone, and then by pointing the form's Bookmark to the Bookmark of the clone, the form will automatically synchronize and display the desired record.

A common mistake is trying to edit the same data in the clone while simultaneously allowing a user to edit the record through the forms controls. We have provided a sample form called frmRecordSetCloneEdit that is designed to show you exactly how to generate this problem; the code on the form will fail with a write conflict, as demonstrated in the following (this is an example of what not to do):

```
Private Sub cmdEdit_Click()
    ' First we simulate a user editing the record
   Me.[First Name] = "Andrew"
    ' locate the same records
    Dim rst As Recordset
    Set rst = Me.RecordsetClone
    rst.FindFirst "[ID] = " & Me.ID
```

```
If Not rst.NoMatch Then
        rst.Edit
        rst![First Name] = "Fred"
       rst.Update
   End If
    ' now try and save the changes to the form
   Me.Dirty = False
End Sub
```

Other than the need to be aware of and avoid write conflicts, the form's RecordsetClone is a very powerful tool; for example, one form can open another form and then manipulate data in the clone as well as resynchronize the other form to the clone.

## Refresh, Repaint, Recalc, and Requery Commands

Refresh, Repaint, Recalc, and Requery commands can be called when you want information displayed on a screen to be updated. The following is a brief description of each:

- **Recalc** Form only. Forces all calculations to be updated.
- **Refresh** Form only. Updates changes made by other users to records, doesn't show new records or remove deleted records (except in an adp). Requery is often a better choice to make when updating the display of records.
- **Repaint** Form only. Forces any pending screen updates to be completed, also forces a Recalc.
- **Requery** Form and controls (often used with combo and list boxes to refresh displayed lists of data). Removes any deleted records and adds any new records.

In this book, you will see many examples of how to use Requery to update the data in forms and controls. Recalc is occasionally used; Repaint and Refresh are used infrequently.

In the demonstration database, the frmCalculations form (Figure 6-22) contains two text boxes into which a user can type a number, and a third text box that displays the result.

The two text boxes are called [txtX] and [txtY], and the calculation is shown in the following code:

```
=CLng(Nz([txtX]))+CLng(Nz([txtY]))
```

Two important features of this calculation are CLnq and Nz. CLnq prevents numbers in the fields from being treated as text and thus string concatenated; Nz prevents an unnecessary error message from being displayed in the result until both the text boxes have valid values.

When you type values into the two unbound controls, the calculated control is automatically updated (without the need for any program code). If you have calculated fields that refer to other controls on the form, Access will update those dependent fields. However, if you were, for example, to create a control that uses a more complex expression such as a domain function linked to other fields on the form, then because the form cannot work out when to update the data, you need to call Recalc explicitly in your code. In this case, the form cannot work out when to update the result).




Figure 6-22 The frmCalculations form showing the differences between ReCalc, RePaint, and ReQuery.

## **Calling Procedures Across Forms**

In a form, you can define a subroutine or function as *Public*; this means that any other part of the application can call the procedure on the form (while the form is open). A typical example for using this is when you have some special programming on a form that needs to be executed because another form has made changes to the data being displayed on the form.

# **INSIDE OUT**

#### Calling public code on a form

In addition to calling subroutines and functions, it is also possible to make any standard event handler on a form public, which allows other forms to call these events. The code required to call code on another form involves setting a form object variable to reference the target form, and then execute the code on the form (when doing this, you will not have IntelliSense to assist you). The example that follows shows a code fragment for calling a function called GetResults() on the form called tfrmTarget:

```
DoCmd.OpenForm "frmTarget"
Set frm = Forms!frmTarget
Dim varResult As Variant
varResult = frm.GetResults()
```

The demonstration database contains the two forms: frmTarget and frmSource. The target form consists of two controls. Figure 6-23 shows frmSource opening frmTarget.




Figure 6-23 A form calling code on another form.

We added the following code on the target form:

```
Public Sub UpdateResults()
    Me.txtResultsUpdate = "Result updated on by UpdateResults " & Now
End Sub
Public Function GetResults() As Variant
   Me.txtResultsUpdate = "Result updated on " & Now
End Function
Public Sub txtResults_AfterUpdate()
   Me.txtResultsUpdate = "Result updated on " & Now
End Sub
```

The source form presents buttons that instruct how to open the target form and then call the appropriate code, as previously defined.

```
Private Sub cmdCallEvent Click()
    Dim frm As Form
    DoCmd.OpenForm "frmTarget"
    Set frm = Forms!frmTarget
    frm.txtResults_AfterUpdate
End Sub
Private Sub cmdCallFunction_Click()
    Dim frm As Form
    DoCmd.OpenForm "frmTarget"
    Set frm = Forms!frmTarget
    Dim varResult As Variant
    varResult = frm.GetResults()
    MsgBox varResult
End Sub
Private Sub cmdCallSubroutine Click()
    Dim frm As Form
    DoCmd.OpenForm "frmTarget"
    Set frm = Forms!frmTarget
    frm.UpdateResults
End Sub
```

## Interacting with Records on a Form

In this section, you start by looking at one of the most important events in form programming: the Current event. This event is triggered when a user moves to a record, and it is often used to change controls on the form to match details of the record being viewed. You then look at Deactivate, Activate, Timer, and Mouse events.

## The Current Event

As you move between records, for each record that you arrive on (including the new record) the Current event will be fired.

```
Current → Current
```

The Current event is extensively used in the programming of a form; its main purpose is to enable/disable controls on a form that are dependent on the data content of the record.

For example, the Customers table contains a ContractClass field, which we only want to display when a company outside the United States is displayed. Figure 6-24 shows the field in the table design.




Figure 6-24 The ContractClass field, which we only want to display for certain customer records.

On the frmCustomersContractClass form, we have added code to hide/display the cboContractClass control. The control is visible in Figure 6-25. The code that follows could have been written directly on the Current event for the form, but because we also want to change the visibility if the Country/Region field changes, it is worthwhile writing the code in a separate procedure, which is called from both the Current form event and AfterUpdate control event.




Figure 6-25 Changing the display to show a customer in the United States causes the cboContractClass combo box to be hidden.

```
Sub DisplayHideControls()
    If Nz(Me.Country Region) <> "USA" Then
        Me.cboContractClass.Visible = True
    Else
        Me.cboContractClass.Visible = False
    End If
End Sub
Private Sub Country_Region_AfterUpdate()
    DisplayHideControls
End Sub
Private Sub Form_Current()
    DisplayHideControls
End Sub
```

# **INSIDE OUT**

#### Controlling column visibility in a Continuous form

Changing the visibility of controls on a form works well for a form in Single Form View; however, it can produce disturbing effects when used on a Continuous form, where the field suddenly appears for all records or for no records, depending on the value in the current record. Figure 6-26 shows what happens when a user moves from a European customer record to the record of a customer in the United States.



**Figure 6-26** The ContractClass field in the *frmCustomersContractClassContinuous* form flickers on and off, depending on the data held in the row.

In this situation, you might consider moving the control into the form's header or footer sections, or making the control locked rather than hiding it.

### Deactivate and Activate Events

In addition to moving between records, a user can switch between forms; when you click off of a form, the *Deactivate* event fires; when you click a form, the *Activate* event fires. These events are not commonly programmed, and you will find that if you try to manage window focus in these events, you do not always acheive reliable results.

Deactivate → Activate

## Setting the Timer Interval Property of the *Timer* Event

If you want to exploit timed operations, you need to consider how these will impact user interaction with the data on forms. The Timer Interval property (measured in milliseconds) allows the *Timer* event to be fired at a specified interval. Setting this to a value of 1000, for example, generates a *Timer* event once every second. When the Timer Interval is set, you

can write code on the *Timer* event that is triggered at each timed interval. It is a good idea to ensure that the time required for the code to execute is less than that of the Timer Interval setting (it is also possible to stop the timer from running by setting a value of 0 for the Timer Interval).

There are many ways to utilize the Timer Interval. The sections that follow present two suggested applications.

#### **Periodic Execution**

By polling a *Timer* event, you can set up an application to run on the desktop and wait for an appointed time to execute. The point of execution could be set for every timer interval, or alternatively, at a specifically appointed time.

In the companion content that accompanies this chapter, the frmPolling form is configured to check every 20 seconds to determine if it needs to execute any procedures. The table tblExecutionEvents acts as a work list of processes that need to run every day, as shown in Figure 6-27.




Figure 6-27 A table of events used for polling a timed event.

Events are logged in the table tblExecutionLog, as shown in Figure 6-28.




Figure 6-28 Events are logged as they are executed.

The execution procedure is defined as follows:

```
Sub modTime_Proc1(LogId As Long)
    ' example timer event
    ' updates the log record with a comment
    Dim strSQL As String
    strSQL = "UPDATE [tblExecutionLog] " & _
             " SET Comments = 'modTime_Proc1 Executed'" & _
             " WHERE LogId = " & LogId
    CurrentDb.Execute strSQL
End Sub
```

On the frmPolling form, we have defined a Timer Interval and written the code that follows to execute on each *Timer* event, as shown in Figure 6-29.




Figure 6-29 A Timer Interval of 20000 milliseconds (20 seconds).

```
Private Sub Form_Timer()
    ' search all the execution events
    ' when not executed today
    ' check for ellaspsed time and execute the event
   Dim db As Database
   Dim rst As Recordset
   Dim rstLog As Recordset
   Set db = CurrentDb
   Dim strSQL As String
   ' all events not yet executed and scheduled time
   ' has elapsed
   Me.txtExecutionPoint = Time
   strSQL = "SELECT * FROM tblExecutionEvents " & _
           " WHERE ExecutionTime < Time() AND LastExecutedOn < Date()"
   Set rst = db.OpenRecordset(strSQL, dbOpenDynaset)
   Set rstLog = db.OpenRecordset("tblExecutionLog", dbOpenDynaset)
   Do While Not rst.EOF
        ' update active events
        rst.Edit
        rst!LastExecutedOn = Date
        rst.Update
        ' log the event execution
        rstLog.AddNew
        rstLog!ExecutionEventId = rst!ExecutionEventId
        rstLog!ExecutionOn = Now
        rstLog.Update
        rstLog.Bookmark = rstLog.LastModified
        ' Execute the procedure
       Run rst!ExecutionProcedure, rstLog!LogId
        rst.MoveNext
   Loop
   rst.Close
   rstLog.Close
End Sub
```

#### Monitoring

In this second example, we have designed a hidden form with a *Timer* event that polls a table and advises users when the system will shut down for maintenance. If the time has elapsed, then the routine will close all the user's forms and reports and quit the application. An administrator can use the table depicted in Figure 6-30 to set a shutdown time and post a user message.




Figure 6-30 The Active flag indicates the event is scheduled for activation.

This application will have a hidden form that is launched upon startup and monitors the table for warning messages. Users are then be given a number of warnings, after which the application will close.

To implement this, you need the following code at startup:

```
Sub modTimer_LaunchMonitor()
   DoCmd.Echo False
    DoCmd.OpenForm "frmSilent"
    Forms("frmSilent").Visible = False
    DoCmd.Echo True
End Sub
```

The form shown in Figure 6-31 and the code that follows it incorporates a Dismiss button that allows the user to ignore the warning until they have completed their work (as long as they don't ignore it for too long).




Figure 6-31 The user can press the Dismiss button to hide the window.

```
Option Compare Database
Option Explicit
Dim lngCriticalWarnings As Long ' flags critical warnings to a user
Const lngMaxWarnings = 2
Dim blUnloading As Boolean
Private Sub cmdDismiss_Click()
    ' hide the form
   Me.Visible = False
End Sub
Private Sub Form Load()
    lngCriticalWarnings = 0
    blUnloading = False
End Sub
Private Sub Form_Timer()
    Dim db As Database
    Dim rst As Recordset
    Dim rstLog As Recordset
    Set db = CurrentDb
    Dim strSQL As String
    ' find any critical shutdown messages that apply
    strSQL = "SELECT * FROM tblCloseDown " & _
            " WHERE CriticalTime > dateadd('n',-30,time())" & _
            " AND Active = True"
    Set rst = db.OpenRecordset(strSQL, dbOpenDynaset)
    If Not rst.EOF Then
        lngCriticalWarnings = lngCriticalWarnings + 1
       If lngCriticalWarnings > lngMaxWarnings Then
            ShutDown
       Else
            ' warn the user
            Me.Visible = True
            Me.txtWarning = rst!WarningMessage
            ' this stays on the screen until the user clicks dismiss
        End If
    Fnd Tf
    rst.Close
End Sub
Sub ShutDown()
    ' shut down the application
    ' close any forms
   On Error Resume Next
    Dim lngfrmCount As Long
    Dim lngrptCount As Long
    Dim lngCount As Long
    lngfrmCount = Forms.Count
    lngrptCount = Reports.Count
    ' close all forms
```

```
For lngCount = 0 To lngfrmCount - 1
        DoCmd.SelectObject acForm, Forms(lngCount).Name
        DoCmd.Close
    ' close all reports
    For lngCount = 0 To lngrptCount - 1
        DoCmd.SelectObject acReport, Reports(lngCount).Name
        DoCmd.Close
    Next
    blUnloading = True
    DoCmd.Quit
End Sub
Private Sub Form_Unload(Cancel As Integer)
    If Not blUnloading Then
        Me.Visible = False
        Cancel = True
    End If
End Sub
```


If you are using hidden forms, it's worthwhile considering what happens to these forms if a user attempts to leave the application. In the sample menu form frmFormsMenu, the following code is added to the *Close* event to tidy up the hidden form:

```
Private Sub Form Close()
    ' close frmSilent if it is loaded
    If CurrentProject.AllForms("frmSilent").IsLoaded Then
        Forms("frmSilent").ShutDown
    End If
End Sub
```

#### The Mouse Events

Mouse events occur for the form, the different form sections, and the controls on the form that can be used to control how a user interacts with the data in the form. With these events, you can determine the mouse position, whether the Shift key is being held down, and which mouse button is pressed. There is also a MouseWheel event on the form.

The frmMouseEvents form, which can be found in the companion content that accompanies this chapter, can be used to investigate these events and display the corresponding values in screen controls for the mouse position and state of the buttons, as shown in Figure 6-32.



**Figure 6-32** The *MouseMove* event tracks the position of the mouse; *MouseUp* and *MouseDown* reacts to button events: *MouseWheel* to wheel movements.

The main events used for programming mouse events on a form are those on the detail section, as demonstrated in the following example:

```
Private Sub Detail_MouseDown(Button As Integer, _
Shift As Integer, X As Single, Y As Single)
ShowMouseEvents "Detail", "MouseDown", Button, Shift, X, Y, 0, 0
End Sub
```

# **INSIDE OUT**

#### Mouse events when a form is in Datasheet view

The form mouse events are also activated when the form is in Datasheet view, as shown in Figure 6-33, but not when it is in Form view (except if you click the forms record selector).




Figure 6-33 Mouse events also occur when a form is in Datasheet view.

# Editing and Undo on a Record

As you start to edit a record, the OnDirty event is fired. If you press the escape key or otherwise undo the changes you've made, the OnUndo event fires.

```
OnDirty → OnUndo
```

If you save your changes to an existing record, then the BeforeUpdate event fires, followed by the AfterUpdate event.

## BeforeUpdate and AfterUpdate Events

You can use the BeforeUpdate event to perform validation and accept or reject a user's changes to either a control or record. With the AfterUpdate event, you can take action after the validation has been completed.

```
BeforeUpdate → AfterUpdate
```

The BeforeUpdate event on both a form and the controls on a form are used primarily for validation checking before a value is saved. On a control, the control's *Undo* method can be called to undo any attempted change. On a BeforeUpdate event, the Cancel argument on the procedure call is set to False to reject any changes.

In the frmCustomersBeforeUpdateEvents form (in the companion content), the BeforeUpdate event on the [ZIP/Postal Code] field shows how you can start to build a sophisticated validation routine. This example also shows how the ctrl. Undo method can undo the user's changes (only for that control). This code is intended for countries other than the United States to verify that the first character of the postal code is text (A...Z, a...z). If the first character is not text, it cancels the update and undoes the text typed in by the user:

```
Private Sub ZIP Postal Code BeforeUpdate(Cancel As Integer)
    If Nz(Me.Country_Region) = "USA" Then
        Exit Sub
    Dim IngFirstCharCode As Long
    If Nz(Me.ZIP_Postal_Code) <> "" Then
        lngFirstCharCode = Asc(Left(Me.ZIP Postal Code, 1))
        If (lngFirstCharCode >= Asc("A") And _
            lngFirstCharCode <= Asc("Z")) Or _</pre>
            (lngFirstCharCode >= Asc("a") And _
            lngFirstCharCode <= Asc("z")) Then</pre>
        E1se
            Cancel = True
            Me.ZIP_Postal_Code.Undo
            ' Note don't use Me.Undo unless you want to
            ' undo all changes to the record
```

```
MsgBox "Must start with a letter", vbInformation, _
                    "Change not accepted"
        End If
    End If
End Sub
```

What if a user has not yet entered a value for the Country, but begins to type the code? One solution is to approach this in a similar manner to that of the ContractClass, but this time write a statement to only enable the [ZIP/Postal Code] if the user has entered a [Country/Region]:

```
Sub EnableFields()
    If IsNull(Me.Country_Region) Then
        Me.ZIP_Postal_Code.Enabled = False
    Else
        Me.ZIP_Postal_Code.Enabled = True
    End If
End Sub
Private Sub Country_Region_AfterUpdate()
    EnableFields
End Sub
Private Sub Form_Current()
    EnableFields
End Sub
```

What if a user sets the Country to USA, types in a number for the ZIP code, and then changes the country to France? You can get around this by adding further code to the Country Region AfterUpdate event. An alternative, which would also mean that existing data was validated, is to add code to the form's BeforeUpdate event. We have also added a SetFocus command to move the cursor into the field that needs to be changed:

```
Private Sub Form_BeforeUpdate(Cancel As Integer)
    If Not IsNull(Me.Country_Region) And _
            Nz(Me.Country_Region) <> "USA" Then
       Dim lngFirstCharCode As Long
        If Nz(Me.ZIP_Postal_Code) <> "" Then
            lngFirstCharCode = Asc(Left(Me.ZIP_Postal_Code, 1))
            If (lngFirstCharCode >= Asc("A") And _
                lngFirstCharCode <= Asc("Z")) Or _</pre>
                (lngFirstCharCode >= Asc("a") And _
                lngFirstCharCode <= Asc("z")) Then</pre>
            Else
                Cancel = True
                MsgBox "Postal/Zip Code Must start with a letter", _
                    vbInformation, "Change not accepted"
                Me.ZIP_Postal_Code.SetFocus
            End If
        End If
    End If
End Sub
```

The AfterUpdate event on a form and the controls on a form are used primarily to carry out special activities following an acceptable change to the data, such as controlling the visibility or values in other controls.

## **Locking and Unlocking Controls**

The next code example is the frmCustomersAndOrders form, which illustrates how you can change a form's behavior so that users are forced to either press a function key or a button to unlock the controls for editing. The form contains a call during the Current event to lock all controls against editing as well as a button to enable editing of data in all controls.

This example also illustrates how we can exclude certain controls from this process by using the control's Tag property. This is a very useful property, and you can decide for yourself how best to use it.

The following code has been added to the form:

```
Private Sub cmdEdit Click()
    modFormLockUnlock_LockUnlock Me, False
End Sub
Private Sub Form_Current()
    modFormLockUnlock LockUnlock Me, True
End Sub
```

In a module modFormLockUnlock, we have written a general purpose routine for locking and unlocking the controls on the form, as follows:

```
Sub modFormLockUnlock_LockUnlock(frm As Form, blLockSetting As Boolean)
    ' Locks all the controls on a form against editing
    Dim ctrl As Control
    Dim ctrlSubfrom As Control
    For Each ctrl In frm
        ' not every control supports these properties
       On Error Resume Next
        If ctrl.Tag <> "SkipLock" Then
            ctrl.Locked = blLockSetting
            ' if we have a subform then lock
            ' all controls on the subform
            If TypeOf ctrl Is SubForm Then
                For Each ctrlSubfrom In ctrl.Controls
                    On Error Resume Next
                    ctrl.Locked = blLockSetting
                Next
            End If
       Fnd Tf
    Next
End Sub
```

# **INSIDE OUT**

#### Using Me vs. Screen. Active Form to pass a reference to a form

When calling the procedure <code>modFormLockUnlock\_LockUnlock</code> (detailed in the previous section), the calling form passes a reference to itself by using the special <code>Me</code> keyword. It is tempting in this module to consider <code>Screen.ActiveForm</code> as an alternative method of getting a reference to the active form. However, during the first call to <code>Current</code>, when the form opens, the window is not yet active, and so this reference will fail.

### BeforeInsert and AfterInsert Events


After the first key press on a new record, the BeforeInsert event and then the Dirty event fire.

BeforeInsert → Dirty

If you save your changes to the new record, then the *BeforeUpdate*, *AfterUpdate*, and *AfterInsert* events fire, as illustrated in the following

BeforeUpdate → AfterUpdate → AfterInsert

As an example of coding for these events, frmCustomersBeforeInsert has code added on the BeforeInsert event that retrieves a special unique key value from a lookup table and adds this to the record. This can be used as a method for getting unique key values for data, as shown in Figure 6-34.



**Figure 6-34** When inserting a new record, a key is generated by looking up values in a table that holds the last used keys.

Unique key values are issued from a table of keys, as shown in Figure 6-35.



**Figure 6-35** The unique key can have a prefix and pad out the number with extra zeros, which could be used for a number of tables.

The following example shows the code that added to the *BeforeInsert* event on the form to retrieve a new value for the key:

```
Private Sub Form_BeforeInsert(Cancel As Integer)
   Dim strKey As String
   Dim strField As String
   strKey = modKeys_GetKeyValue("Customers", strField)
   Me(strField) = strKey
End Sub
```

Alternatively, this code can be added to the AfterInsert event, depending on exactly when you need the key issued.

In the code that follows, modKeys\_GetKeyValue looks up the tablename and then obtains the next sequenced key value. It also has some additional features including adding a prefix to the key (for example, Y2000) and padding the number with leading zeros; for example, 1 would become 001. The most important part of the routine is the lock retries to resolve any multi-user conflicts when two or more users try to get the next key at the same time. This process is implemented with a transaction to protect against multiple users requesting keys at the same time; if a transaction fails, it performs a Rollback then issues a DoEvents to allow some time to elapse before trying the transaction again. We have also set a constant to control the maximum number of times that the transaction can be attempted:

```
Function modKeys_GetKeyValue(strTableName As String, _
                             ByRef strKeyFieldName As String) As String
   On Error GoTo Err_Handler
   Const lngMaxLockRetry = 10
   ' Lookup a unique key value from tblTableKeys
   ' for the specified table strTableName
   Dim db As Database
   Dim wks As Workspace
   Dim rst As Recordset
   Dim strKeyPrefix As String
   Dim lngPadKeyZeros As Long
   Dim lngLastUsedKey As Long
   Dim strSelect As String
   Dim KeyValue As String
   Dim IngPad As Long
   Dim lngTryCount As Long
   Set wks = DBEngine(0)
   Set db = wks.Databases(0)
   lngTryCount = 0
   strSelect = "SELECT * FROM tblTableKeys WHERE [TableName] " & _
               " = '" & strTableName & "'"
```

```
retry:
    wks.BeginTrans
    lngTryCount = lngTryCount + 1
    Set rst = db.OpenRecordset(strSelect, dbOpenDynaset)
    With rst
        .Edit
        strKeyPrefix = Nz(!KeyPrefix)
        lngPadKeyZeros = Nz(!PadKeyZeros)
        lngLastUsedKey = Nz(!LastUsedKey)
        ' update the last used key
        log_{astUsedKey} = log_{astUsedKey} + 1
        !LastUsedKey = IngLastUsedKey
        strKeyFieldName = !KeyFieldName
        .Update
    End With
    wks.CommitTrans
    ' build the key
    KeyValue = IngLastUsedKey
    If lngPadKeyZeros <> 0 Then
        ' option to add 0's for padding
        Do While lngPadKeyZeros > Len(KeyValue)
            KeyValue = "0" & KeyValue
        Loop
    End If
    ' option to add a prefix
    KeyValue = strKeyPrefix & KeyValue
    modKeys_GetKeyValue = KeyValue
    Exit Function
Err_Handler:
   ' Retry in event of a locking problem
    If lngTryCount < lngMaxLockRetry Then</pre>
        wks.Rollback
        DoEvents
        GoTo retry
    Else
        ' special handling of what happens here
        MsgBox "Error maximum lock retries reached", vbInformation, _
            "Error Getting Unique Key Value"
        modKeys_GetKeyValue = 0
    End If
End Function
```

### The *Delete* Event

Deleting a record initiates the following event sequence:

Delete → Current → BeforeDelConfirm → AfterDelConfirm

You then have the option of writing code against these events to display your own confirmation messages and suppress the confirmation message that Access displays, such as shown in the following:

```
Private Sub Form_BeforeDelConfirm(Cancel As Integer, Response As Integer)
   If MsgBox("Delete customer " & Me.Company & " ?", vbYesNo, _
                        "Delete Company") = vbYes Then
       Cancel = False
        ' supress the access message box
       Response = acDataErrContinue
   E1se
       Cancel = True
   Fnd Tf
End Sub
```

# **INSIDE OUT**

Using AfterDelConfirm to detect actions by a user when deleting records

In the AfterDelConfirm, you can detect and act upon the earlier action taken in the BeforeDelConfirm event and choices made by the user. To see an example of the following code in action, look at frmRecordsetClone, which is available in the companion content for this chapter (note that to see acDeleteUserCancel condition you would need to remove the code from the BeforeDelConfirm event):

```
Private Sub Form AfterDelConfirm(Status As Integer)
    Select Case Status
        Case acDeleteOK
            ' delete as expected
        Case acDeleteCancel
           MsgBox "Programmer canceled the deletion."
        Case acDeleteUserCancel
            MsgBox "User canceled the deletion."
    End Select
End Sub
```


## KeyPreview and Key Events

You can pass information about what keys the user presses to the form's KeyPress event by setting the KeyPreview property for a form to True. By default this is not set, so when typing into controls, you need to check the keystrokes for each individual control on the form. The KeyPreview feature was added to work around this problem and allow keystrokes to be checked at a single point on the form.

 $KeyDown \rightarrow KeyPress \rightarrow (Dirty if first edit) \rightarrow KeyUp$ 

#### The *Error* Event

The *Error* event allows you to take control of error message boxes that Access displays when a user edits data through the form, as shown in Figure 6-36.



**Figure 6-36** A trappable error when a user tries to delete a record, but the record has related records.

The AccessError function can be used to lookup the Access Error message. By setting the Response flag, you can control whether the built-in error message is also displayed. See the companion content example form, frmRecordsetClone, for this code:

```
Private Sub Form_Error(DataErr As Integer, Response As Integer)

' Respone can be acDataErrContinue or acDataErrDisplay

Dim strErrorMessage As String

If DataErr = 3200 Then

strErrorMessage = AccessError(DataErr)

' replace the default error message box

MsgBox "Unable to delete this record " & strErrorMessage, _

vbInformation, "Operation not Available"

' supress Access error message

Response = acDataErrContinue

End If

End Sub
```

Figure 6-37 shows the new error message. Note that because we looked up the error message, it does not contain the name of the table that contains the related records that blocked the delete action



Figure 6-37 The Access error message box replaced with a custom dialog box.

An example of how this is extremely useful is when you are working with SQL Server; in this case Access displays a generic ODBC error message. If you look in the *Errors* collection and display *Errors(0)*, then you can provide a much better description of the error.

## **Saving Records**

As users move to a new record or a subform, Access automatically saves changes to the record, but during interaction with the form, after the program code makes changes to a record, there will be points in time when you want to force a record to be saved. Several different methods exist for saving a record.

# **INSIDE OUT**

#### Alternative methods for saving records

The first and oldest technique for saving records is to use the SendKeys action to simulate the user pressing the Shift+Enter keystroke combination, which forces the currently active record to be saved. The True argument indicates that the code should wait until the keystrokes have been processed:

SendKey "+{Enter}",True

The second method is to use the RunCommand action:

RunCommand acCmdSaveRecord

Note that if you debug code when using either the RunCommand or SendKeys methods, the application throws error messages indicating that the record cannot be saved (if it is not already being edited). Usually, this means that you need to add an On Error Resume Next before the save actions; the problem with this is in knowing when there has been a genuine error during the save operation.

A third method is to force the record to save by setting the Dirty property of the form to False, as shown in the following:

Me.Dirty = False

In some older systems, you might also see the use of the DoMenuItem command, which simulates the user making a menu selection to save a record.

# Summary

In this chapter, you learned how to program forms by writing code in response to events. Although forms have a large number of events, you will probably find that you spend most of your time programming against a small subset of them. The following presents some of the key events described in this chapter.

- **BeforeUpdate** Used for validating and rejecting attempts to enter or change data.
- AfterUpdate Used to control enable/disable or hide other controls, based on the recent changes or entry of new data.
- **OnOpen** or **OnLoad** Used to set up controls when a form is first used.
- **OnCurrent** Used to make the controls reflect the data when a user moves to a record.
- **Error** Used to intercept errors and provide alternative messages.



# CHAPTER 7

# **Using Form Controls and Events**

Control Events	74	The <i>TreeView</i> Control	295
Combo Boxes	78	The <i>Tab</i> Control	311
List Payer	96		

n Chapter 6, "Using Forms and Events," we introduced events by demonstrating various techniques that are used when programming Microsoft Access 2010 forms. In this chapter, we start by discussing the key programming events that apply to most controls. We then move on to systematically examine programming with more sophisticated controls.

The first control to examine is the combo box. In this section, you look at how to synchronize data displayed in multiple controls and see the various features that can be used for dynamically adding data to the available values in the control.

Next, you look at programming list boxes and handling multiple values in code as compared to the techniques for working with multiple list boxes, and demonstrate how list boxes can be used to behave like a subform.

The section on the *TreeView* control demonstrates how to enhance your application with a hierarchical tree view of data. This section also shows you how to implement drag-and-drop and add graphical images.

The final section in this chapter looks at the *Tab* control. Here, you see how to manage refreshing data across pages and look at building tabs that can dynamically load and unload subforms.

After reading this chapter, you will:

- Understand the general principles of programming for events on controls.
- Be able to undertake advanced programming tasks with more complex controls.

#### Note

As you read through this chapter, we encourage you to also use the companion content sample databases, Controls.accdb and TreeBuilder.accdb, which can be downloaded from the book's catalog page.

### **Control Events**

You interact with a form through its controls, for example, text boxes, command buttons, list boxes, combo boxes, and so on. Controls can have different types of events, although there are some events that are common to most controls. In this section, we will look at how to write code in response to the most commonly used events. In the Controls.accdb database, the form *frmSimpleEvents* contains the code shown in this section.

Having the Control Wizard active when placing a list box, combo box, or option group on a form is usually helpful, but if you are writing Microsoft VBA code in an application the Control Wizard's assistance with the command button is not so helpful because you do not want the macro code that the wizard generates.

When adding an unbound control to a form, Access automatically gives the control a default name such as txt1, and because the control name is concatenated with the event name—for example, txt1\_Click()—and you might also be referring to the control at other points in the code (Me.txt1), it will improve the readability of your code to give the control a more meaningful name, for example, txtTotalOrderValue. If you decide to change a control name after you have written the event code, then you need to change all the other references to the control, including the names of any event handlers for the control (this is a very important point, because after renaming a control that has associated event code, the code will no longer operate unless you also rename each associated event to incorporate the changed control name).

All controls have a default event, which is generated when you add code to your control. For example, when you are in Form design and you have selected a control, right-click the control, select Build Event, and then on the shortcut menu, click Code Builder, Access will write the event stub for the default event; this defaults to generate a *Click* Event, which is often not what you want.

When you want to write code behind an event, you can either click the ellipse button adjacent to the event name and select code builder, or you can click the drop-down menu, select [Event Procedure] (see Figure 7-1), and then click the ellipse button, which takes you straight to the code.




Figure 7-1 Adding code behind a control's event.

Once you have written code behind events on a control, there are additional points to consider when making copies of a control. If you copy and paste a control that has macro code written behind it, the macro is copied with the control; if you copy a control that has VBA written behind its events, the VBA code is not copied. The only exception is if you make a direct reference from the control's event to either a function behind the form or a public function (see Figure 7-2), then when the control is copied, the reference is also copied.




Figure 7-2 Making direct references to a VBA function from a control's event.

A further point to consider when deciding to write code behind events for a control, is that you can instruct a control to call the event code on another control, which saves duplicating units of code:

```
Private Sub cmdCallEvent_Click()
    Me.CurrencyRegion = "Domestic"
    CurrencyRegion_AfterUpdate
End Sub
```

Or calling a validation event:

```
Private Sub cmdCallEvent_Click()
   Me.ExchangeRate = 999
    Dim blCancel As Integer
    ExchangeRate_BeforeUpdate b1Cancel
End Sub
```

### The Click and DblClick Events

The Click and DblClick events are commonly used in programming for a variety of actions particularly when working with a Command button-including creating application navigation to other forms and reports:

```
Private Sub cmdProducts_Click()
    DoCmd.OpenForm "frmProducts"
End Sub
```

DblClick is another popular navigation action to have on controls other than a Command button. For example, you can color certain text boxes a specific color to indicate to the user that a double-click pops up a form that shows more detailed information.

## The BeforeUpdate Event

You can use BeforeUpdate to validate the data that a user has entered and choose to accept or reject the change. In the following code for the form frmSimpleEvents, you see a typical example of validation code written on the BeforeUpdate event for a textbox control:

```
Private Sub ExchangeRate_BeforeUpdate(Cancel As Integer)
    If Nz(Me.ExchangeRate) <= 0 ;</pre>
       Or Nz(Me.ExchangeRate) > 10 Then
        Cancel = True
       Me.ExchangeRate.Undo
       MsgBox "A value between 0 and 10 is required for the exchange rate", _
            vbInformation, "Missing Information"
    End If
End Sub
```

# **INSIDE OUT**

#### Controlling behavior during validation

The BeforeUpdate event of a control has a single parameter called Cancel As Integer. If you set this value to True, you are rejecting any new value a user enters. If you issue the Me.ControlName.Undo command, any changes that the user typed in the control will be undone, and if you issue the Me. Undo command, all changes made to the record since the edit was started will be undone. If the control is unbound—for example, as with the control txtExchangeRate in frmSimpleEvents—then using the Undo methods do not have any effect on the data being displayed (the code Me.txtExchangeRate. Undo fails to undo the change to the data).

Other points to note are that while you are within the BeforeUpdate event, you are not allowed to either force the record to be saved or shift focus to any other control (the After Update event can be used to save the record or shift focus). A useful property of the control is Me.ControlName.OldValue, which gives the OldValue before the user attempted to change the data (the sample code for this is in the frmSimpleEvents form in the Controls. accdb database).

### The AfterUpdate Event

The AfterUpdate event is the post update event for the control, for which the most common uses is to hide or show other controls by using the Visible property, or enable or disable other controls by using the Enabled property (which prevents or allows a shift of focus into a control), or lock or unlock other controls by using the Locked property to prevent or allow data to be changed. Because you might want to change these settings for particular controls when each record is displayed, it is a good idea to place the code in a procedure

that can be called both from the form's OnCurrent event and the AfterUpdate event of a control, as demonstrated in the following:

```
Sub DisplayCurrencyRates()
    If IsNull(Me.cboCurrencyRegion) Then
       Me.txtExchangeRate.Visible = False
    E1se
       Me.txtExchangeRate.Visible = True
    End If
    If Nz(Me.cboCurrencyRegion) <> "Domestic" Then
       Me.txtExchangeRate.Enabled = True
    E1se
       Me.txtExchangeRate.Enabled = False
    End If
End Sub
```

Having a separate subroutine means that you can call this code both after data is changed and when displaying a different record:

```
Private Sub cboCurrencyRegion_AfterUpdate()
    DisplayCurrencyRates
End Sub
Private Sub Form Current()
   DisplayCurrencyRates
End Sub
```

Notice that with the cboCurrencyRegion control in code, you can refer to the bound value either as Me.cboCurrencyRegion or Me.CurrencyRegion. In the second case, you are referencing the field in the underlying Recordset, and in the first case, you are referring to the bound control. This flexibility can often be confusing.

# The GotFocus and LostFocus Events

The focus events can be programmed to create actions when a user clicks into or out of a control. It is also possible to use SetFocus to move focus to another control; this is often used within Click and AfterUpdate events. Another common use of Focus events is to apply conditional logic (for example in a continuous form) to prevent a user from clicking into a particular field under certain conditions; in this case, you can use the SetFocus events to move a user into another field:

```
Private Sub cmdShiftFocus Click()
    Me.CurrencyRegion.SetFocus
End Sub
```

### Combo Boxes

In this section, you will begin by looking at how two combo box controls can be linked together so that the choice made in one control effects the available data in the second control, this technique can also be used with subforms and other types of controls. You will also look at how the RowSource of a combo box can be manipulated, the column properties, and various methods for adding to the data being displayed in the control.

# Synchronizing Data in Controls

This example looks at synchronizing controls so that a selection made in one control changes what is available in another control. There are several ways to link the controls together, but the key element in all of the methods is for a selection in the first box to Requery the data to be displayed in the second box.

The sample frmComboSynchronised form contains two unbound combo boxes: the first is called cboCategory, and the second is cboProduct, as shown in Figure 7.3.




Figure 7-3 Controls can be set up so that they depend on the values in other controls; the data choices are then synchronized.

The RowSource in the second combo box has been tied to filter by the control value selected in the first combo box, as shown in Figure 7-4.

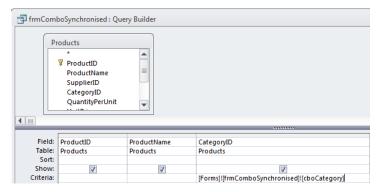


Figure 7-4 Using the Query grid for the RowSource to make a data choice in one control filters the available data choices in a second control.

Before changing the RowSource in the second combo box, ensure that you name the controls. After changing the RowSource, you need to add some code on the AfterUpdate for the first combo box, as shown in the following:

```
Private Sub cboCategory_AfterUpdate()
   Me.cboProduct.Requery
   IF Me.cboProduct.ListCount > 0 Then
       Me.cboProduct = Me.cboProduct.ItemData(0)
       Me.cboProduct.SetFocus
       Me.cboProduct.Dropdown
   End If
End Sub
```

The first command, Requery, instructs the second controls data source to be updated, and because the value in cboCategory has changed and the RowSource uses this control as a filter, the results in the second control will be updated.

# **INSIDE OUT**

Setting combo box defaults and displaying the drop-down list

By using the ItemData property of a combo box, you can iterate through the values for the bound column from 0 to ListCount-1. This can be tested by using the following code:

```
Dim lngItem As Long
For lngItem = 0 To Me.cboProduct.ListCount - 1
   Debug.Print Me.cboProduct.ItemData(lngItem)
Next
```

In the main example code block, the value ItemData(0) forces the control to display the first value (if it has a value available). This must be protected by checking the ListCount property. The SetFocus command forces the mouse to move into the target combo box, and the DropDown method forces the control to display (drop down) a selection of choices.

One disadvantage of this code is that the second combo box RowSource explicitly refers to the form by name. Unfortunately, we cannot replace the name of the form in the Row-Source with the Me keyword. The frmComboSyncronised2 form illustrates a solution to this problem, wherein you use VBA to rewrite the RowSource SQL before updating the control, as demonstrated here:

```
Private Sub cboCategory AfterUpdate()
   Me.cboProduct.RowSource = "SELECT ProductID, ProductName" & _
        " FROM Products WHERE CategoryID = " & Me.cboCategory
   Me.cboProduct.Requery
```

```
IF Me.cboProduct.ListCount > 0 Then
        Me.cboProduct = Me.cboProduct.ItemData(0)
        Me.cboProduct.SetFocus
        Me.cboProduct.Dropdown
    End If
End Sub
```

This method can equally be used with one text box and a combo box, or other combinations of controls.

# Combo Box RowSource Type

A combo box can source data from a Table/Query, Value List, or Field List. It is also possible to use program code that utilizes a callback function to gain complete control of how a combo box is populated. (This is discussed in Chapter 17, "Developing Applications.") With the Table/Query, you can refer to a query, table, or specify an explicit SQL string. Using the Value List, you can specify a set of explicit list of data values to display.

In the previous example, you saw combo boxes that displayed data from a table by using SQL. In the following example, you see how a list of explicit values can be displayed in a combo box. Figure 7-5 shows the frmComboBoxList form, where we have set the Row-SourceType to a Value List and supplied a string of values for the RowSource.




Figure 7-5 Supplying a list of values to a combo box.

The third option of using a Field List is less often used, but it can be useful if you want to develop your own wizard style forms; for example, listing columns from a selected table. The sample frmComboFieldList form lists all available forms in the database, and after selecting a form, it displays a list of all the fields in each form's RecordSource. Figure 7-6 shows the result of building the list of values dynamically.




Figure 7-6 The second combo box displays a list of fields; the data for the first combo box is created with program code.

You begin by developing a routine that uses the CurrentProject object to gather a list of all the forms; the text names are surrounded by double quotes and delimited by a semicolon. These are then assigned to the RowSource of the first combo box, which has a Row-SourceType of Value List:

```
Sub BuildListOfForms()
   Dim strForms As String
    Dim IngForm As Long
    For lngForm = 0 To CurrentProject.AllForms.Count - 1
        If CurrentProject.AllForms(lngForm).Name <> Me.Name Then
            If strForms <> "" Then strForms = strForms & ";"
            strForms = strForms & """" & _
                CurrentProject.AllForms(lngForm).Name & """"
        End If
    Next
    Me.cboForm.RowSource = strForms
```

After the user has selected the form, the controls AfterUpdate event opens the target form in Design mode to read the SQL in the form's RecordSource, which is then set to the Row-Source of the second combo box. Because the second combo box has a RowSourceType of Field List, it automatically displays the list of field names from the SQL, as demonstrated here:

```
Private Sub cboForm_AfterUpdate()
   Dim strSQL As String
   Dim frm As Form
    ' find the recordsource for the target form
    ' we need to open the form in design view to get
    ' this information
    If cboForm <> "" Then
        DoCmd.Echo False
       DoCmd.OpenForm cboForm, acDesign
       Set frm = Forms(cboForm)
        strSQL = frm.RecordSource
       DoCmd.Close acForm, cboForm
       DoCmd.Echo True
       Me.cboField.RowSource = strSQL
       Me.cboField = Null
       Me.cboField.Requery
    End If
Fnd Sub
```

Code is then added to the forms *Open* event to populate the first combo box, as shown in the following:

```
Private Sub Form_Open(Cancel As Integer)
    BuildListOfForms
End Sub
```

If you want to ensure that a user cannot select from the second combo box until a selection is made in the first box, set the Enabled property of the second combo box to False during the form's Open event, and then set it to True before shifting focus in the AfterUpdate event for the first control.

#### Combo Box Columns

Combo boxes are often used to hold more columns than they display (setting any column width to 0 hides the column). This means that additional data values can be easily looked up by using the Columns property of the combo box (see the form frmComboBoxColumns), as shown in Figure 7-7.

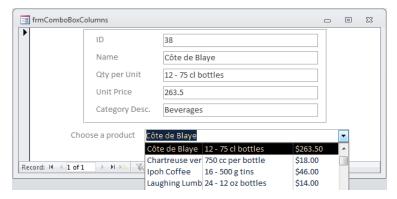


Figure 7-7 If you load additional columns into a combo box, other associated data values can be easily referenced in code.

Additional data values can be read by indexing the Column() property that applies to the currently selected row, as illustrated in the following:

```
Private Sub cboProduct_AfterUpdate()
    If Not IsNull(Me.cboProduct) Then
       Me.txtID = Me.cboProduct.Column(0)
       Me.txtProductName = Me.cboProduct.Column(1)
       Me.txtQuantityPerUnit = Me.cboProduct.Column(2)
       Me.txtUnitPrice = Me.cboProduct.Column(3)
       Me.txtCategoryDescription = Me.cboProduct.Column(4)
    End If
End Sub
```

# **INSIDE OUT**

Solving problems when working with a multi-value field connected to a combo box

Combo boxes do not have a MultiSelect property; however, if you bind one to a multivalue field, you can make multiple selections (see the sample form frmComboMulti Valued). There are restrictions on coding here.

It is only possible to read a value for the ItemSelected.Count property with event code written behind an event on the combo box; code on any other control will always display 0. It is possible to iterate over the ItemSelected collection for the combo box (note that For ... Each is not supported), and the value in Column(0,row) represents the check box value that is automatically displayed when bound to a multi-value data field. The following code can be used to display the column values for all the selected choices:

```
For lngCount = 0 To Me.cboCategoryID.ItemsSelected.Count - 1
   varItem = Me.cboCategoryID.ItemsSelected(lngCount)
   Debug.Print Me.cboCategoryID.Column(0, varItem), _
       Me.cboCategoryID.Column(1, varItem), _
       Me.cboCategoryID.Column(2, varItem)
Next
```

To examine the selections from any events when the combo box does not have focus, you should use Recordset code, as shown in the following:

```
Private Sub cmdRecordSet_Click()
    ' uses a recordset to get the multiple values
    Dim rst As Recordset2
    Dim rstChild As Recordset2
    Set rst = Me.RecordsetClone
    ' locate the record
    rst.FindFirst "[ProductId] = " & Me.ProductID
    Set rstChild = rst!CategoryID.Value
    Do While Not rstChild.EOF
        Debug.Print rstChild(0)
        rstChild.MoveNext
    Loop
    rstChild.Close
    Set rstChild = Nothing
    rst.Close
    Set rst = Nothing
End Sub
```

The rstChild.RecordCount provides the number of selected values.

# **Value List Editing**

In the Property Sheet dialog box, on the Data tab, if your combo box is using the *Value List* setting for the Row Source Type, then by setting Limit To List to *No* and ensuring that the column width of the first column is not 0, users can type in values that are not in the list of choices. If you want to restrict users to entering only the values that are in the list, set Limit To List to *Yes* and set Allow Value List Edits to *No*, as shown in Figure 7-8.




Figure 7-8 Use Limit To List to restrict values to only the available choices.

Another option is to set Limit To List to Yes, but allow the user to add to the list by setting Allow Value List Edits to Yes. This is equivalent to going into Design mode and editing the RowSource for the value List. You will find that this mechanism works best when you do not have any hidden columns and when the combo box displays a single column (see the frmComboBoxValueListEditing form for the sample code). Figure 7-9 shows the built-in popup box for adding new items to the list.





Figure 7-9 After entering values, the combo box is automatically updated with the new choices, but you will need to then select any new values added when editing the list.

Be aware that when a user makes changes this way, he is changing the actual design of the form, so when closing the form, he is prompted to save the design changes, as shown in Figure 7-10.




**Figure 7-10** Altering the list values changes the design of the form, so the user is asked if he wants to save the changes when closing the form.

# **Table/Query Editing**

If you have a Row Source Type that is of type Table/Query, several techniques are available to enable users to add to the list of choices.

The first method is to specify a List Items Edit Form. With this method, if a user tries to type in a value that is not in the list, a prompt appears asking if she wants to add the value, and then the corresponding form is displayed. After adding a new record and closing the popup form, the combo box is automatically refreshed to show any changes to the available items, as shown in Figure 7-11.



**Figure 7-11** Specifying *ProductsAdd* as the form to display when adding values that are not in the list.

After the new value has been added, the user then needs to select the new value.

When viewing a drop-down list in Form view, users can also right-click the control and select Edit List Items, or as shown in Figure 7-12, click the edit icon displayed when the list is displayed (see the *frmComboBoxQueryEditing* form).



**Figure 7-12** The user can click the edit icon in the lower-left corner to display the *ProductsAdd* form.

The second technique is to program a solution by using the NotlnList event (see the frmComboBoxQueryEditingNotInList form). The following code illustrates how you can programmatically add a value to the list that was not previously one of available choices:

```
Private Sub cboProduct_NotInList(NewData As String, Response As Integer)
    ' acDataErrDisplay - use built in message box
    ' acDataErrContinue - display a custom message
    ' acDataErrAdded - add new item to the list
    Dim db As Database
    Dim rst As Recordset
    Set db = CurrentDb
    Set rst = db.OpenRecordset("Products", dbOpenDynaset)
    rst.AddNew
    rst!ProductName = NewData
    rst.Update
    Response = acDataErrAdded
End Sub
```

### **List Boxes**

In this section, you look at working with list boxes. You will see how list boxes can be used to allow users to easily make multiple selections and an alternative approach using two synchronized list boxes, in which the second list box contains the selections made in the first list box. The last part of this section explores using list boxes to mimic the role played by subforms.

### **Multiple Selections**

You can configure a list box to allow a user to select either a single item or multiple items (see Figure 7-13). To restrict selection to one list item only, in the Property Sheet dialog box, on the Other tab, set Multi Select to Simple; the user can click an individual item to select or deselect that item. If you set Multi Select to Extended, the user can press the Shift key to select multiple, adjacent list items, or press the Ctrl key to select multiple, non-adjacent items.




Figure 7-13 Multi Select can be set to Simple or Extended. When set to Extended, the user can press the Shift or Ctrl keys to select multiple list items.

You can add buttons to your form that will assist users when working with multiple selections, as shown in Figure 7-14.

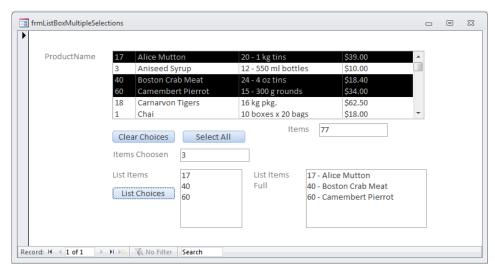


Figure 7-14 You can add buttons to quickly clear choices or select all available choices.

# **INSIDE OUT**

Key properties when working with multiple selections in a list box

Multiple-selection list boxes are more complex to work with than single-selection list boxes for a number of reasons. The following list presents a summary of the key properties of multiple-selection list boxes:

- **ListCount** Counts the total number of items in the list.
- Selected() Boolean collection, one for each row, read/write, indicating whether an item in the list is selected, use either a For ... Each with a variant or a long integer to index the array.
- ItemsSelected.Count Number of selected choices.
- **ItemsSelected** Variant collection of the selected items. Use a variant variable to read values from this collection.
- ItemData(row) Returns the data in the bound column for each list item
- **Column(index,row)** The values for the column for any item in the list box.

With a multiple-selection list box, the actual control value does not have a simple meaning and cannot be directly manipulated.

Setting the control source on an unbound text box can display the total number of items available for selection, as shown in the following:

```
=[lstProducts].[ListCount]
```

The Selected collection can be used to clear or set items as having been selected; there is one entry in this collection for each item in the list. The following code clears all choices in the list:

```
Private Sub cmdClearChoices_Click()
    ' clear any choices
    Dim lngItem As Long
    For lngItem = 0 To Me.lstProducts.ListCount
       Me.lstProducts.Selected(lngItem) = False
    Next
End Sub
```

To select all available choices, use this code:

```
Private Sub cmdSelectAll Click()
    ' select all choices
   Dim lngItem As Long
    For lngItem = 0 To Me.lstProducts.ListCount
       Me.lstProducts.Selected(lngItem) = True
    Next
End Sub
```

To establish which items have been selected, you have two options: you can scan through the Selected collection and extract the identifier for each item, or you can scan through the ItemsSelected collection using a variant variable, which can then be used as an index into the control's Columns to extract other column values for the selected items. The following code shows both methods being used to build a string that contains the choices that are displayed in a text box; vbCrLf is used to split the results over multiple lines:

```
Private Sub cmdListChoices Click()
   Dim strSelections As String
   ' list choices made
   Dim lngItem As Long
   strSelections = ""
   For lngItem = 0 To Me.lstProducts.ListCount
       If Me.lstProducts.Selected(lngItem) Then
            If strSelections <> "" Then
                strSelections = strSelections & vbCrLf
            strSelections = strSelections & Me.lstProducts.ItemData(lngItem)
       End If
   Next
   Me.txtListOfChoices = strSelections
   ' more efficent would be to use the ItemSelected collection
   strSelections = ""
```

```
Dim varItem As Variant
   For Each varItem In Me.lstProducts.ItemsSelected
       If strSelections <> "" Then
            strSelections = strSelections & vbCrLf
       End If
        ' include data in first 2 columns
        strSelections = strSelections & Me.lstProducts.Column(0, varItem) & _
                        " - " & Me.lstProducts.Column(1, varItem)
   Me.txtListOfChoicesFull = strSelections
End Sub
```

# **INSIDE OUT**

Making the selected choices in a list box that is bound to a multi-value control appear at the top of the list.

When paging through records containing a list box that is bound to a multi-value field, it is possible to write VBA code that ensures that all the selected items are displayed at the top of the list (see the sample form frmListBoxMultiValuedNoChanges).

The technique is to construct a union query that adds together first the selected choices and then the non-selected choices, and then sort the data appropriately.

The following code displays the selected choices and then all other available choices:

```
Sub Build_ListRowSource()
    Dim strSQL As String
    Dim strChoosenSet As String
    Dim varItem As Variant
    strChoosenSet = ""
    ' Build a list of everything Choosen
    For Each varItem In Me.lstCategoryID.ItemsSelected
        If strChoosenSet <> "" Then
            strChoosenSet = strChoosenSet & ","
        strChoosenSet = strChoosenSet & Me.lstCategoryID.ItemData(varItem)
    If strChoosenSet <> "" Then
        strChoosenSet = "IN (" & strChoosenSet & ")"
        ' order Choosen items at the begining
        strSQL = "SELECT Categories.CategoryID, Categories.CategoryName, " & _
                 " Categories.Description, O As [Selected] FROM Categories" & _
                    " WHERE CategoryID " & strChoosenSet & \_
                    " UNION " & _
        "SELECT Categories.CategoryID, Categories.CategoryName, " & _
                 " Categories.Description, 1 as [Selected] FROM Categories" & _
                    " WHERE CategoryID NOT " \& strChoosenSet \& _
                    " ORDER BY [Selected], CategoryName "
```

```
E1se
        strSQL = "SELECT Categories.CategoryID, Categories.CategoryName, " &
                " Categories.Description, 1 as [Selected] FROM Categories " & _
                    " ORDER BY [Selected], CategoryName "
    End If
    ' Note we require to add our selected Field to the
    ' Categories table, even when we are not using it
    ' Otherwise the Order By things that [Selected]
    ' is a parameter, when the form is first opened
   Me.1stCategoryID.RowSource = strSQL
    Me.lstCategoryID.Requery
End Sub
```

In the preceding example, we created a field called [Selected] for controlling the ordering of the data. To prevent the ListBox control with the multi-valued field from prompting for a parameter when first opening the form, we have had to add this as a physical field in the table from which we are selecting.

## Multiple Selections with Two List Boxes

As an alternative method for making multiple selections, you can use a list box that is set for simple selection, and then display the values in a second list box, as shown in Figure 7-15.

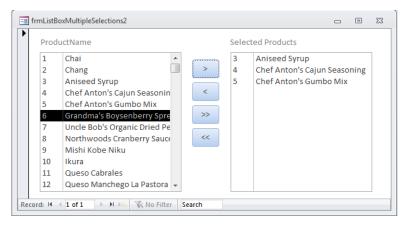


Figure 7-15 By using two list boxes, items that the user has already selected remain visible in the second box as he continues to scroll and select items in the first list box.

For the list box on the left, the RowSourceType is set to a Table/Query; for the list box on the right, RowSourceType is set to Value List. To show that data is selected in the second list box involves manipulating the RowSource for the control as different choices are being made.

To clear all selected choices, set the *RowSource* to an empty string, as shown here:

```
Private Sub cmdUnpickAll_Click()
    ' clear all choices
    Me.lstProductsSelected.RowSource = ""
End Sub
```

To pick all the available choices, scan through all the available items, and then add them to the *RowSource*, as demonstrated in the following:

```
Private Sub cmdPickAll Click()
   Dim strItem As String
   Dim lngItem As Long
   Me.1stProductsSelected.RowSource = ""
   For lngItem = 0 To Me.lstProducts.ListCount - 1
        strItem = Me.lstProducts.Column(0, lngItem) & ";""" & _
                    Me.lstProducts.Column(1, lngItem) & """;"
       Me.lstProductsSelected.RowSource = Me.lstProductsSelected.RowSource & _
                                            strItem
   Next
End Sub
```

To select an individual item, add the new item to the RowSource. The second part of this code unit advances the highlighted row in the available products to the next available entry, as illustrated in the following:

```
Private Sub cmdPick Click()
    ' add current item to selected list
   Dim strItem As String
   strItem = Me.lstProducts.Column(0) & ";""" & _
               Me.lstProducts.Column(1) & """;"
   ' only add if not already in the list
   If InStr(1, Me.lstProductsSelected.RowSource, strItem) = 0 Then
       Me.lstProductsSelected.RowSource = Me.lstProductsSelected.RowSource & _
                                        strItem
   End If
   ' move selection down the list
    ' optional step
   ' find next item
   Dim lngItem As Long
   For lngItem = 0 To Me.lstProducts.ListCount - 1
       If CStr(Me.lstProducts) = Me.lstProducts.ItemData(lngItem) Then
           If lngItem = Me.lstProducts.ListCount - 1 Then
                ' back to top of list
               Me.lstProducts = Me.lstProducts.ItemData(0)
           Else
               Me.lstProducts = CLng(Me.lstProducts.ItemData(lngItem + 1))
               Exit For
           End If
        End If
   Next
End Sub
```

To remove a selection, remove the string from the RowSource by using the Replace string function:

```
Private Sub cmdUnPick Click()
   ' locate and remove the current choice
   Dim strItem As String
   strItem = Me.lstProductsSelected.Column(0) & ";""" & _
           Me.lstProductsSelected.Column(1) & """;"
   Me.lstProductsSelected.RowSource =
               Replace(Me.lstProductsSelected.RowSource, strItem, "")
End Sub
```

### Using the List Box as a Subform

Some developers chose to use list boxes rather than subforms. The main reason for this is to keep the form lightweight. In addition to using a list box, you might decide to only bind the list boxes to display data at certain points when the user is interacting with the form.

One convenient feature of a list box is that when you call a Requery on it, the currently selected item remains highlighted. If you want to provide the ability to add or edit records, then you need a pop-up form to display the record's details. For example, you might decide to limit the details that are presented in the list box but use the pop-up to display or edit the record's details in their entirety.

The frmListBoxAsASubform form shown in Figure 7-16 contains a list box with some additional code to open a detailed form when required.

Product Name	Unit Price	Units In Stock	Units On Order	*
Chai	\$18.00	39	0	
Chang	\$19.00	17	40	
Aniseed Syrup	\$10.00	13	70	
Chef Anton's Cajun Seasoning	\$22.00	53	0	
Chef Anton's Gumbo Mix	\$21.35	0	0	
Grandma's Boysenberry Spread	\$25.00	120	0	
Uncle Bob's Organic Dried Pears	\$30.00	15	0	-

Figure 7-16 A list box configured to function like a subform.

The following code is added behind the delete button:

```
Private Sub cmdDelete Click()
   ' delete the item and refresh the list
   CurrentDb.Execute "DELETE * FROM Products WHERE " & _
                        "[ProductID] = " & Me.lstProducts
   Me.1stProducts.Requery
End Sub
```

To enable a record for editing, you can write the following code on the DblClick event for the list box, behind the Edit button:

```
Const strTargetForm = "frmListBoxAsASubformDetails"
Const strSourceControl = "lstProducts"
Private Sub cmdEdit_Click()
    ' open a detail form for editing
    Dim frm As Form
    Dim strWhere As String
    If IsNull(Me.lstProducts.Column(0)) Then
        Exit Sub
    End If
    strWhere = "[ProductID] = " & Me.lstProducts.Column(0)
    DoCmd.OpenForm strTargetForm, , , strWhere
    Set frm = Forms(strTargetForm)
    frm("txtCallingForm") = Me.Name
    frm("txtCallingControl") = strSourceControl
    Set frm = Nothing
End Sub
```

The code for editing a record needs to open the target editing form and pass values for the calling form and calling control. By using constants for some of the names, you begin to make the code more general purpose and reduce the amount of code that you need to write. There are several ways to pass values to a target form, and this technique of writing values into controls has the added benefit of helping to debug an application (once debugged, you can set the visibility of the controls to False). Figure 7-17 shows a pop-up detail form.




Figure 7-17 The controls in the header are unbound and hidden from the user.

Code is then required on the form's Close or Unload events to refresh the calling form's control:

```
Private Sub Form Unload(Cancel As Integer)
    ' requery the calling forms control
    Forms (Me.txtCallingForm).Controls (Me.txtCallingControl).Requery
    If Not IsNull(Me.txtAdding) Then
        ' force list box to display new selection
        Forms (Me.txtCallingForm).Controls (Me.txtCallingControl) = Me.ProductID
    End If
End Sub
```

On the calling form, behind the Add button, add the following code:

```
Private Sub cmdAdd_Click()
    ' open form for adding a new product
    Dim frm As Form
    DoCmd.OpenForm strTargetForm, , , , acFormAdd
    Set frm = Forms(strTargetForm)
    frm("txtCallingForm") = Me.Name
    frm("txtCallingControl") = strSourceControl
    frm("txtAdding") = "Adding"
    Set frm = Nothing
End Sub
```

As a bonus to the user, the code in the Form\_Unload event also passes a value to instruct the target form to highlight the last new record (just one of many enhancements that can be added).

# **INSIDE OUT**

Using a list box as a subform to allow multiple records to be selected for editing

You can extend the idea of using a list box as a subform by setting the Multi Select property to Simple to highlight multiple records. Then by adding some VBA code, you can pop up a form that filters to display the multiple records for editing as a group.

The sample form frmListBoxAsASubform2 shows this interesting extension where Multi Select is set to Simple. We have also placed the editing routine in a subroutine called Edit-Selections to prevent repeating the code behind the button and on the DblClick event:

```
Sub EditSelections()
    ' open a detail form for editing
    ' this version supports multiple selections
    ' of records for editing
    Dim frm As Form
    Dim strWhere As String
```

```
If IsNull(Me.lstProducts.Column(0)) Then
        Exit Sub
    End If
    ' Build a list of records for editing
    strWhere = ""
    Dim varItem As Variant
    For Each varItem In Me.lstProducts.ItemsSelected
        If strWhere <> "" Then
            strWhere = strWhere & ","
        End If
        strWhere = strWhere & Me.lstProducts.Column(0, varItem)
    Next
    strWhere = "[ProductID] IN(" & strWhere & ")"
    DoCmd.OpenForm strTargetForm, , , strWhere
    Set frm = Forms(strTargetForm)
    frm("txtCallingForm") = Me.Name
    frm("txtCallingControl") = strSourceControl
    Set frm = Nothing
End Sub
Private Sub cmdEdit_Click()
    EditSelections
End Sub
Private Sub lstProducts_DblClick(Cancel As Integer)
    EditSelections |
End Sub
```

In this second example, we have also set the RowSource of the list box to an empty string, and hidden the associated buttons. We have then provided a button on the form that calls the following routine to make the list box available for use:

```
Sub BindListBox()
   Dim strSQL As String
   strSQL = "SELECT [ProductID], [ProductName], [UnitPrice], " & _
             "[UnitsInStock],[UnitsOnOrder] FROM Products "
   Me.1stProducts.RowSource = strSQL
   Me.lstProducts.Visible = True
   Me.cmdAdd.Visible = True
   Me.cmdDelete.Visible = True
   Me.cmdEdit.Visible = True
End Sub
```

## The *TreeView* Control

The sample database TreeBuilder.accdb, contains the form frmNodeBuilderWithImages, which present an example of using the TreeView control (see Figure 7-18) and demonstrates a number of its features.

#### Note

The TreeView control and other 32-bit ActiveX controls are not supported in Microsoft Office 64 bit.

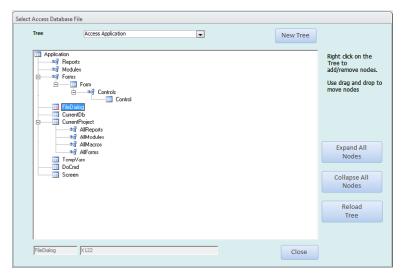


Figure 7-18 The TreeView control can be used as an application menu or for manipulating hierarchical data (as shown here).


## Adding the TreeView Control

Begin with a blank form. On the Design tab, click ActiveX Controls, as shown in Figure 7-19.



Figure 7-19 The option on the Design tab to add ActiveX controls to a form.

The Insert ActiveX Control dialog box opens (see Figure 7-20), in which you can locate and select the Microsoft TreeView Control (note that your computer might have more than one version of this control).



**Figure 7-20** Select a version of the ActiveX control to be installed on any computers that will use the application.

Once you have added the control to the form, you can resize it to the required size. Figure 7-21 shows the control added to a form at its default size.




Figure 7-21 The *TreeView* control when it is first added to a form.

After adding the control, in the form's class module, add in the appropriate reference that will be needed as you start programming the control, as shown in Figure 7-22.




Figure 7-22 Selecting the Microsoft Windows Common Controls in the list of references.

When adding references, you might need to use the Browse button to locate a particular file, but the TreeView control, which is contained in the Microsoft Windows Common Controls, should be in the list of available references.

## Populating the Tree

The companion content contains a table called tblTreeNode that holds the data to be displayed in multiple trees of data. Figure 7-23 shows the tblTreeNode, which in this example has been filtered for tree number 2. The nodes have a relative order reading from top to bottom, and each node holds the identifier of its parent node (ParentKey field).

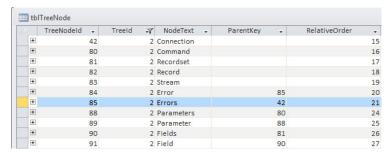


Figure 7-23 Create your own table of data, which will be loaded into the TreeView control.

In the form, you add some basic code to construct the nodes in the tree. It is simpler at this point to add all the nodes without specifying the exact parent/child structure, which can be subsequently added. The nodes need to have a text key, so a simple text prefix of "X" is added to the node keys. You begin by defining variables and constants at the top of the module, as shown in the following:

```
Dim tv As TreeView
Dim lngOrder As Long
Dim lngTreeId As Long
Dim db As DAO.Database
Dim rst As DAO.Recordset
Const NodePrefix = "X"
```

Code is the added to the *Open* and *Close* events to initialize and terminate your variables:

```
Private Sub Form_Open(Cancel As Integer)
    lnaOrder = 0
    Set tv = Me.TreeView0.Object
    lngTreeId = 2
    Set db = CurrentDb
    LoadTheTree
End Sub
Private Sub Form_Close()
    db.Close
    Set db = Nothing
    Set tv = Nothing
End Sub
```

The LoadTheTree routine generates the nodes from the RecordSet, as illustrated here:

```
Sub LoadTheTree()
   ' loads a specified Tree
   Dim strParentkey As String
   Dim strNodeKey As String
   Set rst = db.OpenRecordset("SELECT * FROM tblTreeNode " & _
        "WHERE [TreeId] = " & lngTreeId & _
       " ORDER BY RelativeOrder", dbOpenDynaset)
   tv.Nodes.Clear
   If rst.EOF Then
       Exit Sub
   End If
   Do While Not rst.EOF
        strNodeKey = NodePrefix & rst!TreeNodeId
       tv.Nodes.Add , , strNodeKey, rst!NodeText
        rst.MoveNext
   Loop
End Sub
```

Figure 7-24 shows the tree view after a list of nodes has been added to the control, but the parent/child relationships have not been established.




Figure 7-24 Initially you load the tree with all nodes.

## **INSIDE OUT**

Quickly loading parent/child-related data into a *TreeView* 

Although it is possible to build a tree of data by positioning each child record correctly as it is added to the tree, this can be difficult, because there is no easy mechanism in Access to produce the data from a single table in a hierarchical form, and you cannot specify a relationship to a node that is not already loaded in the tree. It is simpler to first add all the nodes and then edit each one, specifying the relationship to the parent node; once all the nodes are created, the order in which relationships are constructed is not important.

Use the Add method to populate the tree, which creates each node, as demonstrated in Figure 7-25.

```
tv.Nodes.Add
            Add([Relative], [Relationship], [Key], [Texf], [Image], [SelectedImage]) As Node
```

Figure 7-25 Creating nodes by using the Add method.

The next step is to modify the LoadTree routine by adding the following code, which maps the parent child relationships for the nodes. Keep in mind that you need to ensure that you have already created a node before referencing it as a parent node:

```
rst.MoveFirst
Do While Not rst.EOF
    If Nz(rst!Parentkey) <> 0 Then
        strNodeKey = NodePrefix & rst!TreeNodeId
        strParentkey = NodePrefix & rst!Parentkey
        Set tv.Nodes(strNodeKey).Parent = tv.Nodes(strParentkey)
    End If
    rst.MoveNext
Loop
```

This will then render the tree with the correct structure. Once you have this code working, it is useful to add a *DoCmd.Echo False* at the beginning of the *LoadTree* routine and a *DoCmd. Echo True* at the end of the routine. This prevents screen flicker as the tree is rendered and re-organized, as shown in Figure 7-26.





Figure 7-26 The *TreeView* control showing the hierarchical organization of the data.

## **Adding Graphics**

To display images in the *TreeView* control, add an *ImageList* ActiveX control to the form, as shown in Figure 7-27.



**Figure 7-27** Adding the *ImageList* ActiveX control to hold the images that will be used by the tree.

Next, you need to prepare a set of graphical images for each type of node. Each type has two images: one for when the node is selected, and the other for when it is not selected.

In the form's Open event, load the images from file into the ImageList control, as shown here:

```
Dim imgListObj As ImageList
```

The *Open* event is then changed to the following:

```
Private Sub Form_Open(Cancel As Integer)
   lngOrder = 0
   Set tv = Me.TreeView0.Object
   lnqTreeId = 2
   Set db = CurrentDb
   Set imgListObj = Me.ImageList1.Object
   imgListObj.ListImages.Add 1, "Object",
       LoadPicture(CurrentProject.Path & "\Object.bmp")
   imgListObj.ListImages.Add 2, "ObjectSelected", _
       LoadPicture(CurrentProject.Path & "\ObjectSelected.bmp")
   imgListObj.ListImages.Add 3, "Collection", _
       LoadPicture(CurrentProject.Path & "\Collection.bmp")
   imgListObj.ListImages.Add 4, "CollectionSelected", _
       LoadPicture(CurrentProject.Path & "\CollectionSelected.bmp")
                                                                         LoadTheTree
End Sub
```

In the tblTreeNodes table, three more columns have been added to hold the references to the images to display as well as a flag to indicate whether the node is expanded by default, as shown in Figure 7-28.

	□									
			NodeText	v	ImageNumber	~	SelectedImageNumber	⊽	Expanded	$\nabla$
		+	Connection			1		2	<b>V</b>	
		+	DBEngine			1		2	<b>V</b>	
		+	Workspace			1		2	<b>V</b>	
i		+	Errors			3		4		

Figure 7-28 You can create your own fields in your table to record which images to display on any node and whether the nodes are initially displayed as expanded.

You need to make the following change to the loop that loads the nodes in the *LoadTree* processing routine:

```
tv.ImageList = imgListObj
Do While Not rst.EOF
   strNodeKey = NodePrefix & rst!TreeNodeId
   If Nz(rst!ImageNumber) <> 0 And Nz(rst!SelectedImageNumber) <> 0 Then
        ' two images
        tv.Nodes.Add , , strNodeKey, rst!NodeText, _
            CLng(rst!ImageNumber), CLng(rst!SelectedImageNumber)
   Else
        If Nz(rst!ImageNumber) <> 0 Then
            ' one images
            tv.Nodes.Add , , strNodeKey, rst!NodeText, _
                CLng(rst!ImageNumber)
```

```
Else
            If Nz(rst!SelectedImageNumber) <> 0 Then
                ' one image
                tv.Nodes.Add , , strNodeKey, rst!NodeText, , _
                    CLng(rst!SelectedImageNumber)
            Else
                ' no images
                tv.Nodes.Add , , strNodeKey, rst!NodeText
        End If
    End If
    rst.MoveNext
Loop
```

You should also now change the forms *Close* event, as follows:

```
Private Sub Form_Close()
    On Error Resume Next
    rst.Close
    Set rst = Nothing
    db.Close
    Set db = Nothing
    Do While imgListObj.ListImages.Count > 0
        imgListObj.ListImages.Remove (1)
    Set tv.ImageList = Nothing
    Set imgListObj = Nothing
    Set tv = Nothing
End Sub
```

## **Expanding and Collapsing Nodes**

To expand or collapse a node, you set the nodes Expanded property. The following code can be used to expand or collapse the entire tree:

```
Sub ExpandAllNodes(State As Boolean)
   Dim nd As Node
    For Each nd In tv.Nodes
        nd.Expanded = State
   Next
End Sub
```

### **Drag-and-Drop**

The TreeView control supports drag-and-drop, which you can use to create a TreeView and easily re-arrange items on the tree.

To enable drag-and-drop, right-click the *TreeView* control to display the shortcut menu, click the TreeCtrl Object, and then click Properties, as shown in Figure 7-29.




Figure 7-29 The TreeView properties need to be changed to support drag-and-drop.

In the TreeCtrl Properties dialog box, verify that OLEDragMode is set to 1 - ccOLEDragAutomatic, and OLEDropMode is set to 1 - ccOLEDropManual, as shown in Figure 7-30.




Figure 7-30 The settings in the TreeCtrl Properties window to add drag-and-drop capability to the *TreeView* control.

You then need to add three sections of event processing code. In the example, the *TreeView* control is called TreeView0; you might need to change this, check by compiling your code and verifying that all references are appropriately changed.

## **INSIDE OUT**

### Referring to methods and properties in an ActiveX Control

What might be a little confusing in the development of this form is that there is an ActiveX object called TreeView0 on the form. There is also a TreeView object variable called tv that during the forms Open event is set to point at the object TreeView0.

The reason for having the tv object variable is that it allows you to execute a method like tv.Add because you cannot use Me.TreeView0.Add, which will not work because the TreeView0 is a external object. As an added benefit, the tv object variable supports IntelliSense for the TreeView control.

What might appear equally confusing is when we come to define an event handling procedure (in the sections that follow) called TreeViewO OLEStartDrag. The question is why we did not use tv OLEStartDrag?

The answer is that Access can automatically hook up the event handling for the ActiveX object; which is why TreeViewO OLEStartDrag works. There is a way to use the reference to tv\_OLEStartDrag, but to do that, you would have to use a special syntax called With-Events (described in Chapter 10, "Using Classes and Events") when you declared the object variable, Dim WithEvents tv As TreeView.

The OLEStartDrag event clears the selected node, allowing a new node to be selected, as demonstrated in the following:

```
Private Sub TreeViewO_OLEStartDrag(Data As Object, _
                            AllowedEffects As Long)
   tv.SelectedItem = Nothing
End Sub
```

The OLEDragOver highlights the node as you drag over an area:

```
Private Sub TreeView0_OLEDragOver(Data As Object, _
               Effect As Long, _
               Button As Integer, _
               Shift As Integer, _
               x As Single, _
               y As Single, _
               State As Integer)
   If tv.SelectedItem Is Nothing Then
       Set tv.SelectedItem = tv.HitTest(x, y)
   End If
   'Highlight the node being dragged over as a potential drop target.
   Set tv.DropHighlight = tv.HitTest(x, y)
End Sub
```

The OLEDragDrop routine is more complex because it needs to reposition the node in the new tree structure. Note that a Root node is indicated by having a null value for the Parent-Key, as illustrated here:

```
Private Sub TreeView0_OLEDragDrop(Data As Object, _
                                   Effect As Long, _
                                   Button As Integer,
                                   Shift As Integer, _
                                   x As Single, _
                                   y As Single)
```

```
Dim nodDragged As Node
Dim strKey As String
Dim strParentkey As String
Dim lngKey As Long
Dim lngParentKey As Long
Dim strText As String
If tv.SelectedItem Is Nothing Then
E1se
    ' Reference the selected node as the one being dragged.
    Set nodDragged = tv.SelectedItem
    ' If the node was dragged to an empty space
    ' table and make a root node, set ParentKey to Null.
    If tv.DropHighlight Is Nothing Then
       strKey = nodDragged.Key
       lngKey = ExtractKey(strKey)
        strParentkey = nodDragged.Parent
       ' Delete the current node
        tv.Nodes.Remove nodDragged.Index
        rst.FindFirst "TreeNodeId = " & lngKey
        If Not rst.NoMatch Then
            rst.Edit
            rst!Parentkey = Null
            rst.Update
        End If
        ' regenerate the tree
        LoadTheTree
    ' If you are not dropping the node on itself.
    ElseIf nodDragged.Index <> tv.DropHighlight.Index Then
       ' Set the drop target as the selected node's parent.
       Set nodDragged.Parent = tv.DropHighlight
        ' update the table of data
        strKey = nodDragged.Key
        strParentkey = tv.DropHighlight.Key
        lngKey = ExtractKey(strKey)
        lngParentKey = ExtractKey(strParentkey)
        rst.FindFirst "TreeNodeId = " & lngKey
        If Not rst.NoMatch Then
            rst.Edit
            rst!Parentkey = lngParentKey
            rst.Update
        End If
    End If
End If
```

```
' Deselect the node
    Set nodDragged = Nothing
    ' Unhighlight the nodes.
    Set tv.DropHighlight = Nothing
Function ExtractKey(Key As String) As Long
    Dim strKey As String
    strKey = Right(Key, Len(Key) - Len(NodePrefix))
    ExtractKey = CLng(strKey)
End Function
```

## **Deleting a Node with Recursion**

When you delete a node, all the child nodes below that node should also be deleted, as follows:

```
Public Sub DeleteNode(Key As String)
    ' delete a node in the tree
   Dim IngDataKey As Long
    ' get numerical part of the key
    lngDataKey = ExtractKey(Key)
    ' delete any child nodes this is a bit more complex
    ' because each child node can also have child nodes
    rst.FindFirst "Parentkey = " & lngDataKey
    Do While Not rst.NoMatch
        ' has child nodes
        ' NOTE THIS CODE IS RECURSIVE
       DeleteNode NodePrefix & rst!TreeNodeId
        rst.FindNext "Parentkey = " & lngDataKey
    rst.FindFirst "TreeNodeId = " & lngDataKey
    If Not rst.NoMatch Then
        rst.Delete
    End If
   On Error Resume Next
    tv.Nodes.Remove Key
End Sub
```

This code routine is an example of recursive code, which means that the procedure keeps calling itself from within itself, nesting to the required number of levels, and then as execution at any particular level ends, it backs itself out to resume execution at the previous level.

## **INSIDE OUT**

#### Writing and debugging recursive VBA Code

In the previous example, you see that when you delete a node, you must delete all of the child nodes, and then for each child node, you must delete all child nodes for that child node. You need to repeat this process until all the related nodes in the tree are deleted. The example contains the following objects keys and parent keys:

- Forms: X123 → Parent 116, DeleteNode(X123) Delete all with Parent 123
- Form: X130 → Parent 123, DeleteNode(X130) Delete all with Parent 130
- Controls: X131 → Parent 130, DeleteNode(X131) Delete all with Parent 131
- Control: X132 → Parent 131, DeleteNode(X132) Delete all with Parent 132

Later in this section, you will see that the Call Stack assists in monitoring the code, which you can use to see the depth of recursive nesting. The main problem with recursive code is in understanding how the logic branches. At first glance, it looks like the logic cannot work because it uses a single Recordset. But the key to this code is that after deleting child nodes in the loop, it uses a FindFirst to reposition on the parent record.

Recursive code can be quite difficult to debug, but it often provides a very simple solution to an otherwise complex problem. Figure 7-31 shows a sequence of nodes to be deleted.



Figure 7-31 A sequence of nodes that must be deleted.

If you want to further explore how a node is deleted, then place a breakpoint (see Figure 7-32) in the *DeleteNode* subroutine.

```
Public Sub DeleteNode (Key As String)
   ' delete a node in the tree
   Dim lngDataKey As Long
   ' get numerical part of the key
   lngDataKey = ExtractKey(Key)
   ' delete any child nodes this is a bit more complex
    ' because each child node can also have child nodes
   rst.FindFirst "Parentkey = " & lngDataKey
    Do While Not rst.NoMatch
```

Figure 7-32 Insert a breakpoint into the code to trace through a recursive delete operation.

With the form in Form view, right-click the node called Forms to display the node operations form (see Figure 7-33). With this form, you can view details of a node and delete nodes. This pop-up form then calls the public code on the main form that has the TreeView control.



Figure 7-33 Using this pop-up form, you can add and delete nodes.

Next, click the Delete Node button. Tracing through the routine and examining the Call Stack illustrates the recursive nature of this routine, as shown in Figure 7-34.

```
delete any child nodes this is a bit m
   because each child node can also have
rst.FindFirst "Parentkey = " & lngDataKe
Do While Not rst.NoMatch
                                                              Project.Module.Function
                                                                                                                                  Show
                                                               TreeBuilder.Form_fmNodeBuilde
[<Norr-Basic Code>]
TreeBuilder.Form_dlgNodeAction
      ' NOTE THIS CODE IS RECURSIVE
                                                                                                                                  Close
      DeleteNode NodePrefix & rst!TreeNode
rst.FindNext "Parentkey = " & lngDat
Loop
rst.FindFirst "TreeNodeId = " & lngDataKe
If Not rst.NoMatch Then
      rst.Delete
```

Figure 7-34 The Call Stack helps you to understand how the code works.

## **Adding Nodes**

The code that follows presents the two routines with which you can add nodes. The first adds the node to the bottom of the tree. You then drag the node to a particular position. The second method is to add the node as a child node to the current node. In both cases, the node is added to the data table:

```
Public Sub AddNewNode(NodeName As String)
    'TreeViewO.Nodes.Add(relative, relationship, key, text, image,
    ' selectedimage)
    Dim strNodeKey As String
    rst.AddNew
    rst!NodeText = NodeName
    rst!TreeId = lngTreeId
    lngOrder = lngOrder + 1
    rst!RelativeOrder = lngOrder
```

```
rst.Update
    rst.Bookmark = rst.LastModified
    strNodeKey = NodePrefix & rst!TreeNodeId
    tv.Nodes.Add , , strNodeKey, NodeName
    ' force refresh
   Me.txtNodeKey = strNodeKey
   Me.txtNodeName = NodeName
    Dim frm As Form
   On Error Resume Next
    Set frm = Forms!dlgNodeAction
    If Err.Number = 0 Then
        frm.txtNodeName = NodeName
        frm.txtKey = strNodeKey
    End If
End Sub
Public Sub AddNewChildNode(NodeName As String, Parentkey As String)
    'TreeViewO.Nodes.Add(relative, relationship, key, text, image,
    ' selectedimage)
    Dim strNodeKey As String
    rst.AddNew
    rst!NodeText = NodeName
    ' Val gets the number from the string skipping the text prefix
    rst!Parentkey = ExtractKey(Parentkey)
    rst!TreeId = lngTreeId
    lngOrder = lngOrder + 1
    rst!RelativeOrder = lngOrder
    rst.Update
    rst.Bookmark = rst.LastModified
    strNodeKey = NodePrefix & rst!TreeNodeId
    tv.Nodes.Add Parentkey, tvwChild, strNodeKey, NodeName
    tv.Nodes(Parentkey).Expanded = True
    ' force refresh
   Me.txtNodeKey = strNodeKey
   Me.txtNodeName = NodeName
   Dim frm As Form
   On Error Resume Next
    Set frm = Forms!dlgNodeAction
    If Err.Number = 0 Then
        frm.txtNodeName = NodeName
        frm.txtKey = strNodeKey
    End If
End Sub
```

### The Tab Control


In this section, you look at using a Tab control with subforms, and how you can synchronize controls in subforms with controls on other tab pages. You then look at how to dynamically load subforms into Tab control pages (this is demonstrated in the sample database controls.accdb)

## **Refreshing Between Tabs and Controls**

In the frmTabProducts form, there is a Tab control with two tabs, and the form is bound to the Products table. The first tab contains some of the fields from the Products table, including the product category. The second tab contains a subform that lists the available categories, as shown in Figure 7-35.

To place the subform on the tab page, you drag it from the navigation window of the frmCategories onto the second tab page.

Switch to Form view and take a look at this form. You will find that if you click the Product List tab, the Categories tab becomes hidden; clicking the Products tab makes it visible again. This is intentional, and the code for this is described later in this section.

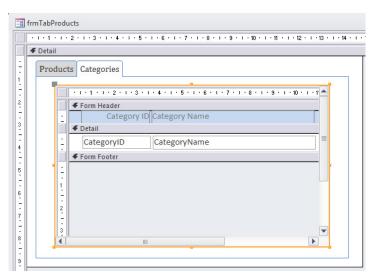

**Figure 7-35** Dragging a subform onto a page of the *Tab* control.

When you positioned the subform, the Child/Master linking field properties are automatically set. These choices need to be cleared (see Figure 7-36), because you do not want the subform to display only the category for the displayed product record; you want to use the subform to manage the list of categories.




Figure 7-36 After you add a subform, always check the Link Master Fields and Link Child Fields properties to verify that they are set correctly (here, the properties have been cleared).

In this example, after you enter or change a record on the subform on the Categories tab page, you want the combo box (see Figure 7-37) on the Products page to be updated with changes made to the list of categories.




Figure 7-37 The choices made on the Categories tab of this subform are reflected in controls on the Products tab.

To do this, use the code that follows on the categories subform, which refreshes a single control, CategorylD. There is also code in these events to refresh another subform called frmProductsList, which we will discuss following the code sample:

```
Private Sub Form_AfterDelConfirm(Status As Integer)
    Me.Parent.cboCategoryID.Requery
   Me.Parent.frmProductsList.Form.Requery
End Sub
Private Sub Form_AfterUpdate()
    Me.Parent.cboCategoryID.Requery
    Me.Parent.frmProductsList.Form.Requery
Fnd Sub
```

Figure 7-38 shows an additional tab that lists products. You want to add some code so that whatever product record a user browses in the first Products tab (the main form), the Product List tab is automatically synchronized to display the appropriate record, and similarly, when moving in the Product List tab, the Products tab changes.

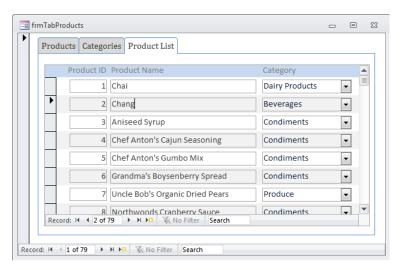


Figure 7-38 As a user pages through product records, the Product List synchronizes to the same record that's displayed in Products tab.

This time you write the code in the Current event for the frmProductList subform. This will synchronize the main form to the record in the Product List, as follows:

```
Private Sub Form Current()
   Me.Parent.RecordsetClone.FindFirst "[ProductID] = " & Me.ProductID
   Me.Parent.Bookmark = Me.Parent.RecordsetClone.Bookmark
End Sub
```

Similar code can be written on the main form's Current event to keep the details in the frmProductList synchronized with the main record, as shown here:

```
Private Sub Form_Current()
   Me.frmProductsList.Form.RecordsetClone.FindFirst "[ProductID] = " ]
                                                        & Me.ProductID
   Me.frmProductsList.Form.Bookmark = _
                    Me.frmProductsList.Form.RecordsetClone.Bookmark
End Sub
```

# **INSIDE OUT**

#### Referring to controls in the Tab control

In the previous example, it is important to realize that although graphically the Tab control contains pages, and each page in turn contains controls (for example, the Products List page contains a subform control), the referencing system does not use the tab then the pages to refer to the controls.

Because the form is bound to the Products table, any controls on the Products page are referenced from code executing on the main form as Me.ControlName, or from code on a subform as Me.Parent.ControlName. Similarly any code on the Product page refers to a subform control as Me.SubFormName.Form.ControlName. This referencing operates almost as if the Tab control were not present.

Sometimes a Tab control can be quite simple, with the main form unbound and each tab containing subforms. In other situations no subforms are used, and the main form is bound, in which case, the tabs are a useful way to split up a large number of controls into groups. In the example, there is a mixed approach, which is also common, in which some tabs represent controls that are bound on the main form, and others are separate subforms. This can become even more sophisticated because the subforms might or might not be linked to the main form by using the Child/Master fields.

## The OnChange Event

The Tab control's OnChange event is called whenever a tab is changed. As illustrated in the following code, this is a useful event for controlling page visibility (note that the page numbering is 0-based):

```
Private Sub TabCt10_Change()
' hide pagCategories when you click on pagProductList
   If Me.tabMain.Value = Me.tabMain.Pages("pagProductList").PageIndex Then
       Me.tabMain.Pages("pagCategories").Visible = False
   E1se
       Me.tabMain.Pages("pagCategories").Visible = True
   End If
End Sub
```

### **Dynamically Loading Tabs**

The technique described in this section can be used to construct a rich, multi-tabbed form with which a user can dynamically load and unload tabs. The frmTabsDynamic form contains the code for this. This could either be used as a specialist form or as a general navigation interface for an application. The tblTabPages table shown in Figure 7-39 contains a set of tab pages for the specified form; TabOrdering controls the load order, DefaultVisible whether the tab will be visible; CanUnloadPage determines whether a page can be unloaded.

Each tab page can also have a RelatedPage, which means that when you double-click a page name, it will load the related page, if it has one; otherwise, if it is not marked as CanUnloadPage, it unloads the page from the tab.

This means that you could have a Tab control, pre-designed with five pages, but have many more pages that can by dynamically loaded and unloaded, as required (this technique means that you can exploit the flexibility of the Tab control but manage associated performance issues with having too many tabs). There are many ways in which to enhance this design technique, we provide here a basic framework to get you started.

Ⅲ tblTabPages □ □ ⊠									
1	TabFormName ~	PageName	SubFormName -	TabOrdering ~	DefaultVisible	- RelatedPa	ge Car	UnloadPa	age -
	frmTabsDynamic	Product List	frmTabsDynamicProductList		<b>▽</b>	Product D	etails		
	frmTabsDynamic	Product Details	frmTabsDynamicProductDetails					V	
	trmTabsDynamic	Categories	trmTabsDynamicCategoriesList		<b>V</b>	Category [	etails		
	frmTabsDynamic	Category Details	frmTabsDynamicCategoriesDetails					<b>V</b>	
*									

Figure 7-39 A table can be used to contain a list of subforms, which can be dynamically loaded into pages in the *Tab* control.

Each tab page has a subform control that is dynamically bound to the SubFormName in the tblTabPages table.

The Tab control pages and subforms follow a naming convention: the pages are named Page0, Page1..., and the subform control on each page is named Page0SubForm1, Page1SubForm1, and so on.

### **Loading Pages**

At the top of the forms module is an array of types that maps to the columns in tblTabPages so that it is effectively dynamically held in memory, as demonstrated in the following:

```
Dim lngArrayPages As Long
                                ' how many tab pages in the array
Dim lngTabPages As Long
                                ' how many physical tab pages
Private Type PageInfo
    strPageName As String
    strPageSubForm As String
    strRelatedPage As String
    blCanBeLoaded As Boolean
End Type
Dim AvailablePages() As PageInfo
```

When the form loads, you write all the available pages to the memory array and also load the pages marked as *DefaultVisible* into the physical *Tab* controls pages.

## **INSIDE OUT**

#### Exploiting the Tag property on controls

When you need to develop a generic feature that relates to controls, one of the most valuable assets in Access is the Tag property. This is the only built-in property on controls that you can define to be whatever you want. In the example, we use this property to hold an Index in an array, but there are many other uses for this property.

The Tag property is particularly useful when you have a form with unbound controls and you need to hold information regarding the type of data that can be entered into the controls; in this situation, you can hold an "s" for a string, a "d" for a date, and so on, setting this in Design mode on each control. This means you can easily write code to scan through the collection of unbound controls and know the type of data in each control. If you generate a SQL WHERE clause from this, information on the data types is very important when formatting the SQL

To identify each tab page with a particular array page, you use the *Tag* property of the page to hold an index in the array of all pages. The following routine loads the tab page's subform into the subform control and sets the page caption and tag:

```
Sub LoadThePage(strPageName As String, _
                lngTargetPageNo As Long, _
                lngTargetArrayId As Long)
    ' Load the tab and make it visible
    Me.TabCtl0.Pages(lngTargetPageNo).Visible = True
   Me.TabCtl0.Pages(lngTargetPageNo).Caption = _
                                    AvailablePages(lngTargetArrayId).strPageName
    Me.TabCtl0.Pages(lngTargetPageNo).Tag = lngTargetArrayId
    ' Named PageXSubForm1
    Me.Controls("Page" & IngTargetPageNo & "SubForm1").SourceObject = _
                                    AvailablePages(lngTargetArrayId).strPageSubForm
End Sub
```

When the form opens, it calls the following routine, which populates the array and calls the preceding procedure to dynamically load pages:

```
Sub LoadTabs()
    ' load the dynamic tabs into arrays
   Dim db As Database
    Dim rst As Recordset
    Dim strSQL As String
    Dim IngArray As Long
    Dim lngPageVisibleCount As Long
```

```
Set db = CurrentDb
   strSQL = "SELECT * from tblTabPages WHERE TabFormName = '" & _
               Me.Name & "' ORDER BY TabOrdering"
   Set rst = db.OpenRecordset(strSQL, dbOpenDynaset)
   rst.MoveLast
   rst.MoveFirst
   lngArrayPages = rst.RecordCount
   lngTabPages = Me.TabCt10.Pages.Count
   ' allocate working array
   ReDim AvailablePages(lngArrayPages - 1)
   lngArray = 0
   lngPageVisibleCount = 0
   Do While Not rst.EOF
       AvailablePages(lngArray).strPageName = rst!PageName
       AvailablePages(lngArray).strPageSubForm = rst!SubFormName
       AvailablePages(lngArray).blCanBeLoaded = rst!CanUnloadPage
       AvailablePages(lngArray).strRelatedPage = Nz(rst!RelatedPage)
       If rst!DefaultVisible And lngPageVisibleCount + 1 < lngTabPages Then
           LoadThePage AvailablePages(lngArray).strPageName, lngPageVisibleCount _
                                     , lngArray
           lngPageVisibleCount = lngPageVisibleCount + 1
        End If
        lngArray = lngArray + 1
        rst.MoveNext
   Loop
    ' Hide any remaining unused tabs
   ' The pages tag property contains the index
    ' to the active page or is null
   Dim IngPage As Long
   For lngPage = lngPageVisibleCount To lngTabPages - 1
       Me.TabCtl0.Pages(lngPage).Visible = False
       Me.TabCt10.Pages(lngPage).Tag = ""
       Me.TabCtl0.Pages(lngPage).Caption = "Page" & lngPage
       Me.Controls("Page" & lngPage & "SubForm1").SourceObject = ""
   Next
    Debuging_ShowTabControl
End Sub
```

This results in the default display shown in Figure 7-40.




Figure 7-40 With the Default Visibility set to True for two tab subforms, when you open the form, the first two tabs are loaded and displayed.

Using the Watches window, you can see how the array is loaded into memory, as shown in Figure 7-41.




Figure 7-41 Arrays are used to hold the map of subforms that can be potentially loaded into the tab pages.

There is also some debugging code to show the current state of the *Tab* control pages:

```
Sub Debuging_ShowTabControl()
    Dim IngPage As Long
    Stop
    For lngPage = 0 To lngTabPages - 1
       With Me.TabCt10
            Debug.Print .Pages(lngPage).Name, .Pages(lngPage).Caption, _
                        .Pages(lngPage).Tag, _
                        Me.Controls("Page" & lngPage & "SubForm1").SourceObject
        End With
    Next
End Sub
```

This generates the result displayed in Figure 7-42, which shows the subforms that are currently loaded into each tab page.

Immediate			
Page0	Product List	0	frmTabsDynamicProductList
Page1 Page2	Categories Page2	2	frmTabsDynamicCategoriesList

Figure 7-42 The two default subforms that are loaded into the first two tab pages.

You can see that Page0 and Page1 have been loaded but Page2 is free to be used.

You can also use the Watches window to display information on the array, which holds information for each page that can be loaded, as shown in Figure 7-43.




Figure 7-43 The Watches window displays more information on the tab management variables.

### Dynamic Loading of a Related Page

Double-clicking certain tabs dynamically loads a related page, if that tab page has been defined to have a related page. The following code checks if the tab page has a related page, checks if you have a free unused tab page, and then dynamically loads the related page:

```
Private Sub TabCtl0_DblClick(Cancel As Integer)
   Dim varNextFreePage As Variant
   ' A double click on a tab means load any related page
    ' indirectly using the Tag property on clicked page
   If AvailablePages(Me.TabCtl0.Pages(Me.TabCtl0).Tag).strRelatedPage
                                    <> "" Then
        ' we have a related page
        varNextFreePage = GetNextFreeTabPage()
       If Not IsNull(varNextFreePage) Then
           LoadTheRelatedTab AvailablePages( _
                        Me.TabCtl0.Pages(Me.TabCtl0).Tag).strRelatedPage,
                        CLng(varNextFreePage)
        End If
       Exit Sub
   End If
   ' if this page does not have a related page then the
    ' double click is used to unload then page
    ' if it can be unloaded
   If AvailablePages (Me.TabCtl0.Pages (Me.TabCtl0).Tag).blCanBeLoaded Then
        UnloadTheTab Me.TabCtl0
   End If
End Sub
```

To load the related page, you need to find the page index in your array, and then also check that the page is not already loaded:

```
Sub LoadTheRelatedTab(strPageName As String, lngTargetPageNo As Long)
   ' is the page already loaded?
   Dim IngPage As Long
   Dim lngArrayId As Long
   lngArrayId = FindArrayId(strPageName)
```

```
For lngPage = 0 To Me.TabCtl0.Pages.Count - 1
        If Me.TabCtl0.Pages(lngPage).Tag <> "" Then
            If lngArrayId = CLng(Me.TabCtl0.Pages(lngPage).Tag) Then
                ' Page is already loaded
                Exit Sub
            End If
        End If
    Next
    LoadThePage strPageName, lngTargetPageNo, lngArrayId
End Sub
Function FindArrayId(strPageName As String) As Long
    Dim lngArrayPageCount As Long
    For lngArrayPageCount = 0 To lngArrayPages
        If strPageName = AvailablePages(lngArrayPageCount).strPageName Then
            FindArrayId = lngArrayPageCount
            Exit Function
        End If
    Next
    ' fatal error is you reached this point
End Function
```

#### Unloading a Page

The double-click function can also unload a page that is marked as being allowed to be unloaded. This way, non-essential pages can be unloaded to make room for other tab pages:

```
Sub UnloadTheTab(lngPageNo As Long)
    ' unload a tab
    ' first we must shift focus from the active tab
    ' before we can change the visibility
    Dim lngNewTabForFocus As Long
    lngNewTabForFocus = lngPageNo - 1
    If lngNewTabForFocus < 0 Then lngNewTabForFocus = 0
   Me.TabCtl0.Pages(lngNewTabForFocus).SetFocus
   Me.TabCt10.Pages(lngPageNo).Visible = False
    ' Leave the caption but clear the tag
   Me.TabCt10.Pages(lngPageNo).Tag = ""
    ' Named PageXSubForm1
   Me.Controls("Page" & lngPageNo & "SubForm1").SourceObject = _
End Sub
```

## Summary

In this chapter, you learned that programming with form controls is an essential part of enhancing a user's experience when interacting with your application. You use key events such as BeforeUpdate on a control to perform validation and AfterUpdate to take appropriate actions following validation.

You also learned how combo box controls on a form can be tied together so that choices made by a user in one control change the available data choices in other controls.

In addition, you saw how you can make multiple selections in list boxes, either in a single list box, or by using two list boxes, and that a list box can be used to act like a subform.

In the section on the *TreeView* control, you learned how ActiveX controls can significantly extend the power of Access. Chapter 11, "Using Classes and Forms," presents additional examples of this, including the *Slider* control and *Up/Down* button controls.

Finally, you saw the Tab control and how it is used to dynamically load pages with different subforms. You also examined the syntax required for synchronizing data presented in different tabs.



## CHAPTER 8

# **Creating Reports and Events**

Report Event Sequences	324	Report Layout Control	331

ypically, you spend the majority of your time writing code associated with forms and form controls. By contrast, reports are easily overlooked when it comes to events. This is because the events associated with reports are not the direct result of a user interacting with the page. Reports have a sequence of events associated with the report opening and rendering the pages of data.

In this chapter, you focus on the techniques for programming against events on a report. You also take some time to look at other associated programming techniques that can be used to enhance report output. Microsoft Access 2010 reports can be opened in either Print/Print Preview and also in the more interactive Report view; some techniques are applicable to both views, and other methods apply to only one of the two views.

After reading this chapter, you will:

- Understand the key event sequences when a report is rendered in different views.
- Know a number of techniques that can be used to enhance the presentation of reports.

#### Note

As you read through this chapter, we encourage you to also use the companion content sample database, Reports.accdb, which can be downloaded from the book's catalog page.

Access 2010 provides a lot of flexibility in how you open a report, but this flexibility can also lead to some confusion. It is not uncommon to find a developer puzzling over why the code on their report is not executing as anticipated, only to find that the reason is the manner by which they opened the report.

The sample reports for this chapter, such as rptCustomerDrillDownList, are designed for a user to interact with events on the report—like a DblClick event—and so these reports need to be opened in Report view (acViewReport). If you open these reports in the Print

Preview mode (acViewPreview), the click events will not work, because this is a preview for printing. The samples database contains examples using the correct options for opening the examples.

## Report Event Sequences

The sample form, dlgReportEvents, opens the rptEvents report, which demonstrates some of the key event sequences on reports, as shown in Figure 8-1.

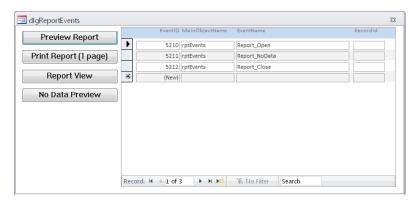


Figure 8-1 The dlgReportEvents form, demonstrating event sequences.

Although programming forms is a more common development task than programming reports, reports can be trickier because their event sequences have more variation than those for forms; the sequences change depending on whether you are viewing, previewing or printing the report (we have omitted some of the less important focus and activation events from these sequences).

When printing a report, a typical event sequence is as follows:

```
Report Open →
ReportHeader_Format → ReportHeader_Print →
PageHeader_Format → PageHeader_Print →
Detail_Format → Detail_Print →
ReportFooter_Format → ReportFooter_Print →
PageFooter Format → PageFooter Print →
Report_Page → Report_Close
```

When printing a report, the Load and Unload events are not called, and the rendering of the report is controlled from sequences of Format/Print events for the different report sections. There might also be Retreat events associated with the report Header and Detail sections.

When previewing a report on the screen a typical event sequence as follows:

```
Report_Open → Report_Load →
ReportHeader Format → ReportHeader Print →
PageHeader_Format → PageHeader_Print →
Detail_Format → Detail_Print →
ReportFooter\_Format \rightarrow ReportFooter\_Print \rightarrow
PageFooter_Format → PageFooter_Print →
Report_Page → Report_Unload → Report_Close
```

The report preview sequences of events are very similar to the report printing, except that there are Load/Unload events. As the user pages forward through the report, events fire to render each page; as they page back, no more events are normally required because that part of the report has already been generated.

When displaying a report in Report view on screen, a typical event sequence is as follows:

```
Report Open → Report Load →
ReportHeader_Paint →
PageHeader_Paint →
Detail Paint →
... (can include additional ReportHeader_Paint, PageHeader_Paint events)
ReportFooter_Paint \rightarrow
PageFooter Paint →
Report_Unload → Report_Close
```

When you have a report in Report view, instead of the Format/Print events, you see Paint events. Because the user can interact with the report, you can also get OnCurrent events if the user clicks into a field in a record. In Report view, as a user pages back and forth between pages, resizes the screen, or otherwise interacts with the report, sequences of paint events are continuously executed. ReportHeader\_Paint and PageHeader\_Paint events are also regularly executed.

When you use *NoData* to close a report, the following sequence is triggered:

```
Report_Open → Report_NoData → Report_Close
```

From the event sequences, you can see that if you intend to add programming to control the detailed rendering of individual records, then for Print Preview or printing, you program against the Format/Print events, but for viewing the report on screen in the Report view, you need to use the *Paint* events.

## Creating Drill-Down Reports and Current Event

In Report view, you can manipulate behavior by using events similar to those normally found in forms, such as Current, Click, and DblClick. These events can be used to interactively open other reports or forms to provide more detailed information to the user. In the sample rptCustomerDrillDownList report code, there are two events that demonstrate how a user can drill down through a report, opening a second report to display more details on a record. The following code, written for the Current event, opens the second report when you click on each record:

```
Private Sub Report_Current()
   DoCmd.OpenReport "rptCustomerDetails", acViewReport, _
            , "[Customer Number] = " & Me.Customer_Number
End Sub
```

The second example places similar code on the *DblClick* event for a specific field:

```
Private Sub Customer_Name_DblClick(Cancel As Integer)
    DoCmd.OpenReport "rptCustomerDetails", acViewReport, _
            , "[Customer Number] = " & Me.Customer_Number
End Sub
```

To see the effect of these events, you must be in Report view.

# **INSIDE OUT**

### Side-by-side details using multiple copies of a report

When drilling down into a report, you might want to open the same report more than once and display them side-by-side. This is possible by using a technique for forms that is described in Chapter 11, "Using Classes and Forms." The sample code is shown in the rptCustomerDrillDownListMultiples form; a collection of reports has been defined in the code module, and the *DblClick* event opens a new copy of the report. Note that to make this work, the target report, rptCustomerDetails, must have a code module, even if the code module does not contain any code (to create an empty code module, you open the report in Design view. Next, on the ribbon, select View Code, and then save the report, or you can set the report's *HasModule* property to *True*):

```
Dim colReports As New Collection
Private Sub Customer_Name_DblClick(Cancel As Integer)
    Dim rpt As Report_rptCustomerDetails
    Set rpt = New Report_rptCustomerDetails
    rpt.Filter = "[Customer Number] = " & Me.Customer_Number
    rpt.FilterOn = True
    colReports.Add rpt, CStr(CLng(Rnd * (2 ^ 31)))
    rpt.Visible = True
End Sub
Private Sub Report_Close()
   Dim rpt As Report rptCustomerDetails
    For Each rpt In colReports
       Set rpt = Nothing
    Next
End Sub
```

## Creating a Boxed Grid with the *Print* Event

In this example, you look at how to program against the Detail Print event to create a report in which fields are boxed in a grid pattern. If you set your text boxes to have a solid border and add a rectangle behind any check boxes, you can create the grid effect, as shown in Figure 8-2.



Figure 8-2 Use text boxes and borders to create a grid effect.

The rptCustomerGrid shown in Figure 8-2 has a problem with the gridlines because the CanGrow property for one of the boxes is set to True. One solution to this problem is to add rectangles around all the controls, but set the control borders to transparent.

# **INSIDE OUT**

#### Report events and drawing graphics

If you are drawing lines or rectangles and other graphics, this can only be performed in the OnPrint, OnFormat, and OnPage events. Using the OnPrint event, you can add borders before a page is printed. This means that these drawing operations cannot be performed in Report view, which would require the OnPaint event.

To create the effect, you need to perform the processing with the OnPrint event, which means that you can only see the effect when in Print Preview or Printing a report. The code has been written in a subroutine, so you can easily experiment to see how this will not work on other events:

Sub DrawRectangles() Dim dblheight As Double dblheight = 0Dim ctrl As Control Dim txtBox As TextBox Dim rect As Rectangle ' Find maximum height

```
For Each ctrl In Me.Section(0).Controls
        If TypeOf ctrl Is TextBox Then
            Set txtBox = ctrl
            If txtBox.Height > dblheight Then
                dblheight = txtBox.Height
        End If
        If TypeOf ctrl Is Rectangle Then
            Set rect = ctrl
            If rect.Height > dblheight Then
                dblheight = rect.Height
            End If
        End If
    Next
    Dim InglineColour As Long
    lnglineColour = RGB(0, 0, 0)
    For Each ctrl In Me.Section(0).Controls
        If TypeOf ctrl Is TextBox Then
            ' is a text box create rectangle
            Set txtBox = ctrl
            Me.Line (txtBox.Left, txtBox.Top)- _
                          Step(txtBox.Width, dblheight), lnglineColour, B
        End If
        If TypeOf ctrl Is Rectangle Then
            ' is a text box create rectangle
            Set rect = ctrl
            Me.Line (rect.Left, rect.Top)- _
                                    Step(rect.Width, dblheight), lnglineColour, B
        End If
    Next
End Sub
This procedure is then called from the OnPrint event for the detail section, as follows:
Private Sub Detail_Print(Cancel As Integer, PrintCount As Integer)
    DrawRectangles
```

The resulting report, rptCustomerGridRectangles, is shown in Figure 8-3.

End Sub

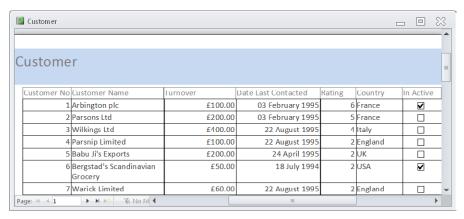


Figure 8-3 The report displayed in Print Preview with the corrected grid.

### Layout Control and the Format Event

In this example, we will demonstrate how you can achieve a more detailed level of control over printing by using the Format event. The sample rptSkipPrinting report is designed with a layout for three labels across the page. The program code on the report allows you to specify a number of label positions to be skipped before printing commences.

# **INSIDE OUT**

### Layout control during printing

The MoveLayout property of a report controls the movement to the next printing location, the PrintSection property controls whether the section is printed, and NextRecord advances to the next record position.

The code on the report is shown in the following:

```
Dim lngSkipPosition As Integer
Private Sub Detail_Format(Cancel As Integer, FormatCount As Integer)
If lngSkipPosition <> 0 Then
   Me.MoveLayout = True
   Me.NextRecord = False
   Me.PrintSection = False
    lngSkipPosition = lngSkipPosition - 1
End If
End Sub
```

```
Private Sub Report_Open(Cancel As Integer)
    Dim varInput As Variant
    varInput = InputBox("No. Of Used Labels To Skip On First Page ? ", , "0")
    If varInput <> "" Then
        lngSkipPosition = CLng(varInput)
        lngSkipPosition = 0
    End If
End Sub
```

The resulting report is shown in Figure 8-4, in which two printing positions are skipped.



Figure 8-4 The labels report in Print Preview mode, with printing positions skipped.

# **Report Layout Control**

In this section, you look at other examples of how you can apply Microsoft VBA to improve the layout of your reports.

# **Driving Reports from a Form**

When producing a reporting system, you can use a number of different approaches to assemble the combination of forms and reports. The simplest method is to make use of the forms collection to allow a report and its underlying data set to extract values that the user has entered in the form.

The sample dlqReportDriver form (see Figure 8-5) contains two controls: the country selection controls the data that is displayed, and the Title control is displayed as a title on the report.



Figure 8-5 Using a form as a dialog for users to make selections before generating the report.

In this case, the rptReportDriver report has a control for which the control source has been set to reference the reporting form, as illustrated in the following:

```
=Forms!dlgReportDriver![txtReportTitle]
```

The report is based on a query called *qryRptCustomers*, and in the reports query criteria, there is a reference to the reporting form:

```
Like ([Forms]![dlgReportDriver]![txtCountry]) & "*"
```

The disadvantage of using this approach is that if you want to use the report in more than one place in the system, the reference is hard-coded to refer to the driving form.

dlgReportDriver2 is a very similar form; however, rather than using a query that is tied to a specific form, you can use the WhereCondition with the DoCmd.OpenReport command to filter the data.

The Open The Report button on the form contains the following code:

```
Private Sub cmdOpen_Click()
   glbReportTitle = Me.txtReportTitle
   If Nz(Me.txtCountry) <> "" Then
        ' we use On Error Resume next to
        ' prevent any error if the reports NoData
        ' is activated and closes the report
       On Error Resume Next
       DoCmd.OpenReport "rptReportDriver2", acPreview, , _
            "[Country] = '" & Me.txtCountry & "'"
   E1se
       DoCmd.OpenReport "rptReportDriver2", acPreview
   End If
Fnd Sub
```

The report has code written behind two events. The NoData event can be used to prevent the report from opening if there is no data to be shown:

```
Private Sub Report_NoData(Cancel As Integer)
   MsgBox "No Data To Display"
    Cancel = True
End Sub
```

The report has an *Open* event that is triggered when the report begins to open; this event provides the opportunity to close a report before it opens. To refer to a control on a report, the code needs to be written on the *Load* event. This code displays the global variable, which holds the report title:

```
Private Sub Report_Load()
   Me.txtTitle = glbReportTitle
End Sub
```

With these changes to the reporting system, you can call a report from different parts of the system, because we have removed any hard-coded references to the form that opens the report.

## Reducing Joins with a Combo Box

In the sample database report rptComboBox contains a combo box named cboType. When rendered, this appears on the report as a text box. The combo box contains two columns, and we can add a second text box control to the report and set the control source for the text box to lookup a related field value by using the bound combo box control:

```
=[cboType].[Column](1)
```

This technique can be used to reduce the number of joins that would otherwise be required in the underlying *RecordSource* used by the report.

### **Programming a Report Grouping**

A report grouping can be based on a field or an expression. It is also possible to base the grouping on a VBA function. The modRPT module contains a public function that will accept a value for a company's turnover and return a classification of 1, 2, or 3. The report then groups by this value, as illustrated in the following code:

```
Public Function modRPT_GetTORange(ByVal varTurnover As Variant _
                                    ) As Integer
    ' Group turnover into special Ranges
    If IsNull(varTurnover) Then
       modRPT_GetTORange = 3
        Exit Function
    End If
    Select Case varTurnover
       Case 0 To 110
            modRPT_GetTORange = 1
       Case 111 To 280
            modRPT_GetTORange = 2
        Case Else
            modRPT_GetTORange = 3
    End Select
End Function
```

The rptGroupBySpecialTurnoverRanges report contains a group that is based on this VBA function, as shown in Figure 8-6.




Figure 8-6 Using a custom VBA function for specialist grouping on a report.

## Packing Address Information with a *ParamArray*

There are many occasions when you need to pack up information from several fields and generate carriage return linefeeds for each line but skip address lines that are blank.

The method used here is general purpose in that it can be used for any number of parts in an address without changing the main function. The following code for packing the address accepts a Variant array of parameters:

```
Function modRPT_PackAddress(ParamArray strAddressLines() As Variant _
                            ) As String
   Dim IngCount As Long
   modRPT_PackAddress = ""
   For lngCount = 0 To UBound(strAddressLines)
       If Not Nz(strAddressLines(lngCount)) = "" Then
            If modRPT_PackAddress <> "" Then
                ' add a CRLF if required
                modRPT_PackAddress = modRPT_PackAddress + vbCrLf
            Fnd Tf
            modRPT_PackAddress = modRPT_PackAddress & _
                        Trim(strAddressLines(lngCount))
       End If
   Next
End Function
```

To use this function in the example report, rptPackAddress, we have added an unbound control called txtAddress and set its CanGrow property to True. The control source is set as follows:

```
=modRPT_PackAddress([Firstname] & " " & [Lastname],[OrganizationName],[Address],
[City], [State])
```

Note that for the first part of the address we are concatenating two fields, which will be treated as a single parameter. Figure 8-7 shows the view of the contents of the *ParamArray*.




Figure 8-7 The ParamArray contains the address fields.

### **Control of Printers**

Access provides considerable control over printers and their settings. The simplest use of this is with the *Application.Printer* object (default printer) and *Application.Printers* collection (available printers).

The following code can be used to examine the available printers and change the default printer:

```
Sub modRpt_ListPrinters()
   Dim prt As Printer
   For Each prt In Application.Printers
       Debug.Print prt.DeviceName, prt.DriverName, _
             prt.PaperSize, prt.Orientation
   Next
   ' details of the default printer
   Debug.Print "Default Printer Information"
   Debug.Print "-----"
   Set prt = Application.Printer
   Debug.Print prt.DeviceName, prt.DriverName,
             prt.PaperSize, prt.Orientation
   ' to a specific printer as the default printer
   'Application.Printer = Application.Printers(2)
   Application.Printer = prt
End Sub
```

The sample *rptPrinterChoice* report uses the preceding code on a pop-up form so that when a user enters Print Preview, she can select a printer before printing a report. This code can easily be incorporated into a button on a form to make the selection before printing:

```
Private Sub Report_Open(Cancel As Integer)
  'acCurViewDesign - Design View
  'acCurViewPreview - Print View
  'acCurViewReportBrowse - Report View
  'acCurViewLayout - Layout View
  If Me.CurrentView = acCurViewPreview Then
        'Me.UseDefaultPrinter
        DoCmd.OpenForm "dlgChoosePrinter", acDesign, , , , acDialog
        End If
End Sub
```

#### Note

There are three other report properties, PrtDevMode, PrtDevNames, and PrtMip, which provide further read/write settings on printer devices.

# **Summary**

In this chapter, you looked at the key event sequences when reports are rendered. You saw that for Print Preview and Printing, the detail section has a sequence of Format/Print events. In Report view, this is replaced with the Paint event.

You also saw how to enhance your reports by using customized grouping and techniques to pack fields to avoid blank lines. Access also provides a number of features for adjusting and selecting printers.



PART 4

# Advanced Programming with VBA Classes

p	ш	A	m	-	E	m	0
L	п	A	۲			K	3

Adding Functionality with Classes ...... 339

#### **CHAPTER 10**

Using Classes and Events ...... 359

#### **CHAPTER 11**

Using Classes and Forms ..... 381



# CHAPTER 9

# Adding Functionality with Classes

improving the Dynamic <i>lab</i> Control	Improving the Dynamic Tab Control	340	Creating a Hierarchy of Classes	35
--	-----------------------------------	-----	---------------------------------	----

ou have seen in earlier chapters how Microsoft VBA program code is either contained in a module or held in a form's class module. In this chapter, you look at how VBA also allows you to construct your own class modules.

It is often overlooked that VBA supports Object-Oriented Programming (OOP), so in this chapter, we introduce you to OOP concepts by having you construct your own classes. Many Microsoft Access developers take a look at classes and then give up because they have difficulty seeing the benefit and justification for using classes. It's true that much of what can be achieved with a simple class can also be achieved by using libraries of code, and that to build classes you often need to put in more effort during the initial development, but there are benefits in using classes that will be explored in this chapter as well as in Chapter 10, "Using Classes and Events," and Chapter 11, "Using Classes and Forms."

This chapter focuses on two examples of classes, and uses each example to introduce the techniques for creating your own classes.

The first example involves applying classes to solve a problem of designing a dynamic *Tab* control that saw in Chapter 7, "Using Form Controls and Events." This example will demonstrate how classes can be used to improve the design of a general purpose tool that can be re-used in your applications.

The second example looks at how to build classes to handle data for a specific business problem.

After reading this chapter, you will:

- Understand how to create class modules.
- Know how to use Let, Get, Set, and New with classes.
- Be able to create collection classes.
- Be able to create base and derived classes.
- Be able to create a hierarchy of classes.

#### Note

As you read through this chapter, we encourage you to also use the companion content sample databases, BuildingClasses.accdb and BuildingClassesAfterExportImport.accdb, which can be downloaded from the book's catalog page.

The object-oriented view to developing software became popular in the 1980s, and in addition to OOP, many terms such as Object-Oriented Design (OOD) and Object-Oriented Analysis (OOA) became increasingly popular.

You have already seen many examples of working with objects in Access. These objects have properties that describe the object, and methods that cause an object to perform an operation. Access maintains collections of like objects; for example, the Forms collection, which contains Form objects that open on the desktop, and the TableDefs collection in the Data Access Object (DAO) model, which contains all the TableDef objects. These are examples of working with objects, but not examples of OOP.

OOP Programming (which is supported in VBA) means taking these ideas of working with objects and extending this concept to guide how program code is written.

Classes can be applied in several different ways in Access to:

- Improve the quality of code (OOP can help you develop more maintainable code).
- Extend form/report behavior (OOP allows you to take control of the underlying behavior of Access objects and wrap or extend the behavior).
- Integrate External Components (some external components do not expose all their functionality and OOP features can help with this).

# Improving the Dynamic Tab Control

In Chapter 7, you saw how to design a dynamic Tab control form that can load and unload pages by using an array of Types, where each item in the array corresponds to a form that is loaded into a subform control. The type structure for that is as follows:

```
Private Type PageInfo
strPageName As String
strPageSubForm As String
strRelatedPage As String
blCanBeLoaded As Boolean
End Type
```

Dim AvailablePages() As PageInfo

As an alternative to using a Type, you will define these pages as objects with properties that correspond to each part of the Type structure, and then you will build a collection to hold these objects, which replaces the array that held the types.

We need the following properties for our object:

- PageName
- SubFormPageName
- RelatedPageName
- CanBeUnloaded

You might have noticed that we have renamed the *CanBeLoaded* property in the preceding list to *CanBeUnloaded*. This is because an object-oriented perspective helps you to think in terms of how an object's state can be changed, so this is a more appropriate term to use. With the object's basic properties determined, you can now proceed to create the object class.

### **Creating a Class Module**

To begin, in the Project pane, you create a new class module, as shown in Figure 9-1.




Figure 9-1 Use the Project pane to create a new class module.

With this file created, you then save it using an appropriate class name; for this example, use clsTabPage. Because you are now working in a class module, you do not need to explicitly define that you are creating a class (as you would need to do in Microsoft .NET). Next, you define the object's internal variables at the top of the class module code, as illustrated in the following:

```
Option Compare Database
Option Explicit
```

- ' These could be declared as either Dim or Private
- ' as within a class their scope is restricted

Dim p\_PageName As String

Dim p\_SubFormPageName As String

Dim p\_RelatedPageName As String

Dim p CanBeUnloaded As Boolean

Note that these variables include the prefix "p " to indicate that they are private variables to each class object (other popular prefixes include "m" or "m\_"). The next step is to provide the user with a way of reading and writing these variable values.

### The Let and Get Object Properties

After you define the object's internal variables or attributes for your class, you need to create a mechanism to read or write these values. To do this, you define properties. On the Insert menu, click Procedure to open the Add Procedure dialog box, as shown in Figure 9-2.




Figure 9-2 Use the Add Procedure dialog box to create a new private or public property.

Ensure that you are not clicked inside any other property when you insert a new property; otherwise, it will fail to add the property correctly to the class. The code that is created needs appropriate data types to be specified for the return type of the property and the parameter type passed to the property.

As shown in the code that follows, you use the Get statement to read an object property from the internal private variable, and the Let statement to assign a value to the internal private variable. An object can have a number of internal variables, but you might only need to make a few of these available to the user. The idea is to keep the object's external interface very simple, exposing only the minimum number of essential features that a user will need. It is up to you to decide for which properties you want both a Let and Get, depending on whether the property is to be read-only (Get but no Let) or write-only (Let but no *Get*):

```
Public Property Get PageName() As String
    PageName = p_PageName
End Property
Public Property Let PageName(ByVal PageName As String)
    p_PageName = PageName
End Property
Public Property Get RelatedPageName() As String
    RelatedPageName = p_RelatedPageName
End Property
Public Property Let RelatedPageName(ByVal RelatedPageName As String)
    p_RelatedPageName = RelatedPageName
End Property
Public Property Get CanBeUnloaded() As Boolean
    CanBeUnloaded = p_CanBeUnloaded
End Property
Public Property Let CanBeUnloaded(ByVal CanBeUnloaded As Boolean)
    p_CanBeUnloaded = CanBeUnloaded
End Property
Public Property Get SubFormPageName() As String
    SubFormPageName = p_SubFormPageName
End Property
Public Property Let SubFormPageName(ByVal SubFormPageName As String)
    p SubFormPageName = SubFormPageName
End Property
```

### Creating an Object with New and Set

To test your new class, you create a module (not a class module) to verify that you can create an object. If you insert a breakpoint and trace through the code execution, you will learn a great deal, as you can trace through the codes execution into the class module code.

You can define the object variable and then later create an object with the New keyword, or as is also shown demonstrated in the following code, with the aTab2 object, you can both define and create the object at the same time. It is largely a matter of personal preference as to which method you choose to use.

Once you have finished with the object, set the object variable to *Nothing*; this destroys the object. The object would be destroyed anyhow when the code stops execution, but explicitly tidying up your objects is good practice and becomes more important when you work with more complex objects:

```
Sub modTabs_TestObject()
    ' test creating an object
    Dim aTab As clsTabPage
    Set aTab = New clsTabPage
    aTab.PageName = "ProductList"
    aTab.RelatedPageName = "Product Details"
    aTab.SubFormPageName = "frmTabsDvnamicProductList"
    aTab.CanBeUnloaded = False
    Debug.Print aTab.PageName
    Set aTab = Nothing
    Dim aTab2 As New clsTabPage
    aTab2.PageName = "Product Details"
    Debug.Print aTab2.PageName
    Set aTab2 = Nothing
End Sub
```

# **INSIDE OUT**

#### Initialization and Termination Events

When you are in a class module, you can select Class from the upper-left drop-down menu, which normally shows (General). Select Initialize or Terminate from the dropdown list that appears, and then generate the following procedures (in this example the type name ObjectType is not a real type but could for example be replaced with a real object type such as a DAO.RecordSet object):

```
Private Sub Class Initialize()
    Set p_Object = New ObjectType
Private Sub Class_Terminate()
    Set p_Object = Nothing
End Sub
```

Because class objects can contain other class objects or built-in class objects such as a Recordset, you might need to use the New keyword in Initialize to create an object that is assigned to a private variable, and then set the objects to Nothing to close the objects in the Terminate procedure. Externally, when your class object is created, the Initialize procedure is executed, and when it is set to Nothing or the variable goes out of scope, the Terminate procedure is executed.

### **Collection of Objects**

A VBA collection is a set of objects that you can use in a similar manner as the built-in collections, such as the Forms collection that you worked with in earlier chapters.

The example that follows defines a collection that is used to hold our Tab page objects:

```
Sub modTabs Collection()
   ' test creating an object
   Dim TabPages As New Collection
   Dim aTab As clsTabPage
   Set aTab = New clsTabPage
   aTab.PageName = "ProductList"
   aTab.RelatedPageName = "Product Details"
   aTab.SubFormPageName = "frmTabsDynamicProductList"
   aTab.CanBeUnloaded = False
   TabPages.Add aTab, aTab.PageName
   Set aTab = Nothing
   Set aTab = New clsTabPage
   aTab.PageName = "Product Details"
   aTab.RelatedPageName = ""
   aTab.SubFormPageName = "frmTabsDynamicProductDetails"
   aTab.CanBeUnloaded = True
   TabPages.Add aTab, aTab.PageName
   Set aTab = Nothing
   For Each aTab In TabPages
        Debug.Print aTab.PageName, aTab.SubFormPageName, _
aTab.RelatedPageName, aTab.CanBeUnloaded
   Debug.Print TabPages.Count
   Stop
   Set aTab = TabPages("ProductList")
   Debug.Print aTab.PageName
   Debug.Print TabPages("Product Details").PageName
   ' note 1 based collection unlike built in collections
   Debug.Print TabPages(1).PageName
   Set TabPages = Nothing
   Set aTab = Nothing
End Sub
```

Notice how the aTab variable is used several times to create objects, and how setting it to Nothing does not destroy the object. This is because once you have created an object, you add it to the collection, which is then responsible for managing the object (when the collection is set to *Nothing*, it will destroy the objects it contains.

When you add an object to a collection, you must also specify a collection key value (which must be unique). Doing this means that rather than referring to a collection object as

TabPages(1), you can use the key and refer to this as TabPages("Product List"). The Collection object's Add method also allows you to specify an optional Before or After argument for positioning an object relative to other objects in the collection. The collections first element is 1 and not 0 (which is what the built-in Access collections use).

Be aware that when you refer to an object by using TabPages(1).PageName, you cannot take advantage of IntelliSense assistance. This is because this type of collection can hold different types of objects, so the environment cannot know exactly which properties would apply to an object.

# **INSIDE OUT**

#### VBA collection classes

The built-in VBA collection classes that you have been working with are different from an Access collection. The first difference is that the Access collections, such as TableDefs, can only hold one type of object; a VBA collection can hold different types of objects (this explains why the IntelliSense is limited). The second difference is that VBA collection classes are 1-based, whereas the Access collections are 0-based.

In the next section, you will be creating your own collection classes that wrap around the VBA collection class. These collections will start to look more like an Access collection.

Once you have added an object to a collection and specified the key value, you will find that you cannot subsequently display the key value—it is hidden. If your procedures need to be able to refer to the key, you might find it useful to add your own property to the object class, which saves and holds the key value in each object. Looking in the class clsTabPage, you see the following (it is not essential to do this in the class):

```
Dim p_Key As String
Public Property Get Key() As String
    Key = p_Key
End Property
Public Property Let PageName(ByVal PageName As String)
    p_PageName = PageName
    p_Key = PageName
End Property
```

## **Creating Collection Classes**

A VBA Collection object supports a limited number of operations—Add, Count, and Remove. You will likely want to be able to add more operations to your collection. To do that, you need to define your own collection class, called *clsTabPageCollection*.

Defining a collection class follows the same steps as defining a normal class to create the class module. Your collection class will contain a VBA collection, so you define an internal variable called p\_TabPages. As we previously described, classes can have two specially named methods for initializing and terminating the class. The simple clsTabPage didn't need any special operations, but the new class needs to create a VBA collection, and then remove all the objects from the collection when it is terminated, as illustrated in the following code:

```
Private p_TabPages As Collection
Private Sub Class_Initialize()
    Set p_TabPages = New Collection
End Sub
Private Sub Class_Terminate()
    Dim aClassPage As clsTabPage
    For Each aClassPage In p_TabPages
        p_TabPages.Remove CStr(aClassPage.PageName)
    Set p_TabPages = Nothing
End Sub
```

You also want to have the standard operations for counting, adding, and removing items from the class, so you need to add these methods to our collection (you also add an Item method, which is another standard feature of a class):

```
Public Property Get Count() As Long
    Count = p_TabPages.Count
End Property
Public Sub Add(aClassPage As clsTabPage)
    p_TabPages.Add aClassPage, aClassPage.PageName
End Sub
Public Sub Remove(PageName As Variant)
    p_TabPages.Remove CStr(PageName)
End Sub
Public Function Item(PageName As Variant) As clsTabPage
    Set Item = p_TabPages(PageName)
End Function
```

Once you start defining your own collection class, you will find that a number of the expected built-in collection class features no longer work. For example, you cannot use a For Each loop, or index the collection by using the friendly key name (you will see how to get around this). The following procedure can be used to test the class; the program lines that are commented out have been included to show what will not work in our collection class:

```
Sub modTabs_clsTabPageCollection()
   ' test creating an object
   Dim TabPages As New clsTabPageCollection
   Dim aTab As clsTabPage
   Dim IngCount As Long
   Set aTab = New clsTabPage
   aTab.PageName = "ProductList"
   aTab.RelatedPageName = "Product Details"
   aTab.SubFormPageName = "frmTabsDynamicProductList"
   aTab.CanBeUnloaded = False
   TabPages.Add aTab
   Set aTab = Nothing
   Set aTab = New clsTabPage
   aTab.PageName = "Product Details"
   aTab.RelatedPageName = ""
   aTab.SubFormPageName = "frmTabsDynamicProductDetails"
   aTab.CanBeUnloaded = True
   TabPages.Add aTab
   Set aTab = Nothing
    For Each aTab In TabPages
         Debug.Print aTab.PageName, aTab.SubFormPageName, _
                 aTab.RelatedPageName, aTab.CanBeUnloaded
    Next
   For lngCount = 1 To TabPages.Count
       Set aTab = TabPages.Item(lngCount)
       Debug.Print aTab.PageName, aTab.SubFormPageName, _
                aTab.RelatedPageName, aTab.CanBeUnloaded
   Next
   Set aTab = Nothing
    Set aTab = TabPages("ProductList")
   ' following will work
   Set aTab = TabPages.Item(1)
   Debug.Print TabPages.Item(1).PageName
   Debug.Print aTab.PageName
   Set aTab = Nothing
   Set TabPages = Nothing
End Sub
```

There are two techniques available to get around the problem of not being able to refer to the collection class by using the key names. The first technique involves adding an AllItems function to the collection class, and the second method involves exporting, editing, and reimporting the class.

# **INSIDE OUT**

### Adding AllItems to a collection class

When you use the *AllItems* method, you need to add the following property to the class (you can give this property an alternative name):

```
Public Function AllItems() As Collection
    Set AllItems = p_TabPages
End Function
```

In the sample testing file, modTabs\_clsTabPageCollection2, you can see how to use this feature. The important code is as follows:

This is a satisfactory solution as long as you are prepared to insert the .AllItems reference when using the collection with the object's key.

### **Exporting and Re-importing the Class**

The reason that you cannot refer to collections by using standard syntax is because VBA classes do not allow special attributes to be set on a class, and these are required to support standard syntax.

If you right-click the collection class module in the project window, export it to a text file, and then open the text file in notepad, you will see the following header information in the class:

```
VERSION 1.0 CLASS
BEGIN

MultiUse = -1 'True
END

Attribute VB_Name = "clsTabPageCollection"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = False
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
Option Compare Database
Option Explicit
' class clsTabPagesCollection
Private p_TabPages As Collection
```

These attributes are not exposed in the VBA environment. There is a special attribute value, which when set to 0, sets the member as the default member for the object. You want the Item method to be the default member and you need to change the method adding the following attribute definition (this will enable references such as TabPages("ProductList") to work). Also, to support enumeration in a For ... Each loop, you need to add the NewEnum method, as shown in the following:

```
Public Function Item(ByVal Index As Variant) As clsTabPage
Attribute Item.VB_UserMemId = 0
         Set Item = p_TabPages(Index)
End Function
Public Function NewEnum() As IUnknown
Attribute NewEnum.VB UserMemId = -4
         Set NewEnum = p_TabPages.[_NewEnum]
End Function
```

After saving these changes, import the class back into your project, as shown in Figure 9-3.



Figure 9-3 Re-importing a class back into Access.

If you look in the VBA Editor, you will not be able to see the new attribute you just added in the *Item* method because it remains hidden.

This then means that the following references will work (note that in the sample database BuildingClassesAfterExportImport.accdb, the following code will work, because we have performed this rather complex operation; in the sample database BuildingClasses.accdb, this code has been commented out because it will not work):

```
For Each aTab In TabPages
   Debug.Print aTab.PageName, aTab.SubFormPageName, _
        aTab.RelatedPageName, aTab.CanBeUnloaded
Next
Set aTab = TabPages("ProductList")
Debug.Print TabPages("ProductList").PageName
Debug.Print aTab.PageName
```

This process needs to be repeated for each collection class in your project.

### Using Classes with the Dynamic Tab

You are now able to modify the code in the frmTabsDynamic form to make use of your new classes.

At the top of the module, where you had defined an array of types, declare your collection class as shown here:

```
Option Compare Database
Option Explicit
Dim TabPages As clsTabPageCollection
Dim lngTabPages As Long
```

The form's Open and Close events then create and dispose of the collection, as shown in the following:

```
Private Sub Form_Close()
    Set TabPages = Nothing
End Sub
Private Sub Form_Open(Cancel As Integer)
    Set TabPages = New clsTabPageCollection
    LoadTabs
End Sub
```

In the following code, in the LoadTabs procedure, you create and load your class objects into the collection:

```
Do While Not rst.EOF
   Set aTabPage = New clsTabPage
   aTabPage.PageName = rst!PageName
   aTabPage.SubFormPageName = rst!SubFormName
   aTabPage.CanBeUnloaded = rst!CanUnloadPage
    aTabPage.RelatedPageName = Nz(rst!RelatedPage)
   TabPages.Add aTabPage
   Set aTabPage = Nothing
   If rst!DefaultVisible And lngPageVisibleCount + 1 < lngTabPages Then
       LoadThePage aTabPage, lngPageVisibleCount
       lngPageVisibleCount = lngPageVisibleCount + 1
    End If
    lngArray = lngArray + 1
    rst.MoveNext
Loop
```

There are some other minor references in the code that used the array of types that now need to be changed to use the new collection and objects.

### Simplifying the Application with Classes

In the preceding sections, you have been able to change your dynamic tab to use classes, but it has not as yet resulted in any simplification of the applications code. In fact, you now have more code to maintain than when you started. But you now have a framework in which you can start to work that will lead to simplification and improved maintenance of your code.

In examining the frmTabsDynamic form, you can see that it has a general routine LoadTabs that involves reading information and placing the information into your collection. This operation could be placed inside the collection. So we can start to enhance our collection (clsTabPageCollection2) by adding the data loading function. But the process of loading the information also involves setting values in controls on the form. This means you also want to allow the collection to reference the controls on the form.

To begin, add new private members to the class:

```
' class clsTabPagesCollection
Private p TabPages As Collection
Private p_TabControl As TabControl
Private p_Controls As Controls
```

You must change the termination routine to clear the new variables and provide properties for setting the new variables, as follows:

```
Private Sub Class_Terminate()
    Dim aClassPage As clsTabPage
    For Each aClassPage In p_TabPages
        p_TabPages.Remove CStr(aClassPage.PageName)
    Next
    Set p_TabPages = Nothing
    Set p TabControl = Nothing
End Sub
Public Property Let TabControl(ByRef TabCtl As TabControl)
    Set p TabControl = TabCtl
End Property
Public Property Let Controls(ByRef Ctrls As Controls)
    Set p_Controls = Ctrls
End Property
```

You can then move the appropriate routines programmed into the form into the collection class.

#### Note

The full code for this can be seen in the sample file.

The result of this is an impressive reduction in the code on the form, which now shrinks to the following (see frmTabsDynamic2):

```
Option Compare Database
Option Explicit
Dim TabPages As clsTabPageCollection2
Private Sub Form_Close()
    Set TabPages = Nothing
End Sub
Private Sub Form_Open(Cancel As Integer)
    Set TabPages = New clsTabPageCollection2
    TabPages.TabControl = Me.TabCtl0
    TabPages.Controls = Me.Controls
    TabPages.LoadFromTable Me.Name, "tblTabPages"
End Sub
Private Sub TabCtl0_DblClick(Cancel As Integer)
    TabPages.TabPageDoubleClick CLng(Me.TabCtl0)
End Sub
```

Although the total amount of code remains unchanged, much of the code has moved out of the form and into the classes. There are a couple of advantages to creating classes to perform these operations:

- The code on the form is significantly simplified; it will be easy to add it to other forms or in other applications.
- The new classes are easy and intuitive to work with, so using them in the future should improve your applications, and you can add more features to these classes.

Some might argue that rather than using classes, which involves constructing a framework, you could more simply have built a re-useable library. This line of argument nearly always holds; thus, the decision to use classes becomes a question of whether it seems more intuitive and natural than using a traditional code module.

# **INSIDE OUT**

### Classes and associated terminology

Another term for creating an object is *instantiating* the class object. This means using the New keyword to create the class object.

The term Encapsulation is often used to convey the idea of tucking away all the functionality inside the class, such that the class only exposes as small a public interface as required to fulfill its purpose. With a class, you are wrapping up all the messy code and placing that inside a box so that you don't need to deal with it on a regular basis.

# Creating a Hierarchy of Classes

In this example, you look at creating a hierarchy of classes, which demonstrates the ability of classes to be used as building blocks for improving the design in managing data objects. The example involves a business problem for which the classes need to perform complex calculations (although you will stick to simple calculations in the example).

Suppose that you have analyzed an insurance company's business, the result of which revealed that the company sells a large number of different insurance products, but you noticed that there are common features in the products. Often, one type of policy only differs from another in a small number of ways. The task is to build an Access application that assists with generating the policy documents and performing appropriate calculations for the different policies.

### Creating a Base Class

The first task is to identify common features to all policies as well as the most standard calculations that a policy would require to perform. This involves creating a class, which will serve as the base class. In the following code, this is called *clsPolicy*.

From the project window in the VBA Editor, create a class module, and then save the module with the name *clsPolicy*, as demonstrated in the following code:

```
Option Compare Database
Option Explicit
' clsPolicy is the base class which has common features
' required in other classes
Dim p_MonthlyPremium As Currency
Public Property Get MonthlyPremium() As Currency
   MonthlyPremium = p_MonthlyPremium
End Property
Public Property Let MonthlyPremium(ByVal MonthlyPremium As Currency)
    p_MonthlyPremium = MonthlyPremium
End Property
Public Function CalculateAnnualPolicyValue() As Currency
    CalculateAnnualPolicyValue = p_MonthlyPremium * 12
End Function
```

This class can then be tested by using the following code:

```
Sub modInsurance_Policy()
    ' create a Policy from clsPolicy
    Dim Policy As New clsPolicy
    Policy.MonthlyPremium = 10
    ' Expect 120
    Debug.Print Policy.CalculateAnnualPolicyValue()
    Set Policy = Nothing
End Sub
```

#### **Derived Classes**

With the basic insurance policy class created, you can now create several other classes that will all use some of the base class features. This involves creating a class, which will serve as the derived class, and in the following code is called clsHomePolicy, being derived from the base class clsPolicy. The term derived is used because the class is in some way related or derived from the base class:

```
Option Compare Database
Option Explicit
' clsHomePolicy uses clsPolicy
Dim p Policy As clsPolicy
Private Sub Class Initialize()
    Set p_Policy = New clsPolicy
End Sub
Private Sub Class_Terminate()
    Set p_Policy = Nothing
End Sub
Public Property Get MonthlyPremium() As Currency
    MonthlyPremium = p_Policy.MonthlyPremium
End Property
Public Property Let MonthlyPremium(ByVal MonthlyPremium As Currency)
    p_Policy.MonthlyPremium = MonthlyPremium
End Property
Public Function CalculateAnnualPolicyValue() As Currency
    CalculateAnnualPolicyValue = p_Policy.CalculateAnnualPolicyValue() + 50
End Function
```

The first derived class, clsHomePolicy, contains a base class object, clsPolicy, so you need to have initialization and termination events to create and dispose of the base class object.

The clsHomePolicy is only loosely tied to clsPolicy, which means that you need to add all the required properties and methods into the new class. But if you look at the CalculateAnnual PolicyValue method, you will see how it can take advantage of the calculation in the base class.

# **INSIDE OUT**

#### Inheritance and polymorphism in classes

Note that we are using the term derived here in a very loose manner. Many OOP languages incorporate the concept of inheritance, which means truly deriving classes, and they use the term polymorphism for how derived classes can implement variations on methods available through base classes.

VBA does not support direct inheritance or explicit polymorphism, but you can use the approach described here to create structures that offer some of these characteristics.

Another OOP term is multiple inheritance, which means inheriting from more than one base class; by embedding other classes using this technique, we can also form structures that behave in some respects like those having multiple inheritance. The techniques used here to produce a hierarchy can also be described by the term wrapper, where we wrap around one class for the purpose of extending or changing its functionality.

As is illustrated in the code that follows, you can now define two additional classes, one called clsSpecialHomePolicy, which is derived from clsHomePolicy, and the other, called cls-CarPolicy, is derived from clsPolicy (you can view the code in the sample database):

```
Option Compare Database
Option Explicit
' clsSpecialHomePolicy
Dim p_Policy As clsHomePolicy
Private Sub Class_Initialize()
    Set p_Policy = New clsHomePolicy
Private Sub Class_Terminate()
    Set p_Policy = Nothing
Public Property Get MonthlyPremium() As Currency
    MonthlyPremium = p_Policy.MonthlyPremium
End Property
Public Property Let MonthlyPremium(ByVal MonthlyPremium As Currency)
    p_Policy.MonthlyPremium = MonthlyPremium
End Property
Public Function CalculateAnnualPolicyValue() As Currency
    CalculateAnnualPolicyValue = p_Policy.CalculateAnnualPolicyValue() + 100
End Function
```


These classes can be tested with the following code:

```
Sub modInsurance_Policy()
   ' create a Policy from clsPolicy
   Dim Policy As New clsPolicy
   Policy.MonthlyPremium = 10
   ' Expect 120
   Debug.Print Policy.CalculateAnnualPolicyValue()
   Set Policy = Nothing
   ' create a HomePolicy
   Dim HomePolicy As New clsHomePolicy
   HomePolicy.MonthlyPremium = 10
   ' Expect 120+50 = 170
   Debug.Print HomePolicy.CalculateAnnualPolicyValue()
   Set HomePolicy = Nothing
   ' create a SpecialHomePolicy
   Dim SpecialHomePolicy As New clsSpecialHomePolicy
   SpecialHomePolicy.MonthlyPremium = 10
    ' Expect 120+50+100 = 270
   Debug.Print SpecialHomePolicy.CalculateAnnualPolicyValue()
   Set SpecialHomePolicy = Nothing
   ' create a CarPolicy
   Dim CarPolicy As New clsCarPolicy
   CarPolicy.MonthlyPremium = 10
   ' Expect 120+80 = 200
   Debug.Print CarPolicy.CalculateAnnualPolicyValue()
   Set CarPolicy = Nothing
End Sub
```

# Summary

In this chapter, you learned about classes via two examples. In the first example, you saw how a general purpose framework for working with form Tab controls can dynamically load subforms and be re-written using classes. The final result was simplified application code with the complexity hidden within the class.

The second example introduced techniques for building a hierarchy of classes by using a base class and several derived classes. This provides a more structured and maintainable solution when using classes.



# CHAPTER 10

# **Using Classes and Events**

WithEvents Processing	360	Friend Methods	378
Abstract and Implementation Classes	370		

n this chapter, you begin by looking at a process called *WithEvent* processing (also known as subclassing). You will see how to develop your own event handlers that can act upon Microsoft Access 2010 form or control events. As an example, you will develop your own *OnError* event handler, which can then be hooked into all your application's forms.

You will also learn you how to construct your own asynchronous batch processor for Microsoft SQL Server by using *RaiseEvent* and asynchronous event processing. This will illustrate another general technique of classes producing and consuming events.

Toward the end of the chapter, you will look at using abstract classes and implementation classes to provide frameworks for building classes. The chapter finishes with a look at *Friend* methods for sharing functionality between classes.

After reading this chapter, you will:

- Understand how to create classes for handling form and control events.
- Know how to use *RaiseEvent* to work with classes that produce and consume events.
- Understand abstract and implementing classes.
- Understand how to use Friend methods.

#### Note

As you read through this chapter, we encourage you to also use the companion content sample database, ClassesAndEvents.accdb, which can be downloaded from the book's catalog page.

# WithEvents Processing

When you include the WithEvents statement in a class, you are indicating that the class can receive notification of events for a particular type of object. In this section, you look at applying this technique to handle events and controls for a form.

### **Handling Form Events**

In a form's class module, you can write code against specific events, but it is also possible to define your own class for handling specific events on a form. In this example, you see how to design an error handling class that can manage the error events on a form.

To begin, create a new class module, and then save this class by using the name clsError Handler. At the top of the class, you use the WithEvents syntax to indicate that this form can handle events for a form type object, as shown in the following:

```
Option Compare Database
Option Explicit
' class clsErrorHandler designed
' to manage error events for an an Access form
Private WithEvents frm As Access.Form
```

After you have defined this, select the frm object inside the class module. You can now write code against any of the standard form events, as shown in Figure 10-1.




Figure 10-1 By selecting the form object frm, you can define the standard form events handlers within your class.

In this case, you want to write an error handler in your class that writes errors to a log table, as follows:

```
Private Sub frm_Error(DataErr As Integer, Response As Integer)
   ' Respone can be acDataErrContinue or acDataErrDisplay
   Dim strErrorMessage As String
   strErrorMessage = AccessError(DataErr)
   ' record the error
   Dim db As DAO.Database
   Dim rst As Recordset
   Set db = CurrentDb
```

```
Set rst = db.OpenRecordset("tblErrorLog", dbOpenDynaset)
    With rst
        .AddNew
        !ErrorNo = DataErr
        !ErrorMessage = strErrorMessage
        !ErrorProc = frm.Name
        ' Also very useful to log the id of the user generating the error
        !WindowsUserName = modErrorHandler_GetUserName()
    End With
    rst.Close
    Set rst = Nothing
    db.Close
    Set db = Nothing
    ' take an appropriate action
       If DataErr = 3200 Then
        ' replace the default error message box
       MsgBox "Unable to delete this record " & strErrorMessage, _
                vbInformation, "Operation not Available"
        ' supress Access error message
        Response = acDataErrContinue
    End If
End Sub
```

You also need to provide a procedure that enables the class to be linked into a form. You can do this by defining a public property in the class:

```
Public Property Set Form(frmCallingForm As Access.Form)
   Set frm = frmCallingForm
End Property
```

The class is used on the sample frmCategoriesErrorHandling form. At the top of the form's class module, add the following definition:

```
Option Compare Database
Option Explicit
Dim instErrorHandler As clsErrorHandler
```

On the form's Open event, create an object of the new class, set the Form property for the new class to point at the current form, and then indicate that there is a processing routine for the OnError Event.

```
Private Sub Form Open(Cancel As Integer)
   Set instErrorHandler = New clsErrorHandler
   Set instErrorHandler.Form = Me
    ' Assign responsibility for handling these events
   Me.OnError = "[Event Procedure]"
End Sub
```

This form can be tested by clicking the record selector and pressing the Delete key while viewing the form; referential integrity will prevent the delete and trigger the error handler in your class. You will also notice that if you attempt to delete a category record when viewing the tables of data or in a form without error handling that you get a more informative error message informing you that the delete is prevented because of records in the related *Products* table. Unfortunately, when you use your own error handling for errors on a form, the returned error message only displays a "|" (vertical bar) symbol rather than showing the related table's name.

#### **INSIDE OUT** Subclassing form events

It is possible to have additional local error handling code on the form behind the On Error event. In this circumstance, the local error handler executes before the code in your class module. This technique of subclassing a form's events can be used to add this error logging to all forms in an application.

### **Handling Control Events**

You can handle events for a particular control on a form in a manner similar to handling events for a form.

You begin by creating a class module called *clsNotification* and indicating that the class will process events for a command button control:

```
Option Compare Database
Option Explicit
' clsNotification designed to handle events for
' certain a command button on a form
Private WithEvents Cmd As Access.CommandButton
```

As in the previous example, the drop-down menu of procedures in the upper-right corner now shows all the events for a command button.

This example contains a routine that logs whenever a button is clicked. You can use this to record when a user invokes specific operations with a form, as illustrated in the following code:

```
Private Sub Cmd Click()
   Dim db As DAO.Database
    Dim rst As Recordset
    Set db = CurrentDb
    Set rst = db.OpenRecordset("tblActionLog", dbOpenDynaset)
   With rst
```

```
.AddNew
        !CallingForm = Cmd.Parent.Name
        !Action = "Executing special code in the class for button : " & _
                   Cmd.Name
        ' Also very useful to log the id of the user
        !WindowsUserName = modErrorHandler_GetUserName()
    End With
    rst.Close
    Set rst = Nothing
    db.Close
    Set db = Nothing
End Sub
```

The preceding example uses the *Parent* property of the command button to gain access to properties of the calling form. A new property is required to allow a command button to be hooked in to the new class, as follows:

```
Public Property Set CmdButton(cmdCallingButton As Access.CommandButton)
    Set Cmd = cmdCallingButton
End Property
```

The sample frmCategoriesCommandButton form shows how this can be used:

```
Option Explicit
Dim instCmdNotify As clsNotificationButton
Private Sub Form Close()
    Set instCmdNotify = Nothing
End Sub
Private Sub Form_Open(Cancel As Integer)
    Set instCmdNotify = New clsNotificationButton
   Set instCmdNotify.CmdButton = Me.cmdNotify
    Set instCmdButton
   Me.cmdNotify.OnClick = "[Event Procedure]"
End Sub
```

Option Compare Database

#### Asynchronous Event Processing and RaiseEvent

This example shows how to use WithEvent processing to create a form and associated classes that can be used to asynchronously execute stored procedures in SQL Server by using ActiveX Data Objects (ADO). ADO and SQL Server are discussed further in later chapters.

## **INSIDE OUT**

#### Producing and consuming events

With classes, a producer task can source (raise) events, and a consumer task can sink (receive) the events. You can take advantage of this by uncoupling tasks within an application and using events as a communication method between the tasks. In practice, these techniques are often used with ActiveX components to trap events raised by the external objects. In the example in this chapter, we use an ADO connection to produce events and a VBA class to consume the events.

A producing class (clsProduced) defines the event that it will raise and then raises the event at some point in the code, as follows:

```
Public Event ChangeText()
    RaiseEvent ChangeText
```

Then the consumer form or class defines a variable of the producer type, specifying the With Events option, and then declares a procedure to match that defined by the producer and combines the variable name with the event name:

```
Private WithEvents objProduced As clsProducer
Private Sub objProduced_ChangeText()
End Sub
```

#### **Stored Procedures**

In an appropriate SQL Server database, create the following two stored procedures (Create-BatchProcedures.sql):

```
USE [AccessInsideOut]
G0
CREATE PROC usp_Proc1 @BatchLogId INT
BEGIN
  -- Wait for a delay to simulate
  -- a batch running
  WAITFOR DELAY '00:00:15';
  SELECT @BatchLogId AS ReturnInfo
END
G0
```

```
CREATE PROC usp_Proc2 @BatchLogId INT
AS
BEGIN
  -- Wait for a delay to simulate
  -- a batch running
  WAITFOR DELAY '00:00:15':
  SELECT @BatchLogId AS ReturnInfo
END
G0
```

You need to created a table in Access that holds a list of the available stored procedures, as shown in Figure 10-2.




Figure 10-2 This table can be used to schedule a list of stored procedures for execution.

#### The ADO Asynchronous Execution Class

This example needs to use ADO because we want to be able to start a stored procedure running asynchronously. This will allow multiple stored procedures to be executed, and the user can then continue to work with the application and receive notification when the stored procedures have completed. You begin by adding a reference to the ADO library and then create the class clsBatchProcessingSQLServer.

At the top of the module, add the code that follows (entering appropriate information in the connection string for your SQL Server). This enables the class to manage events for an ADO Connection object; it also defines a public event called BatchCompleted, which is used for raising an event once processing is complete:

```
Option Compare Database
Option Explicit
' clsBatchProcessingSQLServer
' Performs asynchronous batch processing
' Event for notification when completed
Public Event BatchCompleted(ByVal lngBatchId As Long)
Const strConnect = "DRIVER=SQL Server;SERVER=VISTAULTRA64\SQL2008R2;" & _
                "Trusted_Connection=Yes;DATABASE=AccessInsideOut"
Dim WithEvents con As ADODB.Connection
Dim rstCollection As Collection
```

The class is constructed around the connection object but contains a collection of ADO Recordsets, each of which can be executing a different stored procedure. You need initialization and termination procedures to manage this internal collection. These are presented in the following code:

```
Private Sub Class_Initialize()
    Set con = New ADODB.Connection
    Set rstCollection = New Collection
    con.CursorLocation = adUseClient
    ' set an infinit timeout period
    con.CommandTimeout = 0
    ' Open the connection.
    con.Open strConnect
End Sub
Private Sub Class_Terminate()
    con.Close
    Set con = Nothing
    Dim rstADO As ADODB.Recordset
   On Error Resume Next
    For Each rstADO In rstCollection
        rstADO.Close
       Set rstADO = Nothing
   Next
    Set rstCollection = Nothing
End Sub
```

In the next step, you create a procedure that generates an ADO Recordset object, executes it asynchronously, and then adds it to the Recordset collection (this sample also includes some DAO code that writes a log of the executing stored procedures), as follows:

```
Public Sub ExecuteBatch(ByVal lngBatchId As Long, _
                        strCallingForm As String)
    ' read the batch instruction and execute the batch
   Dim db As Database
   Dim rst As Recordset
   Dim strBatchCommand As String
   Set db = CurrentDb
   Set rst = db.OpenRecordset("SELECT * FROM tblBatch " & _
                            " WHERE BatchId = " & lngBatchId, dbOpenDynaset)
   strBatchCommand = rst!BatchCommand
   rst.Close
   Set rst = db.OpenRecordset("tblBatchLog", dbOpenDynaset)
   With rst
        .AddNew
        !BatchDescription = strBatchCommand
        !CallingForm = strCallingForm
        !WindowsUserName = modErrorHandler_GetUserName()
        !BatchStartTime = Now()
```

```
.Update
    .Bookmark = .LastModified
    strBatchCommand = strBatchCommand & " " & CStr(!BatchLogId)
End With
' Execute the batch command asynchronously
Dim rstADO As ADODB.Recordset
Set rstADO = New ADODB.Recordset
rstADO.Open strBatchCommand, _
 con, adOpenKeyset, adLockOptimistic, adAsyncExecute
rstCollection.Add rstADO, CStr(rstCollection.Count + 1)
```

End Sub

The ADO connection has an ExecuteComplete method, which is called when a batch asynchronously completes execution. This method updates the logged event relating to the stored procedure and then raises an event by using RaiseEvent to the procedure BatchCompleted:

```
Private Sub con ExecuteComplete(ByVal RecordsAffected As Long,
                                ByVal pError As ADODB.Error, _
                                adStatus As ADODB.EventStatusEnum, _
                                ByVal pCommand As ADODB.Command, _
                                ByVal pRecordset As ADODB.Recordset, _
                                ByVal pConnection As ADODB.Connection)
' This gets called when the asnychronous ADO recordset
' is completed
    Dim db As Database
    Dim rst As Recordset
    Set db = CurrentDb
    Set rst = db.OpenRecordset("SELECT * FROM tblBatchLog " & _
                        " WHERE BatchLogId = " & pRecordset(0), dbOpenDynaset)
   With rst
        .Edit
        !BatchEndTime = Now
        !BatchFailed = False
        !BatchCompleted = True
        !BatchReturnInformation = pRecordset(0)
        .Update
        .Close
    End With
    ' notify calling form that process is completed
    RaiseEvent BatchCompleted(pRecordset(0))
    Set rst = Nothing
    db.Close
    Set db = Nothing
End Sub
```

#### **Batch Processing Form**

Figure 10-3 shows the frmBatchProcessingSQLServer form, which is used to perform the batch processing. To execute the batches, select a batch from the drop-down menu, and then click the Execute Asynchronous Batch button. (You need to do this quite quickly because each batch is set to execute for 15 seconds.) Wait until the screen refreshes to see the completed batches.

#### Note

You can interact with the form and other parts of Access while batches are processing (you need to keep the form open while the batches are running).

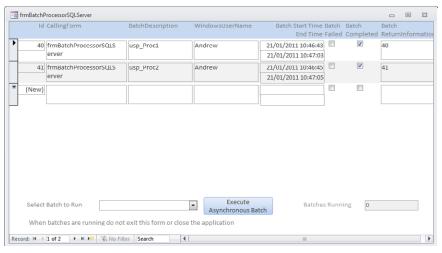


Figure 10-3 The frmBatchProcessingSQLServer form for batch execution of stored procedures.

At the top of the form's module, declare a WithEvents reference to the batch processing class, as follows:

```
Option Compare Database
Option Explicit
Private WithEvents BatchProcessor As clsBatchProcessingSQLServer
```

In the form's Open and Close events, you manage the creation and removal of the object:

```
Private Sub Form Close()
    Set BatchProcessor = Nothing
End Sub
```

```
Private Sub Form_Open(Cancel As Integer)
   Me.txtBatchRunCount = 0
    Set BatchProcessor = New clsBatchProcessingSQLServer
End Sub
```

The code behind the Execute Asynchronous Batch button that executes the batch command is shown in the following:

```
Private Sub cmdExecute Click()
   If Not IsNull(Me.cboBatch) Then
        ' call a batch processing routine
       Me.txtBatchRunCount = Me.txtBatchRunCount + 1
       BatchProcessor.ExecuteBatch CLng(Me.cboBatch), CStr(Me.Name)
   End If
End Sub
```

The form also has a *BatchProcessing* procedure. This was the procedure name declared in the class; it is used by the class to raise an event on the target form:

```
Private Sub BatchProcessor_BatchCompleted(ByVal lngBatchId As Long)
   Me.txtBatchRunCount = Me.txtBatchRunCount - 1
   Me.Requery
End Sub
```

To summarize, the execution proceeds as follows (see Figure 10-4):

- 1. The form opens and creates a batch processing class called BatchProcessor; the class initializes a collection for the ADO Recordsets.
- **2.** The form also declares that it can accept incoming events in its *BatchProcessor*\_ BatchCompleted routine.
- 3. The user clicks to perform the ExecuteBatch command, which creates and executes an ADO Recordset in the class. This is added to the class's collection of executing Recordsets.
- **4.** The class listens for any incoming events on the *Connection*, and when it receives an event after an ADO Recordset is completed through con\_ExecuteComplete, it notifies the form by using the RaiseEvent method.

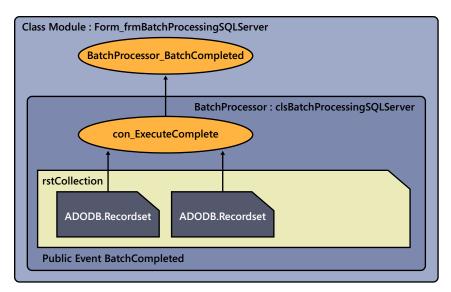


Figure 10-4 The form for batch execution of stored procedures.

## **Abstract and Implementation Classes**

In this section, you look at an example of creating classes by using abstract and implementation classes. The example illustrates how to build classes that assist with data import and export.

Although it costs some time to correctly construct class libraries, the benefit is that once you have them built and tested, you will get a lot of use out of them. The advantage of using abstract classes is that they create a definition that you need to follow when constructing additional classes, which helps you to ensure that you add all the required features when creating new classes.

#### **Abstract Classes**

An abstract class is a template for building other classes. It contains placeholders for your subs, functions, and properties.

The functions, subs, and properties do not contain any code, because once they have been defined in the abstract class and you create a real (or concrete) class that implements the abstract class, you are forced to allow for a stub function, sub, or property to match each item in the abstract class. The derived classes then provide the code to implement the place holders defined in the abstract class. When using abstract classes you will also be using the Implements keyword to build classes that implement the abstract classes.

## **INSIDE OUT**

#### Abstract classes and code

Although an abstract class acts to provide a template for other classes to add implementation code, it is possible to place common code inside the abstract class; to make use of this shared code you need to create an instance of the abstract class inside an implementation class (discussed on page 372). In general, the term abstract class means that you do not create instances of the class, but in VBA, because an abstract class is not a special class in terms of how it is defined, you can create an instance of an abstract class.

An abstract class file is created in exactly the same way as any other class file.

The samples database contains a class called *clsExportImport*, which will act as an abstract class, as demonstrated in the following (only part of the class in this and other examples will be shown):

Option Compare Database Option Explicit

' clsExportImport is an abstract class
Enum enExportType
 TextFile
 ExcelSpreadsheet
End Enum

Public Function ExportData() As Boolean End Function

Public Function ImportData() As Boolean End Function

Public Property Get FileName() As String End Property

Public Property Let FileName(ByVal strNewFilename As String) End Property

Notice that the class does not have any member variables; it only has place holders for the properties and functions/subs. For the sake of convenience, the sample defines an enumerated type which is placed inside the abstract class. This will be used in the derived classes that you will be building.

#### Implementation Classes

The next step is to build specific implementation classes that follow the abstract class template. You do this by using the Implements keyword. There are two implementation classes: one called clsImportExportText for handling text files, and the other called clsImportExport-Excel for handling spread sheets.

At the top of the file, define the member variables, as shown in the following:

```
Option Explicit
' Interface class clsImportExportText
Implements clsImportExport
' Applies to all classes
Private p_FileName As String
Private p_ExportType As enExportType
Private p_DataSource As String
Private p_HasFieldNames As Boolean
```

Option Compare Database

' Specific to this class Private p\_SpecificationName As String

Private p\_ErrorMessage As String

If you select the class object as shown in Figure 10-5, you can view or create the two events associated with the class.

```
Class
                                             Initialize
                                              Initialize
   Private Sub Class Initialize()
       p ExportType = TextFile
   End Sub
```

Figure 10-5 Adding an initialization for each class.

Because you have entered the Implements keyword, you can now select the abstract class name from the drop-down menu (see Figure 10-6). Items for which you already have a stub function are displayed in bold; those for which you need to add a stub function will not be bold.

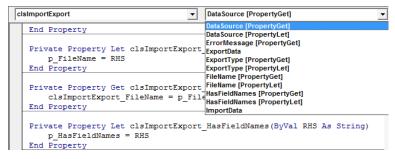


Figure 10-6 Entries must be selected for every Let/Get property and every function/subroutine defined in the abstract class.

One particular function in the abstract class—a stub function to Get the Filename—is defined as follows:

```
Public Property Get FileName() As String
End Property
```

When you add this to the implementing class, the following code results:

```
Private Property Get clsImportExport_FileName() As String
   clsImportExport_FileName = p_FileName
End Property
```

The line of code has been typed in and was not provided when the stub function was generated.

The Get property of the class defined previously is not going to be visible as a property in the derived class. This is because it is marked as private. Also, look at the name clsImport Export\_FileName; if you made it public, it would not look like a desirable name for a property.

This is quite subtle, and it is not until you actually implement the abstract class and trace the code execution path that it becomes clear what is happening. You will also notice in the code where Access has generated stub functions for Let statements that the parameter is named RHS; this means right-hand-side, which indicates that the Let statement will make an assignment using this variable on the right of an expression.

#### Implementing an Abstract Class

What lies at the heart of implementing an abstract class is the ability to work with an object variable that references the abstract class but that can point to any of the derived classes, but have the code executed in the derived class.

So you can perform the following trick (look very carefully at the first two lines of code where the variable is of type clsImportExport, but you create an object with this variable of type clsImportExportExcel):

```
Sub modImportExport_Testing()
   Dim ExportProcess As clsImportExport
   Set ExportProcess = New clsImportExportExcel
   ExportProcess.FileName = CurrentProject.Path & "\test.xls"
   ExportProcess.DataSource = "Products"
   If ExportProcess.ExportData() Then
       Debug.Print "Export completed"
   E1se
        Debug.Print ExportProcess.ErrorMessage
   Fnd Tf
   Set ExportProcess = Nothing
```

Figure 10-7 presents the result of tracing through the code execution into the derived classes code and also illustrates the parameter naming RHS, for right-hand-side generated by Access.



Figure 10-7 When a variable of the abstract class type is set to a derived class object, it executes the code in the derived class.


If you trace the execution in Debug mode, you find that the procedure and methods that are called are in the object type clsImportExportExcel; for example, this occurs when assigning the property ExportProcess. FileName. When you call a property with the name FileName (which is only defined in the abstract class), it actually executes the code in the derived class called clsImportExport\_FileName. The abstract class exposes the property name but then hooks up the code to execute in the class that implements the abstract interface.

If you want to add a new property to your classes, you have two options. You can add a Let and Get (or for read-only, just a Get) to the clsImportExport, but if you do that, it means adding a stub procedure to all the derived classes. The second option is you can just add the new property to the derived class to which it applies.

The question becomes, what happens if you just add something in the derived class? To demonstrate, in your clsImportExportText class, add the following Let and Get:

```
Public Property Let SpecificationName(ByVal strSpecificationName As String)
    p_SpecificationName = strSpecificationName
End Property
Public Property Get SpecificationName() As String
    SpecificationName = p_SpecificationName
End Property
```

Now, in Debug mode, if you look at the ExportProcess properties, you will not see this new property. This is because it is not defined in the abstract class, so you need to create a new object variable of type clsImportExportText and make it point at the object. You can see an example of this in *modImportExport Testing*, as shown in Figure 10-8.



**Figure 10-8** This breakpoint in the Immediate window shows how you can use the extended property *SpecificationName* in the derived class.

So, you define a variable called *EPText*, which is of type *clsImportExporText*, and make it point to the object by using the following:

```
SET EPText = ExportProcess
```

You can now use the *EPText* object variable to access the extended properties defined in the derived class.

## **INSIDE OUT**

#### Establishing an object type with TypeOf

You refer to an object by using an object variable that is defined as a type matching the abstract class. The *TypeOf* statement allows you to establish the type of object being referenced through a variable defined as being of a type corresponding to the abstract class:

```
If TypeOf ExportProcess Is clsImportExportExcel Then
    Debug.Print "Special processing for the object"
End If
```

If you then want to use features specific to that class, you need to use the variable type matching that of the implementing class.

What you have achieved in the sample code thus far is referred to in many programming languages as type casting of pointers; here you have done this through the features of VBA abstract classes.

You now have a property in the implementing class called <code>clsImportExport\_ImportData()</code>, which is not exposed, and in the abstract class is called <code>ImportData()</code>. At first glance, this appears to be a problem, but it is not, because when you call the method with a pointer to an abstract class type (having created an implementing class for this object), it executes the code in the implementing class. This is a clever feature of abstract classes.

If you need to explicitly expose the properties and methods in the abstract class when working with a variable referencing the implementing class, you can use the following technique to define a *Public Function* in the implementing class:

```
Private Function clsImportExport_ImportData() As Boolean
   On Error Resume Next
    DoCmd.TransferText acImportDelim, p_DataSource, p_FileName, p_HasFieldNames
    If Err = 0 Then
        clsImportExport ImportData = True
   F1se
        p_ErrorMessage = Err.Description
        clsImportExport_ImportData = False
    End If
End Function
Public Function ImportData() As Boolean
    ImportData = clsImportExport_ImportData()
End Function
```

Using the previously described approach, you can hold and execute common code from within an abstract class; this extends the idea of an abstract class acting as a placeholder, to contain executable code.

We wish to be clear about one point: a variable defined of type matching the abstract class type needs to be used when manipulating the properties defined in the abstract class, but a variable matching the type of the implementing class needs to be used when referring to features defined in the implementing class, but not in the abstract class.

#### **Hybrid Abstract and Non-Abstract Classes**

Purists will state outright that VBA fails to meet the accepted definitions of polymorphism and inheritance expected of object-oriented languages, and even though that is true, VBA does have some very clever features, such as using WithEvents, that go beyond the basic object-oriented definitions.

Although defining member variables and writing code in the abstract class is permitted, it does not appear to be a useful idea, because you cannot use these variables, or any code written in the abstract class (because an abstract class is a template). But you can add to a derived class a reference to an instance of the abstract class by using a form of wrapper around the abstract class. This might be a poor man's version of inheritance, but it does lead to some interesting possibilities.

It is possible to mix and match features from abstract and non-abstract classes when implementing an interface.

To show how this works, we have created a new base class called clsImportExport2. In this class, we have added a member variable p FileName and changed the Let/Get to use this private member variable. This is now a hybrid class in that it is part concrete and part abstract:

```
Option Explicit
' clsImportExport2 is both abstract and non-abstract class
Private p_FileName As String
Public Property Get FileName() As String
    FileName = p_FileName
End Property
Public Property Let FileName(ByVal strNewFilename As String)
    p_FileName = strNewFilename
End Property
```

Option Compare Database

Option Compare Database Option Explicit

In the new derived class called clsImportExportText2, you need to create an instance of the abstract class (you are both wrapping the class and implementing the class at the same time), as follows:

```
Implements clsImportExport2
' Applies to all classes
Private p_clsImportExport As clsImportExport2
Private p_ExportType As enExportType
Private p_DataSource As String
Private p_HasFieldNames As Boolean
Private p_ErrorMessage As String
' Specific to this class
Private p_SpecificationName As String
```

Private Sub Class\_Initialize() p\_ExportType = TextFile p\_clsImportExport = New clsImportExport2 End Sub Private Sub Class\_Terminate() Set p\_clsImportExport = Nothing Fnd Sub

Because you are implementing this abstract class, you still need the appropriate entries for the FileName Let/Get, but you now call the code in the base/abstract class from the derived class:

```
Private Property Let clsImportExport2_FileName(ByVal RHS As String)
    p_clsImportExport.FileName = RHS
End Property
Private Property Get clsImportExport2 FileName() As String
    clsImportExport2_FileName = p_clsImportExport.FileName
End Property
```

#### Friend Methods

When you develop a class, you invest a lot of time and effort constructing the class. And as you have seen, everything except the very essential elements that you need are private to a class. But if you devise a very useful private internal function in a class and then decide another class that wraps around this class needs to dig into its structure and use the internal function, then there is a method for doing this, and it involves the use of the Friend keyword.

Inside the class clsImportExportText, there is an internal function called ExtractFileName, which extracts the file name from *p\_FileName* (which includes the path and file name). If you create a new class called *clsDemoFriend* that wants to use this function, but you don't want to simply expose this as a property of the class, then you define the function by using the Friend keyword. The following code iilustrates a modified definition of the function in the class *clsImportExportTex*t:

```
Friend Function ExtractFileName(FullPathName As String) As String
   ' This private function extracts the filename from
   ' FullPathName which looks like C:\...\xxx.txt
   ' returning xxx.txt
   Dim Ingpos As Long
   Dim strRev As String
   strRev = StrReverse(FullPathName) ' reverse the string
   lngpos = InStr(1, strRev, "\") ' find last \
   If lngpos <> 0 Then
       ExtractFileName = Left(strRev, lngpos - 1)
   E1se
       ExtractFileName = p_FileName
   End If
   ExtractFileName = StrReverse(ExtractFileName)
End Function
```

In the new class clsDemoFriend, you can work with ExtractFileName, which is the internal part of clsImportExportText. To do this, you need to create an instance of the object that contains the *Friend* function in the class, as follows:

```
Option Compare Database
Option Explicit
' example class using a friend function
Dim p_clsImportExportText As clsImportExportText
Private Sub Class_Initialize()
    Set p_clsImportExportText = New clsImportExportText
End Sub
Private Sub Class_Terminate()
    Set p_clsImportExportText = Nothing
End Sub
Public Property Get GetTheFileName(FullPathName As String) As Variant
    GetTheFileName = p_clsImportExportText.ExtractFileName(FullPathName)
End Property
```

This new class is then able to make a reference to the ExtractFileName() function, which is contained in clsImportExportText. The only reason that you are creating an instance of clsImportExportText is so that you can make use of the Friend function in that class. This is demonstrated in the procedure modFriend\_Test.

### **Summary**

In this chapter, you saw how we can use the WithEvents keyword to develop your own classes, which can provide general purpose event handling procedures to handle events in forms and for controls on forms, by using a process known as subclassing.

Techniques were also demonstrated for using the RaiseEvent keyword to generate events that can then be processed by other classes. In the example, a class generated events that were then processed by a form's class module.

You also saw how to construct an abstract class that acts as a template for creating other classes, which used the Implements keyword. In this case, these classes can be called derived classes.

The hybrid nature of classes was then demonstrated where we had a derived class which also wrapped around an instance of the abstract class (in which case, the abstract class then behaves as both a non-abstract class and abstract class).

Finally, you were introduced to the Friend keyword, which allows a class to borrow features from another class, where these features are not normally exposed as part of the class.





## **Using Classes and Forms**

Opening Multiple Instances of a Form	ActiveX Controls and Events
Classes and Binding Forms	

HIS chapter focuses on working with classes and Microsoft Access forms. You also look at using classes to open multiple copies of the same form.

After reading this chapter, you will:

- Be able to open multiple copies of the same form in an application.
- Use classes to manage the *RecordSource* of a form.
- Understand how to work with ActiveX controls and a form.

#### Note

As you read through this chapter, we encourage you to also use the companion content sample database, ClassesAndForms.accdb, which can be downloaded from the book's catalog page.

## **Opening Multiple Instances of a Form**

You can use programming code and classes to open multiple instances of the same form in the application, as shown in Figure 11-1.

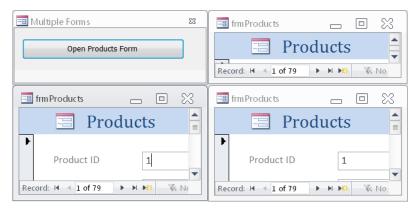


Figure 11-1 Opening multiple copies of the same form by using VBA code.

To open multiple instances of a form, you first need to ensure that the form has a code module. When you first create a form, it does not have a code module associated with it; to generate a code module, you need to view the code behind for the form, or set the form's HasModule property to Yes.

The sample database contains two forms, frmProducts, which has the code module Form\_frmProducts, and frmMultipleProducts, which can open multiple instances of a form. To open an instance of a form, all that is required is a form variable, but to open multiple instances, you need multiple form variables, or alternatively, a collection that can hold the references to the forms, as displayed in the following:

```
Option Compare Database
Option Explicit
Dim colForms As New Collection
Private Sub cmdBrowse Click()
    Dim frm As Form_frmProducts
    Set frm = New Form_frmProducts
    colForms.Add frm, CStr(CLng(Rnd * (2 ^ 31)))
    frm.Visible = True
End Sub
Private Sub Form Close()
    Dim frm As Form_frmProducts
    For Each frm In colForms
        Set frm = Nothing
    Next
End Sub
```

Open multiple copies of the form and then look inside the forms collection. In the Immediate window, you see the following:

?Forms(0).Name frmMultipleProducts ?Forms(1).Name frmProducts ?Forms(2).Name frmProducts

## **INSIDE OUT**

#### Making references in code to multiple forms

In the preceding example, the syntax Forms!frmProducts.Requery is not supported. In this circumstance, you either need to use the numerical index into the forms collection—for example, Forms(2).Requery—or use your own form variable.

## Classes and Binding Forms

Some developers choose to bind the *Recordset* displayed in a form by using program code. The simplest way to do this is to set the forms Recordset property to a Recordset that you have created when the form opens.

#### Binding a Form to a Data Access Object Recordset

The first example uses the sample form frmProductsBoundToAClassDAO to bind the forms Recordset to a Data Access Object (DAO) Recordset. You begin by defining the following clsProductDataDAO class:

```
Option Compare Database
Option Explicit
' clsProductDataDAO
' a class which will be bound to a form
Dim p_db As Database
Dim p_rst As RecordSet
Private Sub Class_Initialize()
    Set p_db = CurrentDb
    Set p_rst = p_db.OpenRecordset("Products", dbOpenDynaset)
End Sub
```

```
Private Sub Class_Terminate()
   p_rst.Close
   Set p_rst = Nothing
   p db.Close
   Set p_db = Nothing
Public Property Get RecordSet() As RecordSet
    Set RecordSet = p_rst
End Property
```

On the form's Open event, you create the new Recordset, and then you change the form's Recordset property to associate it with the new Recordset. On the form's Close event, dispose of the Recordset. The following code demonstrates how to do this:

```
Option Compare Database
Option Explicit
Dim Productdata As clsProductDataDAO
Private Sub Form Open(Cancel As Integer)
    Set Productdata = New clsProductDataDAO
    Set Me.RecordSet = Productdata.RecordSet
Private Sub Form_Unload(Cancel As Integer)
    Set Productdata = Nothing
End Sub
```

#### Binding a Form to an Active Data Object Recordset

It is also possible to bind a form to an ActiveX Data Objects (ADO) Recordset. To do this, you first need to add the appropriate ADO references to your project. This is shown in the sample form frmProductsBoundToAClassADO. To begin, you create the clsProductDataADO class, as follows:

```
Option Compare Database
Option Explicit
' clsProductDataADO
' a class which will be bound to a form
Dim p cn As ADODB.Connection
Dim p_rst As ADODB.RecordSet
Private Sub Class Initialize()
   Set p_cn = CurrentProject.Connection
   Set p_rst = New ADODB.RecordSet
```

```
With p_rst
      Set .ActiveConnection = p_cn
      .Source = "SELECT * FROM Products"
      .LockType = adLockOptimistic
      .CursorType = adOpenKeyset
      .CursorLocation = adUseClient
      .Open
   End With
End Sub
Private Sub Class_Terminate()
    p_rst.Close
    Set p_rst = Nothing
    p_cn.Close
    Set p_cn = Nothing
End Sub
Public Property Get RecordSet() As ADODB.RecordSet
    Set RecordSet = p_rst
End Property
```

Next, add the following code to the form, which is almost identical to the code you used for the previous example:

```
Option Compare Database
Option Explicit
Dim Productdata As clsProductDataADO
Private Sub Form_Open(Cancel As Integer)
    Set Productdata = New clsProductDataADO
    Set Me.RecordSet = Productdata.RecordSet
End Sub
Private Sub Form_Unload(Cancel As Integer)
    Set Productdata = Nothing
End Sub
```

## **INSIDE OUT**

#### Connection and ActiveConnection

In the example, we based our ADO Recordset on the CurrentProject.Connection (which uses Microsoft.ACE.OLEDB.12.0). If we had used CurrentProject.AccessConnection (which uses Microsoft.Access.OLEDB.10.0), then once bound to the form, the form data can no longer be updated. When you work with ADO, if problems occur, it will help your troubleshooting efforts to determine which of these options is being used.

#### **ActiveX Controls and Events**

Using ActiveX controls, you can add extra functionality to your application forms and reports. These controls are available from both Microsoft and other companies (note that not all ActiveX controls will work correctly with Access). You should consult any third-party documentation regarding details for using specific controls. In this section, you will see two examples of popular controls.

For an example that demonstrates how to work with the TreeView control, see Chapter 7, "Using Form Controls and Events."

## INSIDE OUT

#### ActiveX on 64-bit computers

If you are using the 64-bit version of Microsoft Office, you will not be able to use these 32-bit controls; 64-bit versions of these controls are not available. Both of these points might change in later Service Packs.

#### Adding a Slider Control

With the Slider control, a user can move a slider to change a value. To add the control, start with a blank form. In Form design, on the Design tab, click ActiveX Controls, as shown in Figure 11-2.



Figure 11-2 Click ActiveX Controls on the Design tab to add an ActiveX control to a form.

In the Insert ActiveX Control window, click the Slider control, as shown in Figure 11-3.



Figure 11-3 Adding an ActiveX control to the form.

Figure 11-4 shows the slider control in the sample form frmSliderControl.




Figure 11-4 A form with a Slider control.

To detect where a user has positioned the slider, you need to capture an event from the slider object. If you look in the references, you might see an entry for the Windows Common Controls. If it is present, then select the reference; if you do not see the reference, you will need to browse to locate the file MSCOMCTL.OCX, as shown in Figure 11-5.

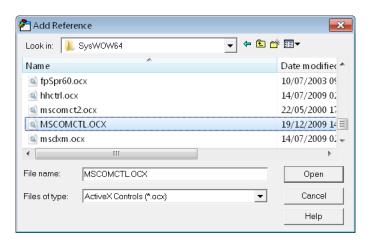


Figure 11-5 Adding the OCX file to create the entry in the references when you do not already have the reference on a 64-bit operating system.

Figure 11-6 shows that for a 64-bit system, the file resides in the SysWOW64 directory.




Figure 11-6 Windows Common Controls 6.0 reference.

After adding the reference, you can write the following code on the form to respond to the Scroll event for the slider control:

```
Option Compare Database
' Add references to Microsoft Windows Common Controls
Private WithEvents SliderObject As Slider
Private Sub Form_Load()
    Set SliderObject = actSlider.Object
End Sub
Private Sub Form_Unload(Cancel As Integer)
    Set SliderObject = Nothing
End Sub
Private Sub SliderObject_Scroll()
    txtValue = SliderObject.Value
End Sub
```

#### The *UpDown* or *Spin* Control

The UpDown or Spin control consists of two buttons that are used to increase or decrease a number. This control is normally used with a text box to display the value. In Form design, on the Design tab, click ActiveX Controls to display the Insert ActiveX Control window, and then choose the control, as shown in Figure 11-7.



Figure 11-7 Inserting the *UpDown* ActiveX control on the form.

Figure 11-8 shows the Spin control in the sample form frmUpDownButton.



Figure 11-8 A form demonstrating the Spin control; the spin control buttons are next to a text box that displays the value.

You want to trap events generated by the buttons, so you need to add a reference to the Windows Common Controls-2. If you do not have this reference (it should already be added when you place the control on the form), then you need to browse and locate the file mscomct2.ocx, as shown in Figure 11-9.

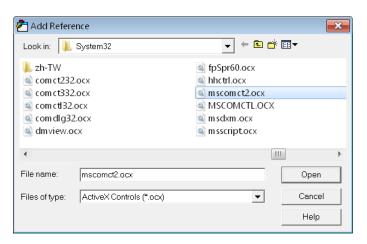


Figure 11-9 Adding the reference to mscomct2.ocx for the spin control.

On a 64-bit system, the file resides in the SysWOW64 directory as illustrated in Figure 11-10.




Figure 11-10 Windows Common Controls-2 reference for the spin control.

After adding the reference, you can write the following code on the form to respond to these UpDown events when a user clicks one of the spin buttons:

```
Option Compare Database
```

End Sub

```
' Add references to Microsoft Windows Common Controls
Private WithEvents UpDownObject As UpDown
Private Sub Form_Close()
    Set UpDownObject = Nothing
End Sub
Private Sub Form_Load()
    Set UpDownObject = UpDown4.Object
    Me.txtValue = 0
End Sub
Sub UpDownObject_UpClick()
    Me.txtValue = Me.txtValue + 1
End Sub
Sub UpDownObject DownClick()
    Me.txtValue = Me.txtValue - 1
```

## **Summary**

In this chapter, you saw how you can use VBA code to open multiple copies of a form at the same time. You also saw how to enhance your forms by adding the Slider and UpDown and Spin button controls.





PART 5

# External Data and Office Integration

CH	A D	=	46	9	12
GII/		ш	30	<b>A</b>	14

Linking Access Tables ...... 395

#### **CHAPTER 13**

Integrating Microsoft Office . . . . . . . . . 437

www.it-ebooks.info



# CHAPTER 12 Linking

## **Linking Access Tables**

Linking Access to Access	Linking to SQL Azure
Linking to Excel and Text Files	Linking to SharePoint Lists
Linking to SOL Server	Linking Access Web Databases

icrosoft Access 2010 has extensive features for connecting an Access database to different sources of data; this means that you can exploit the productivity with which applications can be constructed by using the product even when the data is not being held inside Access.

In this chapter, you will see how to connect an Access database to different sources of data and how to use Microsoft VBA to relink the database when you need to use an alternative data source. The most compelling reason to automatically relink a database is to undertake development work in a system that is not connected to live data, and then switch a live system over to a new application once the changes have been tested (although Access has the ability to import new and altered design objects, this approach is not always ideal and can involve more testing).

You begin by looking at the Access to Access link, in which one database contains the data and the other database contains the application. Then, you will look at extending this to linking to data in Microsoft Excel and text files. As Microsoft SQL Server is an extremely popular data source, you will be looking at how to link and relink SQL Server tables, and how this is extended to relink views. You will also look at how this approach is modified to handle Microsoft SQL Azure. The final sections deal with relinking to Microsoft SharePoint lists, and Access Web Databases, which use Access Data Services.

As you proceed through the chapter, you will be building a generic relinking utility, which will demonstrate the different requirements when linking to a variety of data sources.

After reading this chapter, you will:

- Understand how and why Access databases are often split into a front and back end.
- Be able to relink Access databases to other sources of data.

#### Note

As you read through this chapter, we encourage you to also use the companion content sample databases, Sample fe.accdb, Orders be.accdb, Employees be.accdb, NorthwindAzure.accdb, WebDatabase.accdb, instnwnd.sql, and instnwndtesting.sql, which you can download from the book's catalog page.

## **Linking Access to Access**

Access databases can start life as a single database file that contains all the application forms, reports, and so on, together with the tables that hold the data. For a small single user database, this might be all that is required. But once you have a number of users on an application, it is no longer possible to work on the design while others are sharing the database (unless you are working with a web database, where design changes are managed through a synchronization process). For this reason, and also because you will want to test new changes before changing to use a new version of your application, having the database split into a back-end file that holds the data, and a front-end file that holds the application is an important step in supporting your development.

Once you split a database, the front-end contains links to the tables, which now reside in the back-end, and to make design changes in the tables, you need to open the back-end database when it is not in use (you can also write Data Access Object (DAO) code to apply the design changes to the back-end from another front-end, but that is not what most people choose to do).

There are many other good reasons for having a database split. Among them, it can improve management of systems by allowing you to build multiple application files and multiple back-end data files. One restriction with multiple back-end databases is that you cannot implement referential integrity between tables in different database files.

Another reason for splitting the database is that you can consider giving each user a separate copy of the front-end database file. This copy can then be located on each user's local computer to improve network performance, or it can be held on a personal area of the network. Another advantage of giving users separate application files is that it can improve robustness against corruption; if one user's application becomes corrupt, it does not stop others from using the system. The only disadvantage to doing this is that you will need a mechanism for distributing a new copy of the application to each user whenever it changes or upgrades occur. This can be achieved by using either a simple batch file to copy the files, or possibly using more ingenious ideas such as having local and shared tables that contain version numbers, which can be checked when the application starts (there are also thirdparty products for assisting in distributing front-end files to users).

One final reason for using multiple front-end copies of the application is that the application can more easily contain local tables for each user. This overcomes the limitation in Access to holding distinct temporary results tables for each user. For example, imported data can be held temporarily in a table called tbITEMP, if more than one user attempted this operation at the same time, then you would need to distinguish each user's dataset; to do that, you could add a UserName column to the table, and then use a function like Environ("USERNAME") to populate this column and thus separate each user's data. If you are regularly allowing users to import large amounts of data into local temporary tables, you can also suffer from the bloating effect by which the Access front-end continues to grow in size over a period of time; giving each user a separate front-end simplifies overcoming this problem for a user.

## **INSIDE OUT**

#### Temporary tables and SQL Server

A useful feature in SQL Server is the ability to hold results in temporary tables that can have the same name for all users, for example #TempResults. These tables are then unique in each database connection. This means that SQL Server has an easily used capability to work around a very common problem suffered when working solely in Access.

#### **Using the Database Splitter**

Many developers start with two databases, but if you are starting with only one database and you want to split it into data files and an application file, Access has a built-in tool for doing this. The database splitter is available by going to Database Tools | Move Data | Access Database, as shown in Figure 12-1.



Figure 12-1 Splitting a database into separate application (front-end) and data (back-end) files. For example, a database called Orders becomes Orders\_be and Orders\_fe.

#### Linked Table Manager

Once you have split a database, the database name and file path is hardcoded into the linked tables. This can cause problems if you decide to rename the back-end database or move the file to a different path. To help you to resolve problems like this, Access has a tool called the Linked Table Manager, with which you can redirect the linked tables to a new database name and location.

To access the Linked Table Manager, go to External Data | Import & Link | Linked Table Manager. A menu appears from which you can select and refresh any combination of links (see Figure 12-2). If you have moved the table, you are prompted to browse to the new location. You can also select the Always Prompt For New Location check box to force the selection of the new file location (this is very useful when you need to redirect to a test system, but the live system is still available on the network).

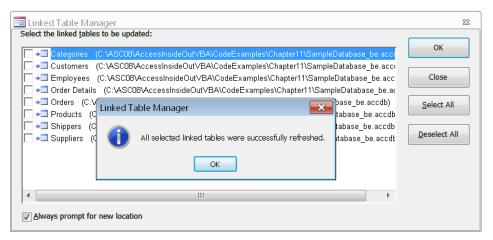


Figure 12-2 The Linked Table Manager window.

If you have, for example, 100 links pointing at several different data sources, you would soon find that the Linked Table Manager can be difficult to use for refreshing the links; this can be overcome with some VBA programming for automatically relinking tables.

#### **Automating Relinking**

It is worth taking the time to construct a general purpose relinker, which you can then use throughout your applications to perform relinking tasks. The sample database Sample\_ fe.accdb contains an example of a relinker. A description of this is provided in the following section.

The relinker uses three tables; each table name is prefixed with the letter z to distinguish them from the application tables, group them together, and sort them at the end of the list of tables. The first table, ztblLinkedDataSources, records the different data sources you will use. If you link to four other Access databases, you would have four data sources. There are three important columns in this table which relate to the target environment called ProductionPath, TestPath, and DevPath, as shown in Figure 12-3. These allow the application to be quickly switched between different environments.




Figure 12-3 Planning for production, test, and development environments by recording different paths for each data source.

The second table is ztblLinkedSystem, which contains only one row that records to which environment the system is currently linked, as shown in Figure 12-4.




Figure 12-4 A table recording the currently linked environment.

The third table, shown in Figure 12-5, is the ztblLinkedTables. This table has a number of fields for recording when new links are added, deleted, or refreshed, which is useful for determining if links fail to refresh; for example, if a table no longer exists, or cannot be relinked for some other reason.




Figure 12-5 This example shows that several tables links were recently refreshed.

# **INSIDE OUT**

#### Essential details for relinking a table


The idea behind relinking a table is quite simple: each TableDef has a Connect property that is either an empty string for a local table or contains a connection string that varies for different data sources. The following code is a very simple example of relinking a single set of linked tables:

```
Sub modLinks_VerySimpleRelink()
    ' Lists the connection strings for all linked tables.
    ';DATABASE=C:\....\Orders_be.accdb
   Dim tdef As TableDef
    Dim strNew As String
    strNew = ";DATABASE=C:\path\Orders_be.accdb"
    For Each tdef In CurrentDb.TableDefs
        If Left(tdef.Connect, Len(";DATABASE=")) = ";DATABASE=" Then
            If InStr(tdef.Connect, "Orders_be.accdb") Then
                Debug.Print tdef.Name, tdef.Connect
                tdef.Connect = strNew
                tdef.RefreshLink
            End If
        End If
    Next
End Sub
```

To relink a table, you assign the new Connect property to the new connection string and execute the Refresh method on the TableDef object.

As discussed previously, a relinker can be very simple; all you need to do is run through the TableDefs collection and change the Connect property. However, if things go wrong and relinking fails, then it is useful to have planned to record failures, show any new objects that were added, and flag objects that have been deleted since the relinker was last run.

The ztblLinkedTableReLinker form operates the relinker. The first time that you use this in an application, press the Clear Data button to delete all the data in the tables used for managing the relinking. Then press the Relink To DEV System, Relink To TEST System, or Relink To PRODUCTION System buttons to automatically populate the data sources and linked tables, as shown in Figure 12-6.

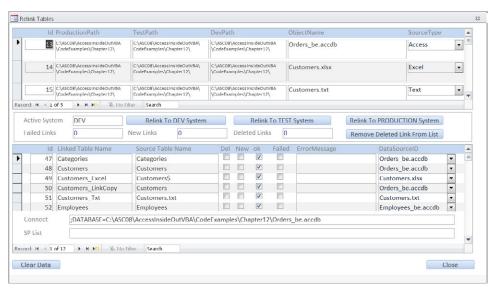

**Figure 12-6** After first use, the Production/Test/Dev paths can be edited to point to different environments and the appropriate relinking button used to relink the application.

As mentioned earlier, the relinker consists of three tables, one form and two subforms. In addition, it also has a module called *modLinks*. This set of objects can then be imported into any application to add relinking functionality.

The key function responsible for the relinking is *modLinks\_Tables*. The module *modLinks* starts by defining an enumerated type that has the values of *dev*, *test* and *production*; the use of an enumerated type is a convenient choice of programming style to make in this situation, as demonstrated in the following:

```
Enum SystemType
dev
test
Production
End Enum
```

The first part of the function prepares a *RecordSet rst* for managing the links, and a *RecordSet rstds* for managing the data sources, and then clears the flags indicating the status of each link, as shown here:

```
Function modLinks_Tables(System As SystemType) As Boolean
Dim lngDataSourceId As Long
Dim db As Database
Dim tdef As TableDef
Dim rst As Recordset
Dim rstds As Recordset
Dim strTableName As String
```

```
Dim blSourceMatched As Boolean
' Flag any existing links as possibly deleted
CurrentDb.Execute "UPDATE ztblLinkedTables SET " & _
                  "LinkDeleted = True, ErrorMessage = Null, " &
                  "LinkRefreshed = False, LinkAdded = False, LinkFailed = False"
' search through the tabledefs collection
' updating the links
Set db = CurrentDb
Set rst = db.OpenRecordset("ztblLinkedTables", dbOpenDynaset)
Set rstds = db.OpenRecordset("ztblLinkedDataSources", dbOpenDynaset)
```

The main part of the routine is a loop that cycles through all the *TableDefs*. This loop excludes any MSys or USys system tables, any temporary internal tables (~TMP), the ztbl tables, and it also excludes any local tables that have an empty Connect string (although the internal ztbl tables are, in this case, local tables, this might not always be the case, as you will see later when relinking web databases):

```
For Each tdef In db.TableDefs
   strTableName = tdef.Name
   If Left(strTableName, 4) = "~TMP" Then
        ' skip system tables
        GoTo SkipTable
   End If
   If tdef.Connect = "" Then
        'skip local tables including MSys, USys tables
        ' Except USysApplicationLog and MSysASO if relinking
        ' a web database
       GoTo SkipTable
     Special requirement for re-linking web database
   If Left(strTableName, 4) = "ztbl" Then
        ' skip the relinker tables
       GoTo SkipTable
   End If
```

The following section of the code creates or locates the linked table in our list of linked tables:

```
' Extract the object information
rst.FindFirst "[LinkedTableName] = '" & strTableName & "'"
If rst.NoMatch Then
   rst.AddNew
    rst!LinkedTableName = tdef.Name
    rst!LinkedSourceTableName = tdef.SourceTableName
    rst!LinkAdded = True
    rst!LinkDeleted = False
    rst.Update
    rst.Bookmark = rst.LastModified
```

```
Else
    rst.Edit
    rst!LinkDeleted = False
    rst.Update
End If
```

In the sample that follows, you can see that the next part of the processing depends on the type of link that you are attempting relink. In this example, there are a set of functions for each link type, which will be explained as we continue through the chapter:

```
' Now change details in the link and refresh
        If Left(tdef.Connect, Len(";DATABASE=")) = ";DATABASE=" Then
            If Not modLinks_Access(System, rst, rstds, tdef) Then
                modLinks Tables = False
                Exit Function
            End If
            blSourceMatched = True
        End If
       If Left(tdef.Connect, Len("Excel")) = "Excel" Then
            If Not modLinks_Excel(System, rst, rstds, tdef) Then
                modLinks_Tables = False
                Exit Function
            End If
            blSourceMatched = True
        End If
        If Left(tdef.Connect, Len("Text")) = "Text" Then
            If Not modLinks_Text(System, rst, rstds, tdef) Then
                modLinks Tables = False
                Exit Function
            End If
            blSourceMatched = True
        End If
       If Left(tdef.Connect, Len("ODBC")) = "ODBC" Then
            If Not modLinks_ODBC(System, rst, rstds, tdef) Then
                modLinks Tables = False
                Exit Function
            End If
            blSourceMatched = True
        End If
       If Left(tdef.Connect, Len("ACEWSS")) = "ACEWSS" Then
            If Not modLinks_SharePoint(System, rst, rstds, tdef) Then
                modLinks_Tables = False
                Exit Function
            End If
            blSourceMatched = True
        End If
       If Not blSourceMatched Then
            ' unknown data source
            Stop
        End If
SkipTable:
   Next
```

The final part of the processing routine updates your record of the currently active system, as illustrated here:

```
' update the active system
   Select Case System
       Case dev: CurrentDb.Execute "UPDATE ztblLinkedSystem " & _
                                    "SET ActiveSystem = 'DEV'"
       Case test: CurrentDb.Execute "UPDATE ztblLinkedSystem " & _
                                    "SET ActiveSystem = 'Test'"
       Case Production: CurrentDb.Execute "UPDATE ztblLinkedSystem " & _
                                    "SET ActiveSystem = 'Production'"
   End Select
   modLinks_Tables = True
End Function
```

The connection string for a linked Access table looks similar to the following example:

```
;DATABASE=C:\....\Chapter12\Orders_be.accdb
```

Let's take a moment to explain the logic for the relinking of an Access table; the other routines all have a very similar form. The processing routine illustrated in the following code starts by taking the existing Connect connection string and extracts the name of the database strObjectName and the path strObjectPath:

```
Function modLinks_Access(System As SystemType, _
                        rst As Recordset, _
                        rstds As Recordset,
                       tdef As TableDef) As Boolean
   Dim strObjectName As String
   Dim strObjectPath As String
   Dim strOldConnect As String
   Dim strPrefix As String
   Dim strConnect As String
   Dim IngPos As Long
   Dim lngDataSourceId As Long
   ' Access datasource
   ' Assumes DATABASE={Drive:\...\Database.accdb or .mdb
   strConnect = tdef.Connect
   str01dConnect = strConnect
   lngPos = InStr(1, strConnect, ";DATABASE=") + Len(";DATABASE=")
   strPrefix = Left(strConnect, lngPos - 1)
   strConnect = StrReverse(Mid(strConnect, lngPos, 255))
   lngPos = InStr(1, strConnect, "\")
   strObjectName = StrReverse(Left(strConnect, lngPos - 1))
   strObjectPath = StrReverse(Mid(strConnect, lngPos, 255))
```

The next part of the processing searches to see if you already have the data source with this name; this is where the code is able to detect and create the list of data sources. If it already has the data source name, it will extract the appropriate Dev\Test\Production path and build the new connection string, as shown in the following:

```
rstds.FindFirst "[ObjectName] = '" & strObjectName & "'"
   If rstds.NoMatch Then
        ' Create a new datasource
        rstds.AddNew
        rstds!SourceType = "Access"
        rstds!ObjectName = strObjectName
        rstds!devpath = strObjectPath
        rstds!Testpath = strObjectPath
        ' best set manually
        rstds!ProductionPath = strObjectPath
        rstds.Update
        rstds.Bookmark = rstds.LastModified
   End If
   lngDataSourceId = rstds!DataSourceID
   strConnect = strPrefix
   Select Case System
       Case dev: strConnect = strConnect & rstds!devpath & _
                                    rstds!ObjectName
       Case test: strConnect = strConnect & rstds!Testpath & _
                                    rstds!ObjectName
       Case Production: strConnect = strConnect & rstds!ProductionPath & _
                                    rstds!ObjectName
   End Select
```

The final processing steps involve refreshing the link for the new path and logging any errors that have occurred as a result of the operations:

```
' refresh the link
    On Error Resume Next
    tdef.Connect = strConnect
    tdef.RefreshLink
    If Err <> 0 Then
        ' log the error
        rst.Edit
        rst!Linkfailed = True
        rst!DataSourceID = lngDataSourceId
        rst!Connect = str0ldConnect
        rst!ErrorMessage = Err.Description & " : " & strConnect
        rst.Update
        If MsgBox("An Error Occured " & Err.Description & ".Stop ?", _
                    vbYesNo, "Error Relinking") = vbYes Then
            modLinks Access = False
            Exit Function
        End If
    E1se
        rst.Edit
        rst!LinkRefreshed = True
        rst!DataSourceID = lngDataSourceId
        rst!Connect = tdef.Connect
        rst.Update
    End If
    On Error GoTo O
    modLinks Access = True
End Function
```

In our demonstration system, we set the Production, Dev, and Test paths to the same location. You should try creating a subfolder, copy the files into that folder, and then editing, for example, the Dev path to point to that folder. Run the relinker, and then you can hover over the linked tables to see that the paths have been changed.

## **INSIDE OUT**

#### Linked table names and SourceTableName

In the sample database, there are two links with the names *Customers* and *Customers* LinkCopy (TableName property), both of which link to the same table called Customers (SourceTableName property). Access supports multiple links to the same table as long as the TableName property is different.

You will also see other examples in which the *TableName* does not match the *Source*-TableName; a text file called Customers.txt would be linked as Customers\_txt, and a SQL Server table called dbo.Customers would become either dbo Customers or be renamed to Customers (the period following dbo is not allowed in a linked table name; therefore, it is converted to the underscore character).

### Linking to Excel and Text Files

In this section, you will look at linking and refreshing links when working with either Excel or text files.

### Linking to Excel

Use the Excel menu (External Data | Import & Export | Excel) to generate a dynamic, readonly link from Access to an Excel spreadsheet. The following code shows an example of the connection string:

Excel 12.0 Xml;HDR=YES;IMEX=2;ACCDB=YES;DATABASE=C:\path...\Customers.xlsx

To repoint this link at the spreadsheet when moved to a different location, you need to construct a new connection string with the path replaced by a new, alternative path. The companion content contains a routine, modLinks\_Excel, that performs this with our relinker.

### Linking to Text Files

Use the Text File menu (The External Data | Import & Export | Text File) to generate a dynamic, read-only link from Access to a text file. The following code shows an example of the connection string (shown in the following split over two lines):

```
Text; DSN=Customers Link Specification;
FMT=Delimited; HDR=NO; IMEX=2; CharacterSet=1252; ACCDB=YES; DATABASE=C:\...\Chapter12
```

The interesting point to note with this connection string is the reference using the DSN= to the Customer Link Specification. If you link to a fixed width text file, you would get the following string (shown in the following split over two lines):

```
Text; DSN=Customers2 Link Specification
;FMT=Fixed;HDR=N0;IMEX=2;CharacterSet=1252;ACCDB=YES;DATABASE=C:\....\Chapter12
```

Using the navigation options to unhide the system objects and looking in the system table MSysIMEXSpecs, you will find the import and export specifications; the table MSysIMEX Columns contains the column definitions for the specifications.

The routine *modLinks\_Text* is used in the relinker to repoint the path for text files.

### Linking to SQL Server

In this section, you look at how SQL Server links can be refreshed. This section assumes that you have successfully installed SQL Server or SQL Server Express, and you want to get started using the product when linked to Access.

The best way to get started with SQL Server is to look at a sample database, that includes a script file for creating one of the standard SQL Server sample database, Northwind. We have included two scripts, the first, instnwnd.sql, creates the Northwind database, and the second, instnwndtesting.sql, creates a similar database called NorthWindTesting. With this configuration, you can create links to the databases and investigate relinking an Access application to different databases or servers.

### Setting up the Sample Database

After you start the SQL Server Management Studio, you are prompted to connect to the Server. You should already see the name of your SQL Server database displayed for you, and you should be able to select Windows Authentication to connect to the server, as shown in Figure 12-7.




Figure 12-7 Connecting to the SQL Server.

Your server name might only be your computer name, for example, MYPC rather than MYPC\SQLServer, or it could be simply SQLExpress. This information is displayed during the SQL Server installation. If you are having problems, try entering (local) in the Server Name field.

# **INSIDE OUT**

#### **SOL Server instances**

When you install SQL Server on a computer, during the installation you are presented with the option to use the default instance or create a new instance of SQL Server. SQL Server allows you to install multiple copies of the same or different versions of the product on the same computer; the most general naming for this is {Computer name}\ {Instance name}, where each installed copy is called an Instance. There is also a shorthand notation called (local), which refers to the default instance. In what follows, we will specify the instance name that we are using.

Management Studio allows you to connect to multiple SQL Server databases at the same time, local, network, remote, and SQL Azure.

To begin, go to File | Open | File. Next, locate and open the file instrumnd.sql. Your screen should appear similar to that shown in Figure 12-8.

```
🧏 Microsoft SQL Server Management Studio
File Edit View Query Project Debug Tools Window Community Help
 🖳 New Query 🔝 📸 📸 😘 🕞 🎏 🖼 🥞 🌉 🍃
💷 📆 master
                 Object Explorer
                          ▼ Ţ X instnwnd.sql - VISTAULTRA64\.....52))
Connect▼ 👺 🕎 🔳 🝸 🌄
                                      ** Copyright Microsoft, Inc. 1994 - 2000

☐ I VISTAULTRA64\SQL2008R2 (SQL Server 10.50.1)


                                      ** All Rights Reserved.

    ■ Databases

 Server Objects
                                      SET NOCOUNT ON
 II 🗀 Replication
 🖽 🗀 Management
   SQL Server Agent (Agent XPs disabled)
                                      USE master
                                      if exists (select * from sysdatabases where name='Northwind')
                                              drop database Northwind
```

Figure 12-8 A script opened in Management Studio. This script creates the sample database.

Press the Execute button on the Toolbar to run the script and create your database. Next, right-click the Database folder, and then select refresh from the drop-down menu to see the resulting database, as shown in Figure 12-9.



**Figure 12-9** Executing the script file creates the sample database. You should also open and run the second script, instrumdtesting.sql.

# INSIDE OUT

#### **Script Files**

You can work with SQL Server either by using the GUI, which is very intuitive as all you need to do is just right-click objects and folders to create and manage them. But as you learn more about SQL Server, you will begin to find that Script Files offer a fantastic way to work with the product. Using Management Studio, you can create Query windows (click the New Query icon on the Toolbar to see this). These windows can be used to either load Script Files or act as a scratch pad window, into which you can type SQL and commands and execute them. Then you can save your work by saving what you typed in the Query window.

### Creating a DSN

A Data Source Name or DSN defines a source of the data. There are two types of data sources that you can choose when connecting in this way to SQL Server: a File DSN, or a Machine DSN.

A File DSN is probably the simplest to use, because all the information to connect to SQL Server is saved in the *Connect* property of each linked table, in the *TableDef* objects.

A Machine DSN holds only the name of the Machine DSN in the Connect property for each TableDef. When using a Machine DSN, if you go to a different computer, you need to ensure that the Machine DSN is created on that computer or that the details are copied onto it. In Windows 7, System DSN information is held in the Windows Registry (HKEY\_ CURRENT\_USER\Software\ODBC\odbc.ini\) and File DSNs are located in the user's C:\Users\ Username\Documents folder.

Machine DSNs have the advantage that changes can be made to the connection information with minimum impact on the application. If, for example, a server name is changed when using a File DSN, then because the server name is held in Connect property of each TableDef, the links need to be changed and refreshed. Machine DSNs have the advantage that links to tables do not need to be changed.

Each method has advantages and disadvantages. For the beginner, a File DSN is often simpler to work with, and in the following, we describe how to work with a File DSN.

Use the ODBC Database menu in your Access application to make a link to SQL Server. Go to External Data | Import & Link | ODBC Database, and then select the option to Link To SQL Server. The Select Data Source dialog box opens, as shown in Figure 12-10.

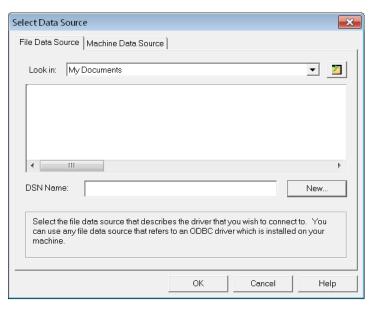


Figure 12-10 Creating a new data source to connect to SQL Server.

Select the File Data Source tab, and then click the New button.

The Create New Data Source dialog box opens, in which you can select an ODBC driver, as shown in Figure 12-11.

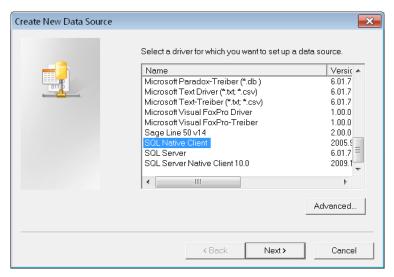


Figure 12-11 Selecting an ODBC Driver. The choices available depend on the version of SQL Server on your computer.

Your choice of SQL Server ODBC driver depends upon your version of SQL Server, as shown in the following table:

SQL Server version	ODBC driver name
All Versions	SQL Server
2005	SQL Native Client
2008 and 2008 R2	SQL Server Native Client 10.0

# **INSIDE OUT**

#### Choosing the SQL Server driver

There are several factors to consider when selecting a driver.

If you go to any organization, it is almost certain that the driver called SQL Server will be installed on every client computer. This means that you have no work to perform when distributing an application, but you will be using older technology.

If you choose to use a more recent driver, such as SQL Native Client, you need to download and install the drivers on each desktop. However, you get the benefits of working with a better driver that has more features and might be faster to use. Be aware, though, that there are problems when using memo fields with the SQL Native Client drivers. For more information about this, go to http://msdn.microsoft.com/en-us/data/ aa937733.aspx.

If you want to work with a new technology such as SQL Azure, you need to use the recommended driver for Azure (SQL Server Native Client 10.0 or later).

You are then prompted to provide a name for your data source, as shown in Figure 12-12.


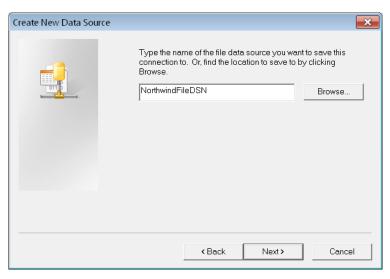


Figure 12-12 Providing a name for the data source.

After you name your data source, you are presented with a sequence of screens, depending on the specific database driver you select. For example, if you are connecting to Oracle or DB2, you can expect to see different screens. The first screen for SQL server is shown in Figure 12-13.

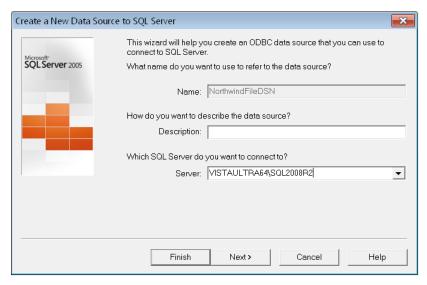

**Figure 12-13** Enter the SQL Server Instance name that you used earlier in this section, and then add an optional description, if you want.

The next dialog requests that you either use Windows authentication or enter a specific SQL Server authentication, as shown in Figure 12-14.

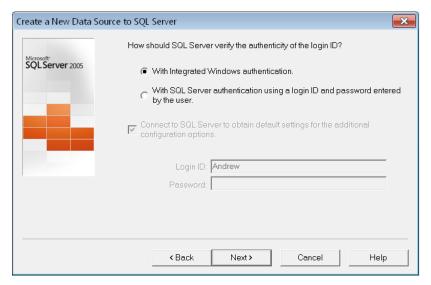


Figure 12-14 Using Windows authentication is the simplest choice when getting started with SQL Server.

# **INSIDE OUT**

#### Windows vs. SQL Server authentication

If you are deploying an application within your own company or to client sites where you are able to be involved in managing the Windows Security, then Windows authentication is the better choice. This can be quite painless because Windows Groups can be easily authenticated in SQL Server, and it will also allow you to track details on individual users working with your system.

If you want to avoid using Windows authentication, you can use SQL Server security; this is often appealing when you want to set up a one-off activity for configuring security without getting involved in maintaining different users (you could have all users logging on to the SQL Server with a single SQL login, or you can also have multiple logon accounts). It is also worth noting that SQL Azure requires that you use SQL Server authentication, as Windows authentication is not supported.

One topic to consider when using a SQL Server login is handling the password and user name. You have three options here: you have an application where users are in some way prompted for the password and/or login; you embed the credentials in the linked tables; or you use some startup code to make the connection where the credentials are protected in the source code.

After providing the server name and authentication, a connection can be made to the server. The next screen provides a drop-down list of available databases, as shown in Figure 12-15.

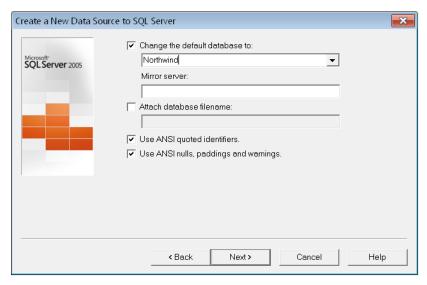


Figure 12-15 Selecting the target database on the server.

In the next screen, you can test the database connection, and then you will be returned to the selection data source screen, with your newly created DSN highlighted (see Figure 12-16). Press OK to complete the setup.

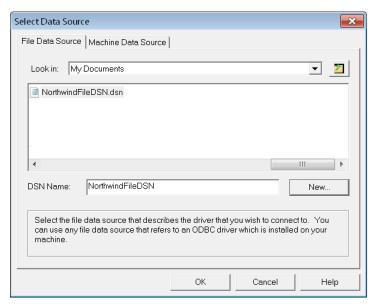


Figure 12-16 Selecting the new data source.

Once this setup is complete and the details for both Machine and File DSNs are saved on your development computer, you can select the DSN for future projects without repeating the operation of creating it through all the subsequent configuration questions.

### Connecting to SQL Server Tables

After selecting a Data Source, you are then shown a list of all the objects in the SQL server database to which you can create links. Select a few examples, as shown in Figure 12-17.




Figure 12-17 When you use SQL Logins, you can save the password in the links by selecting the Save Password check box (this does not apply to Windows authentication).

The list shown in Figure 12-17 includes all the tables and Views, together with a large number of system objects. You will learn about Views beginning on page 505.

Press OK. You will see the linked tables, as shown in Figure 12-18.



Figure 12-18 Linked tables in Access. All tables created in SQL Server are prefixed by dbo\_. Here, the *Products* table has been renamed to remove this.

# **INSIDE OUT**

#### Renaming linked tables to remove the dbo\_ prefix

When you create tables in SQL Server, they are created in a Schema. Schemas offer the ability to have multiple tables with the same name, as long as they are placed on different Schemas (object groupings). The default Schema is dbo, so when Access links, for example, to the table *dbo.Products*, the linked name becomes *dbo\_Products*. You will learn about using Schemas in Chapter 15, "Upsizing Access to SQL Server."

Later, if you write queries in Access, you might want to copy the SQL into SQL Server and this would mean changing a reference like *dbo\_Products* to *dbo.Products*. You might find that it is easier at an early point in development to remove the dbo\_ prefix from the name of any linked table.

### **Refreshing SQL Server Linked Tables**

Examples of ODBC connection strings for the different SQL Server drivers are shown in the following:

ODBC;DRIVER=SQL Server;Data Source=VISTAULTRA64\VISTAULTRA64\_08;
Database=Nothwind; Trusted\_Connection=Yes;
ODBC;DRIVER=SQL Native Client;Data Source=VISTAULTRA64\VISTAULTRA64\_08;
Database=Nothwind; Trusted\_Connection=Yes;
ODBC;DRIVER=SQL Server Native Client 10.0;Data Source=VISTAULTRA64\VISTAULTRA64\_08;
Database=Nothwind; Trusted\_Connection=Yes;

When you are developing with SQL Server, your test and development systems can be on different servers, in which case, for relinking you need to use a different server name. Or

you can use several databases on the same server; in which case, the database name needs to be changed. For example, if connecting to a different database on the same server we could use the following:

```
ODBC;DRIVER=SQL Native Client;SERVER=VISTAULTRA64\SQL2008R2;Trusted_
Connection=Yes; APP=Microsoft Office 2010; DATABASE=NorthwindTesting;
```

In our sample relinker, to use an alternative server or database name, you can edit the appropriate part of the connection string in the TestPath, DevPath, ProductionPath fields, changing the database name and/or server names; we have added additional code in the procedure modLinks\_ODBC to handle this. This procedure records the change to a database object name in the field ChangedObjectName, and then after relinking, it runs an update to the ObjectName in the relinker.

### Connecting to a View in SQL Server

In SQL Server, the equivalent to a Select Query is a View. Executing the following SQL in Management Studio will create a View in SQL Server (the WITH CHECK OPTION means that you can only insert or change data in the view that can be reflected back through the view. In this example, it ensures that the *Country* field is *France*:

```
CREATE VIEW vw_FranceCustomers AS
SELECT * FROM Customers
WHERE Country = 'France'
WITH CHECK OPTION
```

We have used the convention to name all of our views with the prefix vw\_. You can now use the DSN to create a linked table to the View. Once you select to link to the View, the popup dialog shown in Figure 12-19 opens.




Figure 12-19 Selecting a unique identifier to make the View updateable.

This creates a link to the View called dbo vw FranceCustomers, which you can rename to vw\_FranceCustomers. If you selected a unique record identifier, Access makes the View updateable. You should ensure that you do select a combination of fields that are unique; otherwise, you will get unpredictable results when working with the View (if a View returns unpredictable results, check the unique record selector).

# **INSIDE OUT**

#### **Updateability and Views**

Access supports the updateable Views by creating an index called *uniqueindex* in the TableDef for the View. This can be checked by using the following commands in the Immediate window:

```
?currentdb.TableDefs("vw_FranceCustomers").Indexes(0).Name
__uniqueindex
?currentdb.TableDefs("vw_FranceCustomers").Indexes(0).fields.count
?currentdb.TableDefs("vw_FranceCustomers").Indexes(0).Fields(0).Name
CustomerID
```

There are limitations on View updateability. One limitation is that if you have a View with multiple base tables, any update can only affect data in one of the base tables.

If you execute the following in the Immediate window, you will see that there is a potential problem with refreshing Views:

```
currentdb.TableDefs("vw_FranceCustomers").RefreshLink
?currentdb.TableDefs("vw_FranceCustomers").Indexes.count
```

If you Refresh a View, it can destroy the Index and you then lose updateability. In the next section, you will look at methods to solve this.

### Refreshing SQL Server Views

In the previous section, you saw that when you refresh a linked View, it can lose updateability because the index is destroyed. If this happens, you can execute the following SQL DDL command, which recreates the index and restores updateability (note that this is shown split over two lines in our code:

```
CurrentDB.Execute "CREATE UNIQUE INDEX __uniqueindex ON
vw_FranceCustomers(CustomerID)"
```

In modLinks ODBC, the lines of code that refresh the link are modified to save the index information and then execute the DDL following the refresh operation, as shown in the following:

```
' refresh the link
strIndexSQL = ""
If tdef.Indexes.Count = 1 Then
    If tdef.Indexes(0).Name = "__uniqueindex" Then
        ' we have a view
        strIndexSQL = "CREATE UNIQUE INDEX __uniqueIndex " & _
                      " ON [" & tdef.Name & "]("
        strFieldSQL = ""
        For Each fld In tdef.Indexes(0).Fields
            If strFieldSQL <> "" Then
                strFieldSQL = strFieldSQL & ","
            strFieldSQL = strFieldSQL & "[" & fld.Name & "]"
        Next
        strIndexSQL = strIndexSQL & strFieldSQL & ")"
    End If
End If
On Error Resume Next
tdef.Connect = strConnect
tdef.RefreshLink
If Err = 0 Then
    CurrentDb.Execute strIndexSQL
Fnd Tf
```

### Linking to SQL Azure

Before reading this section, you might want to read Chapter 16, "Using SQL Azure," for a detailed explanation of how to create a SQL Azure database. This section assumes that you have created SQL Azure databases and that you need to understand more about how to link to an Azure database and change your links between a development and test or production system.

### **SQL Azure DSN**

When using SQL Azure, you don't want to use your main Azure account information in the application, so the first step is to use Management Studio to create a test account.

The companion content includes two SQL Azure databases, Northwind and Northwind-Testing, as shown in Figure 12-20. If you select the Logins folder (see Figure 12-20) and then press the New Query button on the toolbar, you can create a new query window for executing T-SQL in the Master database.






Figure 12-20 The SQL Azure server showing the Northwind and NorthwindTesting databases.

You can then execute the following Script in *Master* to create a new SQL Server login account:

```
-- Create a test login account in Master
CREATE LOGIN TestUser WITH PASSWORD = 'TestAzureAccount444333222'
```

For each of the test databases, you register the login by creating a user account and assigning the user a database role (normally, you would create an appropriate role, but to get started you will assign the user the db\_owner role). The easiest method for doing this is to click the Database in Object Explorer, and then click New Query and execute the following script (verify that you are executing this in the test database and not in *Master*):

```
-- Create a user account
CREATE USER TestUser FROM LOGIN TestUser
-- Assign user to a database role
EXEC sp_addrolemember 'db_owner', 'TestUser'
```

# **INSIDE OUT**

#### SQL Azure supports security stored procedures

SQL Azure supports the stored procedures sp\_addrolemember, sp\_droprolemember, and sp\_helprole for managing security.

When you create new user accounts, these accounts will not be able to directly connect to the Master database. This means that when you set up DSN connections by using the ODBC Manager, you need to use your primary login account.

At this point, it is useful to close and re-open Management Studio by connecting with the logon details for the newly created user account (notice that the new account can connect to *Northwind* and *NorthwindTesting*, but not to *Master*).

You can then follow a similar set of steps to those described in the SQL Server section of this chapter, using the sample database NorthwindAzure.accdb. In this section, we will only show the important steps. Go to External Data | Import & Link | ODBC Database to create a new file DSN. In the Create A New Data Source dialog box, select the ODBC Driver shown in Figure 12-21.

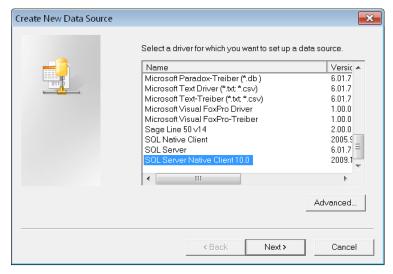


Figure 12-21 Select the latest ODBC drivers for use with SQL Azure.

When entering the server name, enter your Azure server details in the format shown in the following line of code and in Figure 12-22:

ServerName.database.windows.net

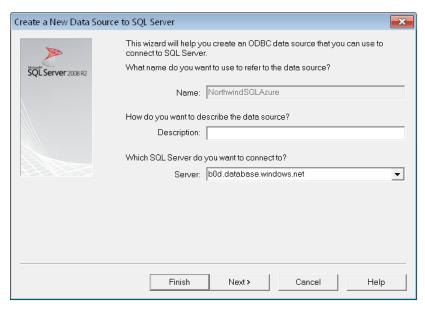


Figure 12-22 Enter your server name for SQL Azure.

When entering the SQL Server Login, use the format shown in the following line of code and in Figure 12-23:

MainAccountName@ServerName

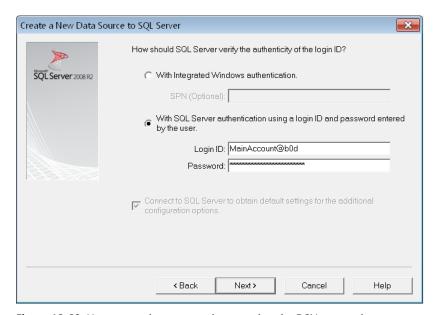


Figure 12-23 Use your main account when creating the DSN connection.

After completing these details, follow through the subsequent screens to enter the appropriate database name (*Northwind* or *NorthwindTesting*), and then test the connection.

### Connecting to SQL Azure

When making a connection to SQL Azure, you have the option to save password information in the links, if you do not select the option, then when you open the first table, you will be prompted to enter the SQL Azure login name and password. However, it is very simple to make this initial connection in code and supply a user name and password, and even when the table links do not contain this information, this will no longer involve any prompting, because the connection will already be established. Go to External Data Import & Link | ODBC Database and link to SQL Azure using the DSN. You are prompted to log in, as shown in Figure 12-24.




Figure 12-24 Login with the test account when using the DSN.

Then, link to the tables, but do not save the password in the links, the *TableDefs* will then have the following *Connect* property:

ODBC; DRIVER=SQL Server Native Client 10.0; SERVER=b0d.database.windows. net;APP=Microsoft Office 2010;DATABASE=NorthwindTesting;

### **INSIDE OUT**

#### Making a connection to SQL Azure for a user

With a few lines of VBA code, you can dynamically make the initial link to SQL Azure, after which, when opening any tables, there will be no prompting for login details. To use this method when the application starts, you can use your own form to capture the user's login name and password; this way you can also integrate to any existing security and map existing login details to the appropriate SQL Azure login details.

In SQL Azure you can use the SUSER\_SNAME() function, which will return the SQL Server Login user name. This can be very useful for identifying which user made changes to data, or in providing tables that only show specific rows of data for a specific user.

To modify the connection string you need to insert; UID=TestUser@b0d; PWD=TestAzure Account444333222; before the ;DATABASE= part of the connection string.

The following code shows an example of adding the user's credentials to the connection string and making the link:

```
Sub modAzure_Login()
   Const strLogin = "TestUser@b0d"
   Const strPassword = "TestAzureAccount444333222"
   Dim strConnect As String
   Dim strCredentials As String
   On Error Resume Next
   Dim db As Database
   Dim gdef As QueryDef
   Set db = CurrentDb
   ' extract the connection string from an existing TableDef
   strConnect = db.TableDefs("Customers").Connect
   Set qdef = db.CreateQueryDef("")
   strCredentials = ";UID=" & strLogin & ";PWD=" & strPassword
   strConnect = Replace(strConnect, ";DATABASE=", strCredentials & ";DATABASE=")
   strConnect = strConnect & "Encrypt=yes;"
   qdef.Connect = strConnect
   ' qdef.SQL = "select @@version" ' useful alternative check
   qdef.SQL = "SELECT SUSER_SNAME()"
   gdef.ReturnsRecords = True
   Dim rst As Recordset
   Set rst = qdef.OpenRecordset()
   If Err <> 0 Then
       MsgBox strConnect, vbCritical, "Connection Failed"
   E1se
       MsgBox strConnect, vbInformation, "Connection OK"
   End If
   Debug.Print rst(0)
   rst.Close
   qdef.Close
   db.Close
End Sub
```

The relinker incorporates a few minor modifications to allow it to relink to a SQL Azure database. The procedure for using the relinker is identical to that described in the earlier sections of this chapter. The changes required to refresh these links involve ensuring that you have logged into SQL Azure, as described in this section. The procedure modLinks\_ Tables contains the following additional check (a similar test has been added to modLinks\_ ODBC to log in to the new target server when changing the links):

```
If InStr(tdef.Connect, ".database.windows.net") <> 0 Then
    If Not blSQLAzureLoggedIn Then
        blsQLAzureLoggedIn = modAzure_TestLogin(tdef.Connect)
        If Not blSQLAzureLoggedIn Then
            Stop
        End If
    End If
End If
```

### Linking to SharePoint Lists

In this section, you will look at linking Access to SharePoint. For example and testing purposes, use the demonstration database WebDatabase.accdb, which is a Web Legal Access Web Database that can be published to Access Data Services. If you want to try this yourself and you don't have the facilities to publish Access Web Database, you can follow along using a version of SharePoint, which has some lists of data to which you can link.

In this example, you have a standard Access .accdb file, and you want to link this database to SharePoint Lists. In the example, these SharePoint Lists are actually an Access Web Database which has been published.

Using a new Access database (not a web database) which contains only our linker software components, go to External Data | Import & Link | More | SharePoint List. In the dialog box that opens, choose the option to Link to data by using a URL similar, for example, to the following: http://xxx.accesshosting.com/NorthWind, and then log on. You are then presented with a list of available SharePoint Lists, as shown in Figure 12-25.

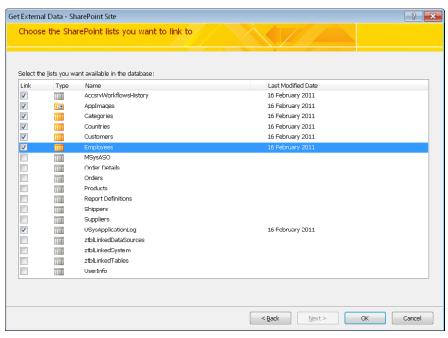


Figure 12-25 The Available SharePoint Lists on the site.

This then provides updateable lists of the data on the SharePoint site, as shown in Figure 12-26.




Figure 12-26 Updateable links to the lists in SharePoint.

Looking at the Connect property of the TableDefs, you see a connection string similar to the following example:

ACEWSS; HDR=NO; IMEX=2; ACCDB=YES; DATABASE=http://xxxx.accesshosting.com/ NorthWind;LIST={857C11A0-CE1D-420E-A774-018D03571D1E};VIEW=;RetrieveIds=Yes

### **Relinking SharePoint Lists**

As with other application links, you need a method to relink the SharePoint Lists if you switch between a development and test or production environment. The key to understanding how this is achieved is in recognizing that the long code LIST={857C11A0-CE1D-420E-A774-018D03571D1E} needs to be changed. If you can change these, then you can relink to the alternative site. You might also notice that the Linked Table Manager is not available for relinking these links.

You will need an application linked to Site1, and then an application linked to Site2. If you then scan the TableDefs collection for an application linked to each of the sites, all you need is some program code to update the LIST information in the target application to be relinked, and then refresh the links. The process is shown in Figure 12-27.

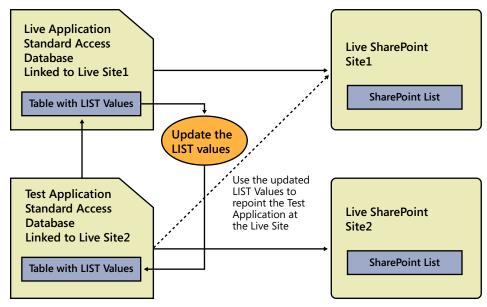


Figure 12-27 The Site2 application uses the table in Site1 to update the LIST values. It then repoints the application at the new SharePoint Site.

In the previous example, we published our sample web database to Site1 and linked a new standard Access database to the SharePoint Lists in Site1. To follow along here, you need to publish a second copy of the web database to Site2, and link a new standard Access database to it, as well. The following refers to the two standard Access databases, now linked to Site1 and Site2.

Because our relinker will get this information, we run the relinker in two applications that populates the local table ztblLinkedTable. Figure 12-28 demonstrates in Site2, that you have also linked to the table ztblLinkedTable in Site1 (ztblLinkedTable1).

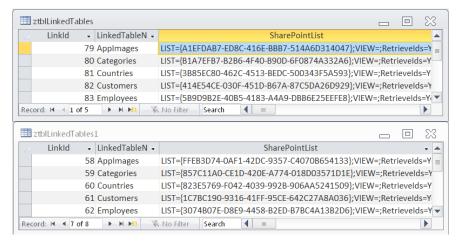


Figure 12-28 Showing the LIST settings in the current site and the values you need to change to connect to the second site.

You then run the following SQL, which updates the relinker table in the active site to have the correct values for the second site:

```
Sub modSharePointPatch UpdateLists()
    ' table ztblLinkedTables contains SharePointList LIST values
    ' for this database
    ' table ztblLinkedTables 1 contains SharePointList LIST values
    ' for the production database
    ' We need to copy the new List Values
   Dim strSQL As String
   strSQL = "UPDATE ztblLinkedTables " & _
                "INNER JOIN ztblLinkedTables1 " &
                    ON ztblLinkedTables.LinkedTableName = " & _
                        "ztblLinkedTables1.LinkedTableName " & _
                " SET ztblLinkedTables.SharePointList = " & _
                " [ztb]LinkedTables1].[SharePointList] " & _
                " WHERE Left([ztb]LinkedTables.LinkedTableName],4) <> 'ztb]'"
   CurrentDb.Execute strSQL
End Sub
```

Figure 12-29 illustrates how the relinker table is now updated.

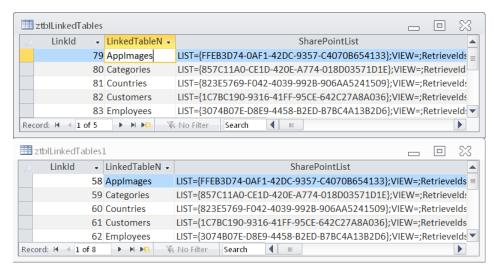


Figure 12-29 Showing the LIST settings in the current site and the values that need to change to connect to the second site.

The last remaining step is to edit the information shown in Figure 12-30 for the Production-Path so that it refers to Northwind, rather than Northwind2, which is the test system.




Figure 12-30 Changing the production path in preparation to relink the tables.

Then you simply run the relinker and press the button to relink the application to the production system.

### **Linking Access Web Databases**

The process of linking to tables in a Published Access Web Database (linking to the Share-Point Site) was described in the previous section. With an Access Web Database, the process of linking to SharePoint is replaced with the idea of publishing the database. When successfully completed, this publishes the tables to SharePoint. In this section, you will look at the links themselves and the need to change the linked tables when you move between development and production systems.

For example and testing purposes, use the demonstration database WebDatabase.accdb. Make two copies of this database, one called WebDatabaseNorthwind.accdb, and the other, WebDatabaseNorthwind2.accdb. Publish the first copy to a SharePoint site called Northwind (Live Site), and then publish the second copy to a site called Northwind2 (Test Site).

Before you begin, here are some general comments on importing and linking data with a Web Database. If you try to subsequently import external Access Tables into a Web Database (which has been published), they will be converted into a SharePoint List, which will be published when you next synchronize the database.

A Web Database is allowed to link to external data sources, although you cannot design browser components that use these linked objects; the use of these links is restricted to your client objects. Figure 12-31 depicts an example of a Web Database that has been published but also contains links to local external data files.




Figure 12-31 A published Access Web Database with additional links to local external data.

# **INSIDE OUT**

#### Linking an Access database to an Access Web Database

If you have an Access Web Database that you have published to SharePoint, the guestion arises as to what happens if you then create an ordinary Access database and attempt to link to the Access Web Database?

If you go to External Data | Import & Link | Access and choose the link option, you are presented with any empty list of tables to which to link. However, if you choose the Import option, after you have logged in, you will see a list of available tables, and if you choose a table, it will create a linked table to the SharePoint List.

The answer is that you cannot link to an Access Web Database, but by using the Import option, you can quickly create SharePoint List links to the underlying site.

### Relinking to an Access Web Database

Now, let's look at the situation in which you want to replace the live web application with the test web application. To do this, you use a similar technique that you applied in the last section, which is shown schematically in Figure 12-32.

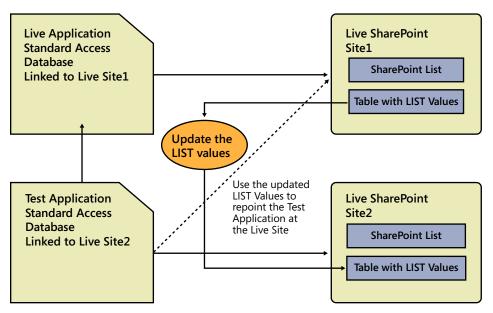


Figure 12-32 Swapping the test application web database to replace the live web database application.

You begin with two web databases called *Live* and *Test*. The objective is to replace *Live* web database with the Test web database. Working with each of the two published databases, open the relinker form called ztblLinkedTableReLinker and click the Relink To Dev System button. This populates the table ztblLinkedTables with the link information (do this for each system). Ensure that you re-synchronize both systems after running the relinker.

Close the *Live* system web database, and then in *Test*, import the table *ztblLinkedTables* from the Live web database, which creates the linked table, as shown in Figure 12-33.




Figure 12-33 The Test system linked to the table *ztblLinkedTables* in the *Live* site, which is called *ztblLinkedTables*1.

Execute the procedure *modSharePointPatch\_UpdateLists()* described in the previous section; this will update the SharePoint fields in *ztblLinkedTables* to the values from *ztblLinkedTables\_1*.

Next, open the relinker form. Figure 12-34 shows the existing *Connect* information and the new SharePoint list reference for an example table.



Figure 12-34 The relinker, ready to repoint the SharePoint links.

Before running the relinker, edit the ProductionPath as shown in Figure 12-35.





Figure 12-35 Change the site name from *Northwind2* to *Northwind*.

Next, click the Relink To Production System button. After running, you will see that for each table, the connection strings have now been changed, as shown in Figure 12-36.



**Figure 12-36** Connection details on all the tables have been changed, the site has changed and the *LIST* has changed.

# **INSIDE OUT**

#### Relinking USysApplicationLog and MSysASO

If you are writing your own routine to perform the relinking, it is critical that you relink the system tables MSysASO and USysApplicationLog. These tables are used by Access to establish the URL of the site against which to publish.

After you relink the list of tables, the database appears as illustrated in Figure 12-37. You should delete the bottom four linker utility tables.




Figure 12-37 After relinking, you can hover the mouse over the links to see that they have been repointed. You can delete the bottom four linker tables.

The final step is to perform a compact and repair. When this finishes, you are prompted to log on to the Live site. If you now synchronize to the Live site, the new application design is uploaded to replace the old application design.

You will find that as a result of this process, the relinker tables are removed from the Live site, but because these are only used for relinking and can be automatically repopulated, they can easily be imported back into the site.

### **Summary**

In this chapter, you learned that splitting an Access database application into a front-end and back-end database provides a more flexible approach to building applications. You also saw the importance of being able to relink the application when moving from test to live systems.

In more sophisticated applications, you might need to link to a wide variety of external sources of data; thus, you saw how taking a general approach to relinking to different data sources means that you can develop an approach to relinking that can be reused in different applications.



# CHAPTER 13

# Integrating Microsoft Office

Working with Objects and Object Models 438	Connecting Access to Excel451
Connecting Access to Word	Connecting Access to Outlook471

f you are building applications that will be deployed in an environment containing other Microsoft Office products, you can pick and choose from the strengths of each Office product and produce a more integrated solution. Because Microsoft VBA is a universal language for the Office family, you have flexibility to program in the different products.

For example, in a project management system built in Microsoft Access 2010, you can integrate with Microsoft Outlook to produce and log outgoing emails together with any incoming emails in the database. You can also synchronize contact details between the database and Outlook. For producing quotes, these can be generated from the database in Microsoft Word by using a placeholder document, or template (this is not related to Office or Word templates), but would still allow staff to accomodate special projects by editing the generated documents. Microsoft Excel can be used to perform financial analysis based on both the data held in the database and other separate financial spreadsheets. An integrated approach to the design means that staff can blend their own expertise in using Office products with the labor saving benefits of an automated system.

After reading this chapter, you will:

- Be able to generate Word documents to create boiler-plate specifications and merge data to generate quotations.
- Be able to structure Excel spreadsheets that are dynamically updated from the database, allowing financial users flexibility in reporting.
- Be able to transfer information between Access and Outlook.

#### **Note**

As you read through this chapter, we encourage you to also use the companion content sample databases, OfficeApplications.accdb, ExcelAnalysis.accdb, WordQuote.accdb and OutlookContacts.accdb, which you can download from the book's catalog page.

### Working with Objects and Object Models

Each of the Office products has an object model that provides a roadmap of how the product can be programmatically manipulated. In Chapter 4, "Applying the Access Object Model," you saw how Access has an object model, and in Chapter 5, "Understanding the Data Access Object Model," you were introduced to the Data Access Objects (DAO) model, which is the most natural extension to the Access objects. If you are programming in Excel, you can use these models to develop an Excel application that drives an Access application. Similarly, to drive an Excel application from Access, you need to understand the Excel object model.

In this section, you will look at the general rules for constructing objects that enable one Office application to refer to objects in another Office application. Use the file OfficeApplications.accdb for this section.

### Early vs. Late Binding and CreateObject vs. New

To explain early binding and late binding, we are going to introduce the CreateObject syntax, which creates an instance of an object; the objects in this case are the Office applications. If you want to follow along with this code, close any copies you have of Excel or Word and step through the execution of the code, looking to see how at each step an application is opened. We have intentionally excluded Outlook for the moment because there are some special considerations here that are described in the Outlook section of this chapter.

The following code will launch each of the Office applications and then close them:

```
Sub modObject_OpenAnApplication()
   Dim objApplication As Object
    ' Start Excel
    Set objApplication = CreateObject("Excel.Application")
    objApplication.Visible = True
    Stop
    objApplication.Quit
    Set objApplication = Nothing
    ' Start Word
    Set objApplication = CreateObject("Word.Application")
    obiApplication. Visible = True
End Sub
```

The preceding code uses the general purpose Object data type. When you do this, it is called late binding. This is because Access cannot check in advance whether a property such as Visible is valid for the object. Because you do not have IntelliSense to guide you in configuring these objects, programming can be very difficult.

Both Excel and Word have a Visible property, which you can use to make the application visible, and both have a Quit method to exit the application. You knew the names to use, Word.Application and Excel.Application, because these are the names of the root objects for these products.

You will see later on that you can start by creating other objects for each of these applications, but the syntax is then specific to each product; for example, you can create a Word. Document object but not an Excel. Workbook object (to do this you need to follow other steps in Adding a WorkBook object to the application object).

Early binding is a technique whereby you use the references to allow specific objects for each application to be created. Early binding provides IntelliSense support.

In the References – Office Applications dialog box, add three references to Excel, Outlook, and Word, as shown in Figure 13-1.




Figure 13-1 Adding references for the Office products.

With the references added, you can now explicitly define objects of each particular type, as shown in the following code. The code now also has IntelliSense. In this example, rather than use CreateObject, which returns a generic Object type, you use the New keyword to create an object of a specific type:

```
Sub modObject_OpenAnApplicationWithObjectTypes()
   Dim objExcel As Excel.Application
    ' Start Excel
   Set objExcel = New Excel.Application
   objExcel.Visible = True
```

```
Stop
    objExcel.Quit
    Set objExcel = Nothing
    Dim objWord As Word.Application
    ' Start Word
    Set objWord = New Word.Application
    objWord.Visible = True
    Stop
    objWord.Quit
    Set objWord = Nothing
End Sub
```

# **INSIDE OUT**

#### Converting early to late binding

Some developers choose to use early binding while developing code and use New rather than CreateObject. Then before distributing an application they would change to using late binding, changing all object variables to use the generic Object data type rather than a specific Object.

One reason for choosing to do this is that you can avoid any issues relating to different references on target computers that are running older versions of Office. If you had early binding code that referred to a property that did not exist in an earlier version of an Office product, and then placed the application on a computer that used the earlier version, this could lead to problems with compiling the code. Early binding offers a slight performance gain over late binding. You might want to consider using conditional compilation statements to allow you to take advantage of both early and late binding, as appropriate to different activities.

#### The GetObject Keyword

You have seen that there are two forms of syntax that you can use for creating an instance of an Office application. When using the CreateObject or New methods, they create an additional instance of the Office product running on the desktop. This has the advantage of isolating the operations so that they do not interfere with any existing work open in a copy of the product.

In some circumstances, you might prefer to get a reference to an open copy of the application. In this case, you use the GetObject keyword, as demonstrated here:

```
Sub modObject_GetObject()
   Dim objExcel As Excel.Application
    ' Use open copy of Excel
   On Error Resume Next
    Set objExcel = GetObject(, "Excel.Application")
```

```
If Err <> 0 Then
       Debug.Print Err.Number, Err.Description
        Err.Clear
    End If
    Set objExcel = Nothing
   Dim objWord As Word.Application
    ' Use open copy of word
    Set objWord = GetObject(, "Word.Application")
    If Err <> 0 Then
        Debug.Print Err.Number, Err.Description
        Err.Clear
    End If
    Set objWord = Nothing
End Sub
```

If there is not an open copy of the product, the application throws the exception error 429 — ActiveX component can't create object.

You can combine GetObject and New to produce code that will either use any open version of a product or open a new version if the product is not already running, as shown in the following:

```
Sub modObject_LaunchApplication()
   Dim objExcel As Excel.Application
   ' Use open copy of Excel
   On Error Resume Next
   Set objExcel = GetObject(, "Excel.Application")
   If Err <> 0 Then
       Err.Clear
       ' create a new copy of execl
       Set objExcel = New Excel.Application
       If Err <> 0 Then
           Debug.Print Err.Number, Err.Description
       Else
           objExcel.Visible = True
       End If
       Err.Clear
   End If
   Set objExcel = Nothing
   Dim objWord As Word.Application
   ' Use open copy of word
   Set objWord = GetObject(, "Word.Application")
   If Err <> 0 Then
       Err.Clear
        ' create a new copy of word
       Set objWord = New Word.Application
       If Err <> 0 Then
           Debug.Print Err.Number, Err.Description
```

```
Else
            objWord.Visible = True
        End If
        Err.Clear
    End If
    Set objWord = Nothing
End Sub
```

#### **Opening Existing Files**

In the previous examples, you used GetObject, New, and CreateObject to work with the application object. You can open existing files by using two methods: you can create an application object and then use Open commands to open a file, or you can directly open the file by using GetObject. It is also useful to have different object variables; for example, you can open a Word.Document object called objDocument, and to refer to the application object, you can use objDocument. Application, but it can be clearer in your code to define a separate object variable and set that to the application object. The following code shows examples of this:

```
Sub modObject_OpenAnApplicationOtherObjects()
    Dim objExcel As Excel.Application
    Dim objWorkbook As Excel.Workbook
    Dim strFile As String
    strFile = CurrentProject.Path & "\SpecificationToRead.xlsx"
    ' opens an existing file
    Set objWorkbook = GetObject(strFile)
    Set objExcel = objWorkbook.Application
    objExcel.Visible = True
    objExcel.Windows(1).Visible = True
    Stop
    Set objWorkbook = Nothing
    Set objExcel = Nothing
    Dim objWord As Word.Application
    Dim objDocument As Word.Document
    ' open an existing file
    strFile = CurrentProject.Path & "\Quote.docx"
    Set objDocument = GetObject(strFile)
    Set objWord = objDocument.Application
    objWord.Visible = True
    Stop
    objWord.Quit
    Set objWord = Nothing
End Sub
```

### Connecting Access to Word

In this section, you will look at connecting Access to Word by using VBA programming. Typical applications of these techniques are to generate documents, filling in details at predefined points via a placeholder document with bookmarks, and boiler plating a document by merging in sections from other documents.

Figure 13-2 shows the Word object model. The use of bookmarks and ranges have a number of overlapping features in the object model; this supports the different ways to manipulate areas of text.




Figure 13-2 The Word object model.

The key objects in the Word object model are:

- **Application** This is used to control the Word environment.
- **Document** A document.
- **Selection** A selection of one or more blocks of areas of text; for example, selecting text to then apply formatting. This represents the currently selected areas of text.
- **Range** An area of text. A document can support multiple ranges.
- **Bookmark** A named area of text that can be visible or hidden.

As described earlier in this chapter, you need to add a reference to the Word Object Library before developing the code described in this section. The sample database file to use in this section is WordQuote.accdb.

# **INSIDE OUT**

#### Pasting links to queries from Access into Word

If you select a query in Access from the navigation window and copy it to the clipboard, you can paste the link into Word by clicking Home | Paste | Paste | Paste | Paste Link. This gives you a dynamic link from Word to the query.

If you then use the shortcut menu and select Edit Field, you will see that the link looks like the following:

- DDEAUTO MSAccess "C:\\ASC08\\ACCESS~1\\CODEEX~1\\CHAPTE~4\\WORDQU~1. ACC; Query qryToPasteIntoWord" All \r

This is further explained in the knowledge base article http://support.microsoft.com/ kb/100931.

#### Generating Documents from a Placeholder Document

The example in this section shows how to construct a placeholder document, into which data from tables in the database can be merged; this is a technique that can be used to generate quotations, specifications, and other documents. You begin by setting up tables in the database that are used to manage multiple placeholder documents. Figure 13-3 shows a table that you can use to manage your documents.




Figure 13-3 Creating a table to hold a list of placeholder documents, referred to as templates. This could hold related information on document paths, document versions, and so on.

We have also created a table that will hold a list of the database fields to be processed for each document, together with bookmark names, which you will create in the Word placeholder document. So that you can make this a general purpose feature for your applications, there are fields indicating the access query that will be used to source the data, a flag to indicate whether the data will be merged into a table in word, and a processing order field to control the order in which the merging is processed. This is illustrated in Figure 13-4.

TemplateId •	BookmarkName -	DatabaseFleldName •	DataSource	*	ProcessingOrder -	TableToP	rocess
Quotation	bkCompanyName	Company	qryQuotationHeader		1		
Quotation	bkLastName	Last Name	qryQuotatlonHeader		2		
Quotation	bkAddress	Address	qryQuotationHeader		3		
Quotation	bkOrderDate	Order Date	qryQuotationHeader		4		
Quotation	bkShippingDate	Shipped Date	qryQuotationHeader				
Quotation	bkitemTable	Product Name	qryQuotationDetails		(		7
Quotation	bkItemTable	Quantity	qryQuotationDetails		7	N	7
Quotation	bkltemTable	Unit Price	gryQuotationDetails		3		7

Figure 13-4 Creating a table to hold a list of the bookmarks and show how they map to each database field.

To create a placeholder document in Word, start a new document, and then from the options menu, select Advanced | Show Document Content | Show Bookmarks. This will help you when laying out the document. On the ribbon, on the Insert tab, click Links | Bookmark to manage the bookmarks in the document, as shown in Figure 13-5.

### **Quotation to Be Filled In By Access**

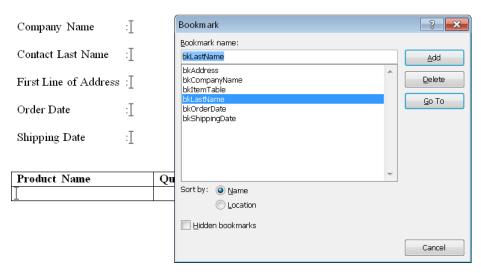


Figure 13-5 To populate a table of data, create a table with one row after your header, and then insert a bookmark in the first cell.

The sample database includes a form (see Figure 13-6) containing a button that you can use to generate a quote. Place a breakpoint behind this button and trace through the execution of the code.

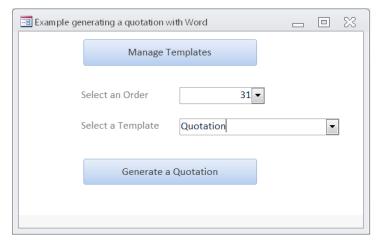


Figure 13-6 Selecting a quotation placeholder template for generating a document.

### **Opening a Placeholder Document**

Generating a quote uses the routine called modTesting\_WriteAQuotation. We will describe the key operations that this routine performs when creating a document.

As shown in the following code, at the top of the module, two object variables are declared; The first one manages the Word application, and the other refers to the specific document:

```
Dim appWord As Word.Application
Dim docQuote As Word.Document
```

The first two steps of processing involve opening Word, and then opening the document, as follows:

```
If Not modWord_OpenWord(True) Then
    Exit Sub
End If
If Not modWord_OpenDocument(strDoc) Then
    Exit Sub
End If
```

The function for opening Word either uses an existing copy of Word or starts a new copy:

```
Function modWord_OpenWord(UseExisting As Boolean) As Boolean
' open a copy of Word, if UseExisting is true try and use any existing open copy
' otherwise create a new instance of Word
   If UseExisting Then
       On Error Resume Next
       Set appWord = GetObject(, "Word.Application")
       Err.Clear
   End If
```

```
If appWord Is Nothing Then
       Set appWord = CreateObject("Word.Application")
        appWord.Visible = True
   End If
   If Err <> 0 Then
       MsgBox "An error occured trying to start MS Word: " & _
           Err.Description, vbCritical, "Unable To Start MS Word"
       modWord_OpenWord = False
   E1se
        modWord_OpenWord = True
   End If
End Function
```

The second function uses the *Open* method of the *Documents* collection to open the placeholder document, as demonstrated in the following:

```
Function modWord_OpenDocument(strFileName As String) As Boolean
' Open an existing word document
   On Error Resume Next
   Set docQuote = appWord.Documents.Open(strFileName)
   If Err <> 0 Then
           MsgBox "An error occured trying to start open the file : " \& _
           strFileName & ": " & _
           Err.Description, vbCritical, "Unable To Open Document"
           modWord_OpenDocument = False
   E1se
           modWord OpenDocument = False
   End If
End Function
```

### Merging Data with Bookmarks

The next steps are to systematically read through the data in the database, locate each bookmark in Word, and then merge in the data.

As shown in the following code example, you start by defining variables for performing the merge and reading through the Recordset:

```
Dim db As DAO.Database
Set db = CurrentDb
Dim rstBookmark As DAO.Recordset
Dim rstData As DAO.Recordset
Dim strDataSource As String
Dim strData As String
Dim strBookMark As String
Dim boolProcessingATable As Boolean
                                        ' variable for recording a bookmark
Dim bkTableProcessing As String
Set rstBookmark = db.OpenRecordset("SELECT * FROM tblWordTemplateBookMark " & _
                   " WHERE TemplateId = " & lngTemplateId _
                   & " ORDER BY ProcessingOrder", dbOpenDynaset)
strDataSource = ""
boolProcessingATable = False
```

The next section of code commences a loop through all the bookmarks defined in the database. It also dynamically opens and closes the required Access Recordsets, depending on the required source of data; different queries could be used for different parts of the document.

```
Do While Not rstBookmark.EOF
   If strDataSource <> rstBookmark!DataSource Then
        ' Need to change the datasource
        Set rstData = db.OpenRecordset("SELECT * FROM [" _
                & rstBookmark!DataSource & "] WHERE [Order Id] = " & _
                lngOrderId, dbOpenDynaset)
        strDataSource = rstBookmark!DataSource
   End If
```

The next step is to read the data from the database field by using the line of code including Nz(rstData(rstBookmark!DatabaseFieldName)). Here, you use the field name, which is contained in rstBookmark!DatabaseFieldName, to index the field in the Recordset rstData, as shown in the following:

#### AnotherRow:

```
On Error Resume Next
strData = Nz(rstData(rstBookmark!DatabaseFieldName))
If Err <> 0 Then
    MsgBox "Unable to find field " & rstBookmark!DatabaseFieldName &
            " in data source " & strDataSource, _
    vbCritical, "Unable To Get Data"
    Exit Sub
End If
strBookMark = rstBookmark!BookmarkName
```

If we are then simply inserting a value at a bookmark then we use the following code:

```
boolProcessingATable = False
' simple merge of data to a bookmark
If Not modWord_InsertAtBookMark(strData, strBookMark) Then
   Exit Sub
End If
```

This calls the routine modWord InsertAtBookMark, which uses the line docQuote. Bookmarks(strBookMark). Select to select the point at the bookmark where data will be inserted, and then docQuote.Application.Selection.InsertAfter strData to merge the data:

```
Function modWord_InsertAtBookMark(strData As String, strBookMark As String) _
' Inserts the data at a specific bookmark
On Error Resume Next
    docQuote.Bookmarks(strBookMark).Select
```

```
If Err <> 0 Then
       MsgBox "Failed to locate bookmark: " & strBookMark, _
           vbCritical, "Failed To Find Bookmark"
       modWord InsertAtBookMark = False
        Exit Function
   docQuote.Application.Selection.InsertAfter strData
   If Err <> 0 Then
       MsgBox "Failed to insert data: " & strData & " at " & _
            strBookMark, vbCritical, "Failed Merge Data"
       modWord InsertAtBookMark = False
   E1se
        modWord_InsertAtBookMark = True
   End If
End Function
```

The outer processing routine is also designed to write data into a Word table. To do this, when processing the first line, you locate the bookmark. Then, for all subsequent lines, you use the MoveRight method, which causes the cursor in the table to move beyond the current cell to the next line and insert a new row. This uses the following code:

```
If Not boolProcessingATable Then
    ' find the bookmark to start processing from
   bkTableProcessing = rstBookmark.Bookmark
   If Not modWord_FindBookMark(strBookMark) Then
        Exit Sub
    End If
    ' insert the data
    If Not modWord_InsertData(strData) Then
        Exit Sub
    End If
   boolProcessingATable = True
Else
    ' move right and enter data
   If Not modWord_MoveRight() Then
        Exit Sub
    End If
    If Not modWord InsertData(strData) Then
        Exit Sub
    Fnd Tf
End If
```

This results in the completed document, as shown in Figure 13-7.

### **Quotation to Be Filled In By Access**

: Company D Company Name

Contact Last Name : Lee

First Line of Address: 123 4th Street

Order Date : 01/20/2006

Shipping Date : 01/20/2006

Product Name	Quantity	Unit Cost
Northwind Traders Dried	10	30
Pears		
Northwind Traders Dried	10	53
Apples		
Northwind Traders Dried	10	3.5
Plums		

Figure 13-7 A completed document generated in Word.

The final code sections call a routine to save the document and then a tidy up routine, which could be configured to leave the documents open in Word, or close Word after producing the document, as presented in the following:

```
Function modWord_SaveAs(strNewDocName As String) As Boolean
    docQuote.SaveAs2 strNewDocName
    If Err <> 0 Then
        modWord_SaveAs = False
   Else
        modWord_SaveAs = True
   End If
End Function
Function modWord_CleanUp(boolCloseDocument As Boolean, boolCloseWord As Boolean) As _
         Boolean
    If boolCloseDocument Then
       docOuote.Close
   End If
    If boolCloseWord Then
        appWord.Quit
   End If
   Set appWord = Nothing
   Set docQuote = Nothing
   If Err <> 0 Then
        modWord_CleanUp = False
   Else
       modWord_CleanUp = True
    End If
End Function
```

#### **INSIDE OUT** Mail merge

In addition to adding links to data in the database and writing data under program control into a document, you can also use the mail merge features in Word to produce documents by using data from the database. A wizard is available to assist you in setting up your mail merge. To access it, on the ribbon, click Mailings | Start Mail Merge | Step By Step Mail Merge Wizard. Using the wizard, you can select a data source and merge the results of a table or query into a document.

### Connecting Access to Excel

In this section, you will be looking at working with some of the key objects in Excel. Figure 13-8 shows a simplified object model of Excel.




Figure 13-8 A simplified Excel object model.

Excel supports a large number of different object types, some of the key object types are as follows:

- **Application** Used to manipulate the Excel environment
- **Workbook** A file that contains multiple Worksheets
- **Worksheet** A spreadsheet

- Range A region within Excel
- **Cell** A cell
- **PivotTable** A pivot table with a possible connection to external data such as Access tables/queries

As described earlier in this chapter, you need to add a reference to the Excel Object Library before developing the code described in this section. The sample database file to use in this section is ExcelAnalysis.accdb.

### Writing Data to a Spreadsheet

In this section, you will look at situations in which you need to either directly read or write information into a spreadsheet. This is particularly useful when receiving or providing information to other people in or outside your organization who will not have any access to your database. The demonstration form frmExcelOperations shown in Figure 13-9 is used to read and write data to Excel.




Figure 13-9 Opening the frmExcelOperations form for reading and writing data to Excel.

The first example demonstrates how to transfer information from database tables to a placeholder spreadsheet. To facilitate re-using the methods developed here and in other parts of an application, we have created a table for holding a list of placeholder template documents, as shown in Figure 13-10.




Figure 13-10 A table designed to support reading and writing of data from different spreadsheets. Each placeholder spreadsheet is referred to a template in the code.

Notice that each placeholder template has entries in a related table (see Figure 13-11), which is used to tie up the reference in a cell to a field in the database (this technique can be easily extended to handle multiple spreadsheets in a workbook).

Bookmarkid	v	TemplateId -	CellColumn •	CellRow •	DatabaseFleldName •	DataSource -	Proc +	4
	1	Product Specification	С	5	Product Code	qryProductSpec	1	
	2 Product Specification C		С	7 Product Name		qryProductSpec	2	2
	3	3 Product Specification F 5 Standard Cost c		qryProductSpec	3			
	4	Product Specification	G	5	List Price	qryProductSpec	4	ŀ
	9	Product Specification To Rea	С	5	Product Code	Products	1	
	12	Product Specification To Rea	С	10	Description	Products	2	-

Figure 13-11 Each spreadsheet uses a table of instructions for reading and writing data. This links the database field names to the cell positions in Excel.

Referring back to Figure 13-9, use the Write Product Specifications To Excel button to display a form, from which you select the specification template and database products, as shown in Figure 13-12.

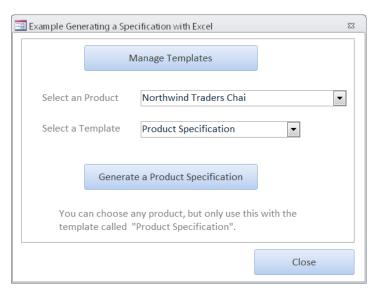


Figure 13-12 Use the sample form frmExcelProductSpecWrite to select a product and specification document template, and then generate a document in Excel.

The code behind the Generate A Product Specification button calls a routine in a library to generate the specification, passing the identifiers for the product and the specification, as shown in the following:

modTesting\_WriteProductSpec Me.cboTemplateId, Me.cboProductId

As demonstrated in the following code sample, the first part of the processing routine looks up some key information based on the document and product identifiers, and then prepares to open the spreadsheet in Excel:

```
Sub modTesting_WriteProductSpec(lngTemplateId As Long, lngProductId As Long)
   ' uses a template to write a product specification
   Dim strTemplateDocument As String
   Dim strSpecDocument As String
   Dim db As DAO.Database
   Dim rst As DAO.Recordset
   Dim crst As Recordset
   strSpecDocument = DLookup("[Product Code]", "Products", "[ID] = " _
                                & lngProductId)
   strTemplateDocument = DLookup("[DocumentName]", "tblExcelTemplate", _
            "[TemplateId] = " & lngTemplateId)
   strSpecDocument = CurrentProject.Path & "\" & strSpecDocument & ".xlsx"
   strTemplateDocument = CurrentProject.Path & "\" & strTemplateDocument
   If Not modExcel_OpenExcel(True) Then
        Stop
   End If
   If Not modExcel OpenWorkBook(strTemplateDocument) Then
       Stop
   End If
   If Not modExcel_OpenActiveWorkSheet() Then
   End If
```

#### **Opening Excel**

All the Excel operations are contained within a single module called *modExcel*, at the top of the module, variables are defined to refer to the Excel objects, as shown in the code that follows:

```
Dim appExcel As Excel.Application
Dim wkbExcel As Excel.Workbook
Dim wksExcel As Excel.Worksheet
```

The code to open Excel has a parameter that allows it to either create a new Excel application or use an existing instance of Excel. If the parameter is set to use an existing instance of Excel and one does not exist, it will create a new instance, as shown here:

```
Function modExcel_OpenExcel(UseExisting As Boolean) As Boolean
' open a copy of Excel
   If UseExisting Then
       On Error Resume Next
```

```
Set appExcel = GetObject(, "Excel.Application")
        appExcel.Visible = True
        Err.Clear
    End If
    If appExcel Is Nothing Then
        Set appExcel = CreateObject("Excel.Application")
        appExcel.Visible = True
    End If
    If Err <> 0 Then
       MsgBox "An error occured trying to start MS Word: " & _
                Err.Description, vbCritical, "Unable To Start MS Excel"
       modExcel_OpenExcel = False
    E1se
        modExcel OpenExcel = True
    End If
End Function
The second routine loads the Excel Workbook:
Function modExcel_OpenWorkBook(strFileName As String) As Boolean
' Open an existing Excel document
    On Error Resume Next
    Set wkbExcel = appExcel.Workbooks.Open(strFileName)
    If Err <> 0 Then
       MsgBox "An error occured trying to start open the file : " \& _
                strFileName & " : " & Err.Description, vbCritical, _
                "Unable To Open Workbook"
        modExcel OpenWorkBook = False
    E1se
       modExcel_OpenWorkBook = True
```

The third routine gets a reference to the active worksheet. You can modify this routine to get a reference to a specifically-named worksheet (an example of which is shown in modExcel SyntaxForWorkSheets):

End If **End Function** 

```
Function modExcel_OpenActiveWorkSheet() As Boolean
' Open an existing word document
   On Error Resume Next
   Set wksExcel = wkbExcel.ActiveSheet
   If Err <> 0 Then
       MsgBox "An error occured trying to choose active sheet in workbook :"
               & Err.Description, vbCritical, "Unable To Select ActiveSheet"
       modExcel_OpenActiveWorkSheet = False
```

```
Else
        modExcel_OpenActiveWorkSheet = True
    End If
End Function
Sub modExcel_SyntaxtForWorkSheets(strExpectedName As String)
    'Set wksExcel = wkbExcel.Sheets(i)
    Dim sheetExcel As Excel.Worksheet
    ' use code like the following to locate a specific worksheet
    For Each sheetExcel In wkbExcel.Worksheets
        If sheetExcel.Name = strExpectedName Then
            Set wksExcel = sheetExcel
        End If
    Next
End Sub
```

#### Writing the Data

Returning now to your main outer code loop, you can examine the additional Do While Not crst.EOF loop that writes all the data entries into the worksheet, as shown here:

```
' Now process the data
Set db = CurrentDb
Set rst = db.OpenRecordset("SELECT * FROM qryProductSpec WHERE [ID] = " _
                            & lngProductId, dbOpenDynaset)
Set crst = db.OpenRecordset("SELECT * FROM tblExcelTemplateCellMap " & _
                            " WHERE [TemplateId] = " _
                            & lngTemplateId, dbOpenDynaset)
Do While Not crst.EOF
   If Not modExcel_WriteCell(crst!CellColumn, crst!CellRow, _
                        CStr(rst(crst!databaseFieldName))) Then
        Stop
   End If
   crst.MoveNext
Loop
```

This code uses the Recordset crst to find the name of the database field, and then uses the expression CStr(rst(crst!databaseFieldName)) to extract the value from the Recordset.

You can set a breakpoint in the code to display the key values in the variables and expressions in the Watches window, as shown in Figure 13-13.




Figure 13-13 Using the Watches window to examine the key variables used to write data to the spreadsheet.

Figure 13-13 shows that the cell reference is C5 and the database field name of Product Code extracts the value NWTB-1.

The WriteCell procedure is as follows:

```
Function modExcel_WriteCell(strCol As String, lngRow As Long, _
                            strCellvalue As String) As Boolean
' Write to a cell
   On Error Resume Next
   wksExcel.Cells(lngRow, modExcel_MapLetterToColumn(strCol)) = strCellvalue
   If Err <> 0 Then
       MsgBox "An error occured trying to write to excel : " & Err.Description, _
           vbCritical, "Unable To Write Data"
       modExcel_WriteCell = False
   E1se
       modExcel WriteCell = True
   End If
End Function
```

Because you are referencing the cell by using a column number and not a column letter, we have added a function to map the column letter to a numeric value, as shown in the following:

```
Function modExcel_MapLetterToColumn(strCol As String) As Long
    ' map excel columns to a number
   ' A.....Z AA.....ZZ
   Dim lngCol As Long
   Dim strChar As String
   If Len(strCol) = 0 Or Len(strCol) > 2 Then
       modExcel MapLetterToColumn = 0
        Exit Function
   End If
   strChar = UCase(Left(strCol, 1))
   lngCol = Asc(strChar) - 64
```

```
If Len(strCol) > 1 Then
       strChar = UCase(Mid(strCol, 1, 1))
       lngCol = (lngCol + 1) * 25 + (Asc(strChar) - 64)
   modExcel_MapLetterToColumn = lngCol
End Function
```

Add a breakpoint to the execution of the code so that you can switch to display the Excel spreadsheet cells being written, as shown in Figure 13-14.

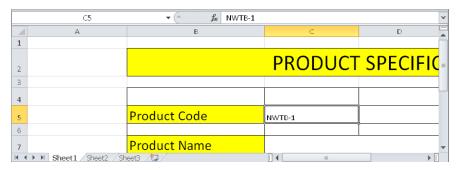


Figure 13-14 Monitoring activity in Excel as data is written to the spreadsheet.

The last portion of your code calls a routine to save the spreadsheet:

```
If Not modExcel_SaveAs(strSpecDocument) Then
        Stop
    End If
Function modExcel_SaveAs(strNewDocName As String) As Boolean
    wkbExcel.SaveAs strNewDocName
    If Err <> 0 Then
        modExcel_SaveAs = False
    E1se
        modExcel_SaveAs = True
    End If
End Function
```

## **INSIDE OUT**

#### Using Excel to drive an Access application

In the sample spreadsheet ExcelOpeningAccess.xlsm, we have written sample code that allows Excel to directly manipulate objects in an Access application by using the following VBA code:

```
Sub StartAccess_Click()
    Dim appAccess As Access.Application
    Dim db As DAO.Database
```

```
Dim rst As DAO.Recordset
    Dim strDatabase As String
    strDatabase = ActiveWorkbook.Path & "\ExcelAnalysis.accdb"
    Set appAccess = GetObject(strDatabase)
    Set db = appAccess.CurrentDb
    Set rst = db.OpenRecordset("Employees", dbOpenDynaset)
    Do While Not rst.EOF
       Debug.Print rst![Last Name]
        rst.MoveNext
    Loop
    Stop
    appAccess.Quit
End Sub
```

References have been added to the Microsoft Access 14.0 Object Library and Microsoft Office 14.0 Access database engine Object Library. This then allows all the types of code that you have been looking at in this book to be executed from inside Excel.

### Reading Data from a Spreadsheet

The process of reading data from an Excel spreadsheet is very similar to the previously described operations for writing data. In the sample code that follows, we have shown part of the code from the module modTesting\_ReadProductSpec, which performs the read operation.

Rather than read the data directly into the table, we have created a temporary table into which you will read the data. You can then use this to update the main tables in the database:

```
' now empty the temporary table
CurrentDb.Execute "DELETE * FROM tblTEMP_Products"
' Now process the data
Set db = CurrentDb
Set rst = db.OpenRecordset("SELECT * FROM tblTEMP_Products", dbOpenDynaset)
Set crst = db.OpenRecordset("SELECT * FROM tblExcelTemplateCellMap " & _
                            " WHERE [TemplateId] = " & _
                            lngTemplateId, dbOpenDynaset)
rst.AddNew
Do While Not crst.EOF
    strReadValue = ""
   If Not modExcel_ReadCell(crst!CellColumn, _
                             crst!CellRow, strReadValue) Then
       Stop
   End If
    ' save the results
    rst(crst!databaseFieldName) = strReadValue
    crst.MoveNext
```

```
Loop
rst.Update
' now we could have appropriate validation
' and then execute the update
CurrentDb.Execute "gryUpdateProductsFromExcel"
If Not modExcel_CleanUp(True, True) Then
End If
```

The following code illustrates the ReadCell processing routine is the reverse of the WriteCell operation:

```
Function modExcel_ReadCell(strCol As String, lngRow As Long, _
                            ByRef strCellvalue As String) As Boolean
' Read from a cell
' Note we are ensuring that by using an Explicit ByVal that this routine can modify
the value
   On Error Resume Next
   strCellvalue = wksExcel.Cells(lngRow, modExcel_MapLetterToColumn(strCol))
   If Err <> 0 Then
       MsgBox "An error occured trying to read from excel: "
               & Err.Description, vbCritical, "Unable To Read Data"
       modExcel_ReadCell = False
   E1se
       modExcel ReadCell = True
   End If
End Function
```

#### Reporting with Excel Linked to Access

In this example, you will look at a very simple and effective way to use Excel for management reporting. There are two compelling reasons for using Excel in this manner (in particular when working with financials). First, the people consuming the data might prefer to use Excel for reporting because it also enables them to tie in their own data from other Excel applications. Second, Excel has many wonderful reporting features that can be difficult to reproduce in Access.

When you link Excel to gueries in Access, there are restrictions regarding the use of Accessspecific functions, such as the Nz function or custom VBA functions in a query; you need to avoid these. You also cannot use any queries that contain references to controls on Access forms.

To get around this restriction of having an Access guery that directly references controls on a form, one simple approach to reporting is to create a local table that contains a user's reporting selections and include this table to filter data in any queries. This can then be linked directly to Excel. To use this approach, the simplest solution is to give each user a

copy of an Access front-end application with a local table containing these choices for reporting (or if the application were shared, only one user at a time could use this reporting feature).

If you decide that rather than creating this for yourself that you prefer to use our example Excel spreadsheet, ExcelReporting.xlsx, you will need to edit the existing connections in the spreadsheet if your database is on a different path to the one we have used. On the ribbon, on the Data tab, click the Connections group, and then click the Connections icon. You will see four items; for the two items, ExcelAnalysis(1), go to Properties | Connection String, and then edit the path to ExcelAnalysis.accdb. For the two items, Query from ExcelAnalysisDatabase(1), make the same change, but notice that you make the change twice in each connection string.

You start by creating a table that will have only one row that is set to the user's reporting choices, as shown in Figure 13-15. Note that this is a single-user solution.




Figure 13-15 The table holding parameter choices for a user. The first field is the primary key, although this table only ever holds one record.

Use the form called frmExcelReporting (see Figure 13-16), which contains a combo box that you use to select a reporting period. The combo box is bound to the ReportingMonth column in tblReportingParameters.




Figure 13-16 The sample form frmExcelReporting for opening Excel and refreshing links to Access.

You start by constructing a query in Access that will use the user's reporting choices to restrict the data. This uses a cross-join or Cartesian product to restrict the records to the user's choice of parameters, the query qryProductSales is shown in Figure 13-17.

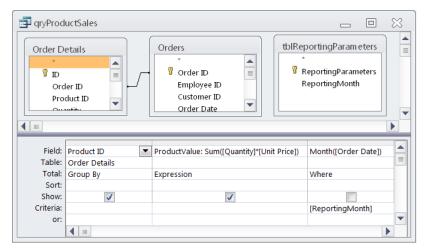


Figure 13-17 A query displaying product sales for a selected month.

The actual products sold each month can change and you want to produce a query that includes all the products. To do this, you create another query that brings the main product and sales information together. This guery is called gryProductSalesAllProducts (see Figure 13-18), and it uses an outer join to bring together all the product records.

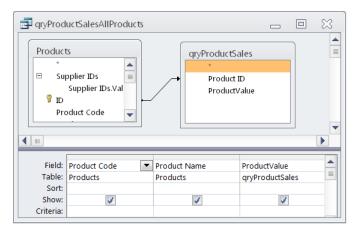


Figure 13-18 Combining the sales and product information together.

There is one more piece of information that you want to include: the reporting month. To do this, you create a top-level query that uses a Cartesian product to project the month information. This uses the qryProductSalesForExcel query, as shown in Figure 13-19.

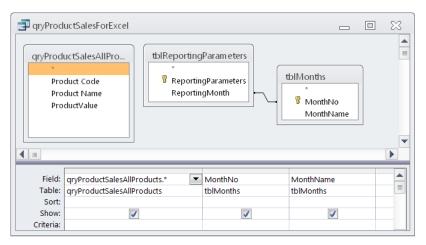


Figure 13-19 A Top-level query displaying month information.

With all the queries saved and closed, you can now open Excel and create a link to the query with the resulting data.

In a new spreadsheet, on the ribbon, on the Data tab, click the Access icon to create the link, as shown in Figure 13-20.



Figure 13-20 Getting external data from Access.

Then, browse until you locate the ExcelAnalysis.accdb database, as shown in Figure 13-21.




Figure 13-21 Use the file dialog to browse and locate your Access database file.

## **INSIDE OUT**

#### Setting Data Link advanced properties

If you still have Access open and click the Test Connection on the Connection tab, a message displays indicating that database is already open. To resolve this, in the Data Link Properties window, click the Advanced tab. You will see that the Access Permissions are set to Share Deny Write. Clear this option, and then select the Read check box. Return to the Connection tab and test the connection; the test will now succeed.

Figure 13-22 shows the Data Link connection and the Access Permissions for the connection.


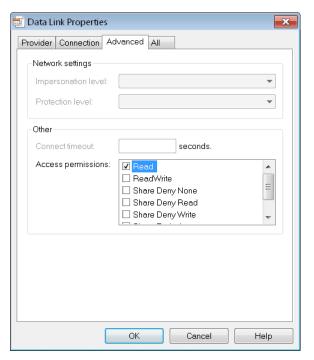



Figure 13-22 Click the Advanced tab on the Data Link Properties dialog box to set the Access Permissions properties.

After you successfully test the connection (on the Connection tab) and click the OK button, Excel displays a list of tables and queries in Access (see Figure 13-23). Notice that this list does not show queries that Excel cannot understand; for example, any query using a custom VBA function. The query qryProductSalesAllProductsUsingIIF is displayed, but the query qryProductSalesAllProductsUsingNZ is not displayed because it contains the Nz function in an expression.



**Figure 13-23** Selecting from available tables and queries. Not all queries will be shown, depending on their content.

The Import Data dialog box opens and prompts you to select whether you want the data displayed in a Table, PivotTable Report, or a PivotChart And PivotTable Report, as shown in Figure 13-24.



**Figure 13-24** Although this is the Import Data dialog box, you are constructing a dynamic link to the query in the Access Database.

After pressing OK to create the linked table of data, place your cursor inside the area of the table, right-click to display the shortcut menu, and then click the Refresh option, which refreshes the data in the table if any changes were made to the data in Access.

Figure 13-25 shows the shortcut menu option to manage the external data for the table.




Figure 13-25 The External Data Properties can be used to manage settings for the table.

Figure 13-26 presents the External Data Properties dialog box. Click the button adjacent to the Connection Name text box to manage the connection details and make changes to the name of the query, table, or SQL used for the external data.




Figure 13-26 Click the button next to the Connection Name box to open a window, in which you can change connection properties.

# **INSIDE OUT**

#### Planning for linking to external data

A useful approach to managing external data links is to allocate one spreadsheet page (for example, called RawData) and place all of your linked tables on this single page. Other spreadsheet pages can then link to this data page.

Depending on how you construct your queries, it can be useful to have a database field to control the ordering of the data being linked from Excel so that when new data rows are added, they do not disrupt any dependencies on row ordering that you build into

the spreadsheet formulae. It can also be useful to change the options shown in Figure 13-26 and select the option Overwrite Existing Cells With New Data, Clear Unused Cells so that additional data does not move other linked tables of data. Planning your layouts to allow for growth in tables of data is important, and placing multiple tables to the right of each other and not below each other can help with allowing for the growth of data.

After selecting the guery, you are offered a number of options for adding the data as a linked table or pivot table. For this example, choose to display the data as a table.

On the Data tab, click the Connections group, and then click the Connections button to display the Workbook Connections dialog box. Here, you can manage all the connections for the Workbook, as shown in Figure 13-27.

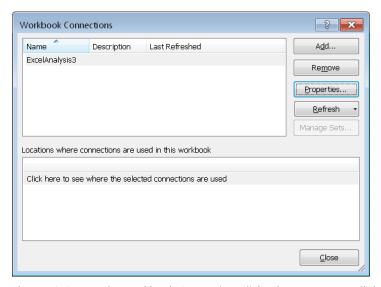


Figure 13-27 Use the Workbook Connections dialog box to manage all the connections in the Workbook.

Save and close the spreadsheet, return to the Access application where you will construct some VBA code to allow the user to make selections, and then open and refresh the Excel spreadsheet.

The code behind the button that refreshes the Excel spreadsheet is as follows:

```
Private Sub cmdReportInExcel_Click()
    ' save any changes made by the user
   Me.Dirty = False
   Dim strExcelWorkBook As String
    strExcelWorkBook = CurrentProject.Path & "\" & "ExcelReporting.xlsx"
    If Not modExcel OpenExcel(True) Then
        Stop
    End If
    If Not modExcel OpenWorkBook(strExcelWorkBook) Then
    End If
    If Not modExcel_OpenActiveWorkSheet() Then
    End If
    If Not modExcel_RefreshConnections () Then
    End If
End Sub
```


The details behind the open procedures have been discussed in earlier sections. The procedure that refreshes the Excel workbook can execute a RefreshAll to refresh all items, or it can selectively refresh the connections (and associated data tables) and any pivots:

```
Function modExcel_RefreshConnections() As Boolean
   On Error GoTo Err_Handler
   Dim lngCount As Long
    wkbExcel.RefreshAll
    ' refresh all connections in the workbook
    For lngCount = 1 To wkbExcel.Connections.Count
        wkbExcel.Connections(lngCount).Refresh
    Next
    modExcel RefreshConnections = True
    Exit Function
Err Handler:
   modExcel RefreshConnections = False
    Exit Function
End Function
```

#### Using MS Query and Data Sources

In the previous section, you linked Excel to Access by using connections; this is not the only method that can be used when connecting Excel to Access. If you are working with older linked spreadsheets, they are likely to use the second technique, which is described in this section.

On the Data tab, click the Get External Data group, and then click From Other Sources | From Microsoft Query. This displays the Choose Data Source dialog box shown in Figure 13-28.

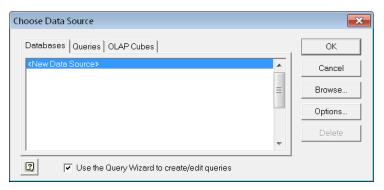

**Figure 13-28** Select the Use The Query Wizard To Create/Edit Queries check box if you want the wizard to provide assistance while setting up or editing queries.

If you do not already have a data source, select <New Data Source>, and then click OK. The Create New Data Source dialog box opens, as shown in Figure 13-29.



Figure 13-29 Enter a name for your data source, and then select the Microsoft Access Driver.

Use the Connect button to browse and select your Access Database. (You might find that you need to close the Access Database to avoid messages indicating that the database is already in use.) You can then select your new database connection, which will be displayed in the Choose Data Source dialog.

You might notice that unlike the connection wizard described in the previous section, the Query Wizard will display queries that you are not allowed to use, and if you try to connect to an illegal query, such as *qryProductSalesAllProductsusingNZ*, you will see the error message displayed in Figure 13-30.

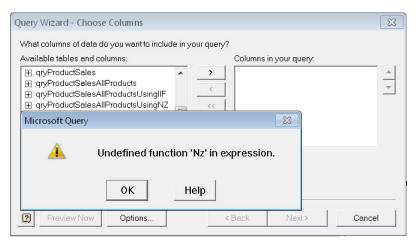


Figure 13-30 The error message that pops up if you attempt to use a guery that contains an unsupported function.

In the sample spreadsheet called ExcelReporting.xlsx, we have added both a Table and Pivot Table to the spreadsheet called MSQueryData.

# **INSIDE OUT**

#### QueryTables and ListObjects

The Excel worksheet contains two collections called PivotTables and QueryTables. With older versions of Office, when you linked a table of data, this created an entry in the QueryTables collection, but with Office 2010, it does not create an entry in the QueryTables collection for the spreadsheet object. Instead, connections are created as described in the previous section and the QueryTable can be accessed through the ListObjects collection in the SpreadSheet object

In the spreadsheet ExcelReporting.xlsm, we have included some example module code for listing Connection and QueryTable information, as shown below:

```
Sub modCon_Connections()
   Dim lngCount As Long
   Dim ODBCCon As ODBCConnection
   Dim OLEDBCon As OLEDBConnection
   For IngCount = 1 To ActiveWorkbook.Connections.Count
       With ActiveWorkbook.Connections(lngCount)
            Debug.Print .Type
            If .Type = x1ConnectionTypeODBC Then
                Set ODBCCon = ActiveWorkbook.Connections(lngCount).ODBCConnection
                Debug.Print "ODBC " & .Name
                Debug.Print ODBCCon.CommandText
            End If
```

```
If .Type = xlConnectionTypeOLEDB Then
                Set OLEDBCon = ActiveWorkbook.Connections(lngCount).OLEDBConnection
               Debug.Print "OLEDB" & .Name
                Debug.Print OLEDBCon.CommandText
           End If
        End With
   Next
   Dim qtable As QueryTable
   Dim 1stObject As ListObject
   For Each 1stObject In ActiveWorkbook.Worksheets("MSQueryData").ListObjects
        Debug.Print 1stObject.Name
       Set qtable = lst0bject.QueryTable
       Debug.Print qtable.CommandText
       Debug.Print qtable.Connection
   Next
End Sub
```

# Connecting Access to Outlook

Figure 13-31 shows a simplified view of the Outlook object model. At the heart of the Outlook object model is the Namespace, the only supported namespace is MAPI, so very much like when working with DAO, wherein you need a reference to the database object, in Outlook, you need a reference to the namespace before you can undertake a lot of programming.




Figure 13-31 A simplified Outlook object model.

A very clever feature of the object model is that the Application object supports CreateItem syntax without the need to traverse the hierarchy to create an object of a specific type.

The Items collections in Outlook can hold different types of objects (note that Item contained in the collection is, in fact, an object data type); this is a very flexible mechanism as it allows for a folder to hold both email items and subsequent folders. But this also means that when traversing a collection, you will need to define a generic object type, and then test the class of object type before subsequently assigning the object to a particular known type of object (to get IntelliSense in your code).

The key objects with which to get started in the Outlook object model are as follows:

- **Application** Used to control the outlook environment
- **Explorer** User interface windows that display content
- **Inspector** Window displaying a single item such as an email message
- **MAPIFolder** Folder containing email messages, tasks and appointments, and so on
- **MailItem** Email message
- **AppointmentItem** An appointment
- **Taskitem** A task
- ContactItem A contact

As described earlier in this chapter, you need to add a reference to the Outlook Object Library before developing the code described in this section. The sample database file to use is OutlookContacts.accdb.

# **Extracting Information from Outlook**

If you already have Outlook running on the desktop, you can use GetObject to get a reference to it; if it is not running, you can create a new instance, as shown in the following code, note that you need to call the *Display* method on any folder to make Outlook visible (if required). Also note that you are allowed to have multiple instances of Outlook. There are also Logon and LogOff methods to facilitate more advanced programming:

```
Sub modOutlook_OpenOutlook()
   ' Initialize outlook objects
   On Error Resume Next
   Set appOutlook = GetObject(, "Outlook.Application")
   If Err <> 0 Then
        ' attempt to start outlook
```

' Note that this code can be used to start a second instance of outlook

```
Set appOutlook = New Outlook.Application
        Set namespaceOutlook = appOutlook.GetNamespace("MAPI")
       Dim folderOutlook As Folder
        Set folderOutlook = namespaceOutlook.GetDefaultFolder(olFolderInbox)
        ' make outlook visible on the desktop
       folderOutlook.Display
   E1se
       Set namespaceOutlook = appOutlook.GetNamespace("MAPI")
   End If
End Sub
```

Following good coding practice, you need a tidy up operation, which could also incorporate the Quit method on the application object if you were creating a new instance, as shown in the following:

```
Sub modOutlook_TidyUp()
    ' tidy up objects
    Set namespaceOutlook = Nothing
    Set appOutlook = Nothing
End Sub
```

The first example of extracting data from Outlook lists the available accounts; with all these examples, you can easily write data through to database tables:

```
Sub modOutLook ListAccounts()
    ' list outlook accounts
    modOutlook OpenOutlook
    Dim accOutlook As Outlook.Account
    For Each accOutlook In namespaceOutlook.Accounts
        Debug.Print accOutlook.DisplayName
    modOutlook_TidyUp
End Sub
```

The next example iterates through the folders and subfolders:

```
Sub modOutlook_ListFolders()
   ' List outlook folders and subfolders
   modOutlook_OpenOutlook
   Dim fldOutlook As Outlook.Folder
   Dim fld2Outlook As Outlook.Folder
   For Each fldOutlook In namespaceOutlook.Folders
        ' Archive Folders and Personal Folders
       Debug.Print fldOutlook.Name, fldOutlook.Description
        For Each fld2Outlook In fldOutlook.Folders
            ' cycle through the folders
           Debug.Print fld2Outlook.Name, fld2Outlook.Description
       Next
   Next
   modOutlook_TidyUp
End Sub
```

You can also choose a specific folder and iterate through the documents in the folder, as demonstrated here:

```
Sub modOutlook ListSpecificFolder()
   ' List notes in a specific folder
   modOutlook OpenOutlook
   Dim fldOutlook As Outlook.Folder
   Dim noteOutlook As Outlook.NoteItem
   Dim lngItem As Long
   Set fldOutlook = namespaceOutlook.GetDefaultFolder(olFolderNotes)
   For lngItem = 1 To fldOutlook.Items.Count - 1
        ' cycle through the folders
       If fldOutlook.Items(lngItem).Class = olNote Then
            Set noteOutlook = fldOutlook.Items(lngItem)
            Debug.Print noteOutlook.Body
       End If
   Next
   modOutlook_TidyUp
End Sub
```

Note that the previous example iterates by using an index (the variable *IngItem*) as an index into the collection to count through the objects. You can also use a For ... Each loop with a generic object variable.

# **INSIDE OUT**

# **Restrict and Find operations**

Outlook supports a number of Find operations when searching for data, but probably the most powerful function is Restrict, with which you can specify criteria and then iterate through the resulting collection. The problem with Restrict is that when you need to wildcard the search to match a pattern using the SQL keyword like, it is not obvious that this syntax will not work. For example, to search the subject, strCriteria = "[Subject] = 'Fred'" will work, but strCriteria = "[Subject] like '%Fred%'" will not work. The following code resolves this problem:

```
Sub modOutlook_RestrictItems()
    ' Filter Items for a subset of items
   modOutlook OpenOutlook
    Dim fldOutlook As Outlook.Folder
    Dim mailOutlook As Outlook.MailItem
    Dim restrictedItems As Outlook.Items
   Dim anItem As Object
   Dim strCriteria As String
   Set fldOutlook = namespaceOutlook.GetDefaultFolder(olFolderInbox)
     strCriteria = "@SQL=" & Chr(34) & "urn:schemas:httpmail:subject" & _
```

```
Chr(34) & " like '%SAFARI%'"
    strCriteria = "@SQL=" & Chr(34) & _
                "urn:schemas:httpmail:textdescription" & _
                Chr(34) & " like '%SAFARI%'"
    ' urn:schemas:httpmail:sender
    strCriteria = "[Subject] = 'Fred'"
    strCriteria = "@SQL=" & Chr(34) & "urn:schemas:httpmail:sender" & _
                    Chr(34) & " like '%Karl%'"
    Set restrictedItems = fldOutlook.Items.Restrict(strCriteria)
    For Each anItem In restrictedItems
        ' cycle through the folders
       If anItem.Class = olMail Then
            Set mailOutlook = anItem
            Debug.Print mailOutlook.Subject, mailOutlook.Sender, _
                mailOutlook.SenderEmailAddress
        End If
    Next
    modOutlook_TidyUp
End Sub
```

This is not a completely intuitive syntax to follow, but the key is urn:schemas:httpmail followed by the property that will be searched. Notice also how this code checks the object class and then only assigns the object of the correct class when the object is matched.

# **Creating Objects in Outlook**

In this section, you will look at sample code for creating emails, adding contacts, adding an appointment to the diary, and creating tasks.

The first example creates an email with an attachment. The Display option displays the email and the Send action transmits the email:

```
Sub modOutlook_SendMail()
   ' example sending an email with outlook
   modOutlook OpenOutlook
   Dim mailOutlook As Outlook.MailItem
   Dim strDoc As String
   strDoc = CurrentProject.Path & "\quote.docx"
   Set mailOutlook = appOutlook.CreateItem(olMailItem)
   With mailOutlook
        .Subject = "Sample email sent by OutlookContacts.accdb"
        .To = "andy@ascassociates.biz"
        .Body = "Attached to this document is our proposal."
        .Attachments.Add strDoc
        ' display the email
        .Display
```

```
' send the email
        ' .Send
    End With
    Set mailOutlook = Nothing
    modOutlook_TidyUp
End Sub
```

The next example demonstrates adding an entry to the diary:

```
Sub modOutlook_AddToDiary()
    ' example adding to the diary outlook
    modOutlook_OpenOutlook
    Dim diaryOutlook As Outlook.AppointmentItem
    Set diaryOutlook = appOutlook.CreateItem(olAppointmentItem)
    With diaryOutlook
        .Start = Now
        .End = DateAdd("h", 1, Now)
        .Subject = "Appointment for next hour"
        .Body = "Appointment generated by OutlookContacts.accdb"
        .Save
    End With
    Set diaryOutlook = Nothing
    modOutlook_TidyUp
End Sub
```

In this example, we show how to add a new task:

```
Sub modOutlook_AddToTasks()
    ' example adding to the task list outlook
    modOutlook OpenOutlook
    Dim taskOutlook As Outlook.TaskItem
    Set taskOutlook = appOutlook.CreateItem(olTaskItem)
    With taskOutlook
        .Subject = "Microsoft Outlook Operations"
        .Body = "Complete Chapter 13"
        .DueDate = Now()
        .Save
    End With
    Set taskOutlook = Nothing
    modOutlook_TidyUp
End Sub
```

The final example in this section is adding a new contact. This example first searches to establish if the record already exists. Because we are performing an exact pattern match, the *strCriteria* can have a very simple form:

```
Sub modOutlook AddToContacts()
   ' example adding a contact
    ' check to see if contact already exists
   modOutlook_OpenOutlook
```

```
Dim contOutlook As Outlook.ContactItem
    Dim fldOutlook As Outlook.Folder
    Dim restrictedItems As Outlook.Items
    Dim strCriteria As String
    Dim strFirstName As String
    Dim strLastName As String
    strFirstName = "A"
    strLastName = "Couch"
    strCriteria = "[FirstName] = '" & strFirstName & _
                  "' and [Lastname] = '" & strLastName & "'"
    Set fldOutlook = namespaceOutlook.GetDefaultFolder(olFolderContacts)
    Set restrictedItems = fldOutlook.Items.Restrict(strCriteria)
    If restrictedItems.Count > 0 Then
        ' exit as name already exists
        Exit Sub
   End If
    Set contOutlook = appOutlook.CreateItem(olContactItem)
    With contOutlook
        .FirstName = strFirstName
        .LastName = strLastName
        .Save
    End With
    Set contOutlook = Nothing
    modOutlook_TidyUp
End Sub
```

# Writing to Access from Outlook

In this section, you will look at developing some VBA code that can be added to Outlook for recording an incoming and outgoing email in an Access database. You start by creating the table shown in Figure 13-32 for recording the email activity.



Figure 13-32 An Access table for recording incoming and outgoing email.

In Outlook, you then use the Developer-Visual Basic option to write VBA code in the ThisOutlookSession module, as shown in Figure 13-33.




Figure 13-33 Select the *ThisOutlookSession* module to write startup code for Outlook.

Use the references to add the Microsoft Office 14.0 Access database engine Object Library.

You begin by defining WithEvents objects, which intercept emails from the InBox and SentMail folders, and appropriate variables for using the database:

```
Option Explicit
' Event handling
Private WithEvents InboxItems As Outlook.Items
Private WithEvents SentItems As Outlook.Items
' Global varaibles
Dim nsOutlook As Outlook.NameSpace
Dim db As Database
Dim rst As Recordset
' constants
Const strdbPath = "C:\.....\CodeExamples\Chapter12\"
Const strdbName = "OutlookContacts.accdb"
Const strTableName = "tblEmailLog"
```

You then write the application startup code, which hooks in your WithEvent processing to the Outlook folders and sets the database variables, as shown in the following:

```
Private Sub Application_Startup()
   Set nsOutlook = GetNamespace("MAPI")
   ' attach our event processing to the InBox and SentMail
   Set InboxItems = nsOutlook.GetDefaultFolder(olFolderInbox).Items
   Set SentItems = nsOutlook.GetDefaultFolder(olFolderSentMail).Items
   ' setup database logging
   Set db = OpenDatabase(strdbPath & strdbName)
   Set rst = db.OpenRecordset(strTableName, dbOpenDynaset)
End Sub
```

You then write a tidy up routine for when the application closes:

```
Private Sub Application_Quit()
    ' tidy up variables
   On Error Resume Next
    rst.Close
    db.Close
    Set nsOutlook = Nothing
End Sub
```

The final procedures to be added are the routines for writing to the database:

```
Private Sub InboxItems_ItemAdd(ByVal Item As Object)
    ' process inbox emails
    Dim mailOutlook As MailItem
   Dim rec As Recipient
    If Item.Class = olMail Then
        Set mailOutlook = Item
       With mailOutlook
            rst.AddNew
            rst!Subject = Left(.Subject, 255)
            rst!Body = .Body
            rst!From = .Sender
            rst!FromAddress = .SenderEmailAddress
            rst!Status = "InBox"
            rst!Logged = .ReceivedTime
            For Each rec In .Recipients
               rst!To = rst!To & rec.Name & " : " & rec.Address & ";"
            rst.Update
        End With
    End If
End Sub
Private Sub SentItems_ItemAdd(ByVal Item As Object)
    ' process outgoing emails
    Dim mailOutlook As MailItem
   Dim rec As Recipient
    If Item.Class = olMail Then
        Set mailOutlook = Item
       With mailOutlook
            rst.AddNew
            rst!Subject = Left(.Subject, 255)
            rst!Body = .Body
            rst!From = .Sender
            rst!FromAddress = .SenderEmailAddress
            rst!Status = "Sent"
            rst!Logged = .SentOn
            For Each rec In .Recipients
               rst!To = rst!To & rec.Name & " : " & rec.Address & ";"
            Next
            rst.Update
        End With
   End If
End Sub
```

To save typing, we have included this code in the file Outlook.txt, which is located in the sample databases.

In the Trust Center, click Macro Settings and adjust the macro security (see Figure 13-34). Close and re-open Outlook for the email logging to start.

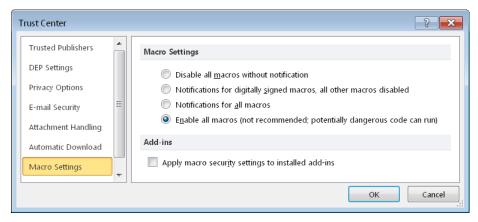


Figure 13-34 Adjusting the macro security to allow the VBA code to execute.

# Summary

The degree of integration available in the Office products is awesome, and the freedom that VBA gives you to copy and paste code and easily work with code in the different products means that your VBA skills are transferable among the Office suite—once you can program one product, you can program them all. The key to your productivity is in understanding the individual object models, and also in understanding any special requirements for interconnecting the products.

- When working with Excel, the most important concept to embrace is the change in focus from TableQuery to the Connection object, which is a significant shift from earlier versions of Office.
- When working with Outlook, the most important concept is the generic nature of the object model and the *Items* collection. The ability to create objects in a generic manner from the Application objects by using one method should not be overlooked.
- Word has always been left trailing behind the other Office products from the perspective of having a more complex object model. However, the comparable simplicity of this object model is also its strength by keeping it very simple to automatically drive Word.



## PART 6

# SQL Server and SQL Azure

CHA	PT	ER	14

Using SQL Server483	Using	SQ	L Ser	ver	•																							483
---------------------	-------	----	-------	-----	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	-----

### **CHAPTER 15**

U	psizing	<b>Access</b>	to	SQL	Ser	ver.								54	3
_	P 9		-				• •	•		•	•	• •	•		-

## **CHAPTER 16**

Isina	SC	L Azure								589
031119	24	LAZUIC	 	 •	• •	 	•	 •	 	303



# CHAPTER 14 Using SQL Server

Introducing SQL Server	Working with Stored Procedures
Getting Started with the SQL Server	Working with Triggers
Management Studio	Working with Transactions
Creating Tables and Relationships	User-Defined Functions534
Working with Views505	Getting Started with SQL Server Security536
Introducing T-SQL 517	, , , , , , , , , , , , , , , , , , ,

Ithough Microsoft Access 2010 is the world's best small-scale database, the product does have limitations; as you add more data or more users to an application, it will eventually run out of steam. It is truly amazing just how far you can push an Access database, but eventually you will begin to have issues with either performance or the stability of the database. The cutoff point will vary, but if we said 200 MB, or more than 20 concurrent users, that would not be an unreasonable measure of when you want to start looking at storing the data in Microsoft SQL Server.

This is the first of three chapters in which we discuss Access working with SQL Server as a means of extending the power of your Access databases. Before you can begin to effectively work with SQL Server, you need an understanding of both what SQL Server is and how to use the tools that come with it.

In this chapter, you will gain an overview of the essential topics to understand when working with SQL Server. Key concepts that you will master include:

- Gaining an overview of key SQL Server product features and the Transact SQL (T-SQL) programming language.
- Understanding how to create tables and relationships.
- Seeing how Views and stored procedures can provide equivalent features to Access queries but with improved performance.
- Gaining an overview of how to use triggers and transactions to enhance your applications.

#### Note

As you read through this chapter, we encourage you to also use the companion content sample database, SQLServerExamples.accdb and the associated script files, which you can download from the book's catalog page.

# Introducing SQL Server

In our experience, it is difficult to find an Access developer who hasn't taken like a duck to water when working with SQL Server. Access and VBA are beautifully crafted products to work with and likewise, so is SOL Server. Although, if this is your first time working with SOL Server, just remember how long it takes to truly master Access, and don't be surprised that it will take some effort to master SQL Server.

SQL Server offers you a familiar and easy to use GUI for undertaking design work, but it has one very significant advantage over Access: it also allows you to ignore the GUI and do everything with script files by using T-SQL. The SQL Server Management Studio has a clever feature, with which you can point at design objects in the GUI and with a quick right-click, you can get the tool to write the T-SQL script for you. Finding the balance between using the GUI and gradually using more T-SQL is how you more fully exploit the product's power at your own pace.

This first section of the chapter discusses a number of important topics relating to SQL Server, but if this is your first time using it, you might want to quickly skim read this section and then return to this once you have had a chance to work with the product, in which case the section, "Getting Started with the SQL Server Management Studio," beginning on page 495, is a great point to get under way.

## **Programs vs. Services**

Access is a program that can be run on your computer. The Access program is loaded into memory and then when the program needs to manipulate data that is on, for example, a shared directory, the data is loaded into your computer memory, as and when it is required, possibly passing over the network. Then it is filtered, manipulated, and displayed. This filtering of data can often mean that large parts of the database need to be transferred over the network to your computer memory. Access then uses a shared locking file to manage the updating of this shared data.

In as much as file-server-based databases such as Access are exceptionally good, as more users are added to the system and the amount of data in a system increases, performance can be reduced, and corruption can be more likely. One reason for this is that as you

increase the demand on the data, you increase the network traffic, and you can have more copies of parts of the dataset in different computer's memories. The question arises, what happens when a computer is inadvertently switched off when it is part way through an operation? The answer is that in most cases, it is the indexing that can become inconsistent, and you might need to compact and repair the database.

SQL Server is a client-server database. The database resides on a server. The server is dedicated to handling incoming requests for data, and then returning parts of the dataset to the client computers. If the client computers fail, the server can still guarantee the integrity of the data. Although you can think of SQL Server as a program, it is installed as a set of Windows Services, which are running in the server memory, listening for commands and taking appropriate actions. This client-server design has advantages when it comes to scaling up as more users and larger volumes of data are present. It also offers better security; because the server is normally not directly accessible, your database can't be easily compromised.

#### Client-Server Performance

When you run Access linked to SQL Server, you still have the Access program in memory, but Access no longer uses the shared file for managing updates to the data, and it is now forced to communicate through a special interface (normally ODBC or ADO, which you'll read more about, shortly). This makes for a much better architecture on larger systems. But, there can still be problems with performance, and these problems relate to the volumes of data being sent from the server to the client.

# **INSIDE OUT**

Minimizing the amount of data requested to be displayed in a form

Access encourages developers to build forms bound to tables that can have thousands of rows and allow, for example, users to perform a Find operation to search for records. This approach works well for native Access Databases but is not a good idea in client-server; if you run a performance analyzing tool such as the SQL Server Profiler (discussed in Chapter 15, "Upsizing Access to SQL Server"), you will soon see how it generates very inefficient operations.

In a well designed client-server system, you attempt to minimize the amount of data that you ask for. If your application uses filters and prompts users to make choices before then displaying more limited data volumes, you will significantly improve performance.

The second big part of an Access application is queries. Normally after switching to work with SQL Server, at least some of the queries will be slow to execute; developers tend to build very complex hierarchies of queries, many of which include very complex VBA or Access-specific functions.

Access can communicate with SQL Server by using linked tables from a standard Access database; these linked tables communicate via a technology called Open Database Connectivity (ODBC). This acts to translate requests from Access to a form that SQL Server can understand. This means that when you write an Access query, that query has to be passed through ODBC to SQL Server. But if that query uses specific Access features for which there is no easy translation through ODBC, then ODBC needs to request a lot more of the data and have Access perform local processing to use all those special features. This is why some of your queries might be running slowly. The good news is, with a little effort, they can normally be made to run a lot faster than they did in Access.

To improve performance, what we need to do is to convert the slow Access queries into a set of Views and stored procedures in SQL Server. This means that when converting the SQL, you might need to find equivalents to special Access and VBA operations by using T-SQL. Once converted, because everything executes in the server, you minimize the amount of data being sent to Access, and so resolve the performance issues.

There are several other alternatives that can also help with improving performance, but the best solution is to move the complex query logic on to the server. One alternative that we will consider later in this book is to use a technology called ActiveX Data Objects (ADO), rather than Data Access Objects (DAO) model; this technology forces you to use SQL Server syntax in operations that avoids translation and can offer improved performance. Another alternative is to use Pass-Through queries, which will be described in Chapter 15. The third alternative is to build your application by using an Access Data Project (ADP). ADP brings you much closer to working with SQL Server and avoids using ODBC and instead uses ADO.

## **SQL Server Versions**

The most recent versions of SQL Server are 2005, 2008, and 2008 R2 (and the corresponding SQLExpress versions). You can take backups from an earlier version and restore them into a database in a newer version, and you can alternatively detach an older version and attach it to a newer version and the databases will be upgraded. You cannot take a newer version and attach that to an older version of SQL Server. It is worth noting that SQL Server 2008 R2 is a newer version than SQL Server 2008, and you cannot attach a SQL Server 2008 R2 database to a SQL Server 2008, so if you detach a 2008 database, and then attach it to a 2008 R2 system, you cannot detach that and then re-attach it back to 2008, because it will have been automatically upgraded.

# **SQL Express and SQL Server Products**

The SQL Server product range extends from the free SQL Express version to a truly enterprisewide product. If you're getting started, then SQL Express is an ideal starting point. You will also find that as a developer, for minimum expense you can purchase a Developer Edition, with which you can more fully appreciate the different product features. You can then still use a SQL Express target because the databases are interchangeable between the different editions for a given product version.

At the time of this writing, the SQL Express download packages very much reflect the options that are available when performing a full product installation. You have the choice of downloading either the 32 or 64-bit versions of the product. If you have a 64-bit version of Windows, you can install either version, but the 64-bit version provides better performance.

You can download and install any one of the following:

- **Database Only** This installs only the database without any management tools, an unlikely choice for a developer computer, and a possible choice for a live environment.
- **Management Tools (Only)** This installs only the management tools, such as the SQL Server Management Studio; this is likely to appeal to you if you are working in an environment in which you have a server set up and you just want the tools on a workstation.
- **Database with Management Tools** The best choices to get started as you get the database and tools on your developer computer.
- Database with Advanced Services If you want to experiment with Report Server, this would be the choice to get everything that is available with SQL Express.

SQL Express is one of the greatest giveaways of the century. You get a fully functional SQL Server database, which allows databases up to 10 GB in size (with 2008 R2; 4 GB with older versions) and you get all the core features. Everything is also compatible if later on you migrate to a full product version.

Now considering things from the perspective of deploying the application to your client you might ask the following questions: what don't you get and does it matter? Could SQL Express run a small business?

SQL Express is also limited to using one gigabyte of operating system memory and one CPU, which for many applications is not an issue. Apart from some of the more esoteric features, the one feature that you don't get is the SQL Server Agent. The Agent is a powerful feature with which you can schedule maintenance plans, backups, and other operations.

So if you are using Express, you either need to find a way to run backups, or have some backup software that can back up a live running SQL Server.

Just like Access needs a Compact and Repair, to maintain a SQL Server database in good condition, you need to run Maintenance Plans. The Maintenance Plans can perform integrity checking and backups, but more important, they rebuild indexing and create space for growth in the indexes. If you ignore this requirement then you can expect eventually to see a performance penalty.

#### Note

SQL Express does not include the Maintenance Plans feature.

A general rule of thumb to apply is that if you are operating on a shoestring budget and building smaller applications, SQL Express will meet your needs. But if you have clients with the appropriate budget, then encourage them to purchase the full product version, which will better suite a larger business and reduce your need to find a workaround to common problems.

# **INSIDE OUT**

#### The essence of a Maintenance Plan

We have included a sample script file called ExpressRebuild.SQL to help you with creating your own Maintenance Plan for SQL Express, this file uses more sophisticated techniques, which we will not cover in the book, but we believe it is useful to the more advanced programmer. In VBA, you can program with Recordsets, where you sequentially move through the records performing an operation. SQL Server has an equivalent mechanism called a cursor. Cursor programming is more difficult than working with a VBA Recordset because it is rather primitive and you need to take control of all the fields that you want to use. Having issued that disclaimer, cursors are very powerful, but sadly outside of the scope of this book. In the following code example, we have inserted a section of this code to give you a flavor of what is possible.

What follows is a nice example of cursor programming. It's a more complex example of T-SQL programming, so feel free to skip this until you have read the rest of this chapter:

- -- find all the tables in the database
- -- and rebuild all the indexes on each table
- -- also run the database consistency checker on each table

DECLARE @TargetDatabase AS VARCHAR(50)

DECLARE @FillFactor AS INT

```
DECLARE @TableSchema as Sysname
DECLARE @TableName AS sysname
DECLARE @Command AS VARCHAR(200)
-- Set the table fill factor
SET @FillFactor = 80
PRINT 'REBUILDING ALL INDEXES AND RUNNING CHECK ON TABLES'
PRINT '-----'
DECLARE reb_cursor CURSOR
SELECT TABLE_SCHEMA, TABLE_NAME FROM
  INFORMATION_SCHEMA.TABLES WHERE TABLE_TYPE = 'BASE TABLE'
OPEN reb_cursor
FETCH NEXT FROM reb_cursor INTO @TableSchema, @TableName
WHILE @@FETCH STATUS <> -1
BEGIN
  IF @@FETCH_STATUS <> -2
  BEGIN
     PRINT @TableSchema + ' - ' + @TableName
     SET @Command = 'ALTER INDEX ALL ON [' + @TableSchema +
        '].[' + @TableName +
        '] REBUILD WITH (FILLFACTOR =' +
        CAST(@Fillfactor AS VARCHAR(10)) + ');'
     EXEC (@Command);
     SET @Command = 'DBCC CHECKTABLE ("[' + @TableSchema +
        '].[' + @TableName + ']")'
     EXEC (@Command);
  END
   FETCH NEXT FROM reb_cursor INTO @TableSchema, @TableName
END
CLOSE reb_cursor
DEALLOCATE reb cursor
```

## **Database File Locations**

Once SQL Server is installed, by default, new databases are created in a specific folder. The folder name varies according to the main product version and whether it is a 32-bit or 64-bit version. It's an easy process to change the folder path in the Database Files property when creating a new database, as shown in Figure 14-1. When you enter the Database Name, this creates two logical file names < DatabaseName > and < DatabaseName > Log. If you choose your own folders, then the only issue to watch out for is any required permissions that SQL Server needs on the folders.

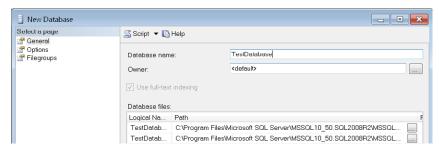


Figure 14-1 The available pages and properties when creating a new database are different from those shown in Figure 14-2, once a database has been created.

In this case, the two files TestDatabase.mdf and TestDatabase\_Log.ldf are located on the path C:\Program Files\Microsoft SQL Server\MSSQL10 50.SQL2008R2\MSSQL\DATA.

# Log Files and Recovery Models

After you create a database, right-click the database name in Object Explorer to display the properties. Configure the different settings for each database, as needed. Figure 14-2 shows the Recovery Model set to Full.



Figure 14-2 If you are using a SQLExpress version, the Recovery Model defaults to Simple; when using the full SQL Server version, the default is Full.

An explanation of the differences in the Recovery Model relates to the Log files. In the previous section, you saw that when a database is created, you specify two physical files, one is the database file, and the other is the Log file.

When changes are made to the data in a database, these changes are recorded in the Log file. SQL Server uses the Log file for a number of purposes. First, it can roll back transactional work by using the Log file. It can also provide special views called INSERTED and DELETED, based around the data in the Log file (this will be described beginning on page 526, when we discuss writing trigger code). The Log files can also be shipped to other servers on a periodic basis by using a process called Log Shipping, in which they can be replayed to provide for backup Servers. SQL Server also supports mirror servers, including a hotstandby mode for server switching.

If you have a very large database, you can decide to back up the full database weekly, and only backup these Log files, recording the changes on a more regular basis. Once backed up, the Log file is then cleared out for re-use.

If you use a Full Recovery Model, the Log files continue to grow until you perform a backup on either the database or the Log files. In practice, over time the Log files can become very large if you are not regularly backing up the databases; they can even exceed the size of your database, swallowing up a lot of storage on your development computers.

On a development computer, you probably want to choose the Simple Recovery Model. Using this setting, the Log files are continuously shortened, which keeps them under control. This still allows you to be taking periodic backups of your database; it just means that you cannot use the more sophisticated features such as Log Shipping, which is found on production servers.

In production environments, you might find that other people have responsibility for configuring the backup policy. If you are planning this, you could still adopt a Simple Recovery Model and rely on RAID and other technologies to secure your backups (these topics are beyond the scope of this book).

Next, go to Database Properties | Options. Here, you will find two other options that you might wish to consider setting. First, set the Auto Close property to False (this is the default on SQL Server, but True on SQL Express), and set the Auto Shrink property to True (default is False).

If you end up with a large Log file and you cannot make it smaller, then investigate the DBCC SHRINKDATABASE command for help with this problem.

#### Instances

As part of the SQL Server installation process you have the choice to install your copy of SQL Server in either the default instance or use a named instance. Instances allow for multiple copies of SQL Server to be installed on the same computer; often these will be different versions of the product to support development for different versions, but it is also possible to install multiple versions of the same product. This could occur if you first install SQL Express and then later install a full version of the product. The name of your instance is by default your <computer name> when installing the full product, and <computer name>\SQLExpress> when installing the express version of the product.

When you are defining connections to SQL Server, you specify the name of your instance as part of the connection information.

Management Studio can be used to work with multiple local, network, and remote connections to different SQL Servers at the same time, and it will also work with earlier versions of SQL Server. Figure 14-3 shows Management Studio connected to a local instance of SQL

Server 2008 R2 and SQL Server 2008. By right-clicking a server name, you can disconnect or connect to additional database servers. You can also click the Connect button (in the upper-left corner of the window) to display a drop-down menu, from which you can add other connections.

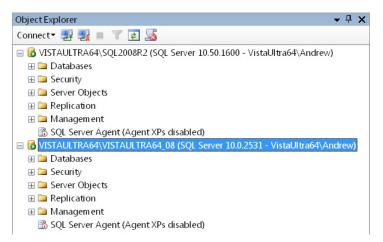


Figure 14-3 Use Object Explorer to connect to multiple database servers.

## Windows Services

After you have installed SQL Server, go to Control Panel | Administrative Tools | Services. Here, you can configure a set of services for each SQL Server Instance, as shown in Figure 14-4.

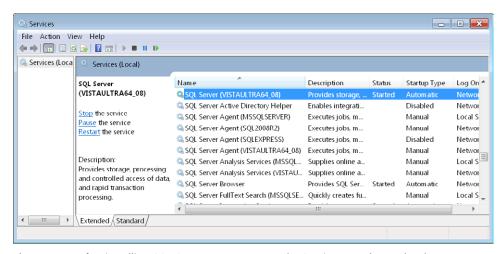


Figure 14-4 After installing SQL Server, you can go to the Services panel to make changes to some of the Windows Services.

Most of the time, you won't need to make changes to these services, and the services that are available depends on whether you installed the full or express version, and whether you chose to also install some of the additional services.

On a developer computer, as a bare minimum, you want to have the main SQL Server and Browser services set to Automatic. You might choose to set some of the other services, such as the Agent, to Manual, and then switch them on if and when required; this saves your computer's resources. If you have several SQL Server instances, you might decide to stop some instances that are only rarely required and perform a manual start from the Services panel (or by using Management Studio) if you need to run them.

# System Databases

Like Access, SQL Server installs some system tables. But it takes this experience further, because in addition to system tables, SQL Server has system databases, as shown in Figure 14-5.



Figure 14-5 The system databases; master and tempdb are the most important.

Within your backup strategy, you might want to include the master database because it holds your server configuration. The following is a brief description of these databases:

- **master** This is the metadatabase. It records all the information on your databases and is key to running the SQL Server. Back it up as part of your regular backup routine.
- **model** This is an interesting but seldom-used concept, by which you put commonly used objects in model, and then whenever you create a new database, SQL Server clones the objects from *model*.
- **msdb** This is used for distributed transactions. *msdb* is a good example of a more sophisticated system database (but unfortunately, beyond the scope of this book).
- tempdb This is the working scratchpad for SQL Server. When SQL Server needs to create temporary objects, or when you need to create temporary objects, they go into tempdb; you don't need to back up this database.

# **System Tables**

Unless you are diving deep into SQL Server, you can probably live your life without delving into the system tables; the same can be said for Access. Some developers find it essential to work with the MSys tables, and others ignore the whole topic. SQL Server has a similar scenario, except that it offers three approaches to this problem.

First, if you want, for example, to get a list of the tables in your database, you can use the following:

```
SELECT * FROM sys.tables
Go
```

But be aware that as with Access, if Microsoft decides to redesign these system tables, you are using what is effectively an unsupported feature. To insulate yourself from the system tables, you could use a built-in system stored procedure, as follows:

```
exec sp_tables
go
```

For a useful and instructive view into both how Microsoft writes T-SQL and how the system tables can be used, in the *master* database, go to Programmability | Stored Procedures | System Stored Procedures, right-click sys.sp tables, and then select modify. You can see the Microsoft source code for the system stored procedure.

# **INSIDE OUT**

#### INFORMATION SCHEMA Views

As an alternative to relying on SQL Server system objects or system stored procedures, if you look in your database (Views | System Views), you will see a set of ANSIcompliant Views, these are on the INFORMATION\_SCHEMA schema. So, you can also use the following:

```
SELECT *
FROM INFORMATION SCHEMA. TABLES
```

Suppose that you want to produce a documentation tool that can find a list of your tables. The best choice is the ANSI-compliant views because Microsoft needs to adhere to this; the second choice is the system stored procedures because Microsoft has maintained this level of insight for developers and is less likely to change these; and third comes the system tables, which do change. Although they give you maximum flexibility, you are likely in the future to have to make alterations if these system tables are significantly changed.

# Getting Started with the SQL Server Management Studio

When you install the Client-Tools for SQL Server, you also install a number of essential tools to help with your development. The most important tool to first gain experience with is the SQL Server Management Studio. This tool allows you to create databases, tables, views, stored procedures, and manage all the other essential components of your database. Management Studio can be used to manage local, network, and remote SQL Servers, such as SQL Azure (this is discussed in detail in Chapter 16, "Using SQL Azure").

In the following sections, you will see how to perform certain operations with the GUI and how to repeat these operations using T-SQL in a script file. In SQL Server, when you open a Query window, you are in a free-format window, into which you can type and execute portions of SQL. This can then be saved as a script file that you can subsequently execute (in part or in full).

You should understand from the outset that this ability to both work with a GUI interface and with these script files lies at the heart of how to effectively develop with the product. You can balance your choice of interface according to how comfortable you are with working in the GUI versus working with pure SQL.

# Running the Demo Database Script

To begin, you will need a sample database. There are three popular database: pubs (an older sample database that is often quoted in older documents), Northwind (popular with Access developers) and AdvertureWorks (shows off all the more advanced features in SQL Server). The best place to get these databases is the CodePlex website at http://sqlserversamples.codeplex.com.

To get you started, we have included with the samples the Script File instrumnd.sql. To run this file in Management Studio, proceed as follows.

- 1. Click File | Open | File, and then open the file instrumd.sql. The file opens in a new query window.
- **2.** On the Toolbar, click the Execute button. This creates the Northwind database, which contains a full set of tables and data.
- **3.** In Object Explorer, right-click the Databases folder, and then select Refresh. You can now explore the sample Northwind database.

# Creating a New Database

You also want to create a new empty database, which we have called *NorthwindTesting*. In this empty database, you can experiment with creating new tables and relationships. Proceed as follows:

- **1.** Right-click the Databases folder, and then select New Database.
- Enter a name for the database, and then click Add.

# Creating Tables and Relationships

Tables and relationships can be created either by using the GUI interface or by using T-SQL script. You will quickly pick up the syntax for creating tables; the syntax for creating relationships is a little trickier, but you can use the SQL Server GUI to help you write the correct syntax by generating a script for existing foreign keys.


## **Database Diagrams**

If you click the Database Diagram folder, and you do not already have any diagrams, you are prompted to allow supporting objects to be added to the database, as shown in Figure 14-6. If you have attached a database supplied from another source and you get a warning regarding ownership, go to Database | Properties | Files | Owner, and then verify that this property is correctly assigned.




Figure 14-6 Adding support for database diagramming when attempting to create your first diagram.

When you use the shortcut menu to create a new diagram, a list appears that displays any existing tables to add to the diagram. After closing this list, you can right-click in any empty part of the diagram to open the shortcut menu shown in Figure 14-7. From this menu, you can add new tables or choose from the same list of existing tables.



**Figure 14-7** Use the diagram shortcut menu and tool bars to add and create tables on a diagram.

When adding a table, as you start to enter the fields, you might find that you want to customize the view of the table, as shown in Figure 14-8.

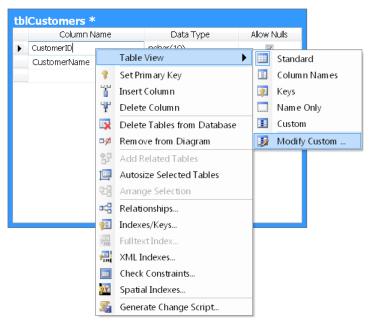

**Figure 14-8** In addition to a number of built-in views, you can also customize table views. This is particularly useful when you want to display defaults and the *Identity* property for fields.

Figure 14-9 shows a customized view of two tables. To make any field the primary key, click the field and use the shortcut menu to select the option Set Primary Key. You can select multiple, adjacent fields by holding the Shift key while you click your selections; for

non-adjacent selections hold the Ctrl key while clicking your selections.. The final step is to drag the CustomerID in tblCustomers onto the corresponding CustomerId in tblContacts to create a relationship. Objects are not changed or created until you save changes to a diagram, so it is important to regularly save the diagram as you work on the design.

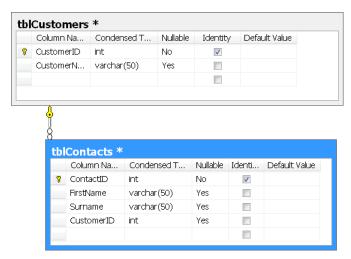


Figure 14-9 Tables and relationships are easily constructed using a database diagram.

Using Object Explorer to expand the database objects, you can see the two tables that have been created and the foreign key that defines the relationship between them, as shown in Figure 14-10.




Figure 14-10 The keys folder contains the primary and foreign keys. You can right-click to generate the T-SQL script for creating the relationships on foreign keys.

As an alternative approach to creating these tables, you can choose the New Table shortcut from the Tables folder, and then create and save each table. Then you can add the tables to a new diagram, dragging them as necessary to create the relationships.

# Tables, Relationships, and Script Files

Right-click both tables to open the shortcut menu, and then select Script Table As | Create To | New Query Window, This generates the T-SQL script commands, which looks similar to the following (to reduce the size of this sample, we have removed some of the additional optional statements from the script):

```
USE [NorthwindTesting]
CREATE TABLE [dbo].[tblCustomers](
   [CustomerID] [int] IDENTITY(1,1) NOT NULL,
   [CustomerName] [varchar] (50) NULL,
 CONSTRAINT [PK_tb]Customers] PRIMARY KEY CLUSTERED
([CustomerID] ASC)
)
G0
CREATE TABLE [dbo].[tblContacts](
   [ContactID] [int] IDENTITY(1,1) NOT NULL,
   [FirstName] [varchar](50) NULL,
   [Surname] [varchar](50) NULL,
   [CustomerID] [int] NULL,
 CONSTRAINT [PK_tb1Contacts] PRIMARY KEY CLUSTERED
([ContactID] ASC)
)
G0
ALTER TABLE [dbo].[tb]Contacts] WITH CHECK ADD
CONSTRAINT [FK_tb]Contacts_tb]Customers]
FOREIGN KEY([CustomerID])
REFERENCES [dbo].[tblCustomers] ([CustomerID])
G0
```

# **INSIDE OUT**

## Script files and batches of T-SQL commands

A script file is the name of a file that contains T-SQL statements, and a batch is a sequence of T-SQL commands that terminate with the GO keyword. When you execute a script file, it checks that each batch is syntactically correct as it progresses through the script. If a batch has errors, it is skipped and the process continues on to any remaining batches.

Each T-SQL statement is an implicit transaction that either fully completes or rolls back any changes; if you execute an UPDATE statement, you do not need to worry that if the statement failed only part of the available data set would be changed.

If a batch fails during execution, the execution halts and processing moves on to any remaining batches. batches are not transactions, and if you need to protect against a partially completed set of statements in a batch, you will need to add transaction processing.

There are some T-SQL commands that need to be executed as the only command in a batch, and in general, a T-SQL script file often contains more GO keywords than the minimum that would be required; once you start programming with variables, batches become more important, because user variables only have scope within a single batch.

# Changing the Design of a Table


There are two different ways to make changes to the design of a table. The first method uses the GUI, and the second method uses T-SQL commands.

# **INSIDE OUT**

#### Changing a table design with the GUI

It is very important to note that when you use the GUI to change the design of tables (for example, when changing a data type), this results in both the table and associated relationships being re-created. If you attempt to do this on a system that is in use, you might find that you are unable to make the change. The alternative is to apply the changes with a script file.

Because this is guite a radical action on the table, the default setting in the Tool in newer SQL Server product versions is to prevent you from doing this. If you want to enable these features, click Tools | Options | Designers | Table And Database Designers, and then clear the Prevent Saving Changes That Require Table Re-Creation option, as shown in Figure 14-11.

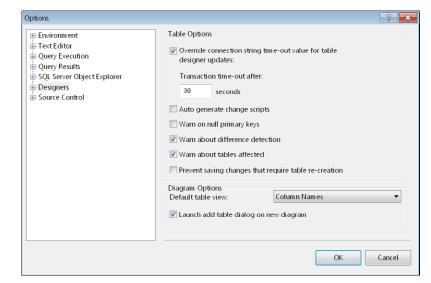

**Figure 14-11** Changing the option to allow table designs to be changed by using the GUI interface.

By using the GUI, you can click a table name (see Figure 14-12) to rename the table.



Figure 14-12 Renaming a table by clicking it and typing a new name.

To make changes to a table, including adding columns, changing the column names and data types, or deleting columns, right-click the table, select Design from the shortcut menu that appears, make the desired changes, and then click the save icon on the Toolbar, as shown in Figure 14-13.

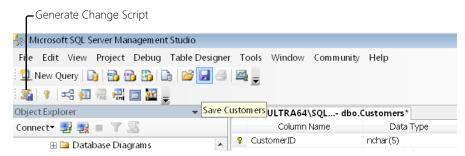


Figure 14-13 Click the Save icon on the top Toolbar to save your design changes.

There is a second option to saving the design changes. You can use the Generate Change Script icon that is shown at the start of the second Toolbar, below New Query (see Figure 14-13). This option can be used to save your changes in a Script File. The file will contain T-SQL script commands to make the change. There are times when this can very helpful, for example, when changing a field name, you will find that the script generated is very useful; in other circumstances, such as changing a data type, the change can result in the table being re-created (this is not always necessary and alternative T-SQL commands are discussed here). This can be a useful tool to learn how to sharpen up your T-SQL skills.

#### **INSIDE OUT** Reasons for using T-SQL script files to record and apply changes

The disadvantages in using the GUI to make design changes in a table are that you don't have a record (unless you save the change to script as previously described) of the change, and you can't easily apply the changes in other systems after testing.

Most developers find it easier to master some simple T-SQL commands for making changes, possibly using the Generate Change Script icon to learn the syntax, and save a set of the changes to a Script File, to which you can keep adding code when recording your design work.

You can then use this file as part of your change procedures for version control, and run the scripts against test systems, and later, production systems.

One final advantage of using scripts is that you can give the objects more meaningful names, which will improve future maintenance. For example, when adding a default to a field, SQL Server automatically names the default; you might prefer to give the default a more informative constraint name.

The following sections present examples of the T-SQL syntax for some common changes to column and table information.

## **Changing a Table Name**

```
EXEC sp_rename 'Customers', 'CustomersNew'
```

### Changing a Column Name

```
EXEC sp_rename 'Customers.Address', 'Address2', 'COLUMN'
G0
```

## Changing a Column Data Type

```
ALTER TABLE [Customers] ALTER COLUMN [Address] nvarchar(80)
G0
```

## Adding a Column

```
ALTER TABLE [Customers] ADD [Address2] nvarchar(80)
```

## **Deleting a Column**

```
ALTER TABLE [Customers] DROP COLUMN [Address2]
G0
```

# Adding a Column with a Default

```
ALTER TABLE [Customers] ADD [Rating] INT
CONSTRAINT defCustomersRating DEFAULT 0
```

Figure 14-14 demonstrates the difference between naming your own constraints and allowing SQL Server to automatically name them for you.

```
dbo.Customers
 🖽 🗀 Columns

■ Constraints

     defCustomersRating
     ■ DF_Customers_Ratin_49C3F6B7
```

Figure 14-14 The first constraint was named explicitly. The second constraint was named automatically.

The constraint names must be unique for the database. It's a good idea to adopt a convention when naming a default constraint name; for example, use def <column Name>.

Individual constraints can be removed by using the following *DROP* syntax:

```
ALTER TABLE [Customers]
DROP CONSTRAINT defCustomersRating
G0
```

# Using the *Identity* Property

Access has Autonumber columns, which are Long Integer columns that automatically issue a sequenced number. Four features of AutoNumber columns are as follows:

- If you delete records from a table with an Autonumber column, you will have gaps in the number sequence.
- You can append data directly into the Autonumber column by using an append query.
- You are allowed only one Autonumber column per table.
- If you compact and repair the database, the next Autonumber value will be reset to follow sequentially after the last Autonumber value in the table.

The equivalent feature in SQL Server is the *IDENTITY* property, which can be defined with start number, and an increment. This means that IDENTITY(1,1) is equivalent to the Access Autonumber.

One difference in SQL Server is that in order to directly append a value into an *IDENTITY* column, you need to set a system flag. This flag can only be set to act for one table at a time in any given connection, and it is good practice to reset the flag once you have completed the operation, if you intend to keep the connection (Query window) in use. The following example creates a table with an IDENTITY column and performs a direct inserts into the column. If you try to run the code without using the SET operation, you receive an error warning you to use the SET operation. The following code is included in the file Identity Insert.sql:

```
CREATE TABLE DataList(
          INT IDENTITY(1,1) PRIMARY KEY,
Comments nvarchar(255)
G0
SET IDENTITY_INSERT DataList ON
-- Insert into the autonumber field
INSERT INTO DataList(AnID, Comments)
```

```
VALUES(999, 'Sample record')
GO
SELECT * FROM DataList
GO
SET IDENTITY_INSERT DataList OFF
GO
```

# **Working with Views**

Access offers several different types of queries. The SELECT queries correspond to Views in SQL Server. If you have Action Queries that will use INSERT, UPDATE, or DELETE statements, these cannot be written in the equivalent View; instead, they can either be directly executed as SQL statements, or when saved in SQL Server, they are placed inside a stored procedure.

# **Graphical Interface**

With Access, you can either write a query in SQL or use the graphical Query grid to design a query. Similarly, with SQL Server, you can create Views either graphically or by using T-SQL.

The shortcut menu for the Views folder offers an improved version of the Query grid, with which you can create a new View, or edit an existing one. In SQL Server, the window is split into four panes; in the Diagram pane, you can graphically manipulate objects; you can directly edit the SQL in the SQL pane; in the Criteria pane, you can enter criteria; and in the Results pane, you can execute the SQL. All of this is presented in Figure 14-15.

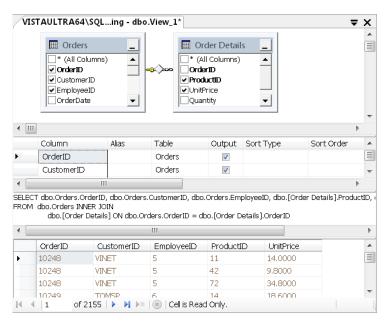


Figure 14-15 The View design interface is split into Diagram, Criteria, SQL, and Results panes.

# **INSIDE OUT**

#### View updateability in Access

In the previous example, you might have noticed that because we have selected data from more than one table, the cells are read-only (see the bottom of Figure 14-15).

A fantastic feature in Access is that if you link to this View, you can make edits to data in the View, as long as you only edit columns in one table and then save the changes. An edit to different fields in multiple base tables in a single update is not allowed (in this case, you need to use program code to force any changes made to data in each table to be saved before you can edit the columns in a different base table).


A useful convention when saving your views is to prefix the names with vw\_, in a similar manner to prefixing the Access queries with gry.

Access developers often build hierarchies of queries that depend on other queries. In SQL Server, you can follow the same approach to building Views. However, there is one very significant difference: if you are explicitly selecting all columns from a table, for example using SELECT Customers.\*, and you add a new field to the Customers table, it will not be shown in the View. In this respect, a View acts like a snapshot of the columns in the underlying table when the View was created.

# **Views and Script Files**

Before we look at how to resolve this problem of the static nature of a View, it is useful to indicate how to step through executing different commands in a script file. This example will demonstrate a number of other features of the Query window in SQL Server.

Figure 14-16 illustrates that by clicking the New Query icon twice, you create two new Query windows. In this example, Management Studio was just started, so the database within which you are working is master. This is an internal system database and does not contain your data; it is important to always check the database name in which the Query window is executing.

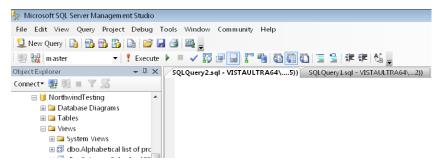

**Figure 14-16** Opening two new Query windows. In this example, the active database is *master* as is indicated above the Object Explorer pane, on the Toolbar (this is also indicated at the lower-right of the screen).

If you click an object in your database in Object Explorer and then click New Query, the query window automatically targets your database. If you need to change the active database, you can select it from the drop-down list located just above the Object Explorer pane. Figure 14-17 shows that the active database is now *NorthwindTesting*.



**Figure 14-17** You can change the active database for the Query window by using the drop-down list above the Object Explorer pane, or clicking an object in your database in Object Explorer and then clicking New Query.

If while executing a script, objects cannot be found, verify that the Query window is referencing the correct database. This context is set for each individual query window. When you first start working with Query windows, it's common to inadvertently be in the wrong database context (usually, this is *master*).

The Query window works like a scratchpad (this is a super version of the Immediate window). Figure 14-18 illustrates an example of select SQL Commands; the commands do not need to be run in sequence. And by highlighting a command and clicking the Execute button (or pressing Alt+X or F5), you can display the results.

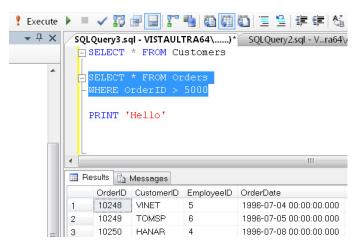


Figure 14-18 The Query window can also show multiple result sets if you were to execute the two blocks of SQL.

Once familiar with the environment, you can work with several of these windows at the same time. For example, you can use the File menu to load existing script files and save your current work as a script file. It's a good idea to add the Use [databasename] GO statements at the top of your script file; this means that it will always switch to use the correct database when the script runs.

# **INSIDE OUT**

#### System stored procedures

Inside the database are a large number of built-in system stored procedures, all prefixed by sp or xp (linking to resources outside SQL Server). As you need to perform special operations, you will gain familiarity with these stored procedures and will find them extremely useful. SQL Server has an exceptionally good help system, which can guide you through the detailed syntax for each procedure.

In the following example, there are two system stored procedures: sp\_refreshview, which refreshes a view for underlying changes on dependent objects, and sp\_depends which lists object dependencies.

The following example (ViewsAndRefreshView.sql) demonstrates how Views are not dynamically updated for changes made in dependent objects. It also shows how to refresh the View using sp refreshview, which updates the View to take into account changes made to the underlying objects used in the View. When you execute this script, use the mouse to highlight all the lines in each batch (the GO keyword indicates the end of a batch), and

then click the Execute button on the Toolbar to show the results. Highlight the next batch and proceed one batch at a time, as you work through the script:

```
USE NorthwindTesting
G0
-- Create a view
CREATE VIEW vw_Customers
SELECT * FROM Customers
GO
-- Display the results
SELECT * FROM vw_Customers
-- Add a new field
ALTER TABLE Customers
ADD NewComments NVARCHAR(100)
G0
-- The new field will NOT be shown
SELECT * FROM vw Customers
G0
-- Refresh the view
sp_refreshview vw_Customers
-- The new field will be shown
SELECT * FROM vw_Customers
-- List objects dependent on this view
-- and objects this view depends upon
sp_depends vw_Customers
-- List objects dependent on the table
sp_depends Customers
```

In the preceding example, you can see how a view can also be created in T-SQL by using the CREATE VIEW syntax. If you try to run that batch more than once, it informs you that the object already exists, and if you right-click and refresh the Views folder, you can see that the View has indeed already been created. A View can be altered by using the following syntax (you can right-click to the shortcut menu on any View object to create an ALTER syntax script):

```
ALTER VIEW vw_Customers
SELECT CustomerID, CompanyName FROM Customers
```

### CROSSTAB Queries

CROSSTAB queries can be written in a View, but you need to use the SQL Server PIVOT syntax for this. Interestingly, SQL Server also has an UNPIVOT syntax for reversing these

presentations. PIVOT syntax can be a little tricky, and the main difference when compared to a CROSSTAB is that a CROSSTAB can dynamically generate the column headings, but in a PIVOT query, these need to be predefined. The following example shows the Access syntax for a CROSSTAB query:

```
TRANSFORM Sum(CCur([Order Details].UnitPrice*[Quantity]*(1-[Discount])/100)*100) AS
ProductAmount
SELECT Products.ProductName, Orders.CustomerID, Year([OrderDate]) AS OrderYear
FROM Products INNER JOIN (Orders INNER JOIN [Order Details] ON Orders.OrderID =
[Order Details].OrderID) ON Products.ProductID = [Order Details].ProductID
WHERE (((Orders.OrderDate) Between #1/1/1997# And #12/31/1997#))
GROUP BY Products.ProductName, Orders.CustomerID, Year([OrderDate])
PIVOT "Qtr " & DatePart("q",[OrderDate],1,0) In ("Qtr 1","Qtr 2","Qtr 3","Qtr 4");
```

The following code shows the equivalent *PIVOT* syntax in SQL Server:

```
CREATE VIEW [dbo].[Quarterly Orders by Product]
AS
SELECT
   [ProductName],
   [CustomerID],
   [OrderYear],
   [Qtr 1],
   [Qtr 2],
   [Qtr 3],
   [Qtr 4]
FROM
 ( SELECT Sum(CONVERT(MONEY, [Order Details]. [UnitPrice] * [Quantity] *
      (1-[Discount])/100)*100) AS [ProductAmount],
 'Qtr ' + CONVERT(VARCHAR, DATEPART(q, [OrderDate])
) AS [PIVOT_ITEM],
[Products].[ProductName],
[Orders].[CustomerID],
Year([OrderDate]) AS [OrderYear]
FROM [Products]
   INNER JOIN (Orders
   INNER JOIN [Order Details]
      ON [Orders].[OrderID]=[Order Details].[OrderID])
      ON [Products].[ProductID]=[Order Details].[ProductID]
WHERE (((Orders.[OrderDate]) Between '1/1/1997' And '12/31/1997'))
GROUP BY 'Qtr ' + CONVERT(VARCHAR, DATEPART(q, [OrderDate])),
[Products].[ProductName],Orders.[CustomerID],Year([OrderDate])
) AS p
PIVOT(
Sum([ProductAmount])
   FOR [PIVOT_ITEM]
 IN ([Qtr 1],[Qtr 2],[Qtr 3],[Qtr 4])) AS pvt
G0
```

You can find code online for creating dynamic column headings for PIVOT queries in SQL Server. The trick to building dynamic pivots it to create a SQL string and execute it; you need some initial code to work out what the potential column names will be and concatenate this into the string.

## **Working with Stored Procedures**

At the beginning of the last section, we introduced Views and described how a View can return data like a SELECT query, and we described how the dataset returned may be updateable. The equivalent to an INSERT, UPDATE or DELETE query in SQL Server is a stored procedure. Stored procedures are in fact more flexible than a simple query that performs one step; for example, updating data in a single table. They are mini programs that can range from a few lines to several pages of code.

In Access, when you need to write a program, you use VBA, in SQL Server, you use T-SQL, which allows for program logic and variables. T-SQL is a specific language for SQL Server; other popular databases have their own variations on SQL to assist with programming; for example, Oracle uses PSQL.

Programing in T-SQL is different to writing VBA. The first difference you will spot is that even though the language has a number of features, it is not as rich and varied as VBA. On the plus side, this means that the language features can be learned quickly. Another big difference is that T-SQL mixes program logic with SQL in a very elegant manner; effectively, the SQL becomes embedded in the code, which means that when you need to mix a variable into a piece of SQL, rather than building up a string to be executed, you can often directly mix the reference to the variable into the flow of the SQL. This is a more elegant code structure.

Before you take a look in depth at the T-SQL language features, you will look at how to create some simple stored procedures. Unlike Views, which can be edited in a GUI in addition to the Query window, stored procedures do not have a graphical editor. The stored procedures are saved in the Programmability | Stored Procedures folder, as shown in Figure 14-19.




Figure 14-19 The Stored Procedure folder in Object Explorer.

The following example (StoredProcedure.sql) illustrates how to create, execute, change, and remove a stored procedure:

```
USE [Northwind]
-- Create a stored procedure
CREATE PROC usp_UpdateCustomersRating
UPDATE Customers
SET Rating = 1
-- Execute the stored procedure
usp_UpdateCustomersRating
-- Alternative syntax for executing the stored procedure
EXEC usp_UpdateCustomersRating
-- Changing the stored procedure
ALTER PROC usp_UpdateCustomersRating
UPDATE Customers
SET Rating = 5
-- Delete the stored procedure
DROP PROC usp_UpdateCustomersRating
G0
```

One area of possible confusion is in thinking that the preceding example is like a VBA module—it is not. When you execute the T-SQL command to create the stored procedure, the actual code is saved inside the database as a stored procedure object. After executing

the lines of code to create the stored procedure and refreshing the folder containing the stored procedures, you will see that the stored procedure has been saved inside the database. To see and modify the stored procedure, you can use the shortcut menu, as shown in Figure 14-20.

```
🖃 🗀 Programmability

☐ ☐ Stored Procedures

   🖪 🖾 dbo.CustOrderHist
   🗈 🔤 dbo.CustOrdersDetail
                                                   -- Create a stored procedure
   dbo.CustOrdersOrders
                                                 CREATE PROC usp UpdateCustomersRating
   🗄 🔤 dbo.Sales by Year
                                                 UPDATE Customers
   dbo.SalesByCategory
                                                 SET Rating = 1
   🖪 🖪 dbo.usp_Update
                       New Stored Procedure...
                                                   -- Execute the stored procedure
                                                 usp_UpdateCustomersRating
                       Modify
                       Execute Stored Procedure...
                                                 EXEC usp_UpdateCustomersRating
                                                   -- Alternative syntax for executing the stored procedure
                       Script Stored Procedure as
                       View Dependencies
```

Figure 14-20 After the code has been executed and the stored procedures folder has been refreshed, you can get back to the code by right-clicking the stored procedures and either selecting Modify or Script Stored Procedure from the shortcut menu.

You will find that the syntax for writing queries to INSERT, UPDATE, and DELETE data in SQL Server is similar to that used in Access, but it is not exactly the same.

#### The *DELETE* Query

In Access, an example of a DELETE query would have the following SQL (notice that Access often adds additional brackets in a WHERE clause):

```
DELETE Customers.*, Customers.Rating
FROM Customers
WHERE (((Customers.Rating)=99));
```

In SQL Server, you don't have the list of fields following the keyword DELETE. The SQL Server syntax shown in the following code would also work in Access. In this situation the additional information for specifying the fields was added by the Access Query designer:

```
DELETE
FROM Customers
WHERE (((Customers.Rating)=99));
```

# **INSIDE OUT**

#### Truncating tables

When you perform any operation to change data in SQL Server, the changes to the data are normally recorded in the LOG file (there are some exceptions to this with respect to Binary and some other data type columns, which due to their size are not recorded in the LOG file). This means that if you try to delete a large amount of data, there will be a lot of data written to the LOG file to record the change, which will take time to execute.

If for example you have a table containing data imports, you might not be interested in having the operation of emptying the table recorded in the LOG file. As long as this import table does not have any relationships, you can use a special TRUNCATE TABLE <tablename> syntax to provide a very significant boost to performance. This command is not recorded in the LOG file, which means that it cannot be undone inside a transaction, and if a backup using LOG files were restored, or you are using log shipping or a mirror database, then the change would not be reproduced. But in this situation, you probably don't care about this minor effect.

#### The *UPDATE* Query

It is only when you come to design an *UPDATE* guery that depends on more than one table that you will find the syntax for this command changes. In the following Access SQL, you are updating only customers who have an order in the system:

```
UPDATE Customers INNER JOIN Orders
ON Customers.CustomerID = Orders.CustomerID
SET Customers.Rating = 1
WHERE (((Customers.Rating)=99));
```

This SQL needs to be rewritten as follows:

```
UPDATE Customers
SET Customers.Rating = 1
FROM Customers INNER JOIN Orders
ON Customers.CustomerID = Orders.CustomerID
WHERE (((Customers.Rating)=99));
```

After the keyword UPDATE, you need to state only the name of the table that will be updated, and then you need an additional FROM clause that restates the main table name and expresses any joins. This involves a cut and paste operation on the first few lines of the SQL.

#### The INSERT and INSERT INTO Queries

There are four different forms for *INSERT* operations.

In you want to insert one or more values of data into a table, in Access, you can use the following syntax:

```
INSERT INTO Customers ( CustomerID, CompanyName )
SELECT "XXX" AS Expr1, "Test Company" AS Expr2;
```

Change the double quotes to single quotes, and the same code will run in SQL Server, as shown here:

```
INSERT INTO Customers ( CustomerID, CompanyName )
SELECT 'XXX' AS Expr1, 'Test Company' AS Expr2;
```

But you would not normally write this expression in SQL Server, because SQL Server supports a VALUES syntax, which has the added benefit of being able to insert multiple rows with a single statement, as shown in the following:

```
INSERT INTO Customers ( CustomerID, CompanyName )
VALUES('XXX', 'Test Company');
```

This can then be extended for up to 1000 rows:

```
INSERT INTO Customers ( CustomerID, CompanyName )
VALUES('XXX1', 'Test Company 1'),
('XXX2', 'Test Company 2'),
('XXX3', 'Test Company 3')
```

The second form of an insert statement is equivalent to an Access Make Table query; in Access you have the following:

```
SELECT Customers.* INTO Customers2
FROM Customers
WHERE (((Customers.Country)="USA"));
```

Apart from changing the double quotes to single quotes, the same SQL executes in SQL Server:

```
SELECT Customers.* INTO Customers2
FROM Customers
WHERE (((Customers.Country)='USA'));
```

The third form of an *INSERT* query is where you want to add values to an existing table. In Access, you create the following Append query:

```
INSERT INTO Customers2
SELECT Customers.*
FROM Customers
WHERE (((Customers.Country) Like "*USA*"));
```

In SQL Server, apart from changing the double quotes to single quotes and the wildcard matching character \* to a %, the SQL is unchanged:

```
INSERT INTO Customers2
SELECT Customers.*
FROM Customers
WHERE (((Customers.Country) Like '%usa%'));
```

It is interesting to note that the wildcard syntax in SQL Server is also supported in Access, which you will see if you paste the code in the previous example back into Access.

# **INSIDE OUT**

#### Temporary tables

In Access, you can't easily create a temporary user-specific table, and yet in solving many complex problems, it is essential to stage data into a holding table for further processing. SQL Server allows user-specific temporary tables to be created; this is an extremely powerful feature, and it can be incorporated into your stored procedures. But if you create temporary tables, you need to ensure that your code allows for the fact that the temporary results table might already exist, as illustrated in the following:

```
IF EXISTS(SELECT *FROM tempdb.dbo.sysobjects
WHERE ID = OBJECT_ID(N'tempdb..#Temp'))
BEGIN
  DROP TABLE #Temp
SELECT * into #Temp
FROM Customers
```

There are two key points to observe when doing this: first, temporary tables are created inside the Temporary Tables folder in tempdb; this means that you can go into this system database and look at the temporary tables. (If you close the Query window that was used to create the temporary table, the temporary table will be removed from tempdb. If you try this, remember to use the shortcut menu and select Refresh to see the folder updated after you have closed the Query window.) Second, these temporary tables exist for as long as the connection exists, which means in Access you could execute a call that creates the temporary table, and then subsequently refer back to the temporary table, because Access will hold the connection open for you.

## Introducing T-SQL

Using T-SQL, you can create mini-programs in SQL Server. These programs can then either be executed as a Script File, or saved in the body of triggers, stored procedures and functions. Depending on how familiar you are with writing SQL statements, you might struggle with some of the SQL Syntax, although the T-SQL programming features are quite simple to master.

## **Defining Variables**

In T-SQL, you must prefix any variable name with the "@" (at) symbol and specify an appropriate data type. When declaring your variables, you can use the keyword As, but this is not required. To assign a value to a variable, you can either use the SET or SELECT command. Also notice that when using the SET command with a SQL statement, you need to surround the expression with parentheses, and the alternative syntax for assignment when using a SELECT statement (which is assumed to return 1 row, and that value for the first row would be assigned to any variable even when multiple rows were returned). The following examples are supplied in the file UsingVariables.sql:

```
DECLARE @CustomerCount INT
DECLARE @EmployeeCount As INT
-- Setting an explicit value for a variable
SET @CustomerCount = 99
-- Using the SET command with SQL to load a variable
-- note the brackets are required
SET @EmployeeCount = (SELECT COUNT(*) FROM Employees)
-- Using the SELECT command with SQL to load a variable
SELECT @EmployeeCount = COUNT(*) FROM Employees
-- Printing out a value
PRINT @CustomerCount
-- Printing out a message
PRINT 'Employee count is ' + CONVERT(NVARCHAR,@EmployeeCount)
GO
```

In the previous example, the PRINT command can be used to display additional information. If you connect Access to T-SQL that contains PRINT statements, you will not see the results of these statements. The PRINT command does not allow you to concatenate different data types without the explicit use of the CONVERT or CAST statement, which were used in the preceding example to change an integer into a string. Additional examples of this are presented in the next section.

Variables defined in a script file have a scope defined by the batch in which they execute, so after a GO keyword, the variables can no longer be referenced.

One very powerful feature of variables is that they can be directly referenced from within a WHERE or HAVING clause, as demonstrated here:

```
DECLARE @Country As NVARCHAR(30)
SET @Country = 'USA'
SELECT * FROM Customers
WHERE Country = @Country
DECLARE @MinCount As INT
SET @MinCount = 10
SELECT Country,COUNT(*)
FROM Customers
GROUP BY Country
HAVING Count(*) > @MinCount
G0
```

#### **INSIDE OUT Executing SQL statements on the fly**

Suppose that you want to create a procedural block of code that allows for a variable in place of a table or column name. In this situation, you are not allowed to directly reference a variable in the embedded SQL as we have been doing with the HAVING and WHERE clauses. To do this, you approach the problem in a similar manner as you would in VBA, by constructing a string for the SQL:

```
-- Example executing an SQL String
DECLARE @Cmd As NVARCHAR(255)
DECLARE @TableName As NVARCHAR(100)
SET @TableName = 'Customers'
SET @Cmd = 'SELECT * FROM ' + @TableName
PRINT @Cmd
EXEC (@Cmd)
G0
```

Using syntax such as SELECT @FieldName FROM @TableName is not allowed in embedded SQL, instead we need to EXECUTE or EXEC an SQL string.

## Using CAST and CONVERT

Access supports implicit type conversion. This means that, for example, if you use the "&" (ampersand) character to concatenate an integer to a string variable, it automatically converts the integer to a text type. SQL Server demands that you use explicit type conversion between types, both in your SQL and when manipulating variables, as shown in the following code (open the file CastAndConvert.sql):

```
SELECT CompanyName + ': '
               + CAST(COUNT(*) AS nvarchar(10)) as Orders
FROM Customers c
   INNER JOIN Orders o
     ON c.CustomerID = o.CustomerID
GROUP BY CompanyName
G0
SELECT CompanyName + ': '
               + CONVERT(nvarchar(10), COUNT(*)) as Orders
FROM Customers c
   INNER JOIN Orders o
     ON c.CustomerID = o.CustomerID
GROUP BY CompanyName
DECLARE @Total Int
SELECT @Total = COUNT(*) FROM Customers
PRINT 'Total Customers ' + CONVERT(nvarchar(10),@Total)
G0
```

In the preceding example, you can also see the use of the *PRINT* statement, which outputs messages to the Messages tab in the results window. This statement is useful for simple debugging in stored procedures, and it does not affect any results being returned to an Access application.

#### **Built-In Functions**

T-SQL has a large number of built-in functions for manipulating dates, strings, and other operations. Sometimes, you will find an exact match between an Access function, for example, the Left string function, and in other instances the functions have a different name or different order of parameters. We have included a few simple examples (open the file BuiltInFunctions.sql) in the following code, but you will find that the help system is full of examples (search for "functions [SQL Server]"):

```
DECLARE @SampleString NVARCHAR(250)
SET @SampleString = ' Charlotte forgot her lunch box again '
PRINT LTRIM(RTRIM(@SampleString)) -- remove blanks
PRINT LEN(@SampleString) -- length
PRINT LOWER(@SampleString) -- lower case
PRINT UPPER(@SampleString) -- upper case
PRINT CHARINDEX(@SampleString, 'CHARLOTTE', 2) -- substring position
PRINT SUBSTRING(@SampleString,2,9) -- substring
DECLARE @TheDate DATETIME
SET @TheDate = '4 December 2005'
PRINT DATEADD(d,10,@TheDate) -- add to a date
select DATEDIFF(year,@TheDate,GETDATE()) -- difference
```

Other basic functions that are often used in T-SQL include:

- **COALESCE** Returns the first non-null value from a list of choices.
- **NULLIF** Returns a NULL if two expressions are equal.
- **ISNULL** Returns a replacement value when an expression is null.
- **CASE** Case statements can provide sophisticated logical testing.

## **System Variables**

SQL Server has around 33 built-in system variables (this number can vary a bit, depending on such variables as Service Pack, and so on). These variables all start with the @@ symbols, and you can use them in your program code. In the following (and in UsingSystem Variables.sql), we have listed two of the more commonly used system variables.

#### @@Version

This variable will return SQL Server version information, which is a useful function for checking the version of SQL Server:

```
CREATE PROC usp_GetSQLServerVersion
SELECT @@VERSION as 'SQLServerVersion'
EXEC usp GetSQLServerVersion
```

### @@IDENTITY, SCOPE IDENTITY() and IDENT CURRENT

The following example illustrates the use of three alternative methods to find the last value for the IDENTITY column in a table; these methods are useful after inserting a row when you need to determine the value in a column that issues an automatic number:

```
CREATE TABLE InsertTest(
AnID INT IDENTITY(1,1),
Comment nvarchar(30)
)
G0
INSERT INTO InsertTest(Comment)
VALUES ('Test Record')
SELECT @@IDENTITY
SELECT SCOPE_IDENTITY()
SELECT IDENT_CURRENT('InsertTest')
G0
```

In general, if you are writing a complex procedure in T-SQL, and you need to find the IDENTITY of the last inserted row, you should use SCOPE\_IDENTITY() rather than @@IDENTITY. The reason for this is that if the table into which you insert has a trigger that inserts into a subsequent table that also has an IDENTITY column, @@IDENTITY returns the IDENTITY value for the table that the trigger inserted into. SCOPE\_IDENTITY() returns the IDENTITY value within the scope of the current code, which is what you want.

In an Access application that performed an insert, you can execute a pass-through query to return the current IDENTITY value for a table.

Alternatively you could create a stored procedure, into which you pass the name of the table and use the IDENT CURRENT function, which returns the current IDENTITY value for a specified table, as shown in the following code:

```
CREATE PROC usp_LastIdentity @TableName VARCHAR(255)
EXEC ('SELECT IDENT_CURRENT(''' + @TableName + ''')')
EXEC usp_LastIdentity 'InsertTest'
GO
```

In summary, if you are writing code in SQL Server, you should use SCOPE IDENTITY() or IDENT\_CURRENT; if you are writing pass-through SQL in Access, the safest option is to use IDENT\_CURRENT.

## **Controlling Program Flow**

T-SQL does not have as many language control structures as VBA (for example, it does not have any FOR or FOR ... EACH constructs). However, because of the way in which SQL can be embedded in the code, it doesn't always follow that you get the same kind of structural layout as you expect to see in VBA. With T-SQL, you can program with a layout style similar to VBA, if you prefer a VBA-style layout.

The first structure to examine is the IF statement. This takes the form IF <Boolean Expression> <sql statement or statement block> ELSE <sql statement or statement blocks. Note that T-SQL does not include a Then keyword. Statement blocks use paired BEGIN ... END statements to indicate the start and end of the block. The following are examples of using the IF statement (open the file ProgramFlow.sql):

```
DECLARE @Country As NVARCHAR(50)
SET @Country = 'usa'
IF EXISTS(SELECT CustomerID FROM Customers
          WHERE Country = @Country)
```

```
BEGIN
   PRINT 'We have ' + @Country + ' customers'
   SELECT * FROM Customers WHERE Country = @Country
END
ELSE
BEGIN
   PRINT 'We do not have any customers for ' + @Country
END
G0
DECLARE @Country As NVARCHAR(50)
DECLARE @CustCount As INT
SET @Country = 'usa'
SET @CustCount = (SELECT Count('*') FROM Customers
                  WHERE Country = @Country)
IF @CustCount > 0
   SELECT * FROM Customers WHERE Country = @Country
ELSE
   PRINT 'We do not have any customers for ' + @Country
G0
```

The second programing structure is the WHILE loop, which supports the use of the Break statement to exit the loop, and the CONTINUE statement to skip subsequent statements and return to the test at the top of the loop. This structure can have the WHILE test working like an IF statement would work testing an explicit value, or use a SQL expression:

```
CREATE TABLE MessagesToProcess(
MsqId
                 INT IDENTITY(1,1) PRIMARY KEY,
Country
                 NVARCHAR(100)
)
G0
INSERT INTO MessagesToProcess(Country)
VALUES ('USA'),('UK')
DECLARE @Country As NVARCHAR(100)
DECLARE @MsgId INT
WHILE EXISTS(SELECT MsgId FROM MessagesToProcess)
BEGIN
   SELECT @MsgId = MsgID, @Country = Country
   FROM MessagesToProcess
   -- Process the message
   SELECT * FROM Customers WHERE Country = @Country
   -- The break statement is useful during testing
   --BREAK
   DELETE FROM MessagesToProcess WHERE MsgId = @MsgId
END
G0
-- Alternative code
DECLARE @Country As NVARCHAR(100)
DECLARE @MsaId INT
DECLARE @RowsToProcess As Int
SET @RowsToProcess = (SELECT COUNT(*) FROM MessagesToProcess)
```

```
WHILE (@RowsToProcess > 0)
BEGIN
   SELECT @MsqId = MsqID, @Country = Country
   FROM MessagesToProcess
   -- Process the message
  SELECT * FROM Customers WHERE Country = @Country
   -- The break statement is useful during testing
   --BREAK
  DELETE FROM MessagesToProcess WHERE MsgId = @MsgId
   SET @RowsToProcess = (SELECT COUNT(*) FROM MessagesToProcess)
END
G0
```

# **INSIDE OUT**

#### T-SQL statements that control program flow

T-SQL also supports the following statements for control of program flow. Of particular note is the GOTO statement which is very useful for structuring complex blocks of code:

**RETURN** Used in a stored procedure to return an integer expression and terminate the execution of the procedure.

**GOTO** < label> Similar to VBA, you define a label, for example ResumeCodeHere, and you can then branch the code to continue execution from the label.

WAITFOR Pauses the code for a timed delay or until a specified time is reached.

## **Error Handling**

In most cases, your application will be performing error handling, but you might also want to add error handling to your T-SQL code and communicate error information from T-SQL to the application.

In the first example (ErrorHandling.sql), you create a procedure that generates an error. This routine indicates how the @@ERROR variable could be used inside the stored procedure to execute statements after the error has occurred:

```
CREATE PROC usp_NumericalError
AS
DECLARE @TotalValue As DECIMAL(10,2)
SET @TotalValue = 6 /0
-- Execution will now continue
IF @@ERROR <> 0
   PRINT 'Error processing logic'
GO
Exec usp_NumericalError
G0
```

In Access, you can use the following code to manage the error. Note that the error (Errors(1)) in errors collection (which will contain two errors) contains the generic

ODBC—call failed error message (this is the same message as is shown by Err.Description), and you need to look at Errors(0) to see the actual SQL Server error text, as demonstrated in the following:

```
Sub modSQLErrors_DivideByZero()
   Dim db As DAO.Database
    Dim qdef As DAO.QueryDef
    Dim rst As DAO.Recordset
    Set db = CurrentDb
    Set qdef = db.CreateQueryDef("")
    ' pick up a connection string
    qdef.Connect = CurrentDb.TableDefs("Customers").Connect
    qdef.SQL = "usp_NumericalError"
    gdef.ReturnsRecords = False
   On Error Resume Next
    qdef.Execute
    Debug.Print Err.Number, Err.Description
    Debug.Print Errors(0).Number, Errors(0).Description
End Sub
```

You are also able to create your own error messages in the *master* database by using the sp\_addmessage stored procedure. These should be numbered starting at 50,001, as shown in the following:

```
USE master
EXEC sp_addmessage 50001, 16, 'TestErrorMessage'
G0
```

You can then use the RAISEERROR command to raise the error. Use a Severity of 16 to allow Access to receive the custom error message:

```
CREATE PROC usp_RaiseCustomError @TotalValue As DECIMAL(10,2)
DECLARE @ProcName AS nvarchar(126)
DECLARE @ParamValue As nvarchar(50)
IF @TotalValue < 100
BEGIN
   SET @ProcName = ERROR PROCEDURE()
   SET @ParamValue = CONVERT(NVARCHAR,@TotalValue)
   RAISERROR (50001,
      16,
                                          -- Severity.
      1,
                                          -- State.
      @ProcName,
                                          -- First argument
      @ParamValue);
                                          -- Second argument.
END
G0
Exec usp_RaiseCustomError 10.5
```

The following code can then be used in Access to display the error message:

```
Sub modSQLErrors RaiseError()
   Dim db As DAO.Database
   Dim qdef As DAO.QueryDef
   Dim rst As DAO.Recordset
   Set db = CurrentDb
   Set qdef = db.CreateQueryDef("")
   ' pick up a connection string
   qdef.Connect = CurrentDb.TableDefs("Customers").Connect
   qdef.SQL = "usp_RaiseCustomError 10.5"
   gdef.ReturnsRecords = False
   On Error Resume Next
   qdef.Execute
   Debug.Print Errors(0).Number, Errors(0).Description
```

Often a cleaner method for handling errors is to use a TRY ... CATCH structure to trap errors. This example returns a Recordset with a single record containing a full description of the error. If no error is generated, the routine returns a Recordset with columns to match what would be expected when an error occurs, but it uses a 0 to indicate that no error has occurred, as illustrated in the following:

```
CREATE PROC usp_MainRoutine
AS
BEGIN TRY
    -- Execute our stored procedure
    EXECUTE usp NumericalError
    SELECT 0,0,0,'','',0
END TRY
BEGIN CATCH
    SELECT
        ERROR_NUMBER() AS ErrorNumber,
        ERROR SEVERITY() AS ErrorSeverity,
        ERROR_STATE() AS ErrorState,
        ERROR_PROCEDURE() AS ErrorProcedure,
        ERROR_MESSAGE() AS ErrorMessage,
        ERROR_LINE() AS ErrorLine;
END CATCH
G0
Exec usp_MainRoutine
G0
```

The advantage of this method for returning error information is that you can get a detailed description. The pass-through query has ReturnsRecords set to True to allow the return of the Error code information:

```
Sub modSQLErrors TryCatch()
    Dim db As DAO.Database
```

```
Dim gdef As DAO.QueryDef
    Dim rst As DAO.Recordset
    Set db = CurrentDb
    Set gdef = db.CreateQueryDef("")
    ' pick up a connection string
    qdef.Connect = CurrentDb.TableDefs("Customers").Connect
    qdef.SQL = "usp_MainRoutine"
    qdef.ReturnsRecords = True
    Set rst = qdef.OpenRecordset()
    If rst(0) <> 0 Then
        Debug.Print rst(0), rst(1), rst(2), rst(3), rst(4), rst(5)
    End If
End Sub
```

## **Working with Triggers**

SQL Server triggers are another very clever feature that allows for some very powerful programing. Access has data macros, which are similar to triggers, but they do not support a transactional model, which is an inbuilt feature of SQL Server triggers.

The idea of both triggers and data macros is to write code that is guaranteed to execute in association with a table, regardless of which form, view, or other technique is used to attempt to modify the data. SQL Server actually supports several different types of triggers, but you will be looking at the classic After triggers.

When you work with these triggers, the code executes after the data has been changed. There is a very good reason for this as it allows you to examine the changes during the execution of the trigger code, and if you don't want to accept the changes, you can undo them. SQL Server supports transactions, which are sequences of operations that can be either fully committed or undone in a ROLLBACK. Triggers are rather special in that they are an implicit transaction, so you don't need to commit the changes (this is what we mean by implicit), but you do have the option to undo them.

Because these triggers occur after the data has been changed, when you are writing trigger code, you have two special virtual tables with which you can work.

The first virtual table is called *DELETED*, and it shows you the image of the data before the change was applied. The DELETED virtual table will contain either any rows that have been deleted or the before image of any rows that have been updated, containing the old values, but not new rows that have been inserted.

The second virtual table is called *INSERTED*. This table shows you the after image of the data, so this contains the updated rows with new values and any newly inserted rows.

A subtle feature of this programming technique is that both *INSERTED* and *DELETED* tables cannot be edited; they act as a guide to what has been changed. A key feature of trigger

programing is in understanding that you can still change the real data, and you can use a join to INSERTED or DELETED to limit how that change is applied.

In this first example (Triggers.sql), you add two new columns to the Customers table to record when a new record is entered and the user who entered the record, as follows:

```
ALTER TABLE Customers
ADD LastUpdatedOn DATETIME
CONSTRAINT DefCustomersLastUpdatedOn DEFAULT GetDate()
ALTER TABLE Customers
ADD LastUpdatedBy NVARCHAR(120)
CONSTRAINT DefCustomersLastUpdatedBy DEFAULT SUSER_SNAME()
G0
```

You now need to create a trigger so that when a user edits a record, the previously added new fields are updated. A trigger can be defined for any combination of the three events UPDATE, INSERT, and DELETE, but because you have defaults set for an INSERT, you only need to write the trigger for the UPDATE event. The trigger in the following example uses the DELETED virtual table to ensure that you only change those records that the user edited:

```
CREATE TRIGGER Tr_CustomerAudit_Update
ON Customers
FOR UPDATE
UPDATE Customers
   SET LastUpdatedOn = GETDATE(),
   LastUpdatedBy = SUSER NAME()
FROM Customers
   INNER JOIN DELETED
      ON Customers.CustomerID = DELETED.CustomerID
GO
```

In the next example, you want to record the old customer record when a user updates the record or deletes the record. You start by creating the audit table, and then adding a new field to record the data operation, as demonstrated here:

```
SELECT * INTO audit_Customers
FROM Customers
WHERE CustomerID IS NULL
G0
-- Add a field to indicate the auditing operation
-- U for Update and D for Delete
ALTER TABLE audit Customers
ADD Operation NVARCHAR(1)
G0
```

You then need to create two triggers: one for *UPDATE*, and the other for *DELETE*. But because you already have an *UPDATE* trigger, you will modify the existing one:

```
-- Record the old image of the data
CREATE Trigger TR_CustomerRowAudit_Delete
ON Customers
FOR DELETE
AS
INSERT INTO audit_Customers
SELECT *, 'D' FROM DELETED
ALTER Trigger TR_CustomerRowAudit_Update
ON Customers
FOR UPDATE
AS
UPDATE Customers
   SET LastUpdatedOn = GETDATE(),
   LastUpdatedBy = SUSER_NAME()
FROM Customers
   INNER JOIN DELETED
      ON Customers.CustomerID = DELETED.CustomerID
INSERT INTO audit Customers
SELECT *,'U' FROM DELETED
```

If you want to test this from the Access database linked to the Customers table, because new fields have been added in the SQL Server table, you should use the Linked Table Manager in Access to refresh the linked table.

Figure 14-21 illustrates that the Customers table has two triggers.



Figure 14-21 The Customers table with auditing triggers.

# **INSIDE OUT**

#### Advanced features of triggers

Triggers are a big subject in and of themselves, and we have only touched on a few features in this section. The following list presents a number of more advanced points relating to designing triggers.

- When you have multiple triggers for the same event, you can control the order in which the triggers fire by specifying whether a trigger will fire first or last in the sequence. You specify this by using the stored procedure sp\_settriggerorder.
- By default, triggers on one table that change the data in other tables that also have triggers will cause the triggers on the other tables to fire; nesting of triggers to 32 levels is supported. This is a server-level setting, and it can be disabled.
- Triggers can potentially be recursively called, and there is a database-level option to Recursive Triggers Enabled, which can control this feature (see the Help system for a discussion of Direct and Indirect recursion).
- INSTEAD OF triggers can be defined on Views to improve updateability.
- Triggers can be enabled and disabled; this is a very useful feature when bulk loading data into a system.
- The triggers we have described are DML triggers. SQL Server also support DDL triggers for recording changes made to data structures in response to CREATE, ALTER and DROP statements.

As an example of using ROLLBACK in a trigger, you can create a trigger to prevent any insertions or deletions on a table, as follows:

```
CREATE Trigger Tr_Categories_INSERTDELETE
ON Categories
FOR INSERT, DELETE
AS
   ROLLBACK TRAN
GO
```

The next example shows how you can use the *UPDATE* function to detect whether a particular column has been modified. In the following example, this will prevent the changes by using a ROLLBACK operation (there is also a more sophisticated COLUMNS\_UPDATED function to test for changes on multiple columns with a single function):

```
CREATE Trigger Tr_Products_ProductName
ON Products
FOR UPDATE
IF UPDATE([ProductName])
   ROLLBACK TRAN
G0
```

## Working with Transactions

A transaction is a unit of work that is protected so that either all the steps within the transaction are completed or none of the steps are completed. This means that within a transaction, you can have a number of SQL statements updating data in different tables, and you are guaranteed that if any step fails, any partially completed work is undone.

Transactions are valuable when you need to perform updates that cannot be completed with a single SQL statement. For example, in a stock control system, you might need to update quantities for sold items on a customer order, and at the same time decrease inventory stock levels of these sold items. If your program failed after it increased the quantity on a customer order in one step, but before it could decrease the corresponding stock level in the next step, you would have an inconsistency in the system. To prevent this, you can place the two operations inside a single transaction; if the system fails before completing the transaction, then the first step is undone, or rolled back, to leave the data in a consistent state.

There are three statements that control transaction processing:

- **BEGIN TRANSACTION (TRAN)** Starts a transaction
- **COMMIT TRANSACTION (TRAN)** Finishes the transaction
- **ROLLBACK TRANSACTION (TRAN)** Undoes the transaction

You start this example (Transactions.sql) by creating a data table for testing, based on the Customers table, and then follow through the script, executing the statements one at a time and monitoring the @@TRANCOUNT (which indicates how many open transactions are active):

```
USE Northwind
-- Examples of working with transactions
-- Start by creating a data table to work with
SELECT * INTO tblCompanies FROM Customers
PRINT @@TRANCOUNT
-- Expect 0 for 0 open transactions
BEGIN TRAN
PRINT @@TRANCOUNT
-- Expect 1 for 1 open transaction
UPDATE tblCompanies SET ContactName = 'Test'
SELECT * FROM tblCompanies
COMMIT TRAN
SELECT * FROM tblCompanies
PRINT @@TRANCOUNT
-- Expect 0 for 0 open transaction
```

In the next example, continue through executing the script one line at a time to see the effect of the ROLLBACK action:

```
BEGIN TRAN
PRINT @@TRANCOUNT
-- Expect 1 for 1 open transaction
UPDATE tblCompanies SET ContactName = 'Test Rollback'
SELECT * FROM tblCompanies
ROLLBACK TRAN
SELECT * FROM tblCompanies
PRINT @@TRANCOUNT
-- Expect 0 for 0 open transaction
```

# **INSIDE OUT**

#### Simulating multiuser interaction with a transaction

One very important question to ask is what happens if another user attempts to view data that has been changed but not yet committed or rolled back? Allowing a user to read dirty data is not the default setting in SQL Server. The default behavior is to prevent a dirty read and leave the other user paused and waiting for the transaction that is locking the data to either commit or rollback. Each Query window that you open in Management Studio behaves as a different connection or user, so it is easy to simulate the multiuser interaction.

If you repeat the execution of the last section of code, and only execute the script up to the line that has updated the data (so that you have not committed the transaction), then open a new Query window and execute SELECT \* FROM tb1Companies, you will see that the second window is effectively blocked from execution. Figure 14-22 shows how to display the Activity Monitor (on the top Toolbar, last icon) and Figure 14-23 shows the results in the Activity Monitor.

Once you switch to the first window and execute either a ROLLBACK or COMMIT, and then return to the second window, you will see that the SELECT statement has been completed. This interplay of transactions and processes being temporarily suspended happens in milliseconds and is a natural feature of concurrent users interacting with the database, in this example we can slow down time and examine the logic behind our processing to ensure that the system is operating as anticipated.




Figure 14-22 The Activity Monitor is a useful tool when you're investigating a locking or blocking issue.

Query

SELECT \* INTO tblCompaniesFRO.

SELECTdtb.name AS [Name],dtb.d..

VISTAULTRA64\SQL... Activity Monitor SQLQuery2.sql - VISTAULTRA64\.... Transactions.sql - VISTAULTRA64\...)) Processes Login Databası Comman Application Time ▼ Proc ▼ Resource By (ms) U 51 1 VistaUltra... master Microsoft 52 1 VistaUltra... Northwind Microsoft ... 0 1 VistaUltra... tempdb RUNNING Microsoft 55 1 VistaUltra... 🚭 Session Details - VistaUltra64\Andrew - 54 - VISTAUL... 👝 📧 🔀 Last Transact-SQL command batch Resource Waits Data File I/O Recent Expensive Queries

In Figure 14-23, you can investigate details of the suspended process.

Kill Process

Figure 14-23 In Process 54, you can examine the suspended or blocked SQL; you can see on the right that it is being blocked by Process 52. You can also examine that last executed command by Process 52.

Refresh

erage

943

7110

If you find in your application that blocking is causing a problem (which is an uncommon feature of an application), sit and watch the activity monitor while you get users to perform specific tasks. This will help you to track down the problem. Look for parts of your application that, for example, open and hold open a large Recordset, or a very complex processing routine that locks areas of the database used by other users.

### Transaction Isolation Levels

In the previous section, you learned how the default behavior of SQL Server is to prevent a dirty read. The formal name for this setting is READ COMMITED. However, if you want to allow a dirty read, you could use READ UNCOMMITTED. SQL Server allows you to change the isolation level in a connection if you want to achieve a different behavior; you will need to set this inside a transaction. The following example illustrates the isolation options:

SET TRANSACTION ISOLATION LEVEL { READ UNCOMMITTED READ COMMITTED REPEATABLE READ **SNAPSHOT** SERIALIZABLE}

## **Nesting Transactions**

You might decide to have transactions within transactions, or you might have structured your code such that a transaction causes other sections of code to be executed that themselves contain transactions. When working with these nested transactions there are several points to be considered.

The first question is recording the nested depth you have reached; the system variable @@TRANCOUNT gives a count of the number of open transactions. Each time a new transaction starts, the count increments by 1, and each time a transaction is committed, the count decreases by 1.

The second question is what happens when at each level in the nested transactions you have a COMMIT or ROLLBACK action. It is only when the outermost transaction is committed that all the work completed inside the inner nested transactions is finally applied in the database. This means that if you begin three nested transactions, then you required three COMMITs to complete the work. If at any point inside any transaction you have a ROLLBACK action, then all the work at all levels will be undone. In the following code, you can see how to use the @@TRANCOUNT to test for a ROLLBACK in the inner transaction:

```
-- Handling a Rollback from a nested transaction
CREATE PROC usp_ForceRollback
AS
BEGIN
   -- Transcation started
  BEGIN TRAN
   -- The following action would be conditional
   ROLLBACK TRAN
END
G0
-- Transaction test
   BEGIN TRAN
  PRINT @@TRANCOUNT
   EXEC usp_ForceRollback
   IF @@TRANCOUNT > 0
      COMMIT TRAN
```

The third question is, when a transaction encounters a ROLLBACK action, how does this affect the execution of the program code? There are two situations in which a ROLLBACK can be encountered. The first situation is when your transactional code decides to explicitly call a ROLLBACK. In this situation, your code continues to execute, and you are responsible for using @@TRANCOUNT to detect that this has occurred and take appropriate action. The second situation is when your code causes a trigger to fire, and the trigger performs a ROLLBACK action. In this situation, your code stops execution, as shown in the following example:

```
-- Handling a Rollback generated from a trigger
CREATE TRIGGER Tr_TestRollBack ON tblCompanies
FOR DELETE
AS
BEGIN
   -- prevent any deletes
   ROLLBACK TRAN
END
G0
-- Test processing
-- Execute this as a block of code
PRINT 'Program Running'
DELETE FROM tblCompanies
PRINT 'Code is still running'
```

One last point to make on transactions is that you can also perform a localized rollback. To use this feature, you define a save point for the transaction, and then when specifying a ROLLBACK, you do so to the named save point.

## **User-Defined Functions**

User-Defined Functions (UDFs) are very similar to VBA functions in that you can incorporate them both within queries (or Views) and inside program code (or stored procedures).

When adding them to Views, the same rules apply as in VBA: if you write a vast number of lines of code and execute blocks of SQL, don't be surprised when you add it to generate a column that it is very slow.

Consider the following SQL example (FunctionExample.sql).

#### Note

This calculation would work in Access.

```
USE Northwind
SELECT [UnitPrice], [Quantity],
      LineTotal= [UnitPrice]*[Quantity],
      SalesTax = [LineTotal] * 0.20,
      Total = [SalesTax] + [LineTotal]
FROM [Order Details]
G0
```

This will not execute in SQL Server because you are not allowed to refer to a calculated expression in another expression (this might come as a big surprise). So, to make this work, you require the following:

```
SELECT [UnitPrice], [Quantity],
     LineTotal= [UnitPrice]*[Quantity],
     SalesTax = [UnitPrice]*[Quantity] * 0.20,
      Total = [UnitPrice]*[Quantity]* 1.2
FROM [Order Details]
```

One solution to restating the sales tax calculation would be to create the following function and modify the SQL as shown in the example that follows, notice that you need to call the function with the dbo prefix (this is because functions need to be prefixed by the schema that owns the function):

```
CREATE FUNCTION ufn_SalesTax(@LineValue DECIMAL(10,2))
   RETURNS DECIMAL(10,2)
AS
BEGIN
   RETURN(@LineValue * 0.2)
END
G0
SELECT [UnitPrice], [Quantity],
      LineTotal = [UnitPrice] * [Quantity],
      SalesTax = dbo.ufn_SalesTax([UnitPrice]*[Quantity]),
      Total = [UnitPrice]*[Quantity] + dbo.ufn_SalesTax([UnitPrice]*[Quantity])
FROM [Order Details]
GO
```

#### **INSIDE OUT** Table-valued functions

In addition to having functions called scalar-valued functions that return a single piece of data, functions returning a table of data in a similar manner as a stored procedure are allowed. These are called table-valued functions. These functions also have an advantage over a stored procedure in that they can be inserted in a FROM clause. There is also a subset of these functions known as inline user-defined functions, which can act like a View that accepts parameters, as shown in the following code (TableValued Functions.sql):

```
CREATE FUNCTION ufn_CustomersInACity
                 ( @City nvarchar(15) )
RETURNS table
AS
RETURN (
        SELECT * FROM Customers
        WHERE City = @City
       )
G0
SELECT * FROM ufn CustomersInACity('London')
```

## Getting Started with SQL Server Security

In this section, we provide enough of an overview of SQL Server Security to get you up and running with your development.

## **Surface Area Configuration**

SQL Server installs with a minimum of its surface area exposed (to protect the security integrity of the server), which means that once you move from your local development environment to working with SQL Server on a network, you should verify that the surface area is suitably configured to enable you to communicate with the database server.

One of the simplest initial tests to run from the command line is the ping program, using the name of your server. This will help you establish that you can see the server on the network (or you could browse the network, or use some other technique to check that the server is available). If you cannot connect to the server, you should check that this is not a network authentication issue.

Once you know that the server is available, the next item to check is that the SQL Server is open for business (check this on the server). The default settings do not make the SQL Server open for communications. Start the SQL Server Configuration Manager by clicking Start | All Programs | Microsoft SQL Server 2008 R2 | Configuration Tools | SQL Server Configuration Manager. This should look similar to Figure 14-24, and you need to enable the appropriate protocols.

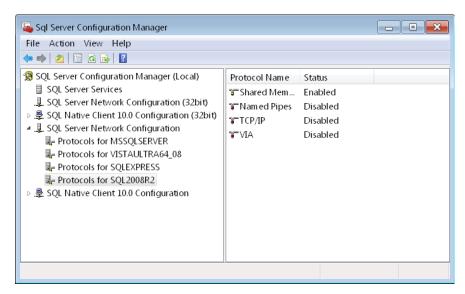


Figure 14-24 Using the SQL Server Configuration Manager. You will most likely want to enable both TCP/IP and Named Pipes for a SQL Server on the network.

The final step is to use a copy of Management Studio (the quickest method), or create or use an ODBC connection to test that you can connect to the server. If you are working with a database administrator (DBA), you might want to consult with him for specific connection details. In some extremely secure environments, DBAs might switch off the SQL Browsing task and change the default ports that the SQL Server will be listening on (but this is not that common).

The error message shown in Figure 14-25 is an indication that you are not able to connect to the SQL Server.

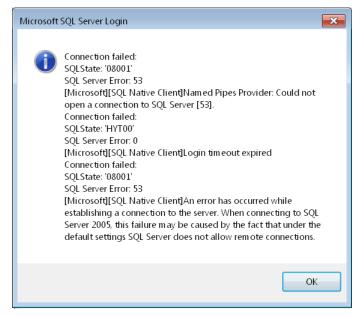


Figure 14-25 This error might be the result of an incorrectly specified server name, or the server is not visible on the network, or the surface area is not open.

The error shown in Figure 14-26 indicates that you are able to connect to the SQL Server, but there is a security problem with the Login, which is described in the next section.

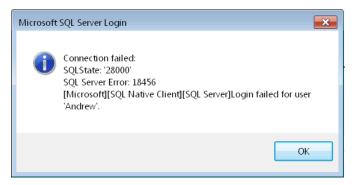


Figure 14-26 This error tells you that you need to look into the login names or passwords or choice of authentication.

Windows authentication is the simpler choice for most security environments, but if you have problems with that, then using a SQL Server Logon is an excellent tool for identifying if a security issue lies with the SQL Server being able to see (authenticate) the required Windows accounts.

### **SQL Server Authentication**

When SQL Server is installed, it can be configured to support either only Windows authentication or both Windows authentication and SQL Server Logons. To change this setting, right-click the server object, and then select properties from the shortcut menu. The Server Properties dialog box opens, as shown in Figure 14-27.



Figure 14-27 Supported authentication is configured by right-clicking the server in Management Studio, and then selecting properties.

When you are working with your own local SQL Server, as part of the installation, you had the option to add your logon account to act as an administrator of the SQL Server. But once you are working with a SQL Server on a network, life can become a bit more complicated. If you have remote login access as an administrator to the target server, you should be able to alter the security to support your choice of security model, if you cannot remotely start Management Studio on the server and connect to the SQL Server, you might need assistance and advice from whoever configured the SQL Server.

Security in SQL Server is defined primarily at the *server level*, and then further fine tuning of the security occurs inside each database. In the following sections, you will create or register accounts at the server level, and then through part of this process, you will create the necessary accounts inside each database. But notice that part of the process of managing the logons at the server level will create the necessary *user level* security in the databases.

To begin, in Object Explorer, click the Security folder, and then right-click the Login folder to open the shortcut menu. Click New Login, as shown in Figure 14-28.




Figure 14-28 Creating a new SQL Server Login.

Next, enter an appropriate login name and select the SQL Server Authentication check box (see Figure 14-29). You might find it useful to disable the Enforce Password Policy (clear the check box), to make things easier when getting started. Farther down this screen, you can also specify a default database for the account.

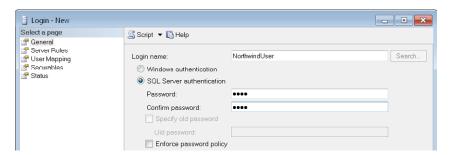


Figure 14-29 Configuring the password and password policy for a SQL Server Login.

Move to the User Mapping page, select the Map for each database a user needs to use, and then assign the user to the db\_owner database role, as shown in Figure 14-30. Later you can create and control your own database roles, which are ideal for managing security; db\_owner is a powerful level of access to have in a database.

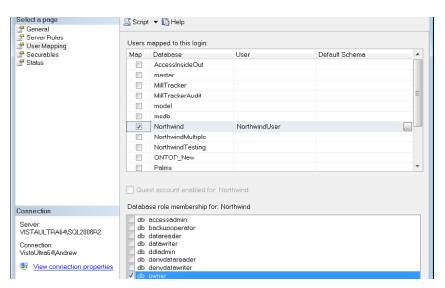


Figure 14-30 Map the user into all databases that they need to use and assign a database role.

Click OK to complete the setup. If you take a look inside the Northwind database, you can see that this is where the User Map is maintained (see Figure 14-31). If you later wish to delete a login, you also need to delete the user from this area in each database that they are using. Deleting a Login does not automatically delete the user from each database.




Figure 14-31 As a result of mapping a Login to a database, a corresponding entry is made in the folder called Users, inside each database to which the Login was mapped.

#### Windows Authentication

To configure Windows authentication, you follow similar steps to those described in the last section, but when creating the Logon, you are adding either an existing Windows User or a Windows Group into the SQL Server. SQL Server checks to see that this is valid selection; you can use the Search button to help you with this, as shown in Figure 14-32.

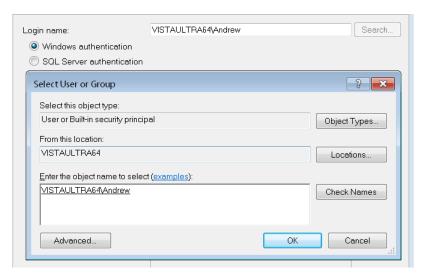


Figure 14-32 Searching to select a Windows User or Group.

After you have added the group name, refer back to the previous section, if necessary, to see how to set the user mapping and database role.

The easiest approach to managing Windows authentication is to have one or two Windows Groups created for the application. These can then be registered in the SQL Server, after which you only need to get the users added to the Windows Group, without the need for any further changes in SQL Server.

## Summary

In this chapter, you have gained a good working knowledge of how SQL Server can be used to replace a back-end Access database, and how to use VBA programming in your Access application to utilize some of the features in SQL Server.

The key points that you should have noticed include:

- How SQL Server is architecturally different from Access and offers improved performance and scalability.
- How your Access application might need to be changed to make the most of SQL Server, including converting some of your queries and ensuring that you minimize the data volumes that are presented in forms.
- How to create tables, relationships, Views, stored procedures, and functions, and how an Access application can link to these objects.
- Trigger programming is very flexible and with it, you can implement elegant and sophisticated features in your application.
- How to effectively use the more advanced features in T-SQL. (You might need to brush up on your SQL, or at least allow time to feel more comfortable when writing SQL.)

You should by now appreciate that SQL Server is a big product, and although we have provided an overview of the features that you need to master, we have not covered every feature in the product.

In the next chapter, you look at the issue of taking an Access database and migrating or upsizing the data into SQL Server.

# CHAPTER 15 Upsizii

# **Upsizing Access to SQL Server**

Planning for Upsizing543	Developing with Access and SQL Server 574
The Upsizing Wizard and the SQL Server	
Migration Assistant 558	

n this chapter, you start by looking at the need for planning before you convert an existing Microsoft Access 2010 back-end database to Microsoft SQL Server. You will then look at two popular Microsoft tools for upsizing a database; the Upsizing Wizard (part of Access) and SQL Server Migration Assistant, which you can download free of charge. The final part of the chapter looks at various issues and techniques that you can use to develop or enhance your converted application.

After reading this chapter, you will be able to:

- Effectively plan how to upsize your databases and avoid common pitfalls.
- Understand how to use the Upsizing Wizard or SSMA to convert an application.
- Understand design techniques that can be used to further develop your application after it is upsized.

#### Note

As you read through this chapter, we encourage you to also use the companion content sample databases, Northwind\_ProblemsAndFixes.accdb, SQLServerCodeExamples. accdb, and the additional script files, which you can download from the book's catalog page.

# Planning for Upsizing

In this section, you will look at how to plan for upsizing an Access database to SQL Server. This includes looking at how the available data types in SQL Server can be matched with those in Access, and the steps that you need to take to verify that your Access database can be correctly converted. This verification will save you a lot of time, regardless of what tool you choose to perform the conversion.

## Text Data Types and UNICODE

The ASCII character encoding scheme has been in use for a long time, but is has an inherent restriction because it supports only 255 different characters in its code set. UNICODE, however, supports over 65,000 characters. The SQL Server data types for character data are CHAR, VARCHAR, and an older TEXT data type, which is equivalent to the Access Memo data type. CHAR is a fixed size and VARCHAR is varying size, so the Access Text data type matches the SQL Server VARCHAR data type.

The SQL Server UNICODE data types can be identified by the "N" prefix, such as NCHAR, NVARCHAR and NTEXT. If you choose to use UNICODE, this will double the required storage, which could have an impact on performance, but you gain a greater flexibility and support for international deployment of your application.

SQL Server has an 8 K page—the maximum column size is 8,000 bytes, and the maximum row size is 8,060 bytes (1 row per page). But SQL Server 2008 R2 does allow the combined length of character and certain other data types to exceed this maximum row size.

When dealing with a *Memo* data type, you have the option of mapping this to an older TEXT or NTEXT data type, or, beginning with SQL Server 2005, you can use VARCHAR(MAX) or NVARCHAR(MAX) data type, which is a better choice. The VARCHAR(MAX) data type can hold up to two gigabytes of data, and is stored in-row, when possible, to improve performance.

#### Date and Time Data

The Access Date data type can hold dates from 1 January, 100 to 31 December, 9999. When no date is given and time-only data is provided, it uses the date 30 December, 1899 to indicate time-only data and hides the date information.

The corresponding data type in SQL Server is the *DATETIME* data type. This can hold dates from 1 January, 1753 to 31 December, 9999. When no date is provided, it defaults the date to 1 January, 1900 (which you might have spotted is different in Access). SQL Server also has a SMALLDATETIME data type.

Beginning with SQL Server 2008, there are some new date and time data types, they are: DATE, TIME, DATETIME2 and DATETIMEOFFSET. When you link Access to these data types, the DATE data type will appear as an Access Date data type, and can store dates in the range 1 January, 0000 to 31 December, 9999.

The most common choice of mapping is to map the Access Date data type to the DATE-TIME data type, but if you only had date data you could consider using the newer DATE data type.

If you use a map to the DATETIME data type, then because it is possible for your Access tables to contain badly entered dates—for example in the year 100—before you convert your database, you should verify that your date data is no earlier than 1 January, 1753 (this is one of the most common problems that applications can have and can cause data conversions to fail). If you find bad dates, and if the field is not a required field, you can set the value to NULL. If it is a required date, set the field to a safe value. The following VBA code in the Northwind ProblemsAndFixes.accdb can be used to search through all the dates in your database, looking for bad dates and making corrections:

```
Sub modUpsizeTests_CheckDatesAndFix()
' Search through all tables with date fields
' Check that there are not tables containing dates
' which will not be accepted in SQL Server
' set illegal dates to NULL or a SafeDate
   Const strMinDate = "1 January 1753"
   Const strSafeDate = "1 January 1900"
   Dim db As DAO.Database
   Dim rst As DAO.Recordset
   Dim tdef As DAO.TableDef
   Dim fld As DAO.Field
   Dim strSQL As String
   Dim strCriteria As String
   Set db = CurrentDb
   For Each tdef In db.TableDefs
        If Left(tdef.Name, 4) <> "MSys" And _
           Left(tdef.Name, 4) <> "USys" And _
           Left(tdef.Name, 4) <> "~TMP" Then
           For Each fld In tdef.Fields
                If fld.Type = dbDate Then
                    strCriteria = "WHERE " & _
                             "[" & fld.Name & "] < #" & _
                             strMinDate & "#"
                    strSQL = "SELECT Count(*) FROM " &
                             "[" & tdef.Name & "] " & strCriteria
                    Set rst = db.OpenRecordset(strSQL, dbOpenDynaset)
                    If rst(0) <> 0 Then
                        Debug.Print tdef.Name, fld.Name
                        If Not fld.Required Then
                            strSQL = "UPDATE [" & tdef.Name & "]" & .
                                     " SET [" & fld.Name & "] = NULL " & _
                                     strCriteria
                        Else
                            strSQL = "UPDATE [" & tdef.Name & "]" & _
                                     " SET [" & fld.Name & "] = #" & _
                                     strSafeDate & "# " & strCriteria
                        CurrentDb.Execute strSQL
```

```
End If
                     rst.Close
                 End If
            Next
        End If
    Next
End Sub
```

With TIME-only data, you need to be aware that as long as Access is used to continue entering this date, the default 30 December 1899 will be applied. But if you decide to write T-SQL in SQL Server, then ensure that you explicitly supply this date, because the default in SQL Server is 1 January 1900.

#### Boolean Data

An Access Yes/No data type corresponds to the SQL Server BIT data type. In Access TRUE is −1 and FALSE is 0; in SQL Server, TRUE is 1 and FALSE is 0.

In Access, if you don't provide a default value for a Yes/No field, it will be always be displayed as FALSE. In SQL Server, if you don't specify a default, the default value is NULL. This means that unlike Access, a SQL Server BIT (Yes/No) field can be NULL, TRUE or FALSE.

Access, when linked to this data type, displays NULL as FALSE. The best advice is to check all your Yes/No fields to verify that they have a default value so that once converted to SQL Server, they have defaults when new data is entered. And in future, when creating new BIT fields in SQL Server, always give them a default value. The reason that this is very important is because SQL Server does not treat NULL as FALSE; it treats NULL as NULL, and testing for FALSE does not identify any rows containing NULL values. If you ignore this point, then at some point when you convert an Access query to a SQL Server View, if that query tests for FALSE, you will find that it no longer works as expected (during conversion you need to watch that FALSE becomes 0 and that -1 or TRUE becomes 1 or <>0). The following code sample could be used to add missing defaults to Yes/No fields prior to converting your database:

```
Sub modUpsizeTests_CheckBooleansForMissingDefaults()
' Search through all tables with Yes/No fields
' Add any missing defaults
   Dim db As DAO.Database
   Dim tdef As DAO.TableDef
   Dim fld As DAO.Field
   Set db = CurrentDb
   For Each tdef In db.TableDefs
       If Left(tdef.Name, 4) <> "MSys" And _
            Left(tdef.Name, 4) <> "USys" And _
            Left(tdef.Name, 4) <> "~TMP" Then
            For Each fld In tdef.Fields
```

```
If fld.Type = dbBoolean Then
                    If fld.DefaultValue = "" Then
                        Debug.Print tdef.Name, fld.Name
                         ' Set default to false
                        fld.DefaultValue = "0"
                    End If
                End If
            Next
        End If
    Next
End Sub
```

## **Integer Numbers**

SQL Server integers range as follows (the Access equivalent types are shown in parentheses): TINYINT (Byte), SMALLINT (Integer), INT (Long Integer), BIGINT (no equivalent). If you define a BIGINT in SQL Server and use a linked table to Access, the field appears as a Text field.

## Real Numbers, Decimals, and Floating-Point Numbers

SQL Server can hold very large or very small numbers by using the FLOAT data type. The type REAL (Access equivalent, Single) is equivalent to a FLOAT(24), 24-byte floating-point number. The default FLOAT is a FLOAT(53), which is equivalent to an Access Double. SQL Server also supports the DECIMAL data type, which aligns with the Access Decimal data type.

## **Hyperlinks**

SQL Server has no equivalent to the Access Hyperlink data type, which you would translate to a VARCHAR or NVARCHAR data type. You would then require some code in Access to make it behave as a hyperlink, using an unbound hyperlink control. Access stores the hyperlink in a memo type column with the Address, Text, and ScreenTip information.

### IMAGE, VARBINARY(Max), and OLE Data

SQL Server supports two data types into which you can transfer Access OLE Data. These data types are, IMAGE (an older data type) and VARBINARY(MAX). The recommended choice is VARBINARY(MAX), but if you encounter any problems when migrating or working with the translated OLE Data, then it is worth trying the alternative data type mapping using the IMAGE data type.

### Memo Data

SQL Server supports two data types into which Memo data can be transferred: TEXT, (which is the older of the two) and VARCHAR(MAX) (and their UNICODE equivalents).

In many respects the better choice is VARCHAR(MAX); if you intend to bind .NET controls such as a *DetailsView* control, then updates with *TEXT* are not supported, but this will work with the VARCHAR(MAX) data type.

# **INSIDE OUT**

#### Driver limitations with VARCHAR(MAX)

You should be aware that there is a serious problem when working with VARCHAR(MAX) and either the Native Client Driver or Native Client 10.0 Driver. If you try pasting in a large amount of text, you get the error [Microsoft][SQL Native Client] String Data, right truncation (#0). In this case, you either need to stick with the older SQL Server Driver or revert to using the TEXT data type, which works with all three drivers. The choice of different drivers is discussed in Chapter 12, "Linking Access Tables."

## Currency

SQL Server supports two currency types, MONEY and SMALLMONEY. The MONEY data type maps to the Access Currency data type.

#### Attachments and Multi-Value Data

Unlike Access and Microsoft SharePoint, SQL Server does not support multi-value fields (Access and SharePoint provide full support for these), This means that you need to normalize your data by creating a new table to hold the multi-value or Attachment field data.

For example, if you have a table called tblCustomer with a primary key CustomerID and an Attachment field called Documents, you need to create a new table called tblCustomer Documents with an AutoNumber primary key, a foreign key to CustomerID, and an OLE Data field called Documents. You then need to create new records in the new table to hold the documents for a customer. Unfortunately, there is no easy way to transfer Attachment data to an OLE Data field.

One strategy to convert your Attachment data is to first use the SaveToFile VBA method of an Attachment object to scan through your attachments and save them as files to a folder (this was described in Chapter 5, "Understanding the Data Access Object Model"). The next step is to create a form bound to your new OLEData Type, and then using the following VBA code for a control called for example TheOLEObject, you can load the file into the bound control and save the record:

> Me.TheOLEObject.SourceDoc = MyPath Me.TheOLEObject.Action = acOLECreateEmbed RunCommand acCmdSaveRecord

## **Required Fields**

In Access, an existing field can be changed to a Required field, but you can skip checking existing data. These fields are created in SQL Server with a NOT NULL attribute; during the process of migrating data, this can cause problems. The following code can be used to check if you have NULL values in any required field. To fix this problem, you can either go through the data, adding a safe default value for the field, or set the Required field attribute to FALSE, as shown in the following:

```
Sub modUpsizeTests_CheckRequiredFieldsMissingValues()
' Search through all Required fields
' List any containing NULL values in the data
    Dim db As DAO.Database
    Dim tdef As DAO.TableDef
   Dim rst As DAO.Recordset
    Dim fld As DAO.Field
    Dim strSQL As String
    Set db = CurrentDb
    For Each tdef In db.TableDefs
        If Left(tdef.Name, 4) <> "MSys" And _
            Left(tdef.Name, 4) <> "USys" And _
            Left(tdef.Name, 4) <> "~TMP" Then
            For Each fld In tdef.Fields
                If fld.Required Then
                    strSQL = "SELECT Count(*) FROM " & _
                             "[" & tdef.Name & "] WHERE " & \_
                             "[" & fld.Name & "] IS NULL"
                    Set rst = db.OpenRecordset(strSQL, dbOpenDynaset)
                    If rst(0) \iff 0 Then
                        ' List where missing values
                        Debug.Print tdef.Name, fld.Name
                    End If
                End If
            Next
        End If
    Next
End Sub
```

## Cycles and Multiple Cascade Paths

It is possible to create relationships in Access that cannot be converted into relationships in SQL Server, although this rarely happens. If it does happen, you get an error message similar to the following:

may cause cycles or multiple cascade paths. Specify ON DELETE NO ACTION or ON UPDATE NO ACTION, or modify other FOREIGN KEY constraints.

The problem is that your relationship includes cascade update or cascade delete actions, which appear to SQL Server to be causing a feedback loop that can lead to problems. The solution is to remove one or more of the cascade actions. If you still need to implement the cascade operation, you can either write a trigger or create a stored procedure to replace it.

# **INSIDE OUT**

#### Partially-completed foreign keys

In Access, if you have a multi-part foreign key, if you start to enter values for one part of the key, you can only save the record once you have valid values in all parts of the key.

In SQL Server, when you have a multi-part foreign key, you can save the record even if not all parts of the key are complete (some fields in the key can contain NULL values). In fact, you can even have illegal values in parts of the key, because it is only when the key is complete that the values are checked.

This is not a common problem, but it's worthy of a note. The SQL Standards show a MATCH option that applies to defining relationships (or references); Access uses the FULL match option, and SQL Server uses the SIMPLE match option.

## Mismatched Fields in Relationships

With Access, you can construct relationships between columns of different data types and sizes; for example, in a Customer table, you can have a foreign key field to a Country table that is *Text(20)*, and in the *Country* table, the corresponding field could be a *Text(30)*.

SQL Server does not allow this, and you need to modify your design to ensure that both fields are the same size and of the same data type. For the previous example, you can set the foreign key to a *Text(30)* field.

You could use code based on the following example to detect and possibly autocorrect these problems:

Sub modUpsizeTests\_CheckFieldTypesAndSizesInRelationships()

' Check that the fields used in relationships

' are on the same type and size Dim db As DAO.Database Dim rel As DAO.Relation Dim fldInRel As DAO.Field Dim fld As DAO.Field Dim fld2 As DAO.Field Dim tdef As DAO.TableDef Dim tdef2 As DAO.TableDef Set db = CurrentDbFor Each rel In db.Relations

```
For Each fldInRel In rel.Fields
           Set tdef = db.TableDefs(rel.Table)
           Set tdef2 = db.TableDefs(rel.ForeignTable)
           Set fld = tdef.Fields(fldInRel.Name)
           Set fld2 = tdef2.Fields(fldInRel.ForeignName)
           If (fld.Type <> fld2.Type) Or (fld.Size <> fld2.Size) Then
                ' need to alter one of the fields
               Debug.Print rel.Name & " has a problem with the fields"
           Else
                Debug.Print rel.Name, tdef.Name, tdef2.Name
           End If
       Next
   Next
End Sub
```

## Replicated Databases and Random Autonumbers

If your database was at one time replicated, then the tables will have picked up a number of special replication fields such as s\_Generation, s\_Lineage, s\_GUID, or s\_ColLineage. It is a good idea to remove these now unwanted fields prior to upsizing, and possibly convert any ReplicationID fields, if used as a primary key, to standard autonumbers.

A general feature of Access that is associated with replication is the option to have a random Autonumber sometimes used as a primary key. If, for example, in an Access database you have a table called Customer2 with a field Newld that was a random Autonumber, then if you look in CurrentDB.TableDefs("Customers2").Fields("NewId").DefaultValue, you can spot a function called GenUniqueID(); this is the internal function that Access uses to generate the random Autonumbers. One nice feature of the Upsizing Wizard is that it will automatically write the following trigger code (usp\_GenUniqueID.sql) to generate the random Autonumber in SQL Server, and sets a default of 0 for the field Newld, which is the primary key:

```
CREATE TRIGGER [dbo].[T_Customers2_ITrig] ON [dbo].[Customers2]
FOR INSERT AS
   SET NOCOUNT ON
  DECLARE @randc int, @newc int
                                    /* FOR AUTONUMBER-EMULATION CODE */
   /* * RANDOM AUTONUMBER EMULATION CODE FOR FIELD 'NewId' */
   SELECT @randc = (SELECT convert(int, rand() * power(2, 30)))
   SELECT @newc = (SELECT NewId FROM inserted)
   UPDATE Customers2 SET NewId = @randc WHERE NewId = @newc
G0
```

The preceding approach, however, has a logical flaw: if an insert is from data in another table with multiple rows or using multiple values, then, as demonstrated in the code that follows, it generates duplicate primary key values of 0 and fails (remember the trigger fires after the insert). The good news is that this is very easily fixed, and the trigger code gives you all the information to write a SQL Server function to resolve this. This code is interesting because you want to create a generic function that uses the RAND function, but it turns out that you are not allowed to use the RAND system function inside a user-defined function. So, you must employ a cunning trick and wrap the RAND function inside a View, and then you are allowed to do this.

After allowing the Upsizing Wizard to convert the sample table Customer2, you can cause the previously described trigger to fail by using the following code:

```
INSERT INTO Customers2(CompanyName)
VALUES('Test'), ('Test2')
G0
```

Next, to resolve this problem, you create a View and then a function to use the View. In the following, notice that the first definition of the function will not work; however, the code starting from creating the View will work:

```
-- This will not work
CREATE FUNCTION usp GenUniqueID()
RETURNS int
AS
BEGIN
   DECLARE @randc INT
   SELECT @randc = (SELECT convert(int, rand() * power(2, 30)))
   RETURN (@randc)
END
-- Create the view
CREATE VIEW vw_Rand
   SELECT convert(int, rand() * power(2, 30)) As RandomSeed
G0
-- This will work
CREATE FUNCTION usp_GenUniqueID()
RETURNS int
AS
BEGIN
   RETURN (SELECT * FROM vw_Rand)
END
G0
```

To complete this, you need to drop the existing trigger (by using DROP), drop the existing default, and then add your new default:

```
-- Drop the trigger
DROP Trigger T_Customers2_ITrig
-- drop the default, your default name would be different to this example
ALTER TABLE [dbo].[Customers2]
DROP CONSTRAINT [DF__Customers__NewId__2C3393D0]
ALTER TABLE [dbo].[Customers2] ADD
```

```
CONSTRAINT def Customers2 NewID
DEFAULT dbo.usp_GenUniqueID() FOR [NewId]
```

In the preceding code, we have exchanged using a trigger for using a function. The subtle difference is that the function is called once for each individual row that is changed, but the trigger would be called once to process changes to multiple rows.

# **INSIDE OUT**

#### Allowing for changes to multiple rows in trigger code

The previous example demonstrates how trigger code should always be written to allow for multiple rows to be inserted, updated, or deleted; otherwise, you run the risk that at some point you perform an operation involving multiple rows and the application then generates errors. In some situations (although not in this case), if you cannot write the trigger for multiple rows, then you can consider using the following T-SQL to temporarily disable and then enable a trigger after completing the operation; this would only be recommended for use in maintenance and not while users are interacting with the system:

```
DISABLE TRIGGER T_Customers2_ITrig ON Customers2
ENABLE Trigger T_Customers2_ITrig ON Customers2
G0
```

This example also shows the benefit in having constraints with easily managed names for triggers and other objects in the database.

## **Unique Index and Ignore Nulls**

Access allows you to create a Unique Index that ignores NULL values; we have added an example to the Employees EmploymentCode column in the sample database to demonstrate this problem.

In SQL Server, NULL is a unique value, and you cannot create a unique index to ignore NULL values. You can add a non-unique index and then write the following trigger code to prevent duplicates but allow multiple NULL values. After you have converted the sample database to SQL Server, you can take a look at how the code (UniqueIndexIgnoreNull.sql) that follows can be used to resolve this problem in the converted SQL Server database:

```
CREATE INDEX idxEmployee ON Employees(EmploymentCode)
G0
CREATE TRIGGER TR_Employees_EmploymentCode
ON Employees
```

```
FOR INSERT, UPDATE
AS
IF EXISTS( SELECT COUNT(*),EmploymentCode FROM Employees
           WHERE EmploymentCode is NOT NULL
           GROUP BY EmploymentCode
           HAVING COUNT(*) > 1)
           ROLLBACK TRAN
G0
-- Test this
UPDATE Employees
SET EmploymentCode = 'N1123'
WHERE EmploymentCode ='N1156'
```

It's also worthwhile to consider using the following code to identify potential issues with these indexes prior to converting your database:

```
Sub modUpsizeTests_UniqueIndexIgnoreNulls()
    ' Example code to search for any ungiue indexes
    ' which ignore null values
    Dim db As DAO.Database
    Dim tdef As DAO.TableDef
    Dim idx As DAO.Index
    Set db = CurrentDb
    For Each tdef In db.TableDefs
        If Left(tdef.Name, 4) <> "MSys" And _
            Left(tdef.Name, 4) <> "USys" And _
            Left(tdef.Name, 4) <> "~TMP" Then
            For Each idx In tdef.Indexes
                If idx.IgnoreNulls = True Then
                    Debug.Print tdef.Name, idx.Name
                End If
            Next
        End If
    Next
End Sub
```

## **Timestamps and Row Versioning**

When you use a software tool to convert an Access database to SQL Server, you are normally provided with an option to add a TIMESTAMP column to your tables (it cannot be over-emphasized how important this option is when working with Access linked to SQL Server), and when you create new tables in SQL Server, you should remember to add a TIMESTAMP column to each table. Most of the current documentation from Microsoft no longer talks about a TIMESTAMP data type but instead discusses a ROWVERSION data type. However, Management Studio only displays a TIMESTAMP data type and not a ROW VERSION data type; you can regard both as meaning the same thing.

When you edit data over a linked table to SQL Server, Access maintains in memory a "Before" image of your data, and once you are ready to save the record, it needs to write the data back to SQL Server by using the Before image to detect any conflict in the data caused by another user simultaneously editing and saving changes to the same record. This standard product feature opens a write-conflict dialog box when a conflict is detected.

Access can use one of two strategies for detecting a conflict during the write-back. If you ignore TIMESTAMPs, Access checks that the values in the Before image for every field matches the current data held in the row in SQL Server. It does this by using a WHERE clause on the *Update* command, as shown in the following:

```
WHERE fld1 = fld1 (old value) and fld2 = fld2 (old value)
```

The following example illustrates how you can see the trace output from the SQL Server Profiler (discussed beginning on page 586) when you perform an update on the Customers table linked to Northwind:

exec sp\_executesq1 N'UPDATE "dbo". "Customers" SET "ContactTitle"=@P1 WHERE "CustomerID" = @P2 AND "CompanyName" = @P3 AND "ContactName" = @P4 AND "Contact-Title" = @P5 AND "Address" = @P6 AND "City" = @P7 AND "Region" IS NULL AND "PostalCode" = @P8 AND "Country" = @P9 AND "Phone" = @P10 AND "Fax" = @P11', N'@ P1 nvarchar(30),@P2 nchar(5),@P3 nvarchar(40),@P4 nvarchar(30),@P5 nvarchar(30),@ P6 nvarchar(60),@P7 nvarchar(15),@P8 nvarchar(10),@P9 nvarchar(15),@P10 nvarchar(24),@P11 nvarchar(24)',N'Sales Agent',N'ANATR',N'Ana Trujillo Emparedados y helados',N'Ana Trujillo',N'Owner',N'Avda. de la Constitución 2222',N'México D.F.',N'05021',N'Mexico',N'(5) 555-4729',N'(5) 555-3745'

The problem with this strategy is that if you have 100 fields, then the WHERE clause includes 100 comparisons, so this update involves a lot of comparisons. The other danger is when working with floating-point numbers; for example, if there were any difference in the precision with which the numbers were held in the two products, then the update could fail to locate the target record, causing the update to incorrectly register a conflict.

The second strategy is to use a TIMESTAMP as soon as you add this column to a table, and then ensure that the linked table is refreshed. Access switches automatically to this second strategy, which involves verifying that the primary key is matched and the TIMESTAMP column is unchanged, as shown here:

```
WHERE pkey1 = pkey1 (old value) and TS = TS (old value).
```

If you now add a TIMESTAMP column called TSCustomers to the Customers table, and then refresh the linked table and repeat the update, you obtain the following output in the Profiler:

```
exec sp_executesql N'UPDATE "dbo"."Customers" SET "ContactTitle"=@P1 WHERE
"CustomerID" = @P2 AND "TSCustomers" = @P3',N'@P1 nvarchar(30),@P2 nchar(5),@P3
binary(8)',N'Owner',N'ANATR',0x0000000000000FA2
```

This second method has the advantage of fewer comparisons and no dependencies on the form of internal storage of data in the products (with the exception of the primary key). The TIMESTAMP column data is automatically generated by SQL Server and changed whenever a record is changed. If you want to see this in greater detail, you can use the SQL Server Profiler to monitor what happens under the hood.

## Schemas and Synonyms

After you create a SQL Server database, click Security | Schemas. There you will find a list of existing schemas. The dbo schema is typically the one that contains all your design objects, and it is where new objects that you create are stored, unless your login has been altered to use a different default schema for the database.

In earlier versions of SQL Server, objects were owned by users, so you could have a table owned by User1.Customers and User2.Customers. However, this caused problems if you wanted to remove User1 from the system but keep an object such as User1.Customers. As a result, in SQL Server 2005 a new interpretation of schemas was introduced that was independent of users.

If you have a large Access database (for example, 200 tables), you can use schemas to split up the tables, Views, and so on, into logical groupings to better manage the database design. You can also use schemas to flexibly and easily configure security; for example, restricting a group of users to having only read permissions on a particular set of tables.

The following example (UsingSchemas.sql) illustrates how to create a Schema, create a table in the Schema, and then create a Synonym to refer to the table without specifying the full Schema prefix:

```
-- Example Schema
CREATE SCHEMA [Companies] AUTHORIZATION [dbo]
-- Example Creating a table on a Schema
CREATE Table [Companies].[Company](
CompanyID INT IDENTITY(1,1),
CompanyName NVARCHAR (100)
)
SELECT * FROM [Companies].[Company]
CREATE SYNONYM [dbo].[Company]
FOR [Companies]. [Company]
SELECT * FROM [Company]
GO
```

The Synonym is very important, because if you already had a table on the dbo schema and moved it to the Companies Schema, any SQL that referred to the table would no longer

work, but once you add the Synonym, that problem is resolved. If you don't specify an explicit schema when creating objects, they will be placed on your default schema, which, as previously mentioned, is normally dbo.

The following example shows an object being moved into a Schema and creating an appropriate *Synonym* for the object:

```
-- Example moving an object onto a Schema
ALTER SCHEMA Companies TRANSFER dbo.Customers
CREATE SYNONYM [dbo].[Customers]
FOR [Companies]. [Customers]
```

If you want to try the previous code and then move the Customers table back to the dbo Schema, you need to drop the synonym before you do this by using DROP SYNONYM Customers. You could then use the following line to move the table back to the dbo schema:

ALTER SCHEMA dbo TRANSFER Companies.Customers

After you have converted your database to SQL Server, you can consider making a list of all your tables, and then create a script to move all your tables into appropriate schemas and simultaneously create appropriate synonyms. You can use sp\_tables to get a list of all your existing tables and the TABLE OWNER property, which is the schema.

# **INSIDE OUT**

#### Using schemas and database roles to manage security

Often in an application you will want to provide users with different permissions on groups of objects in the system. SQL Server has a sophisticated security system with which you can establish fine control of security. One of the simplest approaches to security is to create database roles, and when mapping users, windows groups, or SQL Server logins into your system, assign them an appropriate database role, as demonstrated in the following:

```
CREATE ROLE [ReadOnlyUsers]
CREATE ROLE [Administrators]
GRANT Select, Execute on Schema::Companies TO [ReadOnlyUsers]
GRANT Select, Insert,
Update, Delete, Execute on Schema::Companies TO [Administrators]
```

The Execute and Select permissions will allow the ReadOnlyUsers to both view data and execute procedures on the Schema.

## The Upsizing Wizard and the SQL Server Migration **Assistant**

In the following two sections, you look at migrating an Access databases to SQL Server by using the Upsizing Wizard and the SQL Server Migration Assistant (SSMA). To stretch both tools, we have used the sample database Northwind\_ProblemsAndFixes.accdb, which contains known problems when migrating data. If you want to use this database, you can see how the tools handle the problems, or you can fix the problems as described earlier in this chapter, on page 543, by running the appropriate tests to look for illegal dates, and so on.

## The Upsizing Wizard

Open your database. On the Database Tools tab on the ribbon, under the Move Data group, click the SQL Server icon, The Upsizing Wizard opens. On the first page, you have the option to either create a new database or use an existing SQL Server database.

On the second page, you can choose to use either the (local), which is the default instance of SQL Server, or specify the instance name (which you can determine when you start the SQL Server Management Studio). You also have the option to use either Windows authentication or a SQL Server Logon, as shown in Figure 15-1.

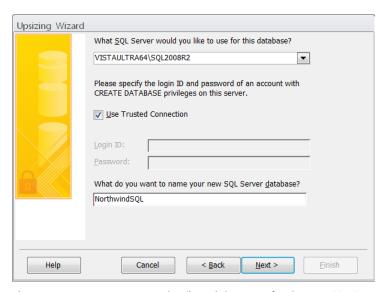


Figure 15-1 Enter your server details and the name for the new SQL Server database in the Upsizing Wizard.

On the next page, you select the tables that you want to upsize. On page four of the wizard (see Figure 15-2), you are presented with a number of optional choices. You can leave these at the default settings. Ensure that the Add Timestamp Fields To Tables? option is set to Yes, Always.

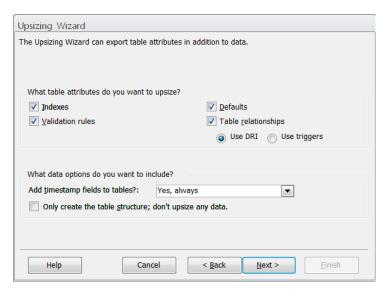


Figure 15-2 Additional choices can be made, including to upsize only the structure and not include the data.

Select the Use DRI option to upsize your relationships. The other option, Use Triggers, is not recommended because it is less efficient than using DRI and it is a throw-back to older databases when referential integrity (RI) was not always supported.

On the last wizard page, you need to complete details, as shown in Figure 15-3. There are three options on this page: leave your database unaltered, replace your tables with links to SQL Server, or create a new Access client/server application (ADP). You will now look first at the option for adding links to the SQL Server tables.

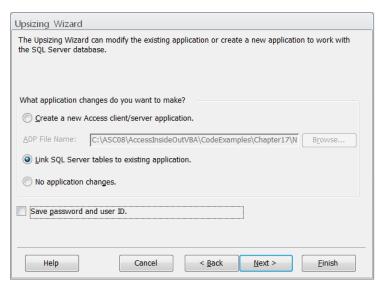


Figure 15-3 The choice of application changes allow you to decide what changes should be made to your existing database.

The Save Password And User ID option is only applicable if you are using a SQL Server Logon and not Windows authentication. And even in that circumstance, if you plan on using multiple SQL Login accounts for different users, embedding the password and user ID in the links is both unsecure and probably not what you want to happen, so leave this option cleared.

After you are finished with the wizard, you are given a report of the setup, along with any error messages.

If you performed the upsize with the illegal dates, you get an error indicating that the relationship was not created. The problem here is that the illegal dates prevent the data from being migrated, and no data in the Orders table prevents the relationship with Order Details from being switched on. If you look in SQL Server, you can see that the Orders table is empty. If you fix the dates and then repeat the upsize, the table converts correctly. The report also contains a warning that a Unique Index could not be created on the Employees, EmploymentCode field; this is because you have a Unique Index Which Ignores Nulls on that column (as described earlier in this chapter). You could then add your own non-unique index and a trigger to satisfy this requirement (also described earlier in this chapter).

Figure 15-4 shows that the process has renamed the original tables and created new linked tables to SQL Server.



**Figure 15-4** The *Order Details* table has been converted, but the *Orders* table has not been fully migrated (and the link is missing) because of illegal dates in that table.

# **INSIDE OUT**

### **Upsizing Wizard strengths and weaknesses**

The least attractive feature of the Upsizing Wizard is that is does not upsize *Required* fields; it should set the attribute *NOT NULL* on any Access column which is a *Required* Field. Even though you can work around this by writing trigger code to perform a *ROLLBACK* if it detected a *NULL* in certain fields, it would be both tedious and inefficient.

The wizard does handle *UNIQUE IGNORE NULL* indexes by skipping over them. It also pleasingly adds a *DEFAULT* of (0) to any *Yes/No* field (*Bit* field), to which it also adds the *NOT NULL* attribute. You also need to deal with any multi-value fields and attachments, as described earlier, on page 548.

The Upsizing Wizard does not have any features for controlling alternative mappings on data types, so you are restricted to having *UNICODE* data types and accepting its data type mapping.

Because the Upsizing Wizard cannot be repeated to just convert the data, when you come to go live with a system, you need to repeat the upsizing process. So during development, you should maintain all your design changes in script files, which you can then easily re-run when making the system live and repeating the upsizing process.

## **Upsizing to Use an Access Data Project**

In this section, you take a look at Access Data Projects (ADPs). Referring back to Figure 15-3, you can use the option, Create A New Access Client/Server Application to generate a new ADP. If you choose this option, you not only create a new database, but the Upsizing Wizard performs a lot of additional processing, as shown in Figure 15-5. Constructing an ADP means that you will no longer have any queries left in Access; these queries will need translation into SQL Server Objects (a process with which the wizard can assist you).




Figure 15-5 The Upsizing Wizard converts queries to SQL Server Objects.

An ADP is a radical departure for Access in some respects because you do not use the ACE database engine. This means that you can no longer have local tables or gueries or utilize the Data Access Objects (DAO) model. Instead of DAO, you use an alternative light-weight technology called ActiveX Data Objects (ADO), which we discuss in Chapter 18 "Using ADO and ADOX." The database window becomes a window into SQL Server (it's a bit like a "lite" version of the SQL Server Management Studio inside Access).

Once you have converted to produce an ADP, go into a query in Design for a View, as shown in Figure 15-6.

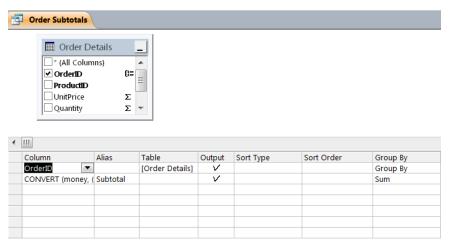


Figure 15-6 This query is a SQL Server View. The interface looks similar to the Access Query grid and Management Studio; of course, you have the flexibility to use Management Studio to edit this.

You will also notice that you have three kinds of gueries, as shown in Figure 15-7.



**Figure 15-7** The top two queries are Views, the next is a stored procedure, and the third and fourth are Table-valued functions.

It is interesting to note that the wizard chose to build a function for *Current Product List*. This is because the SQL contained an *ORDER BY* clause, which is only allowed in a View when you use a special *TOP* syntax (you will see more about this when we look at SSMA). This illustrates an interesting strategic difference between SSMA and the Upsizing Wizard. What is even more interesting is that if you open a function, such as *Current Product List*, you will find that it is updateable. This is quite radical, because in an Access database (an .accdb or .mdb), you cannot link to a function, and in Management Studio, you cannot open a function and edit the data; in the background there are some very clever things going on inside an ADP.

#### **Query Conversion**

Because you can use Access to write SQL in an infinitely-varied number of forms with a subtle interplay of VBA code, it is unlikely that you will ever get a 100% conversion, but it will have made a good attempt at translating your SQL. Sometimes you will find a query like *Product Sales For 1997*, which at first glance appears to have been converted, in fact has not been effectively converted, because it fails when you try to open the query. In this case, the problem can be fixed very easily because the syntax 'Qtr' + datepart(q,ShippedDate) will fail, you would need 'Qtr' + CONVERT(VARCHAR, datepart(q,ShippedDate)) to make this work; sometimes you need a lot more reworking on the SQL. Also note that the translation of SQL in crosstab queries is not supported (the equivalent in T-SQL is the *PIVOT* statement).

An ADP also provides integration for developing SQL Server-specific objects, as shown in Figure 15-8.




Figure 15-8 With an ADP, you have tighter integration to SQL Server features.

# **INSIDE OUT**

#### ADP strengths and weaknesses

In general, ADPs are not the most common choice when converting a database, but they have a following, and if Microsoft continues to enhance ADP, maybe it will become the preferred path. An ADP can offer better performance, because it ensures that you create your equivalent queries in SQL Server. This can also be a weakness because in any conversion you are forced to spend time possibly fixing a large number of queries, but with a standard Access database, you can focus on only converting those queries with poor performance. You also need to judge the impact on your productivity as a result of losing the ability to have local tables and local queries in any existing application.

#### **SSMA**

SSMA is a more generic tool than the Upsizing Wizard and is designed to migrate data from various databases into SQL Server. SSMA is free and can be downloaded from the Microsoft sites.

#### Note

The version of SSMA described here is 5.0 for Access, upsizing to either SQL Server or SQL Azure.

After you download and install SSMA on a 64-bit version of Windows, you will find two program shortcuts, one for 32-bit Access and the other for 64-bit Access. If you try to run the wrong version, you will see a message warning that you are running the incorrect version of SSMA for the available Access libraries. If there is a problem with any libraries, or

you install SSMA on a computer without Access 2010, then links are provided to download the Access 2010 runtime libraries required by SSMA. For a 32-bit Access installation, run the 32-bit version of SSMA.

#### The Migration Wizard

When you start SSMA, by default, the Migration Wizard is active and ready to guide you through the migration process. Figure 15-9 shows the first page of the wizard, in which you name your project and specify either a SQL Server or SQL Azure migration.

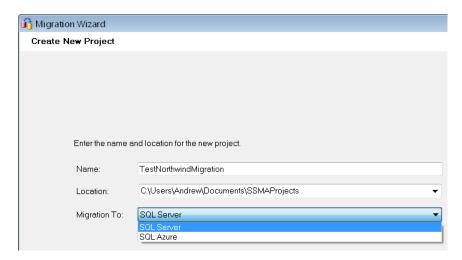


Figure 15-9 Naming your migration project.

On the next page, you can add your multiple Access databases to the project, after which the following list appears (see Figure 15-10) from which you the select individual tables and queries in each database to be migrated.



**Figure 15-10** SSMA acts independent of whether you use an Access database or an ADP project, and allows the selection of both tables and queries.

Following the previous selections, you are able to specify the SQL Server and either select an existing database or type in a new database name. On the next page in the Migration Wizard, you can select the Link Tables check box (the default is not-selected), which

replaces your tables with links to SQL Server. You will most likely want to select this option. The next page is the synchronization page (see Figure 15-11), which provides a detailed roadmap of how the migration will proceed; you can leave all the options on this page unchanged when performing this for the first time.

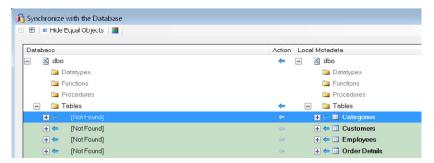


Figure 15-11 This wizard page controls of the data transfer for each table.

After the conversion is run, a summary page opens (see Figure 15-12). This page contains links to lists describing any problems that occurred during the migration.


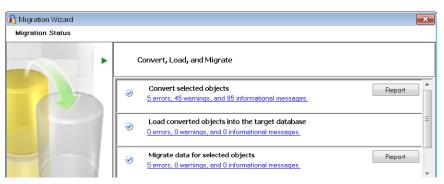


Figure 15-12 Reports provide detailed information on problems that might have occurred during the migration.

One very nice feature in SSMA is a graphical view, with which you can easily see all the objects in your database and identify and investigate those objects that were not converted, as shown in Figure 15-13.



**Figure 15-13** The metadata on your Access database means that you can drill down to find information on objects for which there have been conversion problems.

#### **Mapping Data Types**

SSMA has a mapping system for converting Access to SQL Server databases, which means that you can fully customize your data type mappings (see Figure 15-14). You display this by clicking the Tables folder in the Access Metadata Explorer.




Figure 15-14 Click the Edit button to change the Target Type for each data type mapping.

### **Using Schemas**

SSMA does not offer an option to simply assign combinations of your tables onto different schemas, but it is still possible to make use of schemas with SSMA. In this example, you want to consider a more sophisticated conversion, for this type of conversion you will not want to use the wizard, but perform the conversion with a series of your own steps.

You start by creating a new project, and then adding your Access database, as shown in Figure 15-15.




Figure 15-15 A database has been added, but tables haven't been selected yet.

Highlight the database, and then edit the data type mapping to use non-Unicode data types, as shown in Figure 15-16.

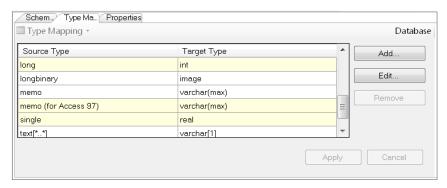


Figure 15-16 The mapping for memo fields after it has been changed from nvarchar(max) to varchar(max) and text fields from nvarchar to varchar.

Because this version of SSMA doesn't seem to easily refresh the schema list, once you have registered your database it is a good idea to create a blank database and define some schemas, as shown in Figure 15-17.




Figure 15-17 New schemas for partitioning your tables.

Returning to SSMA, click Connect To SQL Server, and then select the SQL Server database, as shown in Figure 15-18. Note the new schemas.




Figure 15-18 In each schema you can see a folder into which you will migrate your tables.

After you click to highlight the Tables folder in the Access Metadata Explorer, you can select the Schema tab, and then change the Schema from dbo to Companies, as shown in Figure 15-19.

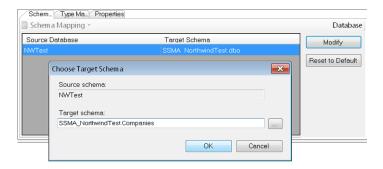


Figure 15-19 Changing the active target schema.

Select the tables that you want to migrate into the active schema, as shown in Figure 15-20.



Figure 15-20 Select the tables to migrate into the active schema. Note in this illustration that Queries is also selected; these should also be cleared after the first migration.

Next, click the Convert, Load And Migrate icon to migrate these tables. Clear these table selections and repeat the procedure to migrate the other tables to their appropriate schemas until you have migrated the set of tables as shown in Figure 15-21.




Figure 15-21 Northwind tables migrated onto separate schemas.

After performing this migration, you most likely want to create a set of synonyms for each table, as described earlier, on page 556.

The only restriction on this approach is that because you are effectively performing multiple migrations, SSMA cannot implement all your relationships across the schemas; you can use the database diagram in SQL Server to add back any missing relationships.

#### Comparing Table Conversion in the Upsizing Wizard and SSMA

SSMA and the Upsizing Wizard use different strategies when performing a conversion.

In our sample databases, we have intentionally inserted known problems so that you can compare how each tool handles these issues. SSMA can convert the Employees table, but it doesn't populate any of the data. This is because our table contains a UNIQUE INDEX with IGNORE NULLS. Unfortunately, this version of SSMA simply adds a UNIQUE INDEX to the table; a better strategy would be to ignore any indexing of this type.

SSMA, like the Upsizing Wizard, adds a default of 0 to any Yes/No field, which avoids the problems described earlier of Bit fields without defaults.

Unlike the Upsizing Wizard, which cannot handle Required fields, SSMA correctly maps these to NOT NULL in the database structure. SSMA can also partly handle NULL values in a Required field or illegal dates in the data. The strategy here is to attempt to migrate data that does not have problems. In the sample data, you can see the order number 10257, which contained an illegal date, 01-Jan-100. This then resulted in the order header record not being migrated, but the order detail records are migrated; this can mean that your data is inconsistent with the RI. However, you might feel that it is better to have some data rather than no data. There is no substitute for running the tests described earlier in this chapter, on page 543, for checking dates and missing values in required fields before migrating your data. SSMA produces output advising you of where data has been partially migrated, as shown here:

```
Preparing table Northwind_Problems_ForSSMA.[Orders]...
Migrating data for the table Orders from the database Northwind Problems ForSSMA...
The following error occurred during migration of the current batch:
SqlDateTime overflow. Must be between 1/1/1753 12:00:00 AM and 12/31/9999 11:59:59 PM.
See the log for the detailed information.
Data migration complete: 818 rows of 830 migrated.
Data migration operation has finished.
   6 table(s) successfully migrated.
   2 table(s) partially migrated.
```

SSMA provides a split window to compare the data in Access against the migrated data in SQL Server, as shown in Figure 15-22.

0 table(s) failed to migrate.

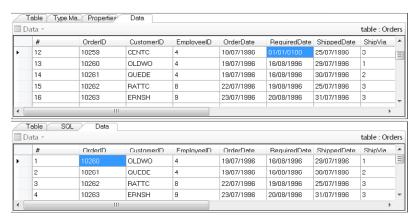


Figure 15-22 The Split data view shows the top 200 rows in Access and SQL Server. The illegal date in the record with OrderID 10259 is not migrated.

At one time in the distant past, the behavior of Access changed so that when you added a new text field, it always set the AllowZeroLength property to No. This was then promptly changed back to default AllowZeroLength to Yes; this setting tended to make data imports and other activities more difficult in Access. If you have an older database that has this set on all your text fields, then when converting by using the Upsizing Wizard, it ignores this attribute. In the past, SSMA generated a Check constraint to do this (which is probably not what you wanted). The new version of SSMA generates a dummy Check constraint, which does not actually perform any checking, an example of which is shown in the following code:

```
ALTER TABLE [dbo].[Customers]
CHECK CONSTRAINT
[SSMA_CC$Customers$Address$disallow_zero_length]
CO
```

This strategy is a compromise between not adding the *Checks*, and providing placeholders for them. If you want to avoid this, you can write some code to scan through the fields in each Access table, changing the AllowZeroLength to Yes before migrating the database.

### Comparing Query Conversion in the Upsizing Wizard and SSMA

In SQL Server, you are not allowed to have the SQL ORDER BY in a View (which conforms with the SQL standard), and for that reason, the Upsizing Wizard creates a function to return a result, as shown in the following:

```
CREATE FUNCTION [dbo].[Current Product List] ()
RETURNS TABLE
AS RETURN (SELECT TOP 100 PERCENT "Product List". ProductID,
"Product List".ProductName
FROM Products AS "Product List"
```

```
WHERE ((("Product List".Discontinued)=0))
ORDER BY "Product List".ProductName)
EXEC sys.sp addextendedproperty @name=N'MS AlternateBackThemeColorIndex',
@value=-1 , @levelOtype=N'SCHEMA',@levelOname=N'dbo',
@level1type=N'FUNCTION',@level1name=N'Current Product List'
G0
```

The Upsizing Wizard also makes extensive use of creating extended properties, which are used to record display settings when displaying the function on a Query grid.

There is a way to put an ORDER BY inside a View, and SSMA will create a View for this guery by using this strategy, which involves including the TOP... WITH TIES statement, as shown here:

```
CREATE VIEW [dbo].[Current Product List]
   SELECT TOP 9223372036854775807 WITH
  TIES [Product List].ProductID,
   [Product List].ProductName
   FROM Products AS [Product List]
  WHERE ((([Product List].Discontinued) = 0))
   ORDER BY [Product List].ProductName
G0
```

The very large number, 9223372036854775807, is used to avoid the need to say TOP 100%, for reasons of internal efficiency.

If you are using an ADP, then the previously mentioned approach with functions can return updateable data, but if you want to use an Access database, you can only utilize a function by using a pass-through query (which is read-only); you cannot link an Access database directly to a function.

Another nice feature of the Upsizing Wizard is that when it converts a query that contains a reference to an Access parameter, it generates a parameterized function, as shown below:

```
CREATE FUNCTION [dbo].[Invoices Filter]
(@Forms___Orders___OrderID1 varchar (255)
)
RETURNS TABLE
AS RETURN (SELECT Invoices.*
FROM Invoices
WHERE (((Invoices.OrderID)=@Forms___Orders___OrderID1)))
G0
```

The original SQL used in the Access query was as follows:

```
SELECT Invoices.*
FROM Invoices
WHERE (((Invoices.OrderID)=[Forms]![Orders]![OrderID]));
```

SSMA is not able to handle this kind of query with references to screen parameters and does not convert the query.

In summary, if you are planning to use an ADP, then the Upsizing Wizard offers a large number of advantages over SSMA when converting queries; but if you are planning to use an Access database (.accdb or .mdb) linked to SQL Server, then you will find that SSMA produces more favorable results when converting your SQL; you can, of course, run a conversion through both tools and copy and paste the preferred results between the systems.

# **INSIDE OUT**

#### SSMA strengths and weaknesses

If you want better control of the Data Type mappings, and you want to ensure that Required fields are correctly translated to NOT NULL column attributes, SSMA offers a better choice than the Upsizing Wizard. The support for migration onto Schemas is also a very attractive feature of the product, but it would benefit from a more structured approach that permits a single migration to split multiple tables over schemas and thus preserve the relationships during the migration process.

The only weakness we came across in SSMA was in attempting to translate a UNIQUE INDEX which ignores Nulls. That can be easily avoided by checking for this in your database prior to conversion.

## Developing with Access and SQL Server

In this section, you will look at some of the changes and design techniques that you might consider using once you have converted your data to SQL Server and relinked your Access database front-end application.

## The dbSeeChanges Constant

When you have code that opens a Recordset on data that includes a column with the IDENTITY property (equivalent to an AutoNumber), you will find that you need to add an additional constant called dbSeeChanges as an option on the OpenRecordSet command; otherwise, you get the error shown in Figure 15-23.



Figure 15-23 An Error message indicating the need to add dbSeeChanges.

```
Sub modSQL_dbSeeChanges()
' Examples illustrating how code needs to be altered
' Adding dbSeeChanges
    Dim db As DAO.Database
    Dim rst As DAO.Recordset
    Set db = CurrentDb
    Set rst = db.OpenRecordset("dbo_Products", dbOpenDynaset)
' Corrected code below
' Set rst = db.OpenRecordset("dbo_Products", dbOpenDynaset, dbSeeChanges)
    rst.Close
    db.Close
End Sub
```

## **Pass-Through Queries**

With pass-through queries, you can create a query that by-passes the checking that Access normally performs when writing SQL. These queries can be used either to execute an operation (when they don't return data) or return a data set. If returning data, then the *Recordset* is always read-only. The SQL written in the query does not support the Query grid because it is written in T-SQL. One of the many uses for pass-through queries is to execute both your own as well as built in stored procedures. These queries can be created by using either DAO code or the query design tool.

To interactively create a pass-through query, start by creating a normal query, but don't select any tables. Next, on the Design tab, click the Pass-Through icon, shown on Figure 15-24.

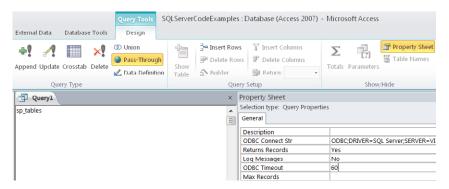


Figure 15-24 When creating a pass-through query, you should also display the property sheet, because you will need to set the ODBC Connection String.

The following list summarizes some of the key properties:

- **ODBC Connect Str** Use the builder when you have clicked into this property to pick your connection string or paste in a valid string.
- **Returns Records** Set this according to whether the query returns a *Recordset*.
- **Log Messages** Stores messages returned from SQL Server in a user-specific table.
- **ODBC Timeout** You might choose to change this to 0 and avoid early timeouts caused by delays in network traffic.
- **Max Records** Limits the maximum number of records being returned.

In the example shown in Figure 15-24, you call the built-in stored procedure sp\_tables to return a list of tables in the database. You could use the alternative syntax including the exec keyword as exec sp\_tables (but this is not essential). You are allowed to have comments using -- or /\*..\*/ added to the body of the SQL, but you can only have one T-SQL command block executed in the pass-through query. If you need to execute a sequence of operations, you need to place them in your own stored procedure.

In the following example, you start by creating a stored procedure in SQL Server that accepts a single input parameter; you can either run this in Management Studio or you can execute the SQL in a pass-through query to create the stored procedure from Access, in which case, you omit the GO keyword and set Returns Records to No, as shown here:

```
CREATE PROC uspListCustomersForCountry @Country NVARCHAR(20)
AS
BEGIN
  SELECT * FROM Customers
  WHERE Country = @Country
END
```

To execute this from Access, you create a pass-through query that contains the following single line of SQL:

```
uspListCustomersForCountry 'UK'
```

You could also get away with using uspListCustomersForCountry UK, but this is a bad idea. To see why, insert a space in the text, as shown in the following line (which will then fail):

```
uspListCustomersForCountry U K
```

The next parameter to give some attention to is dates; SQL is an ANSI standard and as such, it adopts the convention in the United States for date formats. You need to be very careful about passing a date parameter to a database if you live outside the United States. And if you live in the United States and plan to have your application used in other countries, then you also need to be careful about date formats. There is a very simple shortcut to solving this problem, and that is to format your dates to avoid the issue of mm/dd/yyyy or dd/mm/ yyyy, and format your date in an unambiguous way as a text string, such as the following:

```
dd mmmm yyyy.
```

To format a date such as in the preceding code line, in VBA, you use the following syntax:

```
Format(date,"dd mmmm yyyy")
```

In the following example (StoredProceduresAndParameters.sql), a stored procedure illustrates this point:

```
CREATE PROC usp_OrdersByDate @Thedate DATETIME
AS
BEGIN
   SELECT * FROM Orders
  WHERE RequiredDate = @Thedate
END
G0
exec usp_OrdersByDate '1996-08-16'
exec usp_OrdersByDate '16 August 1996'
G0
```

Looking at this problem from the Access perspective, you can write a pass-through query to do this, as shown previously, or this can be written in code.

Creating an on-the-fly pass-through query in code is very simple; the only real issue to consider is how you get the database connection string. You can get this from a global variable, or a function; but in the following code you will get this from a table that is already

linked in your database (if using your sample database, you will need to relink the linked tables to your SQL Server database), as shown in the following example:

```
Sub modSQL PassingDatesInPassthrough()
    ' example of passing a date which
    ' avoids ANSI formating
    Dim db As DAO.Database
    Dim qdef As DAO.QueryDef
    Set db = CurrentDb
    Dim dt As Date
    dt = \#8/16/1996\#
    Set qdef = db.CreateQueryDef("")
    qdef.ReturnsRecords = True
    ' The following line comes before assigning the SQL property
    ' as the Access will not check the SQL after the connect property
    ' is assigned
    qdef.Connect = db.TableDefs("Orders").Connect
    qdef.SQL = "usp_OrdersByDate '" & Format(dt, "dd mmmm yyyy") & "'"
    Dim rst As Recordset
    Set rst = qdef.OpenRecordset()
    Do While Not rst.EOF
        Debug.Print rst(0)
        rst.MoveNext
    Loon
End Sub
```

# **INSIDE OUT**

#### Using advanced features in stored procedures from Access

In general, linking Access to a stored procedure is very easy, as you saw in the last example on pass-through queries, which is the only technique available for linking to a stored procedure. The more complex question is whether you want to simply utilize the capability of a stored procedure to return a result, or whether you want to utilize some of the more advanced features of stored procedures, such as passing input and output parameters. If you want to dig deeper into stored procedures and utilize more advanced features, you need to take a look at ADO, which is covered in Chapter 18.

## **Stored Procedures and Temporary Tables**

In Access, when you need to perform a sequence of complex operations to deliver a dataset for users to interact with on a form, you might need to create temporary results table, which you then clear down before populating with data with a sequence of queries. For example, in an order processing system, you might want to show past orders, payments, and future orders all in a single list. This involves consolidating data from many parts of the system.

When linking to SQL Server, you have a number of different design strategies from which to choose: you can keep using the existing local temporary tables, or you could put the temporary table in SQL Server and add a column to distinguish between data belonging to different users by using the SUSER\_SNAME() function.

One elegant solution to this problem is to utilize SQL Server temporary tables inside a stored procedure; for example, you can create the following stored procedure (Stored ProcedureAndTemporaryTable.sql):

```
CREATE PROC usp_Products
AS
BEGIN
-- Drop temporary tables if they exists
IF object_id('tempdb..#TempProducts') is not null
    DROP TABLE #TempProducts
-- create the temporary results set
  SELECT * INTO #TempProducts
  FROM Products
-- return the temporary result set
  SELECT * from #TempProducts
END
-- Testing
exec usp_Products
G0
```

## **Handling Complex Queries**

Converting queries that have complex calculations (we are going to show a simple calculation to explain this feature) can be a big issue when moving to SQL Server. Consider the following Access query:

```
SELECT
  [Order Details].OrderID,
  [Order Details].ProductID,
  [UnitPrice]*[Quantity] AS LinePrice,
  [LinePrice]*0.2 AS LineItemTax,
  [LinePrice]+[LineItemTax] AS FullPrice
FROM [Order Details]
```

This technique of referring to calculated columns inside other expressions is a very common technique in Access. Unfortunately, SQL Server does not support this, and most migration tools are unable to perform a successful conversion of the SQL.

You have several options when converting this SQL. The simplest option is to restate the calculations in full for each calculated field. The second option is to create SQL Server functions for parts of the calculation, and then modify the calculation to use these functions.

The third option is to create a nested query; you then order the calculations so that they are only referenced by an out level of the nesting. The following code demonstrates the three solutions (ComplexCalculation.sql):

```
-- Restating the calculations
SELECT
   [Order Details].OrderID,
   [Order Details].ProductID,
   [UnitPrice]*[Quantity] AS LinePrice,
   ([UnitPrice]*[Quantity])*0.2 AS LineItemTax,
   [UnitPrice]*[Quantity]+
   ([UnitPrice]*[Quantity])*0.2 AS FullPrice
FROM [Order Details]
-- using functions
CREATE FUNCTION fn_CalculateLinePrice(@Quantity INT,
                                       @Price MONEY)
RETURNS
   DECIMAL(16,4)
BEGIN
   RETURN(@Quantity * @Price)
END
G0
CREATE FUNCTION fn_CalculateTax(@Quantity INT,
                                @Price MONEY)
RETURNS
   DECIMAL(16,4)
AS
BEGIN
   RETURN(@Quantity * @Price *0.2)
END
G0
SELECT
   [Order Details].OrderID,
   [Order Details].ProductID,
   dbo.fn_CalculateLinePrice([Quantity],[UnitPrice]) AS LinePrice,
   dbo.fn_CalculateTax([Quantity],[UnitPrice]) AS LineItemTax,
   dbo.fn_CalculateTax([Quantity],[UnitPrice]) +
   dbo.fn_CalculateLinePrice([Quantity],[UnitPrice]) AS FullPrice
FROM [Order Details]
-- using a nested query
SELECT
   LinePrice,
   LineItemTax,
   LinePrice + LinePrice AS FullPrice
   FROM
      (SELECT LinePrice, LinePrice* 0.2 AS LineItemTax
```

```
FROM

(SELECT

[UnitPrice]*[Quantity] AS LinePrice

FROM [Order Details]

) As Nested1

) As Nested2

GO
```

# INSIDE OUT Case statements

At this point, you should appreciate that T-SQL takes writing SQL in Access to a more sophisticated level, and one feature that you don't want to miss is the CASE statement (often used to replace IIF structures). There are two forms for this, SIMPLE and SEARCHED. To illustrate this, the following code creates a very simple table that lists the months in a year, demonstrating the two forms of this statement (CASE.sql):

```
CREATE TABLE Months(
MonthID
                          INT PRIMARY KEY,
TheMonthName
                          NVARCHAR (15)
)
GO
INSERT INTO Months(MonthID, TheMonthName)
VALUES(1, 'January'), (2, 'February'), (3, 'March'), (4, 'April'),
(5,'May'),(6,'June'),(7,'July'),(8,'August'),
(9, 'September'), (10, 'October'), (11, 'November'),
(12, 'December')
GO
-- Simple Case
SELECT MonthID , TheMonthName,
   Simplecase =
   CASE MonthID
      WHEN 1 THEN 'January'
      WHEN 2 THEN 'February'
      WHEN 3 THEN 'March'
      WHEN 4 THEN 'April'
      WHEN 5 THEN 'May'
      WHEN 6 THEN 'June'
      WHEN 7 THEN 'July'
      WHEN 8 THEN 'August'
      WHEN 9 THEN 'September'
      WHEN 10 THEN 'October'
      WHEN 11 THEN 'November'
      WHEN 12 THEN 'December'
   Else 'Unknown'
   END
FROM Months
G0
```

```
-- Searched Case
SELECT MonthID . TheMonthName.
   SearchedCase =
  CASE
     WHEN MonthID IN(1,2,3) THEN 'First Quarter'
     WHEN MonthID IN(4,5,6) THEN 'Second Quarter'
     WHEN MonthID IN(7,8,9) THEN 'Third Quarter'
     WHEN MonthID IN(10,11,12) THEN ' Fourth Quarter'
   Else 'Unknown'
   END
FROM Months
CO
```

#### **Performance and Execution Plans**

Access is a bit like a black box in that you can extract some information on what it is doing behind the scenes, (but unfortunately, not a lot of information). By comparison, SQL Server is a much more open environment, and one way to investigate and resolve performance problems is the use of execution plans.

To begin, you should appreciate that not all of the information that you see in the plans is easily understood, simply because it is very comprehensive. But within this complex environment is some very valuable information that can help you to solve serious performance issues. In this section, you will construct examples to show how you dig into the strategies used by SQL Server when processing your SQL.

You start by creating a copy of some existing data in NorthWind, as shown in the following script (Indexing.sql):


```
-- Create a test table
SELECT * INTO TestOrders
FROM Orders
G0
-- display any indexing on the table
sp helpIndex [TestOrders]
G0
-- This should confirm that we have no indexes
```

Figure 15-25 presents part of the Toolbar in Management Studio when working with a query window. This has several options for obtaining more information on the execution of the SQL.



Figure 15-25 The Include Actual Execution Plan option for obtaining information. You can also include an estimated execution plan and client statistics.

Click the Include Actual Execution Plan icon. You can then execute a piece of SQL and view the plan output, as shown in Figure 15-26.



**Figure 15-26** This table has no indexing, so SQL Server reads through all of the data by using a *Table Scan*.

Executing the following T-SQL creates a *CLUSTERED INDEX* on the table; all tables should have a clustering key as this is used by other indexes, which are called *NONCLUSTERED* indexes. The clustered index controls the physical ordering of the data; this can impact the speed of retrieval on searches by the key. When you create a table and add a primary key, SQL Server makes that the clustered index (unless you already have another clustered index on the table). The SQL is shown in the following code, with the results shown in Figure 15-27:

```
-- Next create a clustered index
CREATE CLUSTERED INDEX idxTestOrdersClustered
ON TestOrders(OrderID)
GO
```




Figure 15-27 SQL Server uses the clustering key to perform an Index Scan.

In the next example, you will be more selective about the rows to retrieve. The result is shown in Figure 15-28.

```
SELECT *
   FROM TestOrders
  -WHERE OrderID between 10252 and 10254
💷 Results 🛅 Messages 🚏 Execution plan
Query 1: Query cost (relative to the batch): 100%
SELECT * FROM [TestOrders] WHERE [OrderID]>=@1 AND [OrderID]<=@2
             Clustered Index Seek (Cluste...
             [TestOrders].[idxTestOrdersC...
                     Cost: 100 %
```

Figure 15-28 This is a lot more efficient because you have specified criteria, so SQL Server searches the index by using an Index Seek.

Next, you create an index on the OrderDate field, which is used for searching. The SQL is shown in the following code, with the results shown in Figure 15-29:

```
CREATE INDEX idx_TestOrders_OrderDate
ON TestOrders(OrderDate)
G0
```

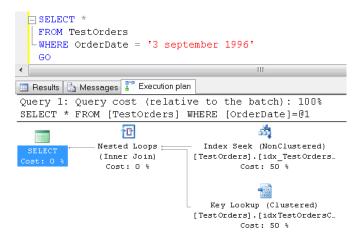


Figure 15-29 SQL Server can use the new index to look up the cluster keys, and then use the clustered index to retrieve the record. This is called a Key Lookup.

We mentioned that the clustering key is stored in the NON-CLUSTERED indexes, and it is only the CLUSTERED index that references the actual physical data. This strategy means that often a search requires a Key Lookup to locate the data. The big advantage of this strategy is that if the physical data needs to be moved by SQL Server, for example, to store more

data in the record, then only the *CLUSTERED* index needs to be altered to record where the data row has been moved; there is no impact on all the other indexes. As updates are very common in databases, this strategy minimizes the impact of updates.

In the following example, rather that retrieve all the columns, you only want to retrieve the *Orderld*. This is shown in Figure 15-30.

**Figure 15-30** In this example, because all the columns selected and searched are contained in the index, SQL Server does not need to retrieve the actual rows of data. The index covers all the required fields and this search will be very efficient.

# **INSIDE OUT**

#### Tips on efficient SQL

Writing your SQL efficiently and giving some thought to what you want to index will improve your applications performance. Here are some tips for how to do that:

- Add indexing to Foreign Keys (Access does this automatically; SQL Server does not). This improves join performance.
- Select only the required fields in your SQL and avoid using \* to select all fields.
- Make your WHERE clauses as specific as possible.
- Don't over-index the database; indexes have a cost as SQL Server needs to maintain the data in the indexes.
- Choose to index columns that are often searched and contain many different values (they are selective). If your index is not selective, SQL Server might avoid using the index.
- Run maintenance plans to rebuild indexes with space for new growth.

The ability in SQL Server to analyze specific queries and look for where indexing is not being used can help you plan your indexes. It is a good idea to start with very few indexes and then gradually add them to improve performance. SQL Server uses a costbased optimizer that maintains statistics on the indexes, which can then be used to decide on a minimum I/O cost based strategy for returning your data.

#### **SQL Server Profiler**

The SQL Server Profiler is a tool with which you can monitor the communications between your applications and the SQL Server database. Earlier in this chapter, on page 554, we looked at the TIMESTAMP columns and showed the resulting communications between Access and SQL Server when data is updated. When you start the Profiler, it will display the window shown in Figure 15-31.



Figure 15-31 Click the New Trace icon (the first one), and then connect to your SQL Server.

When you create a new trace, a Run button appears at the lower-left of the window that you use to start the trace. The trace window can result in displaying a large amount of information, and you can stop and then restart the trace by using the Toolbar icons, as shown in Figure 15-32.

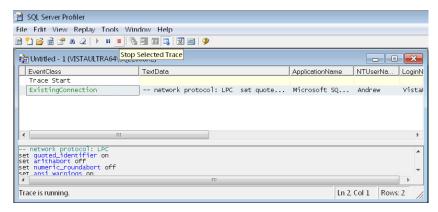


Figure 15-32 Start a trace only when you are ready to perform a specific action that you want to monitor.

With the trace, you can then open various parts of your application and monitor performance; if you take a form bound to a large number of records and perform a search for data (Ctrl+F), you will see the large amount of activity that this causes in the Profiler window. Remember to discontinue the trace once you are finished.

#### The MSysConf Table

After opening your Access application, when Access starts to communicate with SQL Server—for example, if you click on a linked table—you see the following action in the trace window:

```
SELECT Config, nValue FROM MSysConf
```

Access looks to see if it can find a table called MSysConf in your database. If you create a table with this name in your database, you can enter values to control how Access interacts with SQL Server. If you create this table, it's important to correctly set any values in the table. The following script (MSysConf.sql) creates this table and includes examples of setting values in the table:

```
CREATE TABLE MSysConf(
Config SMALLINT NOT NULL,
chValue VARCHAR(255) NULL,
nValue INTEGER NULL,
Comments VARCHAR(255) NULL
)
G0
INSERT INTO MSysConf(Config,nValue,Comments)
VALUES(101,0,
'Prevent storage of the logon ID and password in linked tables.')
GO
--VALUES(103, 50,
--'number of rows retrieved.')
--VALUES(101,1,
--'Allow storage of the logon ID and password in linked tables.')
--VALUES (102,1,
--'delay in seconds between each retrieval.')
--Note Setting a higher delay time decreases network traffic,
-- but increases the amount of time that read-locks are left on data
-- (if the server uses read-locks).
```

Having set the previous option to prevent saving passwords in linked tables, when connecting to SQL Server the check box option to allow saving user names and passwords is no longer displayed (remember to close and then re-open your database if testing this).

It is also worth pointing out that when we have tested option 103 (which controls the number of rows that should be retrieved), we have not been able to see any easily observable changes when monitoring traffic by using the Profiler.

# Summary

In the first part of this chapter, you looked at the need to plan for upsizing your database, which included the following key points:

- Deciding on whether to use *UNICODE* data types.
- Checking your data for invalid dates.
- Ensuring that your Yes/No fields have default values.
- Ensuring that required fields are not NULL.
- Deciding how to map OLE Data and Memo fields.
- Deciding on which version of the SQL Server Drivers to use.
- Normalizing any multi-value data fields into new tables.
- Normalizing and converting any Attachment data to OLE data.
- Planning for using Schemas and Synonyms.

Converting large databases from Access to SQL Server is not something that you should expect to get right the first time you attempt to do it. It is also important use a script file to record any changes that you make in the SQL Server database so that these can be reapplied if you need to repeat the upsizing process. In addition to the Upsizing Wizard and SSMA, you can find other companies that offer products to assist with migrating Access databases to SQL Server.

# CHAPTER 16 Using SQL Azure

Introducing SQL Azure590	Planning and Managing Security615
Migrating SQL Databases	Building Multi-Tenanted Applications 617
The Data Sync Feature	SQL Server Migration Assistant and Access to Azure 624

Office for either reporting management information or developing full applications linked to SQL Server to extend the reach of their applications by placing the Microsoft SQL Server database in the Cloud with SQL Azure. As a result, you can continue to use the existing desktop Office applications after they are relinked directly to SQL Azure. Furthermore, you can consider using Azure and .NET to provide a browser-based interface to your applications later.

There are numerous applications of this technology. One example is to provide remote users with an opportunity to test out an application or product without the need to install the SQL backend. Another example is to build a full, multi-tenanted product in the Cloud. This technology also provides a cloud-based SQL Server that is synchronized to your onpremise applications, using the newest version of Data Sync.

In this chapter, we begin by showing you how to get started with SQL Azure. Next, we discuss the structural requirements for the SQL Server database and the migration process. We then move on to discuss the developer tools for working with SQL Azure and address the issue of planning and implementing security.

After reading this chapter, you will:

- Understand how to get started and develop with SQL Azure.
- Understand how to migrate an on-premise SQL Server database to SQL Azure.
- Be able to construct multi-tenanted solutions.
- Understand how to utilize the Data Sync Service.
- Plan and implement a security model in SQL Azure.
- Experience how Microsoft SQL Server Migration Assistant can migrate directly from Microsoft Access to SQL Azure.

#### Note

As you read through this chapter, we encourage you to also use the companion content sample script files, which can be downloaded from the book's catalog page.

# Introducing SQL Azure

It is possible to have your own SQL Server on the Internet and connect to it directly from your desktop Microsoft Access application. If you have an ISP that provides this service, this is one option for extending the reach of an application. If you try to do this yourself on your own dedicated server, you might find that it's guite challenging and realize that you need to read up about a wide range of technologies, such as configuring firewalls.

One advantage of SQL Azure is that you can have this functionality without the associated difficulty of configuring this for yourself and be up and running very quickly. SQL Azure is not SQL Server running on a server on the Internet; it is a service provided by Microsoft to give SQL Server functionality within the context of cloud computing.

Gradually, SQL Azure is supporting more of the functionality associated with an on-premise SQL Server, and the ease and simplicity of using Azure is continuously improving as Microsoft adds support for an ever increasing subset of SQL Server functionality. You will find that the basic database technology is now well established in SQL Azure. New, additional services include a Data Sync, which can synchronize on-premise databases to cloud databases, and support for Report Services.

#### **Creating Databases**

Once you have set up your SQL Azure account, you can use the browser-based management interface for managing your account and databases, as is shown in Figure 16-1.

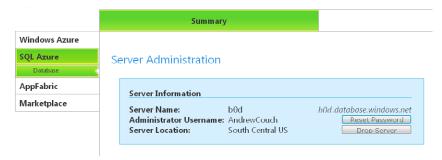


Figure 16-1 Viewed in a browser, the summary page provides the details that you need for connecting to the databases on your server (https://sql.azure.com/ProjectViewer.aspx).

On the Databases tab, click the Create Database button (in the lower-right part of the screen), to set up a new database called **Northwind**. Figure 16-2 shows the result of creating two databases in Azure (the master system database is part of the SQL Azure environment).

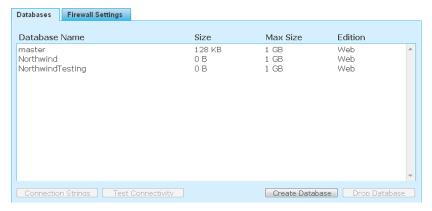


Figure 16-2 You can manage your SQL Azure databases on the Databases tab.

Click the *Northwind* database you just created, and then click the Connection Strings button to display the corresponding connection strings. This displays the following connection string for use with ADO.NET:

Server=tcp:b0d.database.windows.net;Database=Northwind;
User ID=AndrewCouch@b0d;Password=myPassword;Trusted\_Connection=False;Encrypt=True;

The connection string for ODBC will be similar to the following:

Driver={SQL Server Native Client 10.0};Server=tcp:b0d.database.windows.net;Database=Northwind;Uid=AndrewCouch@b0d;Pwd=myPassword;Encrypt=yes;

In the ODBC connection string, the SQL Server Native Client 10.0 driver is used; earlier versions of the ODBC drivers will not work when connecting to SQL Azure. You will find details of how to download these drivers on the Microsoft sites. If you have performed a local installation of SQL Server 2008 R2, the drivers were automatically installed at that time. If you are planning to allow other users to work with the database, then you will need to download and install these drivers on each desktop computer.

#### **Firewall Settings**

When working with SQL Azure, there are two basic levels of security: the first is a SQL Server Login (as of this writing, SQL Azure does not support Windows authentication); the second level of security is the firewall, which will only allow access from a remote location

with an IP address that falls within ranges defined in the firewall rules. Figure 16-3 shows an example of firewall rules.

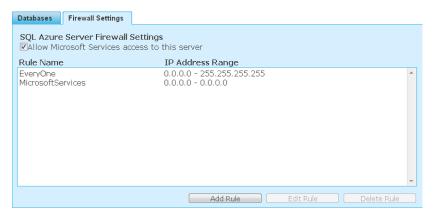


Figure 16-3 Managing the firewall rules for the server.

In this example, we have opened up the firewall to allow access from any IP address (0.0.0.0 - 255.255.255.255). The danger in doing this is that you effectively lose the protection of the firewall and must rely solely on the security provided by the SQL Server Login and password. The advantage in setting a wide IP address range is that if you have a dynamic IP address, you will always be able to connect to the server. For example, if you have a database that is used for product demonstrations, then losing this additional security might be acceptable. If you have fixed IP addresses, then you would only enter the appropriate address ranges.

## **Using Management Studio**

To work from your local computer with Microsoft SQL Server Management Studio, you will need to configure the SQL Server 2008 R2 Management Tools; you can download and install the free Express version of SQL Server 2008 R2 to ensure that you have the required tools.

After starting Management Studio, you are prompted to connect to a SQL Server, Figure 16-4 shows the details that you need to enter for your SQL Azure server. Notice that the Options button has been clicked to display the expanded set of tabs for the connection dialog.

Your server has a code; in our example the code is b0d, which means that the server name to be entered is **b0d.database.windows.net**. The authentication needs to be set for SQL Server Authentication, and then enter your user name as Username@b0d.



Figure 16-4 Entering the details for connecting to the server.

Before clicking the Connect button, click the Connection Properties tab, as shown in Figure 16-5.



Figure 16-5 Enter the name of the database to which to connect in the Connect To Database field.

Type in the name of the database to connect to (the drop-down menu will not be populated). In Figure 16-5, the selected database is Northwind, but you might decide to connect to Master. If you choose to connect to Master, you will also be able to see and manage all the other databases on the server, as shown in Figure 16-6.




Figure 16-6 Connecting to Master allows you to manage all the databases on the server.

# **INSIDE OUT**

#### SQL Azure and the graphical interface

When you are working with Management Studio and SQL Azure, you might notice that not all of the graphical support is available. For example, typically, when you expand a database in the Object Explorer and locate the Tables folder, if you right-click New Table, you will see a graphical interface for designing a table. With Azure, however, you will see a template script for creating a table that is displayed in the Query window. If you right-click an existing table, you will not have the option to use the graphical interface to change the design of the table, or view or edit the data (you need to type in the SQL in the query window to do this).

For many of the actions for which you have previously used the GUI interface, the only option with Management Studio is to write T-SQL to execute these tasks. If you find that this is difficult to do, then you will want to look at using a new online graphical tool that Microsoft is developing, which as of this writing is called Houston (this is described in the following section).

## **Developing with the Browser Interface**

SQL Azure is an evolving technology and Microsoft has been adding an increasing number of features to the services. Of particular note is the way in which Management Studio has been able to offer an ever increasing amount of support for the management and design tasks required to develop SQL Azure databases.

A separate area for which Microsoft has provided an additional tool is in the browser-based management of the database structure. As of this writing, you can go to *https://www.sqlazurelabs.com/houston.aspx* to launch this new feature. After selecting your data center, enter the credentials, as shown in Figure 16-7.




Figure 16-7 The Houston Database Manager window.

Figure 16-8 presents an example of the browser interface being used to change the design of a table.




Figure 16-8 Houston offers an interface that complements those features normally found in Management Studio when working with an on-premise database that are not available when connected to SQL Azure.

# Migrating SQL Databases

In this section, you will learn how to copy an existing on-premise database to SQL Azure. Using the methods described here, there will be no synchronization or connection between the local database and the database in Azure. (Synchronizing the databases is discussed in the next section.)

To copy the database into Azure, you use the following sequence of steps:

- **1.** Generate a script file to be run in Azure that will create the empty tables.
- 2. Modify the script file to be compliant with Azure requirements.
- **3.** Generate the empty tables.
- **4.** Use the SQL Server Import And Export Wizard to copy the data into Azure.

Once again, the sample files for this chapter include the instrumd.sql script to create the *Northwind* sample database in your local SQL Server, ready for use in moving to SQL Azure.

## **Creating a Set of Tables**

The first step is to use Management Studio with your on-premise database to generate a script for creating your database tables, as shown in Figure 16-9.




Figure 16-9 Generating a script for creating the tables.

Figure 16-10 shows the process of selecting your tables. Proceed through the various windows to generate a script in the query window.

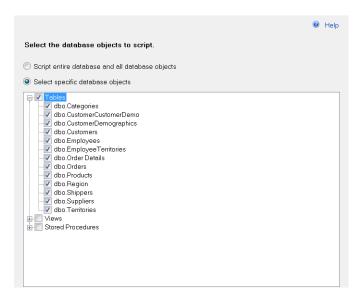


Figure 16-10 Select only the tables.

As previously pointed out, SQL Azure is not identical to SQL Server, and as of this writing, Management Studio does not generate scripts that are compliant with the requirements of SQL Azure. This means that you will need to implement a number of find and replace operations to ensure that you have a compliant script.

# **INSIDE OUT**

#### The SQL Server Import And Export Wizard and UNICODE data types

When used with the transfer mechanism for communicating data to SQL Azure, the SQL Server Import And Export Wizard only allows data to be transferred to UNICODE data types. It will allow you to transfer from a non-UNICODE data type such as a VARCHAR to a UNICODE NVARCHAR. This means that you might need to perform a global find in your own script file to replace any of the following:

- VARCHAR to NVARCHAR
- CHAR to NCHAR
- TEXT to NVARCHAR(MAX)

Note that this is only required because in the method outlined in this section, when using the wizard to transfer the data to Azure, SQL Azure does support these data types. As part of the create table syntax, your script file will contain syntax similar to the following:

```
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, IGNORE_DUP_KEY = OFF,
ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON) ON [PRIMARY]
) ON [PRIMARY]
You will need to change these to read as follows:
)WITH ( STATISTICS_NORECOMPUTE = OFF, IGNORE_DUP_KEY = OFF)
```

The easiest way to make this change is with a succession of find and replace operations to replace portions of the script; for example, replacing PAD\_INDEX = OFF with an empty string. You will find it helpful to make copies of the script file before trying out the changes. This way, you can take one example of the create table syntax and practice making the replacements in a dummy database so that you can ensure that the script will execute. We have included NorthwindInitialScript.SQL and NorthwindFixedScript.SQL in the sample databases.

Once your script file is prepared and tested, you can use Management Studio to execute the script in your database, taking care to execute it in the correct database.

Create a new database in SQL Azure and call it **NorthwindAzure**; you can do this either by using the browser tools or by using Management Studio and executing the following T-SQL while you are connected to the *Master* database in SQL Azure:

```
CREATE DATABASE [NorthwindAzure]
```

Now execute the script NorthwindFixedScript.SQL in the database NorthwindAzure to create a set of empty tables, relationships, and other database objects

## Transferring Data with the SQL Server Import and **Export Wizard**

Now that you have created your empty database structures in SQL Azure, use Management Studio to access your local on-premise database. Right-click the database and select the Export Data option from the Tasks shortcut menu, as shown in Figure 16-11.




Figure 16-11 Exporting data from the on-premise database.

Follow the steps in the SQL Server Import And Export Wizard until you reach the page shown in Figure 16-12.




Figure 16-12 In the Destination field toward the top of the wizard page, Select the .Net Framework Data Provider For SqlServer option.

After selecting the correct data provider for your SQL Azure database, you need to enter the Password, User ID, Data Source, and Initial Catalog (Figure 16-12).

On the next page, select the Copy Data From One Or More Tables Or Views option. Choose the tables that you want to copy (do not select the Views; it is also possible to use Views to transfer the data, but we do not require this), as shown in Figure 16-13.




Figure 16-13 Selecting the tables to transfer automatically completes the destination when the names are matched.

On the next page, select Run Immediately. If everything has worked properly, the wizard will look similar to Figure 16-14. If there are errors, the wizard usually provides a good description of the nature of the problem.




Figure 16-14 Details are displayed after completing the transfer, including any error messages.

For a detailed description of how to link your Access database application to the new SQL Azure database, refer to Chapter 12, "Linking Access Tables."

# **INSIDE OUT**

SQL Import/Export features when transferring to SQL Azure

Normally, when you are transferring data by using the SQL Server Import\Export between two SQL Server databases, you need to consider the following (using the Edit Mappings shown in Figure 16-13):

- For any tables with Identity properties, select the Enable Identity Insert option.
- For any tables with TIMESTAMPS, click the Field Data Type, and then select Ignore.

If you were to use the profiler to monitor how the SQL Server Import And Export Wizard performs the data transfer, you would see insert bulk statements with a CHECK CONSTRAINTS option. This means that referential integrity can still prevent data from being transferred, so a great deal of care can be required.

A fantastic feature of SQL Azure is that when you use Import/Export to transfer data to SQL Azure, you do not need to explicitly set these options, and the data transfer avoids any problems associated with referential integrity and the order in which tables are populated with data.

## Backing up and Copying a Database

Within SQL Azure, you can copy a database, both within a single server and between SQL Azure servers; this can be used to either provide copies for development or to provide a snapshot backup of the database. The following code shows how to create a backup copy of the Northwind database in SQL Azure. It includes commands that can be used to monitor the progress of the operation:

```
-- execute on the master database
CREATE DATABASE NorthwindBackup
   AS COPY OF Northwind
G0
-- retrieve state of the new database
select name, state, state desc from sys.databases
where name = 'NorthwindBackup'
-- retrieve copying details
select * from sys.dm_database_copies
where database_id = DB_ID('NorthwindBackup')
G0
```

# **INSIDE OUT**

#### Importing data from SQL Azure

If you want to transfer a SQL Azure database to a new, local on-premise database, you can do this by using Import.

You perform an Import in Management Studio while connected to your local onpremise database, and not from the Azure database (if you right-click the Azure database, you will not see any Import/Export tasks). It is best to perform this operation into an empty local SQL Server database; this process will then create unkeyed and unrelated tables of all the data.

If you try to reverse the process that was used to push the data into SQL Azure by first creating tables and constraints in the empty on-premise SQL Database, you will run into the problems described earlier when using the SQL Server Import And Export Wizard to migrate between two local SQL Server databases. The process of exporting to SQL Azure and importing from SQL Azure are not identical.

# The Data Sync Feature

In the previous section, you saw how to copy a database to SQL Azure. You can also synchronize your on-premise database with your Azure database by using the Data Sync feature. Data Sync uses the Microsoft Sync Framework and supports complex configurations for synchronizing databases in the Cloud and between the Cloud and your local servers.

As of this writing, not all of the synchronization services are fully available; CTP1 (Community Technical Preview) is available and CTP2 will be available shortly. The following is a brief description of some of the synchronization services:

- Cloud to Cloud (CTP1) Permits synchronization between SQL Azure databases in several different data centers.
- On-premise to Cloud (CTP2) Permits a local SQL Database to be synchronized to an SQL Azure database.
- **Retail & Remote Offices (CTP2)** Permits combinations of multiple remote SQL Servers—for example, in retail stores—to be synchronized.
- Offline Devices (CTP2) Permits devices such as mobile phones to be synchronized to the SQL Azure databases.

Synchronizing databases for the purpose of extending the reach of an application has always been an ambitious technical step, not least because in any environment, you face the difficult questions of how to resolve data conflicts and transmit changes to the database schema.

SQL Azure is an ambitious technology, and as of this writing, the Data Sync technology is still at the CTP level and will no doubt evolve. But we feel that this is such an exciting technology, and one that has reached a sufficient point of maturity, that it warranted inclusion in this book.

In this section, you start from the assumption that you have an on-premise SQL Server Database, and you want to synchronize this to a mirror of the database in the Cloud.

Beginning with the existing local database, you create a new empty database in SQL Azure by using Management Studio connected to the SQL Azure master database, as shown in Figure 16-15.




Figure 16-15 Creating a new, empty database in SQL Azure that will be synchronized to the local on-premise database.

Figure 16-16 shows the CTP2 interface to the Data Sync service.



Figure 16-16 The browser interface for managing Data Sync.

#### The Data Sync Agent

To avoid problems with firewalls and other security issues, the Data Sync service involves the local installation of an Agent, which is then responsible for making outbound requests.

The first step is to download and install the Agent; this is available from the Agents tab (download AgentServiceSetup.msi). During the installation process, you will need to provide details of your domain and an appropriate logon password, this information will be saved when a new Windows service is created (if you do not have a domain but your Windows ID is, for example, Andrew, then enter this as .\Andrew [with a period before the backslash]). The final window after running the installation appears, as shown in Figure 16-17.




Figure 16-17 Installation of the Data Sync Agent is complete.

After completing the install, use the Agent tab in the browser window to create an Agent with an appropriate name, and then with the Agent highlighted, generate the Agent Key, as shown in Figure 16-18.

#### Local Agents



Figure 16-18 Generate the Agent Key in the browser window; the key is shown on the right.

After generating the key, return to the desktop and start the SQL Azure Data Sync Agent application (Figure 16-19). Select the Encrypt Password option, and then click Edit Agent Key. Paste the key generated in the browser into this box (ensure that you have no leading or trailing spaces).

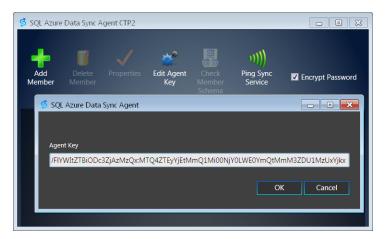


Figure 16-19 Register the Agent Key generated in the browser with the desktop application.

After saving the result, click the Ping Sync Service icon to test that you have correctly edited the key, as shown in Figure 16-20.

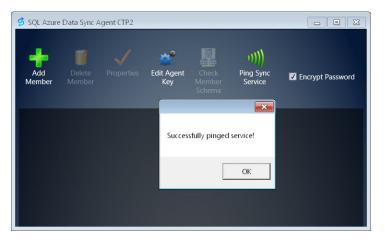


Figure 16-20 Use the Ping Sync Service to verify that the key has been correctly entered.

Next, click the Add Member icon to register your local SQL Server database as a member with the Agent. A dialog box opens, in which you can add the database by using either SQL or Windows authentication, as shown in Figure 16-21.




Figure 16-21 Adding your local SQL Server database as a member, here shown using Windows authentication.

Once this has been completed and you have saved the result, the local SQL Server database appears, as shown in Figure 16-22.

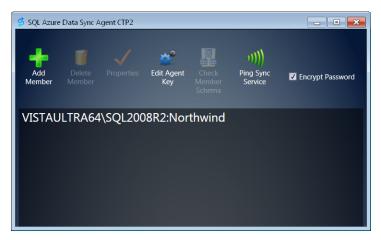


Figure 16-22 The local SQL Server database registered with the Agent.

Looking in the Windows Services (Control Panel | Administrative Tools | Services), you can see that the new Windows service is set to start automatically with the logon credentials you specified during the installation (see Figure 16-23). Right-click to start the service.




Figure 16-23 SQL Azure Data Sync Agent runs as a Windows service.

When you return to the browser window and display the Databases, you should now see your local database on this list. Click the Add button to register your SQL Azure database, as shown in Figure 16-24.



Figure 16-24 Use the browser to register the SQL Azure database.

A list similar to Figure 16-25 appears which includes both your local SQL Server database and your SQL Azure database.

#### Database Management

# Database Name VISTAULTRA64\SQL2008R2\Northwind NorthwindSynchTest - b0d.database.windows.net

Figure 16-25 The database list displays both the local and SQL Azure databases.

At this point, you have completed the configuration of the Agent and registered your databases with the Sync Service. The next step is to set up the synchronization.

## Sync Groups and Sync Logs

On the Sync Group tab in the browser window, you can now configure the details of how data will be synchronized between your databases. First, create a new Sync Group and register both the local and SQL Azure databases in the Sync Group, as shown in Figure 16-26.

New Sync Group		
Sync Group Name:	NorthwindLocalToCloud	
Member List		
Sync Group Hub: Northwi	indSynchTest - b0d.database.windows.net	
VISTAULTRA64\SQL200 NorthwindSynchTest - b	08R2\Northwind b0d.database.windows.net	
Desistand Databases		
Registered Databases		
Database:	Select a database to add	•

Figure 16-26 Add both your local and SQL Azure databases to a new Sync Group.

Using the lower part of the screen shown in Figure 16-27, select the tables to be synchronized and specify the synchronization schedule.

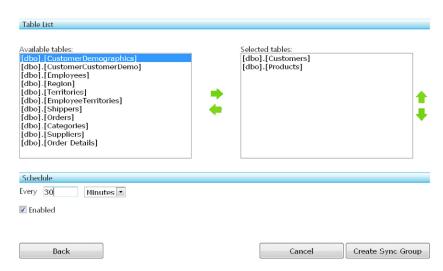


Figure 16-27 Selecting the tables to be synchronized and specifying the synchronization period. Click the Create Sync Group button when you have completed this information.

After creating your Sync Group, select the group, and then click the Sync Now button to start the synchronization. You are then be moved on to the Sync Logs tab where you can monitor the progress of the synchronization process, as shown in Figure 16-28.

#### Sync Logs


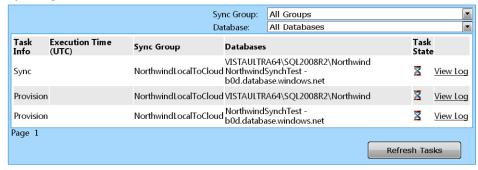


Figure 16-28 Use the Sync Logs tab to monitor the execution of your synchronization tasks.

Return to Management Studio and view the local *Northwind* database (see Figure 16-29). You can see that additional tables have been added to the database to manage the synchronization process.



**Figure 16-29** The local *Northwind* database contains some additional tables for tracking information on the synchronization.

Moving to display the SQL Azure database (see Figure 16-30), you can see how the synchronization management tables have also been created in the SQL Azure database, and the new synchronized tables are also present.




Figure 16-30 The SQL Azure database now contains the management tables and the synchronized versions of the local tables.

Now that you have configured the synchronization between the two databases, the next area to investigate is what happens when changes are made to the data.

## **Changing Data and Database Structure**

The top half of Figure 16-31 shows the result of having first performed an edit on the first record in the local SQL Server and then having waited to refresh the data after an edit has been performed on the second record in SQL Azure. The lower part of the figure shows how we have performed a similar update but on the second record in SQL Azure, and again, waited to refresh the data after synchronization. The result is that the synchronization has correctly executed and both databases have received the changes to data made in the other database.




Figure 16-31 The results of making separate changes in the local and SQL Server databases, after a synchronization.

# **INSIDE OUT**

#### Database synchronization and triggers

For each table that is included in the synchronization, a tracking table is created; thus for the Customers table, we have <code>DataSync.Customers\_dss\_tracking</code> on the <code>DataSync</code> schema. In addition, there are three new triggers added to the table: <code>Customers\_dss\_delete\_trigger</code>, <code>Customers\_dss\_insert\_trigger</code>, and <code>Customers\_dss\_update\_trigger</code>. Each of these triggers changes attributes for the appropriate row in the tracking table; the tracking table has one row for each row in the physical table. These tables are then used by the Sync Framework to synchronize the data.

The next scenario addresses what happens if two users change the same record within the same synchronization period. You need to understand how the conflict is indicated and how to resolve it.

#### **Conflict Resolution in Data**

Because the synchronization process is effectively passive to your application, when a conflict occurs, the synchronization process needs to make a decision about which change takes priority. In the CTP, the rules are defined as "the hub wins," with other changes being overwritten. This means that SQL Azure, which by default is the hub, wins all synchronization conflicts.

As of this writing, this is in CTP, and it is likely in the future that mechanisms will be provided for better control of conflict resolution.

## **Changes to Table Structure**

The next question to ask is what happens to the synchronization if the table structures in either the local or SQL Azure databases are changed. The following are three such scenarios:

- If you add new fields to either of the databases, the synchronization continues to operate, but the newly created column is not synchronized.
- If you delete a column, you have created an inconsistency and the synchronization
  will fail (see Figure 16-32). However, if you then correct the structures so that they are
  consistent, the synchronization will recover, but the recovered field will contain NULL
  values.
- If you alter the size of a field, synchronization will continue to operate as long as the data being synchronized does not violate your structural changes.

#### Sync Logs




Figure 16-32 The result of causing a synchronization failure by deleting a field, and then recovering the synchronization by adding the field back. Although the synch is recovered, other records will show a NULL value in the recovered field.

If you look at editing your Sync Group, you will find that there is no option to refresh individual table structures. There is, however, an option to change the nature of the synchronization from the perspective of creating a central hub to distribute data, as shown in Figure 16-33.

#### Edit Sync Group - NorthwindLocalToCloud



Figure 16-33 When you edit a Sync group, you can control the distribution mechanism, but not alter the tables in the synchronization set.

As of this writing, Data Sync is still in CTP, but this is a technology that holds great promise and will allow developers to come up with imaginative methods for distributing data to multiple locations.

Key features of this technology include the following:

- It is a scalable technology that can be extended to handle complex configurations.
- The technology uses a no-code approach to synchronization.
- Conflict resolution is considered within the framework.
- Logging and monitoring features are provided.
- The elastic nature of the service reaches out to data being distributed to different platforms.

# Planning and Managing Security

SQL Server offers two security models: Windows authentication, in which a user's Windows logon is integrated to the SQL Server, and SQL Logins, in which you set up specific accounts with passwords. As of this writing, Azure only supports the use of a SQL Login.

One of the most useful functions in SQL Server is SUSER SNAME(). This function will pick up the identity of either the Windows authenticated user or the name of the SQL Login. Because this function is supported in SQL Azure, you have the option to record information on the individual users accessing your database.

Security can be viewed from either the perspective of preventing unauthorized access to a system or in recording the activities of authorized access. The first aspect of security, which we described earlier in this chapter, was in setting the firewall rules for IP address access to the SQL Azure database. Recall that you can either open up a wide range of IP addresses to allow for access from dynamic IP addresses, or you could use fixed IP address ranges for situations in which you have a range of static IP addresses.

As an Access developer, you might already have a security scheme in your application; thus, the issue we discuss here is how to integrate this security scheme with SQL Azure.

You have several alternatives for managing security, including:

- Prompt the user to log on with the Azure logon name and password.
- Hide the Azure logon name but force the user to enter the Azure password.
- Hide both the Azure logon and password and map everything through to your own local table of logons and passwords.
- Hide everything and use a single sign-on for all users.
- Embed the passwords and user names in the linked tables and forget about security.

Assuming that you have not chosen to simply embed a password and user name in your linked tables, the first time a linked table is opened (interactively or in code), you will be prompted to provide logon credentials. These credentials will remain in force while accessing all the other linked tables to that data source.

To avoid the problem of a pop-up box appearing that requests the user to log on, you need to use some program code to open a connection with SQL Azure.

Start with your tables linked to SQL Azure. Note that we have not saved any credentials in the connection string. In this example, you have the following connection string:

```
ODBC;DRIVER=SQL Server Native Client 10.0;SERVER=b0d.database.windows.
net:APP=Microsoft Office 2010:DATABASE=NorthwindAzure:
```

In the master SQL Azure database, run the following T-SQL to create an account for testing (CreateUser.sql). The CREATE LOGIN command must be run in the master database, and the command to CREATE USER and assign security should be executed in the NorthwindAzure database:

```
-- Create a test login account in Master
CREATE LOGIN TestUser WITH PASSWORD = 'TestAzureAccount444333222'
-- Create a user account in NorthwindAzure
CREATE USER TestUser FROM LOGIN TestUser
-- Assign user to a database role in NorthwindAzure
EXEC sp_addrolemember 'db_owner', 'TestUser'
Now use the following code to make the connection:
Sub modAzure MakeConnection()
    ' Illustrates making the connection to SQL Azure in code
    Dim strUsername As String
    Dim strPassword As String
    ' You could then prompt the user for appropriate information
    strUsername = "TestUser@b0d "
    strPassword = "TestAzureAccount444333222"
    Dim db As DAO.Database
    Set db = CurrentDb
    Dim qdef As DAO.QueryDef
    Dim rst As DAO.Recordset
    Dim strConnect As String
    ' Get the connection string
    strConnect = db.TableDefs("Products").Connect
    strConnect = strConnect & "UID=" & strUsername & _
                 "PWD=" & strPassword
    Set qdef = db.CreateQueryDef("")
    gdef.Connect = strConnect
    qdef.SQL = "SELECT @@version As SQLAzureVersion"
    Set rst = qdef.OpenRecordset()
    Debug.Print rst!SQLAzureVersion
End Sub
This constructs the following connection string:
```

```
ODBC;DRIVER=SQL Server Native Client 10.0;SERVER=b0d.database.windows.
net;APP=Microsoft Office 2010;DATABASE=NorthwindAzure;UID=TestUser@b0d;
PWD=TestAzureAccount444333222;
```

The previous code can then be easily adapted to integrate with your existing user security model.

# **Building Multi-Tenanted Applications**

Whether you are creating a demonstration of your product or building a product that can work for multiple companies, cloud computing makes us all think more carefully about the potential savings from starting to design our database to supporting multiple organizations. The popular terminology for building these applications is to make them *multitenanted*—that is, each tenant is a customer.

Most Access developers are used to using the table as the key method for users interacting with data and then layering queries on top of the table to deliver up data that is filtered or organized to meet a particular need. To move to a multi-tenanted architecture, you need to insert another layer on top of your tables that isolates each tenant's information.

The SQL Server terminology for a query is the View. You start with an architecture in which users do not have permissions on the underlying tables but will use a View, and this View will be filtered to only show the tenant data for that user.

#### **User Tables and Views**

Because we are going to end up with an increased number of objects to manage in our SQL Server database, we will use schemas to partition the design and manage security. A *schema* is a mechanism for grouping together a set of objects.

Begin by constructing a schema to hold information about your users; use a separate schema for this because you might want to assign read/write permissions for users who could only have read permissions in other parts of the system. On this schema, you will create a filter table that will hold one record for each user in the system (MultiTenanted.sql):

```
-- Tables Schema for holding user specific information
CREATE SCHEMA [Filtering_T]
GO
-- Table holding User specific choices
CREATE TABLE [Filtering_T].[Filter](
   [UserId] INT IDENTITY(1,1) PRIMARY KEY,
   [UserName] nvarchar(255) NOT NULL
   DEFAULT SUSER_SNAME(),
   [TenantID] INT NOT NULL,
   -- List other useful user specific fields here
   [CustomerID] nvarchar(5)
   )
GO
```

Users do not have any permissions on the [Filtering\_T] schema. This prevents them from seeing data that belongs to other tenants.


The second step is to create another schema on which users will be granted read/write permissions. On this schema, you create a view through which users can edit data:

```
-- Schema for using user specific information
CREATE SCHEMA [Filtering]
-- User specific view returning 1 row
CREATE VIEW [Filtering].[Filter_VW]
-- User only gets to see other user specific choices
SELECT [CustomerID] FROM [Filtering T].Filter
WHERE [UserName] = SUSER_SNAME()
WITH CHECK OPTION
GO
```

The use of the SUSER\_SNAME() function restricts a user to seeing only their own record in the underlying table. To make it simpler for users to refer to the view without the need to specify schema information, you create a synonym, which provides a shortcut name for referring to the view:

```
-- Synonym to ref to users choices
CREATE SYNONYM [Filter] FOR [Filtering].Filter_VW
-- Create an example record for current user
INSERT INTO Filtering T.Filter(TenantID)
VALUES(1)
SELECT * FROM Filter
SELECT * FROM Filtering_T.Filter
GO
```

These steps create the table and view shown in Figure 16-34.



**Figure 16-34** Adding new users to the system requires either an administrator to enter data directly in the physical table or some other special processing that can directly access the table.

The final step is to construct a function that can be used in other parts of the system to return the tenant identifier, as demonstrated in the following:

#### **Application Tables and Views**

When constructing the application, you should decide on a set of useful schemas to further split up the application. This step is not essential, but it is useful for improving the maintainability of the application. Each schema has an underscore and the letter T appended to the name; all of these schemas will contain the base tables on which no users will have any permissions.

In the following example, you will construct a table for holding customer details for each tenant:

```
-- Tables schema for information on companies
CREATE SCHEMA [Companies_T]
-- Table holding customer information
CREATE TABLE [Companies_T].[Customers](
   [TenantID] INT NOT NULL DEFAULT dbo.fn GetTenant(),
   [CustomerID] [nchar](5) NOT NULL,
   [CompanyName] [nvarchar](40) NOT NULL,
   [ContactName] [nvarchar](30) NULL
   CONSTRAINT pk_Customers
   PRIMARY KEY ([TenantID], [CustomerID])
G0
```

By adding the function as a default on the *TenantID*, when users enter new records, they are tagged appropriately. We have also added the *TenantID* to the primary key.

It is also useful to add a trigger to this table that prevents any user from altering the TenantID to a value other than that which is allowed for their business:

```
-- Trigger to ensure data correctly marked for the Tenant
CREATE TRIGGER TR_Customers_TenantCheck
ON [Companies_T].[Customers]
FOR UPDATE, INSERT
AS
-- Prevent any manual changes to TenantID
IF EXISTS(SELECT TenantID FROM INSERTED
WHERE TenantID <> dbo.fn_GetTenant())
   ROLLBACK TRANSACTION
GO
```

When you construct a multi-tenanted design, all the primary keys must be composite and include the TenantID. This also means that all your foreign keys will be composite. In the following example, you will create a related table, Projects, which has the composite primary key ([TenantID,ProjectID]), and then add the foreign key relationship to the Customers table; the foreign key needs to be composite on ([TenantID],[CustomerID]):

```
-- Adding a related table
-- Table holding project information
CREATE TABLE [Companies_T].[Projects](
   [TenantID] INT NOT NULL DEFAULT dbo.fn_GetTenant(),
   [ProjectID] INT IDENTITY(1,1) NOT NULL,
   [ProjectName] [nvarchar](40) NOT NULL,
   [CustomerID] [nchar](5) NOT NULL
   CONSTRAINT pk_Projects
   PRIMARY KEY ([TenantID],[ProjectID])
   )
```

```
-- Adding the Foreign Key Constraint
ALTER TABLE [Companies_T].[Projects]
WITH CHECK ADD
CONSTRAINT [FK_Projects_Customers]
FOREIGN KEY([TenantID], [CustomerID])
REFERENCES [Companies_T].[Customers] ([TenantID], [CustomerID])
G0
```

The final step is to create a schema on which users will have permissions, and provide a view for managing the data:

```
-- Schema for using company information
CREATE SCHEMA [Companies]
G0
-- Restricted view showing only the users companies
CREATE VIEW [Companies].[Customers_VW]
SELECT * FROM [Companies_T].[Customers]
WHERE [TenantID] = dbo.fn_GetTenant()
WITH CHECK OPTION
--Synonym to refer to Customers
CREATE SYNONYM [Customers] FOR [Companies].[Customers_VW]
-- Test data for an insert
INSERT INTO Customers(CustomerID,CompanyName)
VALUES('TT','Test Company')
G0
SELECT * FROM Customers
-- Attempt an illegal insert, this should fail
INSERT INTO Customers(CustomerID, CompanyName, TenantID)
VALUES('TT2','Test Company2',2)
G0
```

The preceding tables and views and their interaction with the user specific tables are shown in Figure 16-35.

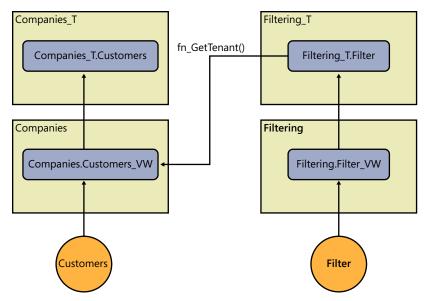


Figure 16-35 Using the filter table so that each user can work only with the data associated with their TenantID.

This technique can be extended easily, allowing users to make filtering choices that can then be applied in the system, as shown in the following:

```
-- Example adding user specific choices
UPDATE Filter
SET CustomerID = 'TT'
G0
-- Example filtering by the users choices
SELECT *
FROM Customers
WHERE CustomerID = (SELECT CustomerID FROM Filter)
-- Example using a cross join, useful for multiple filters
SELECT c.*
FROM Customers c
   CROSS JOIN Filter f
WHERE c.CustomerID = f.CustomerID
G0
```

# **INSIDE OUT**

# Creating optional parameters by using the COALESCE function

In the previous example, when filtering by using the statement c.CustomerID = f.CustomerID, you would have a problem when no filter has been set and f.CustomerID was NULL. One solution to this problem is to use the COALESCE function, which returns the first non-null value from a list of choices. If instead you use WHERE c.CustomerID = COALESCE(f.CustomerID, c.CustomerID), then when a NULL is supplied for f.CustomerID, it will compare c.CustomerID to f.CustomerID, which is always true (unless c.CustomerID is NULL because the test NULL = NULL would return false; this you might find a surprising fact).

To extend this method to handle a *NULL* in the column *c.CustomerID*, you could use the test WHERE COALESCE (c.CustomerID, '') = COALESCE(f.CustomerID, c.CustomerID, ''). This means that if *C.CustomerID* and *f.CustomerID* are both *NULL*, you are comparing two empty strings, which will be true. If you had to perform the comparison on a numeric, you would change the empty string to compare 0 to 0. And if comparing a date, you could use any fixed date; for example, '1 january 2000' = '1 january 2000'.

### **Managing Security**

Having organized all your tables into schemas, you can now look at granting security permissions on the schemas. To further simplify managing the security, you will create three database roles and assign permissions on the schemas to the database roles:

CREATE ROLE Administrator GRANT SELECT, INSERT, UPDATE, DELETE ON SCHEMA::Companies TO Administrator GRANT SELECT, INSERT, UPDATE, DELETE ON SCHEMA::Companies\_T TO Administrator GRANT SELECT, INSERT, UPDATE, DELETE ON SCHEMA::Filtering TO Administrator G0 GRANT SELECT, INSERT, UPDATE, DELETE ON SCHEMA::Filtering\_T TO Administrator sp\_addrolemember 'ReadOnlyUser', 'TestLogin'

In the previous example, only the Administrator role is granted permissions on the schemas that contain the actual tables. The system stored procedure sp\_addrolemember can be used to assign membership for a single user account or Windows group.

# **SQL Server Migration Assistant and Access to Azure**

If rather than moving an on-premise SQL Server database into the Cloud, you are starting with an Access database and wish to directly migrate it to the Cloud, then SQL Server Migration Assistant (SSMA) is well worth examining (remember to run either the 32-bit or 64-bit version of SSMA to match your version of Microsoft Office). This section uses the sample database Northwind ForAzure.accdb and shows how we can migrate this directly into the cloud. For more information about SSMA, read Chapter 15, "Upsizing Access to SQL Server."

Using the same technique as described earlier, connect to your SQL Azure database with Management Studio, and then execute the following T-SQL to create a new database:

CREATE DATABASE SSMA\_Northwind

Next, start SSMA. Note that for this example we show the steps when running the wizard. When creating your project, choose the SQL Azure option, as shown in Figure 16-36.

Enter the name and location for the new project.				
Name:	SqlMigration33			
Location:	C:\Users\Andrew\Documents\SSMAProjects			
Migration To:	SQL Azure ▼			

Figure 16-36 Choosing to migrate to SQL Azure.

After you select the Access database to be added to the project, you are prompted for your SQL Azure logon to the newly created database, as shown in Figure 16-37.

SQL Azure					
Server name:	b0d ▼ .da	atabase.windows.net			
Database:	SSMA_Northwind	▼ Browse			
User name:	AndrewCouch@b0d				
Password:	•••••				

Figure 16-37 Connecting to the new SQL Azure database.

In the next window, select the Link Tables option, and then follow the remaining steps to perform the migration. If you select the Link Tables To SQL Azure option, you will see a second prompt toward the end of the migration to provide logon details to SQL Azure as the links are created. At this point, you will also receive a security warning indicating that your ID and password will be saved in the table links (see Figure 16-38). We will discuss this later.



**Figure 16-38** SSMA does not provide any option to create the links without embedding the user name and password.

The resulting migrated database is shown in Figure 16-39.




Figure 16-39 The migrated database tables when viewed in Management Studio.

SSMA then renames your existing tables and provide new links to SQL Azure, as shown in Figure 16-40.




Figure 16-40 The new linked table to the database in SQL Azure.

# **INSIDE OUT**

SSMA, SQL Azure, and changing the Data Type Mapping

Although SSMA allows you to change your Data Type Mapping, you should avoid changing to a NON-UNICODE mapping; for example, changing NVARCHAR to VARCHAR. If you change this mapping, the data migration will fail.

Figure 16-38 showed that SSMA will embed user name and password information in the linked tables. The following code shows an example of the connection property for one of the tables:

ODBC; DRIVER=SQL Server Native Client 10.0; SERVER=b0d.database.windows. net;UID=AndrewCouch@b0d;PWD=XXXXXXXX;APP=SSMA;DATABASE=SSMA\_Northwind;

Earlier in this chapter, you learned how to create links to SQL Azure that avoid the necessity to embed this information in the links. Therefore, choosing the Link Tables option in the wizard is a good way to get started, but you will probably want to re-create your own links without this embedded information, as described earlier.

If you select a table in the Access Metadata such as the categories table shown in Figure 16-41, you can examine the T-SQL that SSMA uses to create your table by selecting the SQL tab for the table in SQL Azure, which is located in the lower part of the screen.

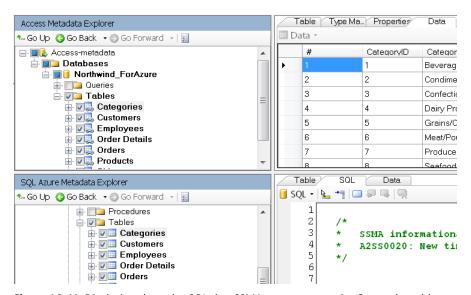


Figure 16-41 Displaying the script SQL that SSMA uses to create the Categories table.


SSMA performs an excellent job of migrating your Access databases directly into SQL Azure. One point you might wish to consider is that because there is no simple method to extract the database from SQL Azure back to an on-premise SQL Server, whether you would prefer to first migrate to an on-premise SQL Server and then migrate that into SQL Azure, or use the Data Sync to maintain a copy both on-premise and in the Cloud.

## Summary

In this chapter, you learned how to extend the reach of your database applications by using SQL Azure to take an existing SQL Server database that is linked to Access and moving the SQL database into the Cloud. By using this approach, you can easily reconnect your existing client Access database application directly into SQL Azure.

You also saw that SSMA has tools that can bypass the need for a local SQL Server and perform a direct migration of the Access data into the Cloud.

As of this writing, the latest Data Sync technology is still in CTP2. Once this is available, you will be able to easily extend parts of an existing on-premise database into the Cloud by using a variety of configurations that combine different databases at different locations, using a hub database in SQL Azure to coordinate synchronization of data.

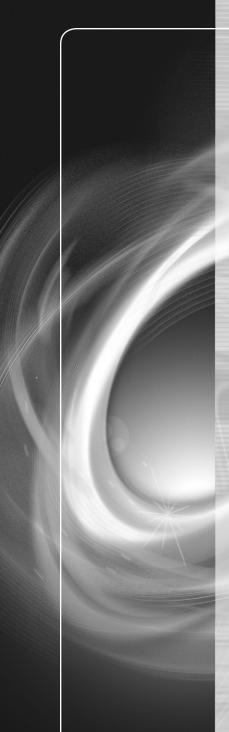

#### PART 7

# **Application Design**

CH		

Building Applications . . . . . . . . . . . 631

#### **CHAPTER 18**



# CHAPTER 17 Building Applications

Developing Applications631	Deploying Applications655
Completing an Application	

n this chapter, you look at how to develop, complete, and deploy Microsoft Access 2010 applications. You will also be bringing together a number of references to coding techniques that you learned in earlier chapters as you create your applications.

After reading this chapter, you will:

- Be able to decide on how to structure the user interface.
- Know different techniques that can be used to complete an application.
- Understand the implication of design decisions on deploying and subsequently maintaining your applications.

#### Note

As you read through this chapter, we encourage you to also use the companion content sample databases, ApplicationDevelopment.accdb, ApplicationDevelopment64Bit. accdb, or ApplicationDevelopment\_2007.accdb, which you can download from the book's catalog page.

# **Developing Applications**

In this section, we will demonstrate different approaches that you can take when developing a user interface for your Access applications.

#### **Application Navigation**

When you create an application, key decisions to make on the interface design include the following:

- How will you open forms? For example, forms can be maximized to fill the entire screen area, fixed at an absolute positioning on the screen, or displayed in another controlling form.
- Will users be allowed to simultaneously interact with multiple windows?
- When switching between forms, do you preserve, refresh, or synchronize the user's record position on related data records?
- How will you handle different screen resolutions, and how could this impact the appearance of your application?

The first decision you need to make is on a general technique that you want to use for navigating users through your application. What should the look and feel of the interface be? In this section, you will see a number of common approaches to building an application interface.

#### Push Buttons on a Form

This is one of the simplest and most popular approaches to designing interfaces, and it involves adding command buttons to forms that then open other forms, which either pop up, open maximized, or open at a particular size and position on the screen. Figure 17-1 shows the sample form frmNavigation PushButton as your new interface gets underway.

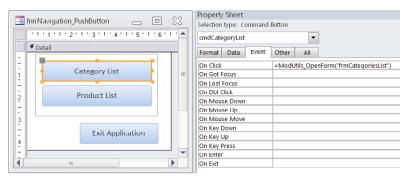


Figure 17-1 Adding buttons to your user interface. Code is written either behind each button, or as shown here, calling a utility function to open a specific form.

In the example, we have chosen a form that is not maximized, but it can work equally well when maximized to the screen area. The main advantage of this approach is that it is very simple. It is also possible to add some Microsoft VBA code to control button visibility, and you could create several of these menus forms and link them together by using code behind the command buttons.

#### The Switchboard Manager Manager

The Switchboard Manager is a feature in Access with which you can create a table-driven menu system. The resulting design components can be easily tailored to create your own look and feel to the interface.

In Access 2010, this feature is not included on the standard ribbons, but you can either add it to a standard ribbon or the Quick Access Toolbar. To add the Switchboard Manager to your Quick Access Toolbar, do the following:

- 1. Right-click the Quick Access Toolbar, and then select Customize Quick Access Toolbar from the shortcut.
  - A drop-down menu opens.
- 2. From the drop-down menu, choose Commands, and then choose Commands Not In The Ribbon.
- 3. Locate and select the Switchboard Manager to add it to your Quick Access Toolbar.

The Switchboard Manager can be activated repeatedly to change the menu system. It has a fixed set of simple commands to create a set of menu pages with buttons for individual menu choice, as shown in Figure 17-2. Behind the scenes, the manager writes data into a table called Switchboard Items, which is used to drive the menu system.

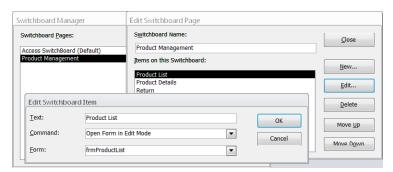


Figure 17-2 Use the Edit Switchboard Page dialog box to maintain the list of switchboard pages; each page can be edited and appropriate commands added to open forms and reports.

Figure 17-3 shows the sample navigation form frmNavigation\_Switchboard in Design view with an example of the macro code that the switchboard uses to control the menus.

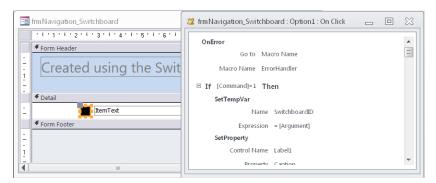


Figure 17-3 The macro code generated by the Switchboard Manager can be converted to VBA to provide an increased level of flexibility in the menu system.

This table-driven approach to generating menus is easily adapted to provide user-specific menus, and the navigation command data in the table can be directly edited. Your navigation design work can be accomplished with a single navigation form (an advantage over the previous technique of using push buttons on a form ), and it is particularly productive if you need to add new menus or move commands to different menu areas.

#### The Navigation Control

As an alternative to the Switchboard Manager, an additional feature introduced in Access 2010 is the Navigation Control. The Navigation Control provides a more browser-based style of interface and is used for navigation in the browser when using Access Web Databases, but it can equally be used in standard databases.

To access the Navigation Control, on the ribbon, on the Create tab, in the Forms group, and then click the Navigation drop-down list. Figure 17-4 shows the sample frmNavigation\_ NavigationControl form in Layout view, in which forms and reports can be dragged onto the control to create tabs for navigation.

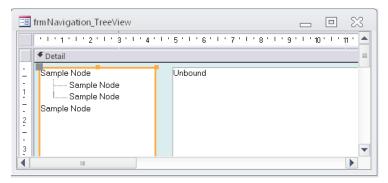


Figure 17-4 In Layout view, forms and reports can be easily added to the tab area of the Navigation Control.

The Navigation Control is fairly sophisticated and has macros that support swapping in and out forms to display information. This is a good choice of interface if you believe that you will eventually be using a web database. Because VBA is not supported in published Access web databases when viewed in a browser, if you intend to go down this route, then writing your navigation system by using only macros will save future redesign work.

#### The *TreeView* Control

The *TreeView* control can be used to create a number of powerful interfaces, including creating an interface that feels like Microsoft Outlook. The sample form *frmNavigation\_Tree View* includes a *TreeView* control that is driven from the Switchboard Items table. The form is shown in Figure 17-5. The code behind the *Click* event on the *TreeView* control rebinds the unbound control to display an appropriate form.



**Figure 17-5** On the left is the *TreeView* control, and on the right, an unbound *Subform* control for dynamically displaying forms.

In Chapter 7, "Using Form Controls and Events," you looked in great detail at the programming behind the *TreeView* control, The approach we have taken in the samples database is to drive the menu system from the same table that was used in the previous section with the Switchboard Manager. As a user selects nodes in the tree, the appropriate form is switched into the unbound control shown in Figure 17-5.

If you plan to load forms into another form for display, then you need to take care with how you reference objects on the form. For example, if you open the form frm-CategoriesList, you can refer to a control on the form as Forms!frmCategoriesList!Cate goryld. However, if you open this inside your navigation form, the reference becomes Forms!frmNavigation\_TreeView!frmTarget.Form!Categoryld. As we described in Chapter 4, "Applying the Access Object Model," if the form has a module, you can use the following reference to the control Form\_frmcategoriesList!Categoryld, which works both when the form is opened independently on the desktop, and when it is opened inside another form by using a SubForm control.

#### The *Tab* Control

Tab controls can provide users with a convenient way to switch between two or more forms or different parts of an application. Figure 17-6 shows the dynamic tab interface described in Chapter 7.




Figure 17-6 The Tab control can also provide an easy-to-use interface for navigating through parts of an application.

The Tab control can effectively reduce the number of menu choices in a system by condensing groups of operations onto sets of tabs.

#### The Ribbon

The ribbon can be viewed as either a context-sensitive feature, such that when as a user loads different objects like forms or reports, different ribbons display, presenting operations that apply to the action being performed or the object that is being manipulated (for example, a Sort icon for sorting data displayed on a forms ribbon), or you can use a custom ribbon to provide a sophisticated Icon-driven navigation interface for the entire application. Figure 17-7 shows a system-wide ribbon that we constructed for the sample database to navigate to other forms. The forms in this case are the other navigation systems. We discuss the ribbon in greater detail beginning on page 639. The sample ribbon has additional code associated with it that grays out the currently selected item, which make it easier for users to see when they have clicked on an item in the ribbon.



Figure 17-7 The sample database ribbon is used to display the other navigation interfaces described in this chapter.

# **INSIDE OUT**

#### Customizing an interface for each user

You might need to either customize the data that a user sees or customize the available menus in an application.

Customizing menus can be achieved by creating for a table of users and assigning each user a particular role, or using <code>Yes/No</code> flags to restrict access to administration or other menus (<code>the Environ\$("Username")</code> function can be used to establish the user's Windows logon name). Then you can change your navigation technique to filter the available choices for each user, depending on the user's permissions. As an alternative, to using the <code>Environ\$</code> function, you can also use the Windows API to establish the user's identity; this technique was described in Chapter 3, "Understanding the VBA Language Features."

Customizing data, for example, to restrict departments to viewing only their own data can be implemented by classifying your users by department, and then adding a department field to all appropriate tables. Then, by using a filter based on a user's department, you can limit access to only the appropriate data.

#### **Opening Multiple Copies of a Form**

Another useful interface design technique is to allow users to open multiple copies of a form, each capable of showing different views of the data. Implementing this involves a bit of object-oriented scripting. Some developers are put off by this part of VBA programming, but as was shown in Chapter 11, "Using Classes and Forms," opening multiple copies of a form is very easy and only takes a few lines of program code to richly enhance the interface.

#### **Navigating with Combo and List Boxes**

A very popular approach to reporting is to construct a master form for all reports that contains a combo or list box that displays a set of reports, and to display the reports from either a table of reports or by using program code to search for available reports.

Rather than show a simple example by using a table (which you can find in the Help system) we have included an example *frmCallBackListBox* that shows how to use a *CallBack* function on a list box to populate the *listbox* from program code. This example has an

unbound listbox for which the RowSourceType is set to ListReports, the RowSource is left blank, and the following function is added to the form:

```
Function ListReports(fld As Control, id As Variant,
   row As Variant, col As Variant, code As Variant) _
    As Variant
   Dim rpt As AccessObject
   Static strReports() As String ' Array to hold File Names
   Static IngCount As Integer
   Select Case code
       Case acLBInitialize:
                                   ' Initialization
               ListReports = True
       Case acLBOpen:
                                   ' Get the data
               ' Generate unique ID for control
               ListReports = Timer ' This is very important
               ReDim strReports(CurrentProject.AllReports.Count - 1)
               lngCount = 0
               For Each rpt In CurrentProject.AllReports
                   If rpt.Name <> Me.Name Then
                       strReports(lngCount) = rpt.Name
                       lngCount = lngCount + 1
                   End If
               Next
       Case acLBGetRowCount:
                                   ' return the row count
               ListReports = lngCount
       Case acLBGetColumnCount: ' return the number of columns
               ListReports = 1
                                   ' Match the property
       Case acLBGetColumnWidth:
                                   ' specify column widths
                                    ' Match default
               ListReports = -1
                                  ' Get format
       Case acLBGetFormat:
               ListReports = -1
                                   ' Return default
                                 ' Return each row, column of data
       Case acLBGetValue:
               ListReports = strReports(row)
                                  ' Termination
       Case acLBEnd:
   End Select
End Function
Private Sub lstReports_DblClick(Cancel As Integer)
   DoCmd.OpenReport lstReports.Value, acViewPreview
End Sub
```

The line of code during the acLBOpen processing that reads ListReports = Timer is particularly noteworthy; during initialization you need to provide a unique ID for the control and use the *Timer* function to do this. Without this line of code the *listbox* will fail to show any data.

#### The Maximize, Popup, Modal, and MoveSize Properties

Another general interface question to ask is this: do you want a Single Document Interface (SDI), in which a user can only interact with one form or report at a time, or do you want a Multiple Document Interface (MDI), in which users can switch between different parts of

the system and work in multiple areas at the same time? Access is an MDI tool, but it can easily be made to work like an SDI, or like a wizard that takes a user through a sequence of operations. A related question is, do you want the interface objects maximized (filling the screen), or would you prefer sized windows? Maximizing forms leads you more toward an SDI.

If you want an MDI, then there are two other techniques with which you might want to become familiar. With the first technique, you can use the DoCmd.MoveSize command to provide absolute positioning and sizing of objects. The second technique is to switch off the AutoResize property on a form, which means it will remember the exact size that you last saved the form when in Design view and display the form using these settings.

Next you might want to think about the *Modal* and *PopUp* properties. Windows that have their PopUp property set to True respect the order of activation for each window and pop up on top of other pop-up windows. When the Modal property of a window is set to True, users are prevented from moving away from the window, usually until some required action on the window has been carried out. An associated question is whether you want to allow users to minimize or maximize a window, and if you allow this, what effect would it have on other windows that are not maximized; a normal window that is not maximized will become maximized if you open another form that is maximized. This can be stopped by either making the window a pop-up or by setting the BorderStyle to Dialog or Thin.

One further question to consider is screen resolution. In this case, you can either research the resolutions that your users typically use and make an appropriate decision regarding your form layouts, or look for a third-party tool to dynamically resize screens.

We have also seen techniques for synchronizing data both on forms with multiple subforms and between separate forms; the more you move toward an MDI, the more you need to consider the impact of users changing data in one form and how that will affect the data in other forms and take appropriate actions to refresh related data. You don't want a related form displaying #Deleted; this can occur if one form deletes the same data that is being displayed in a second form without a Requery operation being performed on the second form.

#### Ribbon Design

In this section, we will guide you through the process of creating custom ribbons. You might also find it useful to search the Internet for ribbon editors, which can greatly assist with building custom ribbons by checking that your ribbon XML is well formed (Access will not display your ribbon if it is not well formed, and it will not give any assistance in establishing why that has happened). The most common problems are failing to give items a unique identifier (which can be lessened by using a naming convention that we will describe shortly) and incorrectly spelling the names of graphical icons on the ribbon. Before developing your custom ribbons, you might want to go to File | Access Options | Client Settings and select the Show Add-In User Interface Errors check box. This instructs Access to

display ribbon XML errors. The ribbon is a big subject, and in this section, we want to focus on general principles when developing a ribbon, and not on providing an exhaustive reference to each kind of control and their specific features.

#### The *USysRibbons* Table

Before you can begin working with the ribbon, you need to create a special system table. To do this, right-click the database Navigation window, select Navigation Options, and then select the Show System Objects check box, as shown in Figure 17-8. With this setting enabled, when viewing tables, you will see MSys-prefixed table names, and later, USysprefixed table names, as well. These are the Access system tables.



Figure 17-8 Setting the Display Options to Show System Objects.

Next, you create the table shown in Figure 17-9, which contains two fields: the first is a text field to name the ribbon, and the second field is a memo that will hold the XML used to define the ribbon. Save this table with the special name USysRibbons.




Figure 17-9 Creating the special system table, in which you can configure your custom ribbons.

You can create several different ribbons in the USysRibbons table. All of the ribbons that you place in this table are loaded and made available for you to use in your application (so after adding or changing a ribbon, you need to re-open the database). This means that you can define a system-wide ribbon for the application, and then override this default when displaying a particular form or a report; you can use these objects in the Open event to determine which ribbon to display, or specify the name of the ribbon with the RibbonName property.

The ribbons are written in XML, for which, unfortunately, the Microsoft Office family does not provide a built-in editor for constructing the XML or validating that the XML is "well formed." This can be quite painful, because if you get anything wrong in the XML, the ribbon either will not load without giving you error messages, or it will fail to function as anticipated. The most important factor in avoiding problems with ribbons is that each ribbon item has an identifier, and these identifiers need to be unique. We would recommend that you use a simple naming convention for the tags, our convention is to name each tag with the tab tx, group qx, and button bx, which means that button 2 in group 3 on tab 2 would be t2a3b2.

In the first line, xm1ns is a reference to the schema for the ribbon, and the line startFromScratch means that we are defining a new ribbon which does not use any built-in features of the standard ribbons. The following code illustrates a very simple one-button ribbon:

```
<customUI xmlns="http://schemas.microsoft.com/office/2009/07/customui"</pre>
onLoad="modR_OnRibbonLoad">
 <ribbon startFromScratch="true">
  <tabs>
  <tab id = "t1" label = "Menu Systems">
      <group id="t1g1" label = "PushButton" >
         <button id="t1g1b1"
            label="PushButton Menu"
            imageMso="GroupListViewToolbar" size="large"
            getEnabled="modR_CallbackGetEnabled"
            onAction="modR HandleOnAction"
            tag="frmNavigation_PushButton"/>
      </group>
  </tab>
    </tabs>
 </ribbon>
</customUI>
```

# **INSIDE OUT**

#### The elements of a ribbon

The ribbon consist of a number of elements, including:

- customUI Represents the custom ribbon. The OnLoad event enables you to get a reference in code to the ribbon.
- ribbon Defines the ribbon.
- tabs Represents the tabs on the ribbon.
- tab Defines a tab. Each tab has an ID and label.
- group Defines a group of controls in a tab. Each group has an ID and a label.
- controls The individual items on the ribbon, such as buttons, combo boxes, and other controls.

The ribbon elements have events that reference procedures in your VBA code which are called callbacks; these are the points where you link in to take an action in response to the user interacting with the ribbon or the ribbon loading. The ribbon makes a callback into your VBA code.

#### The OnLoad Callback

The OnLoad callback allows your VBA code to get set a variable to reference the ribbon. To begin, you need to add a reference to the Microsoft Office 14.0 Object Library and define a global variable to reference the ribbon. Then, you write the callback to assign this variable to the active ribbon when it is loaded:

```
Option Compare Database
Option Explicit
Global UIRibbon As IRibbonUI
Public Sub modR_OnRibbonLoad(ribbon As IRibbonUI)
' This gets called when the ribbon loads
    Set UIRibbon = ribbon
End Sub
```

If you look back to the XML you previously used to define the ribbon, you will spot the call to onLoad="modR OnRibbonLoad".

#### The OnAction Callback

Use the OnAction callback to respond when a user clicks the ribbon icon control. The following code uses the convention that a tag that opens a form should have the prefix frm in the tag name; by using a convention for specifying the tag, you can write flexible and general purpose code in response to this event:

```
Public Sub modR_HandleOnAction(Control As IRibbonControl)
' Handles selections by the user
    If Left(Control.Tag, 3) = "frm" Then
        DoCmd.OpenForm Control.Tag
   End If
End Sub
```

If you look back to the XML that you previously used to define the ribbon, you will spot the call to onAction="modR\_HandleOnAction" on the t1q1b1 button.

#### The GetEnabled Callback

One problem with the ribbon is that when a user clicks an item, there is no indication of what he selected. To assist the user, you can use a technique of graying out the last clicked ribbon element. To do this, you need a variable to store the last selected item, so at the top of the module you add the variable Global strActiveTag As String (there is another variable called blEnableTheTag that determines whether to enable or disable the active tag). Now, write the following callback to gray out the appropriate control:

```
Sub modR_CallbackGetEnabled(Control As IRibbonControl, _
                       ByRef enabled)
' Can be used to grey out the currently active tag
    If Control.id = strActiveTag Then
```

```
If blEnableTheTag Then
            ' enable previously selected tag
            enabled = True
        E1se
            ' user has selected the tag
            enabled = False
        End If
    E1se
        ' any tag other than the active tag gets enabled
        enabled = True
    End If
End Sub
```

If you look back to the XML we previously used to define the ribbon, you will spot the call to getEnabled="modR\_CallbackGetEnabled" on the t1g1b1 button.

The next piece of code is a little more complicated because you need to invalidate the control to trigger the callback to activate the code in modR CallbackGetEnabled, which will enable the property to gray out the button. So you need to change the OnAction handler, as follows:

```
Public Sub modR HandleOnAction(Control As IRibbonControl)
   If Nz(strActiveTag) <> "" Then
     ' causes the previously select tag to be unselected
       If Not UIRibbon Is Nothing Then
           blEnableTheTag = True
           UIRibbon.InvalidateControl strActiveTag
           DoEvents
       Else
           MsgBox "UIRibbon is invalid, close and re-open the database"
           Exit Sub
                 End If
        End If
   strActiveTag = Control.id
    ' causes the currently active tag to be greyed out as selected
   If Not UIRibbon Is Nothing Then
        ' Exclude Reports as they display their own ribbon
       If Left(Control.Tag, 3) <> "rpt" Then
           blEnableTheTag = False
           UIRibbon.InvalidateControl strActiveTag
           DoEvents
       End If
   E1se
       MsgBox "UIRibbon is invalid, close and re-open the database"
       Exit Sub
   End If
End Sub
```

The key method in the previous code is the *InvalidateControl* method, which causes the control to be re-initialized and the enabled callback to fire. You will also see that we have added DoEvents. This is useful for debugging because it allows any asynchronous event processing to be completed before you code stops at an appropriate breakpoint (otherwise, you might get error messages displayed).

#### Setting a Default Ribbon for the Application

After you add new ribbons to USysRibbons (or make changes to it), you need to close and re-open the database to make the new ribbons available for selection. You can select the ribbon that will be displayed when the database is opened. To do this, in Backstage View, click Options, and then click Current Database. In the Ribbon And Toolbar Options section, choose the ribbon from the Ribbon Name drop-down list, as shown in Figure 17-10.

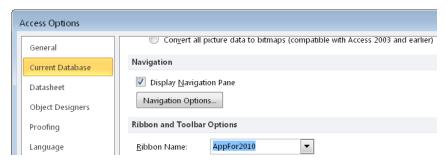


Figure 17-10 Setting the default ribbon to display when a database opens.

If you do not set this system-wide ribbon, you can still use custom ribbons for specific forms and reports, as will be discussed later.

Whether you are using the built-in ribbon or a custom one, you can turn off the systemwide ribbon (note this is a very useful command in applications when you do not want to show any ribbons) by using the following command:

DoCmd.ShowToolbar "Ribbon", acToolbarNo

To turn it back on, replace acToolbarNo with acToolbarYes. Also note that opening a database while holding down the Shift key stops the custom ribbon from being displayed.

#### **Images**

The property imageMso="GroupListViewToolbar" in the XML code provides the ribbon item icon. You can either use one of more than 700 images built into Office for this, or you can define and load your own images. To make it easier to find the right icon, you can download the Office 2010 Addin Icon Gallery (available at http://www.microsoft.com/ download/en/details.aspx?id=21103), which is a Microsoft Word document containing all these images. Alternatively, Figure 17-11 shows the mouse hovering over built-in ribbon options when customizing the built-in ribbon (right-click a ribbon and select Customize The Ribbon). Use this to quickly get the imageMSO for built-in ribbon icons in Access (note that XML is case-sensitive, so you need to ensure that the image names are referenced exactly as they are shown).




Figure 17-11 Finding the image references for built-in ribbon icons.

Your image options are not limited to the Office gallery; you can also load your own images for use in the ribbon. To do this, add a callback reference in the XML as follows:

```
<customUI xmlns="http://schemas.microsoft.com/office/2009/07/customui"</pre>
onLoad="modR_OnRibbonLoad" loadImage="modR_GetImage">
```

You then add your reference to the image file in the XML:

```
<group id="t1g7" label = "About" >
   <button id="t1g6b7"
     label="About"
     image="Book.jpg" size="large"
     getEnabled="modR_CallbackGetEnabled"
     onAction="modR_HandleOnAction"
     tag="frmAbout"/>
</group>
```

Finally, write the callback function, which will automatically be called to load any images:

```
Public Sub modR_GetImage(imageID As String, _
                     ByRef image As Variant)
   ' Call back will automatically load any images
   Set image = LoadPicture(CurrentProject.Path & "\" & imageID)
End Sub
```

#### Dynamically Changing Tab Visibility and Focus

You might want to alter the tabs available on the ribbon dynamically, based on the type of user who is working with the application. You can accomplish this by setting the visibility of a tab. To illustrate this, you will create a second administration tab. To begin, you add the following XML to the first tab on your ribbon:

```
<group id="t1g6" label = "Change Ribbon" >
         <button id="t1g6b1"
            label="Toggle Admin Menus"
            imageMso="AdministrationHome" size="large"
            getEnabled="modR_CallbackGetEnabled"
            onAction="modR HandleOnAction"
            tag="cmd Admin"/>
      </group>
   </tab>
Here is the second tab:
  <tab id = "t2" label = "Administration" getVisible="modR_GetVisibleCallback">
      <group id="t2g1" label = "Ribbon" >
         <button id="t2g1b1"
            label="USysRibbons"
            imageMso="RibbonGiveFeedback" size="large"
```

getEnabled="modR\_CallbackGetEnabled" onAction="modR\_HandleOnAction" tag="frmUSysRibbons"/>

In the event that handles user actions, add the following code (this code also defines a global variable called *blAdministrator* to flag whether a user is an administrator):

```
If Control.Tag = "cmd_Admin" Then
    ' display the admin menus
    blAdministrator = Not blAdministrator
    strActiveTag = ""
   UIRibbon.Invalidate
End If
```

</group> </tab>

Notice in the definition of the XML for t2 that there is another callback named getVisible. Using this, you can write the following code in response to this event:

```
Public Sub modR_GetVisibleCallback(Control As IRibbonControl, _
                                ByRef visible As Variant)
' called by each tab when the ribbon loads
' used to control which tabs users can see
   If Not blAdministrator Then
       Select Case Control.Id
       Case "t2": visible = False
       Case Else:
           visible = True
       End Select
```

```
E1se
        visible = True
        If Control.Id = "t2" Then
            ' changes focus to the administration ribbon
            UIRibbon.ActivateTab "t2"
        End If
    End If
End Sub
```

The previous code also makes a call to Activate Tab which sets the focus to the newly added administrator tab.

# INSIDE OUT

#### Office 2007 and the File menu

If you are creating a ribbon for Office 2007, you can customize the Office menu by using the following XML fragment (which enables only the compact and repair option for the database):

```
<customUI xmlns="http://schemas.microsoft.com/office/2006/01/customui">
  <ribbon startFromScratch="true">
  <officeMenu>
   <button idMso="FileCompactAndRepairDatabase" insertBeforeMso</pre>
="FileCloseDatabase" />
   <button idMso="FileOpenDatabase" visible="false"/>
   <button idMso="FileNewDatabase" visible="false"/>
   <splitButton idMso="FileSaveAsMenuAccess" visible="false" />
  </officeMenu>
```

You will also notice that the schema reference for 2007 is different than that of 2010.

#### The Backstage View

There are probably two actions that you will want to undertake with the Backstage view: the first is to disable built-in features, and the second is to add your own specialized features. The following code limits Backstage view to only show a minimum number of options (this code is in the ribbon AppFor2010\_BackStage and added before the </customUI> tag at the end of the XML):

```
<backstage>
  <tab idMso="TabInfo" visible="true"/>
  <button idMso="FileSave" visible="false"/>
  <button idMso="SaveObjectAs" visible="false"/>
   <button idMso="FileSaveAsCurrentFileFormat" visible="false"/>
  <button idMso="FileOpen" visible="false"/>
```

```
<button idMso="FileCloseDatabase" visible="false"/>
   <tab idMso="TabRecent" visible="false"/>
   <tab idMso="TabNew" visible="false"/>
   <tab idMso="TabPrint" visible="true"/>
   <tab idMso="TabShare" visible="false"/>
   <tab idMso="TabHelp" visible="false"/>
   <button idMso="ApplicationOptionsDialog" visible="false"/>
   <button idMso="FileExit" visible="true"/>
</backstage>
```

#### **Ribbons for Forms and Reports**

You can either design one single ribbon for your application, and then when performing an operation such as print preview use the appropriate part of the main ribbon, or you can design a special ribbon for only previewing a report. In the sample database, we have created a ribbon called *PrintRibbon*; the following code shows the XML definition for one of the icons on this ribbon:

```
<group id="t1g1" label = "Print" >
  <button id="tpg1b1"
     label="Print"
      imageMso="PrintDialogAccess" size="large"
      getEnabled="modR CallbackGetEnabled"
      onAction="modR HandleOnActionReports"
      tag="cmd_Print"/>
</group>
```

In the example report rptCategories, on the Open event, we have associated this ribbon with the report:

```
Private Sub Report_Open(Cancel As Integer)
    Me.RibbonName = "PrintRibbon"
    strReportBeingPreviewed = Me.Name
End Sub
```

The ribbon has two commands associated with the icons, cmd\_Print and cmd\_ClosePrint-Preview, and you can modify the callback event handler to take appropriate actions by adding the following code to the routine *modR\_HandleOnActionReports*:

```
' Report Actions
If Control.Tag = "cmd_ClosePrintPreview" Then
    ' Close the report
    strActiveTag = ""
    UIRibbon.Invalidate
    DoCmd.SelectObject acReport, strReportBeingPreviewed
   DoCmd.Close
End If
```

```
If Control.Tag = "cmd_Print" Then
    ' Close the report
    strActiveTag = ""
    UIRibbon.Invalidate
    DoCmd.OpenReport strReportBeingPreviewed, acViewNormal
    DoCmd.Close
End If
```

Figure 17-12 depicts the custom ribbon being displayed for the report.



Figure 17-12 The custom ribbon for previewing a report. The XML for this ribbon could be added to the main ribbon if you want a single ribbon for all operations in the application.

# **INSIDE OUT**

#### Loading a custom ribbon

You have seen how an application can have a custom ribbon, and that additionally, you can specify individual ribbons for forms and reports. These are all made available from the ribbons defined in the USysRibbons table.

You have also seen how to dynamically alter the available system-wide ribbon. Although the system-wide ribbon cannot be dynamically replaced, you can dynamically load additional new ribbons by using the following:

Application.LoadCustomUI(CustomUIName, CustomUIXML)

You can either construct this in code or read it from a table of data. The CustomUIName must be different from any ribbons defined in USysRibbons or previously loaded. These ribbons can then be used when displaying forms or reports, for example, when changing the available options depends on the type of use.

#### 32-Bit and 64-Bit Environments

Office 2010 introduced VBA7, which is available in both 32-bit and 64-bit installations (for the 64-bit installation, you must be running a 64-bit version of Windows). You can only

install either the 32-bit or 64-bit versions of VBA on a single computer; as of this writing, the default installation is the 32-bit version on both 32-bit and 64-bit platforms.

Existing 32-bit Office applications work unchanged on a 64-bit or 32-bit platform. However, if you are planning to use the 64-bit version of Office, your 32-bit applications might need some modification.

Later, when we discuss ACCDE files, you will find that you need an appropriate file created either with the 32-bit or 64-bit version of Office to be used by other Office installations.

32-bit ActiveX controls such as the *TreeView* control cannot be used in Office 64-bit (it cannot load 32-bit binaries), and presently there are no 64-bit versions of these controls; for many developers this is a significant restriction.

If you have Windows API calls (discussed later), then you need to ensure that the API procedures using Office 64-bit are appropriately changed, you can use appropriate compiler directives if supporting multiple environments.

In Chapter 2, "Understanding the VBA Language Structure," we discussed conditional compilation; there are special compiler constants that you can use to isolate code, depending on whether the target computer has the 32-bit or 64-bit versions of Office (note that you do not need to define these as they are built into the VBA environment). The general form for detecting different versions is shown in the following code:

```
#if Vba7 then
  Code is running in the new VBA7 editor
     #if Win64 then
       Code is running in 64-bit version of Microsoft Office
     #else
     ' Code is running in 32-bit version of Microsoft Office
#else
' Code is running in VBA version 6 or earlier
#end if
```

You can see an example of this in ApplicationDevelopment64Bit.accdb, which is designed to use either the 32-bit or 64-bit VBA API.

#### Working with the Windows Registry

The Windows Registry is a useful place in which to store configuration information for an application. VBA supports the following procedures for reading and writing registry keys to the hive HKEY CURRENT USER\Software\VB and VBA Program Settings. If you need to read/write to other parts of the registry, you need to use Windows API calls:

```
Sub modReg RegistryFunctions()
    ' Demonstrates registry functions
    Ston
    ' saving key information this creates the section
    SaveSetting strAppName, "General", "Version", "V1.0" ' save a version number
    SaveSetting strAppName, "General", "Country", "USA" ' save country info
    ' reading a single key
    Dim strKey As String
    strKey = GetSetting(strAppName, "General", "Version")
    Debug.Print strKey
    ' reading all keys into an array
    Dim varKeys As Variant
    Dim IngCount As Long
    varKeys = GetAllSettings(strAppName, "General")
    If Not IsEmpty(varKeys) Then
        For lngCount = 0 To UBound(varKeys)
            Debug.Print varKeys(lngCount, 0) & " : " & varKeys(lngCount, 1)
       Next
    End If
     delete the entire section of keys
    DeleteSetting strAppName, "General"
End Sub
```

You should consider that in some companies, the registry is locked down and a user might not have privileges on their computer to write information into the registry.

## Using the Windows API

You can use API calls to link in to features that are not available in Access, but are available either in a part of the Windows environment, or supplied by a third-party as a DLL. Although this is a popular technique with developers, you should realize that you are building into your application dependencies on these components subsequently being available as the Windows platforms evolve. With Access 2010, if you are planning to support both 32-bit and 64-bit versions, you need to allow for making changes in these API calls, depending on which version is being used; the compiler directives discussed earlier in this chapter can be used to detect the appropriate system version.

Access Developers do not tend to excessively use Windows API calls, but there are situations in which you desperately need to perform an operation that is not supported by the VBA programming environment and not available through any suitable ActiveX control. If you intend to use an API, search online for some code, because if you have to work out the appropriate mechanism for calling an API from scratch, it can be quite difficult. For example, you can download a file called win32api.txt that contains a list of API calls and associated structures. You can download this file from <a href="http://support.microsoft.com/kb/178020">http://support.microsoft.com/kb/178020</a>. The file contains 32-bit information on the Windows API, which you could convert to 64-bit. In Chapter 3, we constructed a function called <a href="mailto:moderrorHandler\_GetUserName(">moderrorHandler\_GetUserName()</a>) that illustrates how to retrieve a user's name by using the API.

Using API calls mean that you are likely to need to share data between Access and the external program; this means that an area of memory needs to be allocated for this shared communication. Because both Access and the external program could be reading and writing to memory, it is up to you to ensure that variables are correctly defined; otherwise, the communications can break down. This is also the reason for ensuring that calls are correctly defined for 32-bit and 64-bit communications.

As an example of using an API call, you can look in win32.api.txt, where there is a function for flashing a window that has the following declaration:

```
Declare Function FlashWindow Lib "user32" _
                            (ByVal hwnd As Long, _
                             ByVal bInvert As Long) As Long
```

Declare statements also allow the use of an Alias, with which you can use an API call when the name could conflict with some other procedure or built-in function name. In the following declaration, you can see how to use the Alias:

```
Declare Function API_FlashWindow Lib "user32" _
                            Alias "FlashWindow" _
                            (ByVal hwnd As Long,
                             ByVal bInvert As Long) As Long
```

This is an interesting function, because to flash the window, you need to know the window's handle hwnd; an Access form has this property. You can then write a procedure that uses the Windows API call to flash the window:

```
Sub modAPI_FlashMe(hwnd As Long)
    Const lngMaxPos As Long = 40
    Dim lngCount As Long
   Dim lngRet As Long
    Dim IngState As Long
    Dim IngPause As Long
    lngState = 1
    For lngCount = 1 To 50
        lngRet = modAPI_Flash(hwnd, lngState)
        ' Toggle the state between 1 and 0
        lngState = lngState + 1 Mod 2
        For lngPause = 1 To lngMaxPos
           DoEvents
       Next
    Next
End Sub
```

In the form frmAbout, we have added a command button to flash the window. This code could be modified to continue flashing a window when a given condition holds by using a timer event:

```
Private Sub cmdFlash_Click()
   modAPI FlashMe Me.hwnd
End Sub
```

If you need to write your API call for 64-bit Office, you should download the article from http://msdn.microsoft.com/en-us/library/ee691831.aspx, which will help you make the conversion.

The equivalent declaration for our FlashWindow function in the 64-bit form is as follows:

```
Declare PtrSafe Function API_Flash Lib "user32"
                             Alias "FlashWindow"
                            (ByVal hwnd As LongLong, _
                             ByVal bInvert As LongLong) As LongLong
```

In the sample database, we have added the compiler directives to use the appropriate 32-bit or 64-bit calls and application code. We have also provided a copy of the sample database called ApplicationDevelopment64Bit.accdb, which has all references to the 32-bit ActiveX controls removed.

# Completing an Application

In this section, you will look at a number of techniques that can be used to complete your application.

## **Splash Screens**

If you place a .bmp file in the same directory as your application, and the file has the same name as your application, Access will display your custom splash screen as the application loads.

#### **Progress Bars**

In Chapter 4, "Applying the Access Object Model," we discussed how to use the built-in progress meter by using the SysCmd function, and how to create your own custom progress form. We also discussed using the DoCmd. Echo and DoCmd. Hourglass actions when you need greater control of what a user sees when your application is performing a large amount of processing.

# **INSIDE OUT**

#### Exploiting IntelliSense in a standard module

Because the VBA environment provides IntelliSense to code defined in a standard module, you can perform a trick that makes it look like you have created a clever object model inside Access, without in fact creating any objects or doing any complex programming. This is particularly useful when you need to combine a sequence of useful functions into a single operation. As an example, create a standard module, add the following code, and then save the module using the name Hourglass:

Public Sub TurnOn() DoCmd.Hourglass True DoCmd.Echo False End Sub

Public Sub TurnOff() DoCmd.Hourglass False DoCmd.Echo True End Sub

Then, in your code you can just type Hourglass.TurnOff, and as you type, IntelliSense shows you the option to TurnOn or TurnOff.

## **Error Handling**

Adding error handling (described in Chapter 3) becomes increasingly important as you work toward a more completed application. In particular, if you are creating ACCDE files, then as there is no source code recording where an error occurred, this becomes very important. Also, in Access Runtime it becomes essential as untrapped errors will cause your application to terminate.

## **Locking Down an Application**

In Chapter 4, you learned how to lock down your application and prevent users from attempting to bypass startup code and display the database window. Making an ACCDE or delivering in Runtime are also very popular methods for preventing users from stepping outside your application. After you have locked down an application, it is not easy to prevent someone from using another copy of Access to extract data or other design objects or link to data in your application. The only option in this case would be to password-protect the database, or to protect your data, put the data in SQL Server.

# **Deploying Applications**

In this section, you will look at issues relating to deploying Access applications.

## Protecting Your Design with ACCDE Files

To make an ACCDE file, your code must all be compiled and not contain any errors. This file can then be distributed to users, and you can feel comfortable in the knowledge that your application code will be protected, and users will not be able to make any design changes to the forms and other objects in the database. An ACCDE file constructed with a specific version of Access will not run on a computer with any other version of Access, this also applies to an ACCDE constructed with 32-bit or 64-bit versions (note that this also applies to having the same Service Packs applied to the environment).

## **Runtime Deployment**

Using Access Runtime (which is free), you can redistribute your application to users who do not have Access. In the Runtime environment, there is no built-in ribbon, no database window and no ability to make design changes. The Runtime tools include a packaging feature with which you can create an installation set, which will both install Runtime and your application. This can be obtained from the Microsoft Download Center (or search the web for the Access 2010 Runtime Download). It is essential to have good error handling, as untrapped errors in program code will cause the application to terminate.

## Single and Multiple Application Files

Chapter 12, "Linking Access Tables," points out that it is common to split an Access database into two files. The data file can be shared, but you have the option to either have all users share the same application file, or give each user a separate copy of the application.

The advantages in giving each user a separate copy to install on their local computer include:

- Improved performance.
- Reduced bloat.
- Less risk if the application becomes corrupt.
- Easier to manage the need for local user-specific results tables, and changes to queries made in code.
- Avoids problems with getting users out of the shared application file.

The disadvantage is that you must allow for updating files to each users location if the application is updated (there are third-party tools that can assist with this).

## **DSNs and Relinking Applications**

If you are linking to other data sources such as SQL Server, and you choose to use one of the more recent ODBC or OLEDB drivers, then you need to ensure that these are installed on the user's computer. If you're using a Machine DSN, this will need configuring on the individual computers, and if you're using a File DSN, then you will need appropriate code for relinking your application. These topics are discussed in Chapter 12.

## **Depending on References**

If you have added references to your application, for example, to program the TreeView control or for other custom controls, you should allow for the need to identify if a computer has a missing or broken reference (this was discussed in Chapter 2).

Custom controls need to be available on each user's computer; a control such as the *TreeView* can normally be anticipated as being already on a user's computer, but third-party controls will need to be installed on a computer. Also remember that 32-bit controls are not supported on Office 64-bit.

## **Updating Applications**

Getting users out of an Access application has always been difficult; placing your data in SQL Server can resolve some but not all issues. Below are some suggested tactics for handling this problem:

- Create a message table into which you can add a message indicating when a system is going down for maintenance, and add a KickOut flag to indicate when you want to immediately force people out. Examples of code for this are provided in Chapter 6, "Using Forms and Events."
- When a user starts the application, if within a fixed time period of the maintenance point, then display a warning to the user. If the KickOut flag is set, then immediately exit them from the application.
- Add a hidden form or attach to the switchboard a timer event that periodically checks the KickOut flag and exits the user if the flag is set or a maintenance time has been reached.
- Send emails to users.
- Use network administration features to close open files. This runs the risk of corruption.

# **Summary**

In this chapter, you looked at different techniques for creating a user interface that integrates your forms and other design objects into an application. You also explored several topics relating to completing an application and issues surrounding the deployment of an application.



# Using ADO and ADOX

ActiveX Data Objects	ADOX
Working with SOL Server	

number of years ago, there was a great controversy regarding the future of the Data Access Objects (DAO) model, which was the way to manipulate data in the Joint Engine Technology (JET) that underpins Microsoft Access, and whether Microsoft would continue to support the technology. At the same time, a new technology called ActiveX Data Objects (ADO) was emerging. However, with the advent of Access 2010, the JET Engine technology, has been rebranded as Access Connectivity Engine (ACE) and became the inheritor of the DAO technology—which has given DAO a new lease on life. In the intervening period, ADO has progressed to ADO.NET and has enjoyed a great degree of success, becoming a very well-established technology.

Most Microsoft VBA developers use DAO in preference to ADO. ADO is less integrated with Access than DAO; the advantage of ADO is that it is a lightweight technology giving improved performance, and it has a wider support for different data sources, offering a number of more sophisticated features when working with other types of data sources.

ADO is a complementary technology to DAO, so if you are like most Access programmers, who have a large amount of time and money invested in DAO, you look to ADO only when you need to take advantage of specific features. If you are going down the Access Data Project (ADP) route with SQL Server, then ADO is the natural choice because an ADP does not include the DAO programming model.

In this chapter, you see how ADO can enhance the VBA programming experience. The final part of the chapter looks at ADOX, which is another library that complements and extends ADO to be able to look at the structures inside the database. ADOX can be regarded as a technology that fills in the bits that ADO can't see, as compared to DAO; DAO is similar to ADO plus ADOX in this respect, but the advantage of ADOX is that it works with other data sources such as SQL Server.

After reading this chapter, you will

- Understand how to use ADO to add value to your Access applications beyond what can be achieved with DAO.
- See how ADOX can be used to extract design information from a data source.

#### Note

As you read through this chapter, we encourage you to also use the companion content sample databases, ADOExamples.accdb, DocADOX.accdb, and other script files, which can be downloaded from the book's catalog page.

# **ActiveX Data Objects**

If you are working with an ADP, then your VBA project will already have the required references for ADO objects. For a standard Access database or MDB database, the references need to be added to the project (see Figure 18-1). To add the relevant references for this section, you need the Microsoft ActiveX Data Objects 6.0 Library (ADO), and later you will require the Microsoft ADO Ext. 6.0 for DDL and Security (ADOX).




Figure 18-1 When you're working with an Access database or MDB database, use the References dialog box to add the required references.

Figure 18-2 presents a simplified ADO model. Compare this to the DAO model discussed in Chapter 5, "Understanding the Data Access Object Model," and you will see that the ADO model contains far fewer objects. The key object in ADO is the connection. Within a connection, you can either execute a command or open a Recordset.




Figure 18-2 The ADO Model.

You will find that ADO programming is very similar to DAO programming. One of the most obvious differences is when you want to edit a record. In DAO, you need to start with an rst. Edit command; in ADO, you don't need this command:

```
Sub modADO EditData()
' Example of editing a record
   Dim rst As New ADODB.Recordset
   rst.Open "Customers", CurrentProject.Connection, adOpenDynamic, adLockOptimistic
   Do While Not rst.EOF
       Debug.Print rst!Id
       rst![E-Mail Address] = "any@ascassociates.biz "
       rst.Update
       rst.MoveNext
   Loop
   rst.Close
   Set rst = Nothing
End Sub
```

ADO leads you to think more carefully about what happens when you try a simple operation like interacting with data because you will find that you need to specify the correct parameters to make an operation work.

#### Cursors

A cursor is another term for a Recordset. You can either manipulate the Recordset data in your own computer's memory, or you can manipulate it in the memory of the server. If you are working with a pure Access database, there is no server involved, but once connected to SQL Server, there is, of course, a server, so you need to think about what this means.

The DAO is very clever: it copies your data into your computer's memory, and then writes back the changes to the database (Access or SQL Server). What DAO effectively achieves is to disconnect the data from the server while you edit it, and then write back the changes. The technical term for this is a client-side cursor.

With ADO, you are not restricted in this way, because you have two options. First, you can have a client-side cursor, but not just edit one record. You can edit several records and then perform a batch update of all the changed records. Second, you can choose a server-side cursor.

# **INSIDE OUT**

## Cursor location, type, and lock type

ADO makes you think more carefully about how a Recordset will operate. Here are three key points to note:

- CursorLocation Controls whether the Recordset is in the server's memory or your computer's memory. The default setting is adUseServer, and the alternative setting is adUseServer.
- CursorType Controls the updateability of the Recordset and can have an impact on performance. The default setting is adOpenForwardOnly, and the alternative settings are adOpenDynamic, adOpenKeyset, or adOpenStatic.
- LockType Controls the locking and can have an impact on both performance and conflict resolution. The default setting is adLockReadOnly, and the alternative settings are adLockBatchOptimistic, adLockOptimistic, or adLockPessimistic.

Not all these options are applicable with Access, but with other data sources such as SQL Server, more of them do apply.

## **Asynchronous Operations**

In Chapter 10, "Using Classes and Events," you saw how by using an ADO Recordset and WithEvents, you can construct batch processing, during which the client application fires an asynchronous server-side process that allows the Access application to continue execution, and then receive notification of the completed operation from the ExecuteComplete method. There is no equivalent feature in DAO to this asynchronous operation.

#### Forms and ADO Recordsets

In Chapter 11, "Using Classes and Forms," we provided code for binding a form to an ADO Recordset by using a VBA class. As an alternative, you can avoid using classes and directly embed the code in the form, as demonstrated in the sample database form frmADOProducts (shown in the following code example) To construct this form, you start with a bound DAO form, and then empty the RecordSet property and add the appropriate code, as shown in the following:

```
Option Compare Database
Option Explicit
Dim p cn As ADODB.Connection
Dim p_rst As ADODB.Recordset
Private Sub Form_Close()
    p_rst.Close
    Set p_rst = Nothing
    p_cn.Close
    Set p_cn = Nothing
End Sub
Private Sub Form_Load()
   Set p_cn = CurrentProject.Connection
   Set p_rst = New ADODB.Recordset
  With p_rst
      Set .ActiveConnection = p_cn
      .Source = "SELECT * FROM Products"
      .LockType = adLockOptimistic
      .CursorType = adOpenKeyset
      .CursorLocation = adUseClient
      .Open
   End With
   Set Me.Recordset = p_rst
End Sub
```

# Working with SQL Server

In this section, you will look at using ADO with SQL Server. You will see demonstrations of how this supports operations that are either not available when working with the DAO or offer improved functionality over using DAO.

#### **Connection Strings**

When using DAO to connect to SQL Server, it is possible to use different versions of the ODBC drivers. The ODBC drivers also have corresponding OLEDB providers that can be used with ADO. If you need to use newer features associated with a particular version of SQL Server, then you need to use one of the appropriate providers (see Table 18-1). The computer that has SQL Server components installed will already have the correct providers; on other computers, you need to download and install the drivers. The drivers and further information can be obtained from http://msdn.microsoft.com/en-us/data/aa937733.aspx.

Table 18-1 OLEDB Providers

SQL Server version	Provider	ODBC driver name
All Versions	SQLOLEDB	SQL Server
2005	SQLNCLI	SQL Native Client
2008 and 2008 R2	SQLNCLI10	SQL Server Native Client 10.0

Examples of the connection strings for each provider are shown in the following code example. These examples use integrated Windows authentication connecting to the database master on a SQL Server called VISTAULTRA64\VISTAULTRA64\_08:

```
Provider=SQLOLEDB; Data Source=VISTAULTRA64\VISTAULTRA64_08; Initial
Catalog=master;Integrated Security=SSPI;
Provider=SQLNCLI;Data Source=VISTAULTRA64\VISTAULTRA64_08;Initial
Catalog=master;Integrated Security=SSPI;
Provider=SQLNCLI10; Data Source=VISTAULTRA64\VISTAULTRA64_08; Initial
Catalog=master;Integrated Security=SSPI;
```

## Connecting to SQL Server

In some situations, you might find that an ADO connection test can respond faster than an ODBC connection test. The code that follows illustrates how to test a connection by using both ADO and DAO. The timeout settings need to be set long enough to allow for delays in the network. If you only have one instance of SQL Server installed on your computer, you could consider using (*local*) to replace your server name in these examples:

```
Sub modSQL ADOConnectionTest()
' Example of testing an ODBC Connection
' with the timeout set to 10 seconds
   Dim conn As New ADODB.Connection
   Dim txtConnectionString As String
   txtConnectionString = "Provider=SQLOLEDB;" &
                          "SERVER=VISTAULTRA64\SQL2008R2;" & _
                          "Initial Catalog=Northwind;" & _
                          "Integrated Security=SSPI"
   conn.ConnectionString = txtConnectionString
   conn.ConnectionTimeout = 10
   On Error Resume Next
   conn.Open
   If Err <> 0 Then
       Stop
       Exit Sub
   End If
   Dim rst As New ADODB.Recordset
   rst.ActiveConnection = conn
   rst.Open ("SELECT @@VERSION")
   Dim ver As String
   ver = Nz(rst(0))
```

```
MsgBox ver, vbInformation, "Server Version"
    rst.Close
    conn.Close
    Set rst = Nothing
    Set conn = Nothing
End Sub
The test with DAO is as follows:
Sub modSQL_DAOConnectionTest()
' Example of testing an ODBC Connection
' with the timeout set to 10 seconds
    Dim db As DAO.Database
    Dim rst As DAO.Recordset
    Dim gdef As DAO.QueryDef
    Dim txtConnectionString As String
    txtConnectionString = "ODBC;DRIVER=SQL Server;" & _
                          "SERVER=VISTAULTRA64\SQL2008R2;" & _
                          "DATABASE=Northwind;" &
                          "Trusted_Connection=Yes"
    Set db = CurrentDb
    Set qdef = db.CreateQueryDef("")
    qdef.Connect = txtConnectionString
    qdef.ReturnsRecords = True
    qdef.ODBCTimeout = 10
    qdef.SQL = "SELECT @@VERSION"
    On Error Resume Next
    Set rst = qdef.OpenRecordset()
    If Err <> 0 Then
        Stop
        Exit Sub
    End If
    Dim ver As String
    ver = Nz(rst(0))
    MsgBox ver, vbInformation, "Server Version"
    rst.Close
    gdef.Close
    db.Close
End Sub
```

#### **INSIDE OUT** Connection time

In the sample database for the connection code using ADO and DAO, there are timing variables that measure the time for completing the operation. ADO can be very useful for more quickly establishing whether a connection to a server has been successful, and this can be a useful technique if the ODBC connections are timing out due to incorrect information in the connection string (note that you will probably only see differences here when operating over networks).

## **Command Object**

With ADO, you can use the command object to parameterize a block of SQL by using the ? (question mark) character to indicate a parameter in the SQL (this is an example of an implicit parameter and we have not specified the parameter type) as follows:

```
Sub modSQL CommandObject()
    ' Example of a command object using a parameter
    Dim conn As New ADODB.Connection
    Dim cmd As New ADODB.Command
    Dim rst As New ADODB.Recordset
    Dim param As ADODB.Parameter
    Dim txtConnectionString As String
    txtConnectionString = "Provider=SQLOLEDB;" & _
                          "SERVER=VISTAULTRA64\SQL2008R2;" & _
                          "Initial Catalog=Northwind;" & _
                          "Integrated Security=SSPI"
    conn.ConnectionString = txtConnectionString
    cmd.CommandText = "SELECT * FROM Customers WHERE City = ?"
    cmd.CommandType = adCmdText
    cmd.ActiveConnection = conn.ConnectionString
    cmd.Parameters(0) = "London"
    For Each param In cmd.Parameters
        Debug.Print param.Name, param.Value
    Next
    Set rst = cmd.Execute()
    Do While Not rst.EOF
        Debug.Print rst!CompanyName
        rst.MoveNext
    Loop
    rst.Close
    Set rst = Nothing
    Set cmd = Nothing
    Set conn = Nothing
End Sub
```

This flexibility is not something that you can produce using DAO, because a QueryDef does not allow you create parameters in code.

#### Stored Procedures

In addition to accepting an input parameter on a stored procedure, stored procedures can also return output parameters back to the calling application. You can also use the Return statement, which is useful for passing back an integer flag to indicate success or failure with the procedure. In the following example, a stored procedure accepts one input parameter, one output parameter, and uses the return code (usp\_CountOrdersByDate2.sq1):

```
CREATE PROC usp_CountOrdersByDate2 @Thedate DATETIME,
                                   @OrderCount INT OUTPUT
AS
BEGIN
   SET @OrderCount = (SELECT COUNT(*) FROM Orders
  WHERE RequiredDate = @Thedate)
   RETURN(-1)
END
GO
-- Testing
DECLARE @OC INT
DECLARE @RV INT
exec @RV = usp_CountOrdersByDate2 '16 August 1996', @OC OUTPUT
-- Alternative without the return value
-- exec usp_CountOrdersByDate2 '16 August 1996', @OC OUTPUT
Print @oc
Print @RV
G0
```

The following code illustrates how to pass the parameter into, and receive the parameter back from the procedure. Note that if you are using the return value, it must be defined as the first parameter:

```
Sub modSQL_CommandObjectAndStoredProcedure()
    ' Example of a command object using input and output parameters
    Dim conn As New ADODB.Connection
    Dim cmd As New ADODB.Command
    Dim param As ADODB.Parameter
    Dim txtConnectionString As String
    txtConnectionString = "Provider=SQLOLEDB;" & _
                          "SERVER=VISTAULTRA64\SQL2008R2;" &
                          "Initial Catalog=Northwind;" & _
                          "Integrated Security=SSPI"
    conn.ConnectionString = txtConnectionString
    cmd.CommandText = "usp_CountOrdersByDate2"
    ' Note the above gets changed to { call usp_CountOrdersByDate2 }
    cmd.CommandType = adCmdStoredProc
    cmd.ActiveConnection = conn.ConnectionString
    Set param = cmd.CreateParameter("ReturnValue", adInteger, adParamReturnValue)
    cmd.Parameters.Append param
    Set param = cmd.CreateParameter("Thedate", adDBDate, adParamInput, _
                , "16 August 1996") cmd.Parameters.Append param
    Set param = cmd.CreateParameter("OrderCount", adInteger, adParamOutput)
    cmd.Parameters.Append param
    For Each param In cmd.Parameters
        Debug.Print param.Name, param.Value
    Next
    cmd.Execute
    Debug.Print cmd.Parameters("OrderCount")
    Debug.Print cmd.Parameters("ReturnValue")
    Set cmd = Nothing
    Set conn = Nothing
End Sub
```

## Multiple Active Result Sets and Performance

If you use the SQL Server Native Client provider with an ADO Recordset, you can take advantage of the Multiple Active Result Sets (MARS). These Recordsets are read-only and forward scrolling. This feature allows you to open a Recordset on multiple SQL statements or call a procedure that returns multiple result sets, and move through each Recordset in turn.

The following stored procedure returns multiple *Recordsets*:

```
CREATE PROC usp_MarsFeature @Thedate DATETIME
AS
BEGIN
   SELECT * FROM Orders WHERE RequiredDate = @Thedate
  SELECT * FROM [Order Details]
   INNER JOIN Orders
      ON [Order Details].OrderID = orders.OrderID
  WHERE RequiredDate = @Thedate
END
G0
exec usp_MarsFeature '16 August 1996'
```

In the ADO code that calls this stored procedure, notice that you need the line of code Set rst = rst.NextRecordset to move through the *Recordsets*:

```
Sub modSQL Mars()
   ' Example using Mars
   Dim conn As New ADODB.Connection
   Dim cmd As New ADODB.Command
   Dim rst As New ADODB.Recordset
   Dim param As ADODB.Parameter
   Dim txtConnectionString As String
   ' use SQLNCLI or SQLNCLI10
   txtConnectionString = "Provider=SQLNCLI10;" &
                          "SERVER=VISTAULTRA64\SQL2008R2;" & _
                          "Initial Catalog=Northwind;" & _
                          "Integrated Security=SSPI;" & _
                          "MARS Connection=True;"
   conn.ConnectionString = txtConnectionString
   cmd.CommandType = adCmdStoredProc
   cmd.ActiveConnection = conn.ConnectionString
   Set param = cmd.CreateParameter("Thedate", adDBDate, adParamInput, _
                , "16 August 1996")
   cmd.Parameters.Append param
   Set rst = cmd.Execute()
   ' Note MovePrevious is not allowed
   Do While Not rst.EOF
       Debug.Print rst!CustomerID
       rst.MoveNext
```

```
Loop
    Debug.Print rst.RecordCount
    ' This line is very important
    Set rst = rst.NextRecordset
    Do While Not rst.EOF
       Debug.Print rst!ProductID
        rst.MoveNext
   Loop
    Debug.Print rst.RecordCount
    rst.Close
    Set rst = Nothing
    Set cmd = Nothing
    Set conn = Nothing
End Sub
```

By default a connection string using the native client has MARS activated, but in this example, there is an explicit statement to the connection string to ensure that the feature is active.

The example allows only one Recordset at a time to be open; the NextRecordset operation closes the first Recordset.

One advantage of this approach is that both Recordsets are obtained with a single trip to the server, which yields improved performance; the stored procedure is called only once.

#### **MARS and Connections**

In the second example of working with MARS, there are two alternative connections, the first uses the older SQLOLEDB (shown commented out), and the second example uses SQLNCLI (activating MARS). The following sample code tests these two alternatives:

```
Sub modSQL_MarsTwoRecordsets()
   ' Example using Mars
   Dim conn As New ADODB.Connection
   Dim rst As New ADODB.Recordset
   Dim rst2 As New ADODB.Recordset
   Dim txtConnectionString As String
   'txtConnectionString = "Provider=SQLOLEDB;" & _
                          "SERVER=VISTAULTRA64\SQL2008R2;" & _
                          "Initial Catalog=Northwind;" & \_
                          "Integrated Security=SSPI;"
   ' use SQLNCLI or SQLNCLI10
   txtConnectionString = "Provider=SQLNCLI10;" & _
                          "SERVER=VISTAULTRA64\SQL2008R2;" & _
                          "Initial Catalog=Northwind;" & _
                          "Integrated Security=SSPI;" & _
                          "MARS Connection=True;"
   conn.ConnectionString = txtConnectionString
   conn.Open
   Set rst = conn.Execute("SELECT * FROM Orders", , adCmdText)
```

```
Set rst2 = conn.Execute("SELECT * FROM [Order Details]", , adCmdText)
   rst2.Close
   rst.Close
   Set rst2 = Nothing
   Set rst = Nothing
   Set conn = Nothing
End Sub
```

If you execute this code first using SQLOLEDB and then using SQLNCLI (or SQLNCLI10), if you monitor the resulting actions by using the Profiler, you will see an output for SQLOLEDB similar to that shown in Figure 18-3.

EventClass	TextData
Trace Start	
ExistingConnection	network protocol: LPC set quote.
ExistingConnection	network protocol: LPC set quote.
Audit Login	network protocol: Named Pipes s.
SQL:BatchStarting	SELECT * FROM Orders
Audit Login	network protocol: Named Pipes s.
SQL:BatchStarting	SELECT * FROM [Order Details]
SQL:BatchCompleted	SELECT * FROM [Order Details]
SQL:BatchCompleted	SELECT * FROM Orders
Audit Logout	
Audit Logout	
Audit Login	network protocol: LPC set quote.
SQL:BatchStarting	SELECT * FROM Orders
SQL:BatchStarting	SELECT * FROM [Order Details]
SQL:BatchCompleted	SELECT * FROM [Order Details]
SQL:BatchCompleted	SELECT * FROM Orders

Figure 18-3 This example creates two connections (two Login/Logout) operations. If you do this with MARS, it would share a single connection.

When multiple *Recordsets* are used with MARS, the *Recordsets* share the same connection. This means that you could hold two Recordsets open at the same time on a single connection. The default behavior of ADO when a second Recordset is opened is to open a second implicit connection. This can have implications if you are working with transactions and you need both Recordsets to operate within the context of a single connection. MARS allows you to manipulate both Recordsets within a single transaction. This is illustrated by the second trace shown in Figure 18-4.

SQL Server Profiler - [Untitled - 1 (VISTAULTRA64\SQL2008R2)]		
File Edit View Replay Tools Window Help		
EventClass	TextData	
Trace Start		
ExistingConnection	network protocol: LPC set quote	
ExistingConnection	network protocol: Named Pipes s	
ExistingConnection	network protocol: Named Pipes s	
Audit Login	network protocol: LPC set quote	
SQL:BatchStarting	SELECT * FROM Orders	
SQL:BatchStarting	SELECT * FROM [Order Details]	
SQL:BatchCompleted	SELECT * FROM [Order Details]	
SQL:BatchCompleted	SELECT * FROM Orders	
Trace Stop		

Figure 18-4 This example illustrates the processing within a single MARS connection.

# **INSIDE OUT**

#### **How DAO manages connections**

If you run the profiler and open linked tables, or run pass-through queries, or open a Recordset, everything takes place within a single connection. If you run the code modSQL DAOTwoRecordsets(), which opens two Recordsets, then you see an additional login generating a second connection for the second Recordset; this is similar to ADO except that in DAO the first Recordset runs in the same connection as any desktop interaction (a useful feature).

The procedure modSQL DAOTwoRecordsetsInATransaction() performs operations within a transaction. This provides a similar environment to MARS for DAO programming, and it will generate a new connection within which to process the multiple Recordset operations (this has to happen because it is running in a transaction).

The following code is for modSQL DAOTwoRecordsetsInATransaction; the code for modSQL\_DAOTwoRecordsets is almost identical but does not have the transaction processing:

```
Sub modSQL_DAOTwoRecordsetsInATransaction()
    Dim db As Database
    Dim rst As DAO.Recordset
    Dim rst2 As DAO.Recordset
    Set db = CurrentDb
    Dim wks As Workspace
    Set wks = DBEngine(0)
    wks.BeginTrans
    Set rst = db.OpenRecordset("SELECT * FROM Orders", dbOpenDynaset, dbSeeChanges)
    Set rst2 = db.OpenRecordset("SELECT * FROM [Order Details]", dbOpenDynaset)
```

```
rst.MoveLast
    rst2.MoveLast
   wks.CommitTrans
    rst2.Close
    rst.Close
   wks.Close
    Set wks = Nothing
    Set rst2 = Nothing
    Set rst = Nothing
    Set db = Nothing
End Sub
```

#### **ADOX**

ADOX offers an opportunity to develop an approach to structural analysis that is not locked into the DAO model. The object model is shown in Figure 18-5.




Figure 18-5 The ADOX object model.

The sample database DocADOX.accdb illustrates how you can use ADOX to retrieve information from different data sources. The following sample code for ADOExamples.accdb illustrates how this works:

```
Sub modADOX ListTables()
   Dim cat As ADOX.Catalog
   Dim strConnectionString As String
    ' create the catalog
    Set cat = New ADOX.Catalog
    strConnectionString = "Provider=SQLNCLI;" & _
                          "SERVER=VISTAULTRA64\SQL2008R2;" & _
                          "Initial Catalog=Northwind;" & _
                          "Integrated Security=SSPI;"
    cat.ActiveConnection = strConnectionString
   Dim tbl As ADOX. Table
    For Each tbl In cat. Tables
        If tbl.Type = "SYSTEM TABLE" Or tbl.Type = "SYSTEM VIEW" Then
            GoTo SkipSystemTables
       Else
            Debug.Print tbl.Name, tbl.Columns.Count, tbl.Type
       End If
SkipSystemTables:
   Next
End Sub
```

## Summary

In this chapter, you saw how ADO can be used to extend the functionality of an Access application beyond DAO, and how ADOX can provide a more generic approach to extracting information on the structure of a database.



# Index

#### **Symbols**

"&" (ampersand) character, using, 86, 92 /Decompile command line switch, 45 @@IDENTITY, SCOPE IDENTITY() and IDENT CURRENT in

T-SQL, 520

"\*" (star) character, 97

"\_" (underbar) character, using, 86

#### A

#### abstract and implementation classes

abstract classes, 370

hybrid abstract and non-abstract classes, 376-378

implementing an abstract class, 373-376

implements classes, 372

libraries, benefits of constructing, 370

object types, establishing with TypeOf, 375

#### ACCDE files, protecting designs with, 655

#### Access 2010

Access Basic, 114

Access Connectivity Engine (ACE), 659

earlier versions of, 38

locking down, 154

#### Access collections vs. VBA collection classes, 346

#### Access Web Databases, linking

Access database to an Access Web Database, 431 process of, 430

relinking, 432-434

Activate and Deactivate events, 255

ActiveForm and ActiveControl, working with, 151

#### ActiveX controls

Slider control, adding, 386-388

TreeView control, 295-300

UpDown or Spin control, 388-390

## ActiveX Data Objects. See ADO (ActiveX Data Objects)

address information, packing, 334

#### ADO (ActiveX Data Objects)

ADO asynchronous execution class, 365-367

ADOX, understanding, 672

Asynchronous operations, 662

client-server performance, 485

connections

Connection and ActiveConnection, 385

DAO management of, 671

as the key object in ADO, 660

cursors (Recordsets)

differences with DAO, 661

forms, binding to, 384-386

vs. Data Access Object (DAO) model, 161, 659

forms and ADO Recordsets, 662

libraries to add, 660

program vs. services, 484

references and, 163

sample databases, 660

SQL Server, working with. See also SQL Server

command objects, 666

connecting to, 664

connection strings, 663

connection time, 665

MARS and connections, 669-671

MARS and performance, 668

stored procedures, 666

#### ADOX, understanding, 672

#### ADP (Access Data Project)

ADO and, 659

query conversion, 563

strengths and weaknesses, 564

understanding, 561-563

AfterDelConfirm event, 268	Office 2007 and the file menu, 647
AfterInsert and BeforeInsert events, 265–267	the OnAction callback, 642
AfterUpdate event, 276	the OnLoad callback, 642
AllItems method, 349	tab visibility and focus, dynamically changing, 646-
"&" (ampersand) character, using, 86	648
Append Only memo fields, 130-132	tips, 639
application development	the USysRibbons table, 640
application navigation	sample databases, 631
combo and list boxes, 637	32-bit and 64-bit environments, 649
custom interfaces for users, 637	updating applications, 656
DoCmd object, 140	Windows API, using, 651–653
forms, opening multiple copies of, 637	Windows Registry, working with, 650
interface design decisions, 632	ApplyFilter event, 247
locking down an application, 654	arrays
Maximize, Popup, Modal, and MoveSize Proper-	determining the dimensions of, 64
ties, 638	dynamic arrays, 61
the Navigation Control, 634	multi-dimensional arrays, 62–64
push buttons on a form, 632	option base, 65
the ribbon, 636	reading records into, 215
Switchboard Manager, 633	type structures, 65
Tab controls, 636	working with, 59–61
the TreeView control, 635	ASC function, 93, 94
completing an application	asynchronous event processing and RaiseEvent
error handling, 654	ADO asynchronous execution class, 365–367
IntelliSense, using in a standard module, 654	BatchProcessing SQL Server form, 368–370
locking down Access, 154	stored procedures, 364
progress bars, 653	WithEvent processing, 363
splash screens, 653	asynchronous operations in ADO, 662
deploying applications	attachments
ACCDE files, protecting your design with, 655	copying between tables and records, 204–206
DSNs and relinking applications, 656	data types, limitations, 197
references, depending on, 656	fields in Recordsets, 197–200
Runtime deployment, 655	importing, using LoadFromFile method, 203
single and multiple application files, 655	planning for upsizing to SQL Server, 548
ribbon design	authentication. See security
Backstage view, 647	Azure. See SQL Azure
custom ribbon, loading, 649	В
default ribbon, setting, 644	_
elements of a ribbon, 641	backing up SQL Azure databases, 603
for forms and reports, 648	Backstage view, in application development, 647
the GetEnabled callback, 642	base class, creating, 354
images for, 644	BatchProcessing SQL Server form, 368–370

BeforeDelConfirm event, 268	Call Stack
BeforeInsert and AfterInsert events, 265-267	displaying module linking with, 21
BeforeUpdate event, 262, 276	tracing procedures with, 30
binary transfer, using with OLE data, 207–209	camel notation, 109
bookmarks	Case statements in SQL Server, 581
merging data with, 447–451	CAST and CONVERT, using in T-SQL, 518
in Recordsets, 191	Choose statements, 79
synchronizing, 249	Chr function, 93
Boolean data, planning for upsizing to SQL Server, 546	ClassAndForms.accdb sample database, 381
bound forms, 233, 243	classes
boxed grids, creating with the Print event, 327–329	abstract and implementation classes
breakpointing code	abstract classes, 370
breakpoint Step and Run commands, 26–29	hybrid abstract and non-abstract classes, 376–378
changing code on-the-fly, 34	implementing an abstract class, 373–376
conditional Watch Expressions, adding, 32	implements classes, 372
Immediate window, working with, 33	libraries, benefits of constructing, 370
methods for, 23–25	object types, establishing with TypeOf, 375
procedures, tracing with Call Stack, 30	advantages of, 339, 340
Set Next command, 25	asynchronous event processing and RaiseEvent
variables, displaying in the locals window, 29	ADO asynchronous execution class, 365–367
Watching variables and expressions, 31	BatchProcessing SQL Server form, 368–370
broken references, 48	stored procedures, 364
BuildCriteria, using to simplify filtering, 130	WithEvent processing, 363
BuildingClasses.accdb, sample database, 340	binding forms and
Building Classes After Export Import. accdb, sample	binding to an Active Data Object Recordset, 384
database, 340	binding to a Data Access Object Recordset, 383
built-in functions	class modules
ASC function, 94	creating, 341
date and time functions, 90–92	locating form or report code in, 7
format function, 94	Err.Raise and, 122
Mid string function, 95	friend methods, 378
string functions, 92	hierarchy of, creating
ByRef and ByValue parameters, defining, 70–72	base class, creating, 354
•	derived classes, 355
	inheritance and polymorphism in classes, 356
calculated fields in Recordsets, 210	producing and consuming events, 364
callbacks	sample database, 359
GetEnabled callback, 642	tabs, dynamically loading
OnAction Callback, 642	class module, creating, 341
OnLoad callback, 642	collection of objects, 345
calling procedures across forms, 251–253	improving, 340
	Initialization and Termination events, 344
	midalization and reminiation events, 544

classes (cont.)	collections
tabs, dynamically loading (cont.)	Containers collections, 222
Let and Get object properties, 342	Errors collection, 171–173
New and Set, creating an object with, 343	objects and, 104, 345
simplifying the application code with classes, 352	TableDefs collection and indexes, 179–182
terminology of, 353	columns
VBA collection classes	adding, in T-SQL, 503
vs. Access collections, 346	adding, with a default in T-SQL, 503
adding AllItems to, 349	column data type, changing in T-SQL, 503
creating, 346–348	ColumnHistory memo fields, 130–132
exporting and re-importing the class, 349	column name, changing in T-SQL, 503
using with the Dynamic Tab, 351	column visibility, controlling, 255
WithEvents processing	combo box columns, 282
control events, handling, 362	combo boxes
form events, handling, 360–362	combo box columns, 282
Click and DblClick events, 275	data, synchronizing in controls, 278–280
client-side cursors, 661	defaults and the drop-down list, 279
cloning and copying Recordsets, 212–215	and list boxes, in application development, 637
Close events, 248	multi-value fields, 283
cloud computing. See SQL Azure	reducing joins with, 333
Cloud to Cloud (CTP1) synchronization service, 604	RowSource Type, 280–282
COALESCE function, 623	Table/Query editing, 285
code. See also debugging	Value List editing, 284
calling directly from a control's event, 152	comments, adding in VBA, 40
calling public code on a form, 252	compiler directives
changing on-the-fly, 33	conditional compilation, 45
compiling in VBA, 44	early and late binding, 438–440
control events, writing code behind, 274	32-bit or 64-bit, 650
line continuation in VBA, 86	conditional statements and program flow
quality of, improving with constants, 49–51	Choose statements, 79
simplifying with classes, 352	Do While and Do Until loops, 82–84
CodeDB, 175, 176–179	Exit statements, 84
code, maintainable	For and ForEach loops, 81
Access document objects, naming, 108	GoTo and GoSub statements, 86
database fields, naming, 109	IfThenElse statements, 77
indenting code, 113	IIF statements, 78
naming conventions, 113	line continuation, 86
unbound controls, naming, 110	Select Case statements, 80
using the Me object to reference controls, 113	TypeOf statements, 80
variables in code, naming, 110–112	the With statement, 85
CodePlex website, 495	conditional Watch Expressions, adding, 32

conflict resolution, in SQL Azure data, 613	calling code directly from, 152
constants and variables. See also variables	Click and DblClick events, 275
arrays	GotFocus and LostFocus events, 277
determining the dimensions of, 64	handling, 362
dynamic arrays, 61	writing code behind, 274
multi-dimensional arrays, 62–64	Control Wizard, 274
option base, 65	defaults for, 274
type structures, 65	dynamically loading tabs, improving, 340
working with, 59-61	list boxes
code quality, improving with constants, 49–51	multiple selections, 286–290
Enum keyword, 51	two list boxes, multiple selections with, 290-292
global variables, 56	using as a subform, 292–295
NULL values, IsNull and Nz, 53-55	sample databases, 273
scope rules, 58	tab controls
static variables, 55	dynamically loading tabs, 314-320, 340-355
type structures, 65	OnChange event, 314
variables and database field types, 52	referring to controls in, 314
variable scope and lifetime, 57–59	refreshing between tabs and controls, 311–313
consuming events, 364	Tag property, 316
contacts in Outlook, adding, 476	TreeView control
Containers and Documents	ActiveX controls, 304
Container usage, table of, 223	adding, 296–298
investigating and documenting in DAO, 222-224	in application development, 635
controls	drag and drop, 303–307
ActiveX controls	graphics, adding, 301–304
dialog box, 297	nodes, adding, 309
referring to methods and properties in, 304	nodes, expanding and collapsing, 303
slider control, adding, 386–388	nodes with recursion, deleting, 307–309
UpDown or Spin control, 388–390	parent/child-related data, loading, 300
combo boxes	populating the tree, 298–301
combo box columns, 282	recursive VBA code, writing and debugging, 308
data, synchronizing in controls, 278–280	sample database example, 295
defaults and the drop-down list, 279	using for filtering, 236–242
multi-value fields, 283	CONVERT, using in T-SQL, 518
RowSource Type, 280–282	copying SQL Azure databases, 603
Table/Query editing, 285	CountryLibrary.accdb database, 176
Value List editing, 284	CreateObject vs. New, 438-440
control events	CROSSTAB queries in SQL Server, 509–511
AfterUpdate event, 276	CTP1 synchronization service, 604
BeforeUpdate event, 276	CTP2 synchronization service, 604
bound or unbound, 233	currency, in upsizing to SQL Server, 548

CurrentDB, 175	Recordsets
Current event, 326	adding, editing, and updating records, 193
CurrentProject and CurrentData objects	Attachment fields, 197–200
dependency checking and embedded macros, 138	attachments, copying, 204–206
Form Datasheet View properties, changing, 136	Bookmarks, 191
object dependencies, 137	calculated fields, 210
version information, retrieving, 135	cloning and copying, 212–215
cursors. See also Recordsets	Delete, 202
DAO, differences with, 661	field syntax, 191
location, type, and lock type, 662	Filter and Sort properties, 193
custom interfaces for users, in application development, 637	forms, binding to, 383
custom ribbon, loading, 649	information, displaying, 200
cycles and multiple cascade paths, converting for SQL	LoadFromFile method, 203
Server, 549	Multiple-Values lookup fields, 194–197
D	OLE Object data type, 206–209
D	reading records into an array, 215
DAO (Data Access Object) model	SaveToFile method, 202
vs. ActiveX Data Objects (ADO), 161, 659	searching, 188
connections, management of, 671	types of, 188
databases, working with	references and, 163
CodeDB, 176–179	sample databases
CurrentDB, DBEngine, and CodeDB, 175	DAOExamples.accdb, 162
DAO and ADO libraries and, 164	DocDAO.accdb, 224
Database Object, 173	Find_IT.accdb, 225–227
Data Definition Language (DDL), 183	understanding, 162
datasheet properties, managing, 184–186	VBA libraries, techniques when writing, 177
DBEngine Object, 165	data
Errors collection, 171–173	data exchange, using DoCmd object, 142
relationships, creating, 186	data files, single and multiple application, 655
TableDefs collection and indexes, 179–182	data types
transactions, 166–170	converting for SQL Server, 547
Workspace Object, 165	mapping in SSMA, 567
objects, investigating and documenting	naming conventions for, 112
Containers and Documents, 222–224	text data types and UNICODE, 544
object properties, 224	external, linking to, 430–434
queries	extracting from Outlook, 472–475
QueryDef parameters, 220–222	merging with bookmarks, 447–451
QueryDefs and Recordsets, 218	minimizing, for display in forms, 485
QueryDefs, creating, 218–220	multi-value data, planning for upsizing to SQL Server, 548
temporary QueryDefs, 216–218	parent/child-related data, loading, 300
working with, 215	synchronizing in controls, 278–280

Data Access Object model. See DAO (Data Access Object) model
databases. See also sample databases; upsizing databases
Access Web Databases, linking
Access database to an Access Web Database, 431
process of, 430
relinking, 432–434
changing structure of, in SQL Azure, 612
database splitting, 396, 397
database systems, moving data between, 91
DFirst and DLast functions in, 100
fields, naming conventions for, 109
in SQL Server. See also SQL Server
database diagrams, 496–498
demo database script, running, 493
file locations, 488
system databases, 493
SQL Azure databases. See also SQL Azure
backing up and copying, 603
creating, 590
SQL databases, migrating using SQL Azure
sequence of steps, 596
set of tables, creating, 597–599
SQL Import/Export features when transferring to SQL Azure, 602
SQL Server Import and Export Wizard and UNICODE data types, 598
SSMA (SQL Server Migration Assistant), 598
transferring data with the SQL Server Import and Export Wizard, 599–603
variables and database field types, 52
working with in DAO
CodeDB, 176-179
CurrentDB, DBEngine, and CodeDB, 175
DAO and ADO libraries and, 164
Database Object, 173
Data Definition Language (DDL), 183
datasheet properties, managing, 184–186
DBEngine Object, 165

Errors collection, 171-173

relationships, creating, 186

sample databases, 223-226

transactions, 166-170 Workspace Object, 165 Data Definition Language (DDL), 183 Data Link, setting advanced properties, 464 datasheet properties, managing, 184-186 Datasheet view, 261 Data Source Name (DSN). See DSN Data Sources, using, 468-471 Data Sync Agent in SQL Azure conflict resolution in data, 613 data and database structure, changing, 612 database synchronization and triggers, 613 loading and installing, 605-609 Sync Groups and Sync Logs, 610-612 synchronization services, 604 table structure, changes to, 613 Data Type Mapping, changing in SQL Azure, 627 dates Date and Time data, converting for SQL Server, 544-546 date and time functions, 90-92 date values, rules for in Where clauses, 97 default, in data storage systems, 91 DBEngine object, 165, 175 DblClick event, 275 dbo prefixes, renaming, 417 dbSeeChanges constant in SQL Server, 574 DDL, creating relationships with, 187 Deactivate and Activate events, interacting with, 255 debugging breakpointing code breakpoint Step and Run commands, 26-29 changing code on-the-fly, 34 conditional Watch Expressions, adding, 32 Immediate window, working with, 33 methods for, 23-25 procedures, tracing with Call Stack, 30 Set Next command, 25 variables, displaying in the locals window, 29 watching variables and expressions, 31 Debug Assert command, 23

TableDefs collection and indexes, 179-182

debugging <i>(cont.)</i>	dbSeeChanges constant, 574
forms	efficient SQL, tips for, 585
application and VBA code windows, 6-8	the MSysConf table, 587
database sample, 4	Pass-Through queries, 575–578
VBA editor, entering, 5	performance and execution plans, 582–585
modal forms, 38	SQL Server Profiler, 586
modules and procedures	stored procedures and temporary tables, 578
debug commands, 23	stored procedures, using advanced features in, 578
debugging code in modules, demonstration of, 20–22	DFirst and DLast functions, 100
editing environment, accessing, 8-10	Dialog forms, OpenArgs and, 121
functions, executing, 15	diary entries, adding, 476
modules, creating, 10	DisplayAttachmentInfo subroutine, 200
procedures, creating, 11	displaying records
searching code, 19	bound and unbound forms, 233
split window, 17–19	modal and pop-up forms, 234
subroutines, executing, 13-15	opening and loading forms, 235
viewing and searching code, 16	Refresh, Repaint, Recalc, and Requery commands, 250
Object Browser and Help system	DISTINCT and DISTINCTROW, 234
Help system, configuring, 35	DocADOX.accdb sample database, 660
Object Browser, working with, 36	DocDAO.accdb sample database, 224
VBA code, recursive, 308	DoCmd object
decimals	in application development, 140
converting for SQL Server, 547	application navigation, 140
precision of, in DAO, 183	data exchange, 142
default ribbon, setting, 644	environment, controlling, 138
deleting	size and position, controlling, 139
Delete events, 267	DoCmd.OpenForm command, 6
DELETE query in SQL Server, 513	DoEvents command, 103
Recordsets, 202	domain functions
demo database script, running, 495	description of, 95
dependency checking, and embedded macros, 138	Where clauses, constructing, 97
deploying applications	Do While and Do Until loops, 82–84
ACCDE files, protecting your design with, 655	drag and drop in TreeView control, 303–307
DSNs and relinking applications, 656	drill-down reports, creating, 326
references, depending on, 656	driver limitations with VARCHAR(MAX), 548
Runtime deployment, 655	DSN (Data Source Name)
single and multiple application files, 655	creating, 410–413
derived classes, 355	Machine DSNs, 410
developing applications. See application development	and relinking applications, 656
developing with SQL Server	in SQL Azure, 420–423
Case statements, 581	dynamic arrays, 61
complex queries, handling, 579–582	Dynamic Tab, and using classes, 351
	Dynaset, 189

E	BeforeDelConfirm event, 268
Early Binding vs. Late Binding, 438–440	BeforeInsert and AfterInsert events, 265–267
Editing and Undo on records	BeforeUpdate and AfterUpdate events, 262
BeforeInsert and AfterInsert events, 265–267	Close events, 248
BeforeUpdate and AfterUpdate events, 262	control events
Delete events, 267	AfterUpdate event, 276
Error event, 269	BeforeUpdate event, 276
KeyPreview and Key events, 268	bound or unbound, 233
Locking and Unlocking controls, 264	calling code directly from, 152
in Recordsets, 193	Click and DblClick events, 275
saving records, 270	GotFocus and LostFocus events, 277
edits, multiple using transactions, 170	writing code behind, 274
ellipse button, 274	Current event, 251
email	Deactivate and Activate events, 255
creating, in Outlook, 475	Delete events, 267
writing to Access, from Outlook, 477–479	Error events, 269
embedded macros, dependency checking and, 138	Initialization and Termination events, 344
embedded quotes, SQL and, 98–101	KeyPreview and Key events, 268
Employees_be.accdb sample database, 396	Mouse events, 260
Encapsulation, 353	OnChange event, 314
Enum keyword, 51	Open event, 235
Err object, 117, 172	producing and consuming events, 364
Error event, 269	report event sequences
error handling	boxed grids, creating with the Print event, 327-329
in application development, 654	drawing graphics and, 328
in T-SQL, 523–525	drill-down reports and current events, creating, 326
in VBA	typical, 324–326
Err object, 117	Timer event, 255–260
Err.Raise, 122	Unload and Close events, 248
general purpose error handler, developing, 118–121	ExcelAnalysis.accdb sample database, 437
how errors occur, 115	Excel, Microsoft
On Error GoTo, 118	connecting Access to
On Error Resume Next, 116	Data Link advanced properties, setting, 464
OpenArgs and Dialog forms, 121	key objects in, 451
subclassing form events, 362	linking to external data, planning for, 466
error messages, 172	MS Query and Data Sources, using, 468–471
Errors collection in DAO, 171–173	QueryTables and ListObjects, 470
Err.Raise, 122	reporting with, 460–468
Eval function, 102	spreadsheets, reading data from, 459
events	spreadsheets, writing data to, 452–459
AfterDelConfirm event, 268	files, linking to, 406
ApplyFilter event, 247	Exit statements, 84
* * *	

exporting	focus events, 2//
migrating SQL databases, 598, 602	For and ForEach loops, 81
VBA collection classes, 349	foreign keys, partially completed, 550
expressions	Format event, layout control and, 330
conditional Watch Expressions, adding, 32	Format function, 94
Expression Builder	Format string function, 93
invoking, 133	Form Datasheet View properties, changing, 136
locating, 38	forms
working with, 144	and ADO Recordsets, 662
Watches window, 31	BatchProcessing form, 368–370
external data, linking to, 430–434	binding forms and
extracting information from Outlook, 472-475	binding to an Active Data Object Recordset, 384
-	binding to a Data Access Object Recordset, 383
F	bound or unbound, 233
fields	calling public code on, 252
calculated fields in Recordsets, 210	closing, 248
field syntax in Recordsets, 191, 192	Continuous forms, controlling column visibility in, 255
mismatched, converting for SQL Server, 550	control events and
Multiple-Values lookup fields, 194–197	AfterUpdate event, 276
multi-value fields connected to a combo box, 283	BeforeUpdate event, 276
naming conventions for, 109	Click and DblClick events, 275
required fields, converting for SQL Server, 549	GotFocus and LostFocus events, 277
files, opening, 442	writing code behind, 274
filtering	debugging code
forms	application and code windows, 6–8
ApplyFilter event, 247	the class module, locating code in, 7
calling procedures across forms, 251–253	database sample, 4
RecordsetClone, 248	modal forms, 38
Unload and Close events, 248	VBA editor, entering, 5
using another form, 245–247	Dialog forms, OpenArgs and, 121
using controls, 245–251	driving reports from, 331–333
using filter property, 243–245	Editing and Undo on records
simplifying by using BuildCriteria, 130	BeforeInsert and AfterInsert events, 265–267
using controls, 236–242	BeforeUpdate and AfterUpdate events, 262
FilterOnLoad property, 235	Delete events, 267
Filter property, 193, 243–245	Error event, 269
Find and FindNext methods, 189	KeyPreview and Key events, 268
Find operations, 474	Locking and Unlocking controls, 264
firewall settings in SQL Azure, 591	saving records, 270
floating point numbers, converting for SQL Server, 547	filtering
flow, program. See conditional statements and program	ApplyFilter event, 247
flow	calling procedures across forms, 251–253

RecordsetClone, 248	pages, loading, 315–318
Unload and Close events, 248	pages, unloading, 320
using another form, 245–247	related pages, dynamically loading, 319
using controls, 236–242	simplifying the application code with classes, 352
using filter property, 243–245	Forms and Reports collections
form events	Access Objects, creating in code, 149
handling, 360–362	controls on a Subform, referencing, 145–148
subclassing, 362	Expression Builder, working with, 144
frmCustomers form, 232	VBA class module, syntax for, 147
linking code to, in modules, 22	working with, 143
minimizing data display in, 485	friend methods, 378
opening	Full Recovery Model, in SQL Server, 491
multiple copies of, 637	functions
multiple instances of a form, 381–383	built-in functions
using DoCmd.OpenForm command, 6	ASC function, 94
using a Where clause, 246	date and time functions, 90-92
properties and	format function, 94
FilterOnLoad, 235	Mid string function, 95
OrderByOnLoad, 235	string functions, 92
push buttons, in application development, 632	in T-SQL, 519
records, displaying	changing to subroutines, and vice versa, 14
bound and unbound forms, 233	COALESCE function, 623
modal and pop-up forms, 234	DFirst and DLast functions, 100
opening and loading forms, 235	domain functions
Refresh, Repaint, Recalc, and Requery commands, 250	description of, 95
records on forms, interacting with	Where clauses, constructing, 97
Current event, 251	the Eval function, 102
Deactivate and Activate events, 255	executing, 15
Mouse events, 260	Left, Right, Mid string functions, 93
Timer Interval property of the Timer event, set-	Len string function, 93
ting, 255–260	MsgBox function, 14
ribbon design for, 648	and procedures
sample databases, 231	ByRef and ByValue parameters, defining, 70–72
size and position, controlling	calling, variations on standard rules for, 66
DoCmd object, 139	modules and class modules, organizing code in, 76
tabs, dynamically loading	ParamArray qualifier, 75
class module, creating, 341	parameters, Optional and Named, 73
collection of objects, 345	procedures, private and public, 72
Initialization and Termination events, 344	subroutines and functions, default referencing of
Let and Get object properties, 342	parameters in, 71
New and Set, creating an object with, 343	subroutines, managing code with, 67–70
options for, 314	in VBA 13

functions (cont.)	migrating SQL databases, 598, 602
returning variant or string data, 93	VBA collection classes, 349
Shell and Sendkeys, 102	indenting code, 113
table-valued functions, 535	indexes, TableDefs collection and, 179-182
User-Defined Functions (UDFs) in SQL Server, 534–536	INFORMATION_SCHEMA views, in SQL Server, 494
VBA, using in Queries, 101	inheritance in classes, 356
G	Initialization event, 344
	INSERT and INSERT INTO queries in SQL Server, 515–517
GetEnabled callback, 642	inserted OLE documents, 209
GetObject keyword, 440–442 Get object properties, 342	installing SSMA, 564
global variables, 56	instances in SQL Server, 491
GotFocus and LostFocus events, 277	Instnwnd.sql sample database, 396
GoTo and GoSub statements, 86	Instnwndtesting.sql sample database, 396
graphical interface	InStr, InStrReverse string functions, 93
of SQL Azure, 595	integer numbers, converting for SQL Server, 547
of SQL Server, 505	interfaces for users, in application development, 632, 637, 638
graphics	IsBroken, references, 48
adding to TreeView control, 301–304	IsNothing, IsEmpty, and IsObject, 106
drawing, and report event sequences, 328	isolation levels of transactions, in SQL Server, 532
grids, creating with the Print event, 327–329	
GUI (graphical user interface), changing table designs	J
with, 500–502	JET (Joint Engine Technology), 659
H	Join string function, 93
Help system, configuring, 35	K
hybrid abstract and non-abstract classes, 376–378	KeyPreview and Key events, 268
hyperlinks, converting for SQL Server, 547	keys, partially completed foreign, 550
I	L
@@IDENTITY, SCOPE_IDENTITY() and IDENT_CURRENT in	language settings in VBA
T-SQL, 520	comments, adding, 40
Identity property, using in SQL Server tables, 504	compiling code, 44
IfThenElse statements, 77	conditional compilation, 45
Ignore NULLs, in SQL Server, 553	/Decompile command line switch, 45
IIF statements, 78	Option Compare, selecting, 43
images for ribbon design, 644	options, setting explicitly, 41
IMAGE, VARBINARY (Max), and OLE Data, converting for	references, 46–49
SQL Server, 547	Visual Basic for Applications Extensibility, 48
Immediate window, working with, 33	Late Binding vs. Early Binding, 438–440
implementation classes, 372. See also abstract and implementation classes	layout control
importing	report grouping, programming, 333
data from SQL Azure, 603	using the Format event, 330

layout control of reports	to SharePoint lists
driving reports from a form, 331–333	getting started, 426–428
during printing, 330	relinking SharePoint lists, 428
joins, reducing with a combo box, 333	to SQL Azure
ParamArray, packing address information with, 334	connecting to SQL Azure, 424–426
printers, control of, 335	DSN, 420–423
Left, Right, Mid string functions, 93	security stored procedures, support for, 421
Len string function, 93	to SQL Server
Let object properties, 342	DSN (Data Source Name), creating, 410–415
libraries	getting started, 407
ADO libraries to add, 660	sample database, setting up, 407–409
benefits of constructing, 370	script files, 409
DAO and ADO libraries and, 164	Server driver, choosing, 412
VBA libraries, techniques when writing, 177	Server instances, 408
Linked Table Manager, 398	Windows vs. SQL Server authentication, 414
linked TableName, 406	to SQL Server tables
linking	getting started, 416
Access to Access	linked tables, refreshing, 417
database splitter, using, 397	linked tables, renaming to remove the dbo_prefix, 417
Linked Table Manager, 398	updateability and Views, 419
linked table name and SourceTableName, 406	views in SQL Server, connecting to, 418
relinking, automating, 398–406	views in SQL Server, refreshing, 419
relinking tables, essential details for, 400	to Text Files, 407
splitting databases, 396	list boxes
temporary tables and SQL Server, 397	in application development, 637
Access Web Databases	key properties when working with multiple selections
Access database to an Access Web Database, 431	in, 287
process of, 430	multiple selections, 286–290
relinking, 432–434	selected choices, working with, 289
to Excel files	two list boxes, multiple selections with, 290–292
Data Link advanced properties, setting, 464	using as a subform, 292–295
key objects in, 451	ListObjects, 470
linking to external data, planning for, 466	lists
MS Query and Data Sources, using, 468–471	drop-down list, displaying, 279
QueryTables and ListObjects, 470	SharePoint lists, 426–428
reporting with, 460–468	loading
spreadsheets, reading data from, 459	LoadFromFile method, 203
spreadsheets, writing data to, 452-459	and opening forms, 235
and text files, 406	Locals window, displaying variables in, 29
external data links, planning for, 466	Locking and Unlocking controls, 264
	locking down an application, 654

Log files in SQL Server, 490	Modal property, 638
loops	model database, in SQL Server, 493
Do While and Do Until loops, 82-84	modules
For and ForEach loops, 81	class module, creating, 341
LostFocus event, 277	naming conventions for, 109
M	standard modules, using Intellisense in, 654
	modules and procedures
Machine DSNs, 410	the class module, locating code in, 7
macros	code types for, 76
and VBA, evolution of, 114	debug commands, 23
converting to VBA, 115	debugging code
embedded, dependency checking and, 138	debug commands, 23
Mail Merge, 451	debugging code in modules, demonstration of, 20-22
Maintenance Plan, for SQL Express, 488	editing environment, accessing, 8-10
Management Studio, using, 592–594	functions, executing, 15
MARS (Multiple Active Result Sets)	in modules, 10, 20–22
and connections in SQL Server, 669–671	procedures, creating, 11
and performance, 668	searching code, 19
master database, in SQL Server, 493	split window, 17–19
Maximize property, 638	subroutines, executing, 13–15
MDI. See Multiple Document Interface (MDI)	viewing and searching code, 16
Memo data, converting for SQL Server, 547  Me object, to reference controls, 113	editing environment, accessing, 8–10
Microsoft Excel. See Excel, Microsoft	functions, executing, 15
Microsoft Outlook. See Outlook, Microsoft	modules and class modules, organizing code in, 76
Microsoft SQL Azure. See SQL Azure	modules, creating
Microsoft Word. See Word, Microsoft	how to, 10
Mid string function, 95	linking code to forms and reports, 22
migrating SQL databases using SQL Azure	naming conventions, 21
sequence of steps, 596	scope rules and, 58
set of tables, creating, 597–599	searching code, 19
SQL Import/Export features when transferring to SQL	split window, 17–19
Azure, 602	subroutines, executing, 13–15
SQL Server Import and Export Wizard and UNICODE data types, 598	viewing and searching code, 16  Mouse events, interacting with, 260
SSMA (SQL Server Migration Assistant), 598	MousePointer shape, changing, 150
transferring data with the SQL Server Import and Export Wizard, 599–603	msdb database, in SQL Server, 493
Migration Wizard, 565–567	MsgBox function, 14 MS Query, 468–471
missing references, 48	MSysASO system table, relinking, 434
modal forms	MSysConf table in SQL Server, 587
debugging, 38	multi-dimensional arrays, 62–64
and pop-up forms, 234	

Multiple Active Result Sets. See MARS (Multiple Active	non-abstract classes, hybrid, 376–378
Result Sets)	NorthwindAzure.accdb sample database, 396
multiple cascade paths, converting for SQL Server, 549	NULL values
Multiple Document Interface (MDI), 638	and IsNull and Nz, 53-55
Multiple-Values lookup fields, 194–197	managing, with multiple controls for filtering, 242
multi-tenanted applications in SQL	in SQL Server, 553
application tables and views, 619–622	string expressions and, 92
optional parameters, creating, 623	numbers
overview, 617	converting integers for SQL Server, 547
security, managing, 623	real numbers, decimals, and floating point numbers,
user tables and views, 617–619	converting for SQL Server, 547
multi-user interaction, simulating with transactions, 531	0
Multi-value data, and upsizing to SQL Server, 548	
N	Object Browser, working with, 36, 38
	objects
Named and Optional parameters, 73	the class object, instantiating, 353
naming conventions	command objects in ADO, 666
Access document objects, 108	creating
database fields, 109	in Outlook, 475–477
the Me object to reference controls, 113	using New and Set keywords, 343
for procedures in modules, 21	Database Object in DAO, 173
unbound controls, 110	DBEngine object, 165
variables in code, 110–112	Excel, key objects in, 451
navigation experience of users, 140	investigating and documenting in DAO
navigation, in application development	Containers and Documents, 222–224
combo and list boxes, 637	object properties, 224
custom interfaces for users, 637	Let and Get object properties, 342
DoCmd object, 140	object models and
forms, opening multiple copies of, 637 interface design decisions, 632	Early vs. Late Binding and CreateObject vs. New, 438- 440
locking down an application, 654	existing files, opening, 442
the Navigation Control, 634	GetObject keyword, 440–442
push buttons on a form, 632	object types, establishing with TypeOf, 375
the ribbon, 636	Recordsets vs. Recordset2 objects, 188
Switchboard Manager, 633	Word object model, key objects in, 443
Tab controls, 636	Workspace object, 165
the TreeView control, 635	objects and collections
nesting transactions in SQL Server, 533	CurrentProject and CurrentData objects
New keyword, 105, 343	dependency checking and embedded macros, 138
nodes	Form Datasheet View properties, changing, 136
adding to trees, 309	object dependencies, 137
expanding and collapsing, 303	properties and collections of, 134
with recursion, deleting, 307–309	version information, retrieving, 135

objects and collections (cont.)	OLE Object data type
description of, 103	advantages of, 206
the DoCmd object	binary transfer, using, 207-209
application navigation, 140	documents, inserted, 209
data exchange, 142	importing and exporting OLE objects, 206
the environment, controlling, 138	OnAction Callback, 642
size and position, controlling, 139	OnChange event, 314
Forms and Reports collections	On Error GoTo mechanism, 118
Access Objects, creating in code, 149	On Error Resume Next technique, 116
controls on a Subform, referencing, 145–148	OnLoad callback, 642
Expression Builder, working with, 144	On-premise to Cloud (CTP2) synchronization service, 604
VBA class module, syntax for, 147	OOP (Object-Oriented Programming)
working with, 143	objects, working with, 340
IsNothing, IsEmpty, and IsObject, 106	supported in VBA, 339
object methods and properties	Open Args, and dialog forms, 112
ColumnHistory and Append Only memo fields, 130– 132	opening
the Expression Builder, invoking, 133	Excel, 454–456
filtering, simplifying by using BuildCriteria, 130	existing files, 442
the Run method, 128	and loading forms, 235
the RunCommand Method, 129	Open event, 235
TempVars, examining, 132	placeholder documents, 446
object variables, 105	Optional and Named parameters, 73
-	Option Compare, selecting, 43
Screen Object  ActiveForm and ActiveControl, working with, 151	Option Explicit, selecting, 41
_	OrderByOnLoad property, 235
control's events, calling code directly from, 152	Orders_be.accdb sample database, 396
MousePointer shape, changing, 150	OutlookContacts.accdb sample database, 437
user interface, enhancing	Outlook, Microsoft
locking down Access, 154	connecting Access to
Office FileDialog, selecting files with, 157–159	creating objects in, 475–477
progress bars, custom, 156	extracting information from, 472–475
Setting and Getting options, 152–154	Outlook object model, 471
SysCmd, monitoring progress with, 155	Restrict and Find operations, 474
ODBC drivers, 663	writing to Access from Outlook, 477–479
OfficeApplications.accdb sample database, 437	P
Office FileDialog, selecting files with, 157–159	-
Office, Microsoft. See also specific Office applications	ParamArray
code to launch Office applications, 438	packing address information with, 334
Office 2007 and the file menu, 647	qualifier, 75
Offline Devices (CTP2) synchronization service, 604	parameters
OLE Data, converting for SQL Server, 547	creating, in a QueryDef, 221
OLEDB providers, 663	creating optional, using the COALESCE function, 623

default values for optional parameters, specifying, 75	Identity property, in SQL Server, 504
Optional and Named, 73	Let and Get object properties, 342
parent/child-related data, 300	Managing Datasheet properties, 184–186
Pass-Through queries in SQL Server, 575–578	Maximize, Popup, Modal, and MoveSize Properties, 638
performance, Multiple Active Result Sets and, 668	for multiple-selection list boxes, 287
periodic execution of a Timer event, 256	Tag property, 316
placeholder documents	push buttons on a form, 632
generating documents from, 444-446	
opening, 446	Q
polymorphism in classes, 356	queries
popup and modal forms, 234	complex queries, handling in SQL Server, 579–582
Popup property, 638	CROSSTAB queries in SQL Server, 509–511
Print event, creating boxed grids with, 327–329	DELETE query in SQL Server, 513
printing	MS Query, using, 468–471
printer controls and settings, 335	naming conventions for, 109
reports, layout control during, 330	Pass-Through queries in SQL Server, 575–578
private and public procedures, 72	pasting links to, from Access into Word, 444
procedures	query conversion, 572–574
calling, across forms, 251–253	QueryDefs
calling, variations on standard rules for, 66	creating, 218–220
changing types, 14	parameters, 220–222
creating, 11	and Recordsets, 218
debug commands, 23	temporary, 216–218
editing environment, accessing, 8-10	QueryTables, 470
functions, executing, 15	in SQL Server
in modules, naming conventions, 21	DELETE query, 513
modules and class modules, organizing code in, 76	INSERT and INSERT INTO queries, 515–517
scope rules, 58	UPDATE query, 514
stored procedures	using VBA functions in, 100
in ADO, 666	working with, 215
in SQL Server, 364, 578	quotation marks, embedded, 98–101
subroutines, executing, 13-15	R
tracing, with Call Stack, 30	RaiseEvent, 363–368
viewing and searching code, 16	random autonumbers, converting for SQL Server, 551–553
producing and consuming events, 364	real numbers, decimals, and floating point numbers,
program flow. See conditional statements and program	converting for SQL Server, 547
flow	Recalc, Requery, Refresh, and Repaint commands, 250
progress bars	records, displaying
custom, creating, 156	bound and unbound forms, 233
in application development, 653	modal and pop-up forms, 234
properties	opening and loading forms, 235
Filter and Sort, 193	Refresh, Repaint, Recalc, and Requery commands, 250

## records, editing and undoing references BeforeInsert and AfterInsert events, 265-267 in application development, 656 BeforeUpdate and AfterUpdate events, 262 core libraries and, 46-49 controls, locking and unlocking, 264 refreshing between tabs and controls, 311-313 deleting events, 267 Refresh, Repaint, Recalc, and Requery commands, 250 multiple records, selecting for editing, 294 relationships saving records, 270 creating, in DAO, 186 RecordsetClone creating, using DDL, 187 synchronizing bookmarks with, 249 relinking applications, DSNs and, 656 working with, 248 relinking databases Recordsets. See also cursors Access to Access, automating, 398-406 adding, editing, and updating records, 193 USysApplicationLog and MSysASO, 434 ADO, forms and, 662 Web Databases, 432-434 Attachment fields, 197-200 Repaint, Recalc, Requery and Refresh commands, 250 attachments, copying, 204-206 Replace string function, 93 Bookmarks, 191 replicated databases and random autonumbers, converting for SQL Server, 551-553 calculated fields. 210 reports cloning and copying, 212-215 with Excel linked to Access, 460-468 Delete, 202 layout control field syntax, 191 driving reports from a form, 331-333 Filter and Sort properties, 193 during printing, 330 information, displaying, 200 joins, reducing with a combo box, 333 LoadFromFile method, 203 ParamArray, packing address information with, 334 Multiple-Values lookup fields, 194-197 printers, control of, 335 OLE Object data type, 206-209 report grouping, programming, 333 reading records into an array, 215 using the Format event, 330 vs. Recordset2 objects, 188 linking code to, in modules, 22 SaveToFile method, 202 opening, 323 searching, 188 report event sequences types of, 188 boxed grids, creating with the Print event, 327-329 records on forms, interacting with drawing graphics and, 328 Current event, 251 drill-down reports and current events, creating, 326 Deactivate and Activate events, 255 typical, 324-326 Mouse events, 260 Reports.accdb, sample database, 323 Timer Interval property of the Timer event, setting, 255-260 ribbon design, in application development, 648 Record Source, updateability of, 234 sample reports, 323 Recovery Models in SQL Server, 490 side-by-side details, using multiple copies, 327 recursion size and position, controlling, 139 deleting and node with, 307-309 Reports collections in VBA code, writing and debugging, 308 Access Objects, creating in code, 149

controls on a Subform, referencing, 145-148

Expression Builder, working with, 144 Employees\_be.accdb, 396 VBA class module, syntax for, 147 FormExamples.accdb, 231 working with, 143 for Microsoft Office applications, 437 Requery, Refresh, Repaint, and Recalc commands, 250 Instnwnd.sql, 396 Restrict operations, 474 Instnwndtesting.sql, 396 Retail & Remote Offices (CTP2) synchronization NorthwindAzure.accdb, 396 service, 604 opening, 4 ribbon desian Orders\_be.accdb, 396 in application development, Backstage view, 647 Reports.accdb, 323 custom ribbon, loading, 649 Sample fe.accdb, 396 default ribbon, setting, 644 setting up in SQL Server, 407-409 elements of a ribbon, 641 for SQL Azure, 420 for forms and reports, 648 for SQL Server, 495 the GetEnabled callback, 642 SQLServerExamples.accdb, 484 images for, 644 for upsizing databases from Access to SQL Server, 543 Office 2007 and the File menu, 647 VBAEnvironment.accdb, 4 the OnAction callback, 642 VBAExamples.accdb, 40 the OnLoad callback, 642 VBAFeaturesExamples.accdb, 89 tab visibility and focus, dynamically changing, 646-648 WebDatabase.accdb, 396 tips, 639 sample reports, 323 the USysRibbons table, 640 SaveToFile method, 202 RowSource Type combo box, 280-282 saving Row Versioning in SQL Server, 554-556 records, 270 rules, scope, 58 Save button, 7 RunCommand Method, 129 **Schemas** Run method, 128 in SQL Server tables, 417 Runtime deployment, 655 and synonyms in SQL Server, 556 using in SSMA, 567-570 scope sample databases constants and, 51 AccessObjectModel.accdb, 128 scope rules, 58 ADOExamples.accdb, 660 SCOPE\_IDENTITY() in T-SQL, 520 for application development, 631 Screen Object BuildingClasses.accdb, 340 ActiveForm and ActiveControl, working with, 151 BuildingClassesAfterExportImport.accdb, 340 control's events, calling code directly from, 152 ClassAndForms.accdb, 381 MousePointer shape, changing, 150 ClassesAndEvents.accdb, 359 script files Controls.accdb, 273 in SQL Server, 506-509 DAOExamples.accdb, 162 in SQL Server tables, 499 demo database script, 495 SDI. See Single Document Interface (SDI) DocADOX.accdb, 660 DocDAO.accdb. 224

reasons for, 396

searching	split window view, 17–19
code	spreadsheets
for debugging modules and procedures, 16	reading data from, 459
in modules and procedures, 19	writing data to
Recordsets, 188	opening Excel, 454–456
security	when to use, 452–454
planning and managing	writing the data, 456–458
firewall settings, working with SQL Azure, 591	SQL. See also queries
in multi-tenanted applications, 623	Data Definition Language (DDL), 183
security models in SQL Server, 615–617	executing, different methods for, 217
in SQL Server	splitting over multiple lines in VBA, 86
authentication, 538–540	SQL Azure
surface area configuration, 536–538	browser interface, developing with, 595
Windows authentication, 541	connecting to, 424–426
Windows vs. SQL Server, 414	databases
in SQL Azure, support for security stored procedures, 421	backing up and copying, 603
using Schemas and database roles to manage, 557	creating, 590
Select Case statements, 80	sample databases, 420
selections, multiple	Data Sync Agent
key properties, 287	conflict resolution in data, 613
list boxes and, 286–290	data and database structure, changing, 612
with two list boxes, 290–292	database synchronization and triggers, 613
SendKeys action, 102, 270	loading and installing, 605–609
Set keyword, 343	Sync Groups and Sync Logs, 610–612
Set Next command, 25	table structure, changes to, 613
Setting and Getting options, 152–154	Data Type Mapping, changing, 627
SharePoint lists, linking to, 426–428	DSN, 420-423
Shell command, 102	firewall settings, 591
Single Document Interface (SDI), 638	graphical interface, 595
64-bit environments	importing data from, 603
ActiveX on, 386	introduction to, 589, 590
in application development, 649	Management Studio, using, 420, 592–594
using the Windows API, 651–653	migrating SQL databases
Slider control, adding, 386–388	sequence of steps, 596
Sort property, 193	set of tables, creating, 597–599
SourceTableName, 406	SQL Import/Export features when transferring to SQL
Space and String string functions, 93	Azure, 602
Spin control, 388–390	SQL Server Import and Export Wizard and UNICODE
splash screens, in application development, 653	data types, 598
Split string function, 93	SSMA (SQL Server Migration Assistant), 624
splitting databases	transferring data with the SQL Server Import and Export Wizard, 599–603
Database Splitter, using, 397	

multi-tenanted applications, building	instances, 491
application tables and views, 619-622	introduction to, 484
optional parameters, creating, 623	limitations of, 483
overview, 617	linking to
security, managing, 623	DSN (Data Source Name), creating, 410-415
user tables and views, 617–619	getting started, 407
security, planning and managing	sample database, setting up, 407–409
firewall settings, 591	script files, 409
for multi-tenanted applications, 623	Server driver, choosing, 412
security models, 615–617	Server instances, 408
security stored procedures, support for, 421	Windows vs. SQL Server authentication, 414
SQL Server Migration Assistant and Access to	Log files and Recovery Models, 490
Azure, 624–627	performance, improving, 486
SQL Express and SQL Server products, 487–489	sample database, 484
SQL Server. See also upsizing databases	security
ADO, working with	authentication, 538–540
command objects, 666	surface area configuration, 536–538
connecting to SQL Server, 664	Windows authentication, 541
connection strings, 663	SQL Express and SQL Server products, 487–489
connection time, 665	SQL Server 2008 R2 Management Tools, 592
MARS and connections, 669–671	SQL Server Management Studio, using, 592–594
MARS and performance, 668	SQL Server Migration Assistant (SSMA), 624
stored procedures, 666	statements, executing on the fly, 518
BatchProcessing SQL Server form, 368–370	stored procedures
database file locations, 489	DELETE query, 513
description of, 485	INSERT and INSERT INTO queries, 515–517
developing with	system stored procedures, 508
Case statements, 581	UPDATE query, 514
complex queries, handling, 579–582	working with, 511-513
dbSeeChanges constant, 574	system databases, 493
efficient SQL, tips for, 585	system tables, 494
the MSysConf table, 587	tables and relationships, creating
Pass-Through queries, 575–578	database diagrams, 496–498
performance and execution plans, 582–585	Identity property, using, 504
SQL Server Profiler, 586	script files and batches of T-SQL commands, 499
stored procedures and temporary tables, 578	table design, changing, 500–504
stored procedures, using advanced features in, 578	tables, relationships, and script files, 499
getting started with	T-SQL script files, using to record and apply chang-
demo database script, running, 495	es, 502
new database, creating, 496	tables, linking to
understanding components of, 495	getting started, 416
INFORMATION_SCHEMA views, 494	linked tables, refreshing, 417

SQL server (cont.)	"*" (star) character, 97
tables, linking to (cont.)	statements
linked tables, renaming to remove the dbo_prefix, 417	in SQL Server, executing on the fly, 518
updateability and Views, 419	in T-SQL, controlling program flow, 523
views in SQL Server, connecting to, 418	static variables, 55
views in SQL Server, refreshing, 419	Step and Run commands, breakpoint, 25-28
tables, Schemas in, 417	stored procedures
temporary tables and, 397	asynchronous event processing and, 364
transactions	in SQL Server
nesting transactions, 533	DELETE query, 513
transaction isolation levels, 532	INSERT and INSERT INTO query, 515–517
working with, 530-533	system stored procedures, 508
triggers, working with, 526–529	and temporary tables, 578
T-SQL (Transact SQL)	UPDATE query, 514
CAST and CONVERT, using, 518	using advanced features from Access, 578
error handling, 523–525	StrComp string function, 93
functions, built-in, 519	string functions, 92
@@IDENTITY, SCOPE_IDENTITY() and IDENT_CUR-	subclassing. See WithEvents Processing
RENT, 520	subforms
program flow, controlling, 521–523	placing on the tab page, 311
system variables, 520	referencing controls on, 145–148
variables, defining, 517	using the list box as, 292–295
User-Defined Functions (UDFs), 534–536	subroutines
versions of, 486	changing to functions, and vice versa, 14
views, working with	DisplayAttachmentInfo, 200
CROSSTAB queries, 509–511	executing, debugging modules and procedures, 13–15
graphical interface, 505	and functions, default referencing of parameters in, 71
INFORMATION_SCHEMA views, 494	managing code with, 67–70
and script files, 506–509	surface area configuration in SQL Server, 536-538
updateability of, in Access, 506	Switchboard Manager, 633
Windows services, 492	Sync Groups and Sync Logs in Data Sync Agent in
SQL Server Profiler, 586	SQL, 610-612
SSMA (SQL Server Migration Assistant)	synchronization services in SQL Azure. See Data Sync Agent in SQL Azure
Access to Azure, 624	· ·
installing, 564	synonyms in SQL Server, 556
mapping data types, 567	SysCmd, monitoring progress with, 155
Migration Wizard, 565–567	system databases in SQL Server, 493
Schemas, using, 567–570	system stored procedures in SQL Server, 508
strengths and weaknesses, 574	system tables in SQL Server, 494
standard modules, 654	

T	temporary tables, in SQL Server, 397, 578
tab controls	transactions, using to perform inserts, 169
dynamically loading tabs	truncating, 514
class module, creating, 341	user tables, in SQL Server databases, 617
collection of objects, 345	the USysRibbons table, 640
improving, 340	table-valued functions, 535
Initialization and Termination events, 344	tabs
Let and Get object properties, 342	Agents tab, 605
New and Set, creating an object with, 343	Dynamic Tab, VBA collection classes and, 351
options for, 314	Tab controls, 636
pages, loading, 315–318	tab visibility and focus, dynamically changing, 646–648
pages, unloading, 320	Tag property, 316
related pages, dynamically loading, 319	tasks in Outlook, adding, 476
simplifying the application code with classes, 352	tempdb database, in SQL Server, 493
OnChange event, 314	temporary tables, 397
referring to controls in, 314	temporary tables, in SQL Server, 516, 578
refreshing between tabs and controls, 311–313	TempVars, examining, 132
TableDefs collection, 179–182	Termination event, 344
Table/Query editing, 285	Text Files, linking to, 407
tables	32-bit and 64-bit environments, in application development, 649
DISTINCT and DISTINCTROW, using, 234	time and date functions, 90-92
Linked Table Manager, 398	Time data, converting for SQL Server, 544–546
linked table name and SourceTableName, 406	Timer Interval property
MSysConf table in SQL Server, 587	considerations in using, 255
naming conventions for, 109	monitoring, 258–260
relinking tables, essential details for, 400	periodic execution, 256
SQL Server tables	Timestamps and Row Versioning, 554–556
database diagrams, 496–498	transactions
Identity property, using, 504	multiple edits and, 170
linked tables, refreshing, 417	simulating multi-user interaction with, 531
linked tables, renaming to remove the dbo_prefix, 417	in SQL Server
script files and batches of T-SQL commands, 499	nesting transactions, 533
system tables, 494	transaction isolation levels, 532
table design, changing using the GUI, 500–504	working with, 530-533
tables, relationships, and script files, 499	working with in DAO, 166-170
temporary tables, 516	TreeBuilders.accdb sample database, 273
T-SQL script files, using to record and apply chang- es, 502	TreeView control
table conversion, comparing methods for, 571	ActiveX controls, 304
table name, changing in T-SQL, 503	adding, 296–298
table structure, changes to 613	in application development, 635

TreeView control (cont.)	updateability
drag and drop, 303–307	of a Record Source, 234
graphics, adding, 301–304	support for, 419
nodes, adding, 309	of views, in SQL Server, 506
nodes, expanding and collapsing, 303	UPDATE query in SQL Server, 514
nodes with recursion, deleting, 307–309	updating applications, in development, 656
parent/child-related data, loading, 300	UpDown or Spin control, 388–390
populating the tree, 298-301	Upper, Lower, StrConv string functions, 93
recursive VBA code, writing and debugging, 308	upsizing databases
sample database example, 295	planning for
triggers	attachments and Multi-Value data, 548
multiple rows in trigger code, allowing for changes	Boolean data, 546
in, 553	currency, 548
in SQL Server, 526–529	cycles and multiple cascade paths, 549
Trim, LTrim, and RTrim string functions, 93	Date and Time data, 544–546
T-SQL (Transact SQL)	hyperlinks, 547
CAST and CONVERT, using, 518	IMAGE, VARBINARY (Max), and OLE Data, 547
error handling, 523–525	integer numbers, 547
functions, built-in, 519	Memo data, 547
@@IDENTITY, SCOPE_IDENTITY() and IDENT_CURRENT, 520	mismatched fields in relationships, 550
script files and batches of commands, 499	multiple rows in trigger code, allowing for changes in, 553
script files, using to record and apply changes, 502	partially completed foreign keys, 550
statements, controlling program flow with, 523	real numbers, decimals, and floating point num-
system variables, 520	bers, 547
understanding, 511–513	replicated databases and random autonumbers, 551-
variables, defining, 517	553
TypeOf statements, 80, 375	Required fields, 549
Type structures, for working with arrays, 65, 340	Schemas and synonyms, 556
U	security, using Schemas and database roles to man- age, 557
UCase and UCase\$ functions, 93	text data types and UNICODE, 544
unbound controls, naming conventions for, 110	Timestamps and Row Versioning, 554–556
unbound forms, 233, 243	Unique Index and Ignore NULLs, 553
_" (underbar) character, using, 86	query conversion, comparing in the Upsizing Wizard and
UNICODE data types	SSMA, 572–574
SQL Server Import and Export Wizard and, 598	SSMA
text data types and, 544	installing, 564
Unique Index and Ignore NULLs, in SQL Server, 553	mapping data types, 567
Unload and Close events, 248	Migration Wizard, 565–567
	Schemas, using, 567–570
	strengths and weaknesses, 574

table conversion, comparing in the Upsizing Wizard and	Watches window, 31
SSMA, 571	VBA class module
Upsizing Wizard	Object-Oriented Programming (OOP), support for, 339
strengths and weaknesses of, 561	syntax when using, 147
using, 558–561	VBA collection classes
to use an Access Data Project (ADP)	vs. Access collections, 346
ADP strengths and weaknesses, 564	adding AllItems to, 349
query conversion, 563	creating, 346–348
understanding, 561–563	exporting and re-importing the class, 349
Upsizing Wizard	using with the Dynamic Tab, 351
strengths and weaknesses of, 561	VBA editor
using, 558–561	entering, 6
User-Defined Functions (UDFs) in SQL Server, 534-536	features of, 37
user interface	Project pane, 9
in application development, 632, 638	Properties pane, 9
custom, in application development, 637	sample database, 4
enhancing	windows, opening and closing, 9
locking down Access, 154	VBA language structure
Office FileDialog, selecting files with, 157–159	constants and variables, working with
progress bars, custom, 156	arrays, 59–65
Setting and Getting options, 152–154	code quality, improving with constants, 49–51
SQL Azure, making a connection to, 424	Enum keyword, 51
SysCmd, monitoring progress with, 155	global variables, 56
single and multiple application files, 655	NULL values, IsNull and Nz, 53–55
USysApplicationLog and MSysASO system tables, relinking, 434	scope rules, 58
USysRibbons table, 640	static variables, 55
3.7	type structures, 65
V	variables and database field types, 52
validation, controlling behavior during, 276	variable scope and lifetime, 57–59
Value List editing, 284	control statements and program flow
VARBINARY (Max) Data, converting for SQL Server, 547	Choose statements, 79
variables. See also constants and variables	Do While and Do Until loops, 82–84
Bookmarks, 191	Exit statements, 84
complex variables, investigating values in, 31	For and ForEach loops, 81
displaying in the locals window, 29	GoTo and GoSub statements, 86
Global variables, using, 56	IfThenElse statements, 77
naming conventions for, 110–112, 113	IIF statements, 78
object variables, 105	line continuation, 86
scope and lifetime, 57–59	Select Case statements, 80
static variables, using, 55	SQL, splitting over multiple lines, 86
system variables in T-SQL, 520	TypeOf statements, 80
variables defining in T-SOL 517	the With statement, 85

Visual Basic for Applications Extensibility, 48

VBA language structure (cont.)	W
functions and procedures	Watches window, 32
ByRef and ByValue parameters, defining, 70–72	WebDatabase.accdb sample database, 396
calling, variations on standard rules for, 66	Web Databases, linking
modules and class modules, organizing code in, 76	Access database to an Access Web Database, 431
ParamArray qualifier, 75	process of, 430
parameters, Optional and Named, 73	relinking, 432–434
procedures, private and public, 72	Where clauses
referencing from a control's event property, 244	constructing, 97
subroutines and functions, default referencing of parameters in, 71	opening forms with, 246 windows
subroutines, managing code with, 67–70	
understanding in VBA code, 66	application and VBA code windows, 6–8 Immediate window, working with, 33
language settings	Locals window, displaying variables in, 29
comments, adding, 40	split window, debugging modules and procedures
compiling code, 44	in, 17–19
conditional compilation, 45	Watches window, 32
\Decompile command line switch, 45	Windows API, using in application development, 651–653
Option Compare, selecting, 43	Windows, Microsoft
Option Explicit, setting, 41	authentication, 414
references, 46-49	authentication in SQL Server, 541
Visual Basic for Applications Extensibility, 48	SQL Server services, 492
sample database, 40, 89	Windows Registry, working with, 650
VBA code, recursive, 308	WithEvents statements
VBA libraries, 177	control events, handling, 362
vbCR, vbCRLF, vbLF, vbTab string functions, 93	form events, handling, 360–362
vbObjectError constant, 123	processing, 363
version information	With statements, 85
retrieving, 135	Word, Microsoft
for SQL Server, 486	connecting Access to
views, in SQL Server	data, merging with bookmarks, 447–451
connecting to, 418	documents, generating from a placeholder docu-
CROSSTAB queries, 509–511	ment, 444–446
databases, 617	Mail Merge, 451
graphical interface, 505	placeholder documents, opening, 446
INFORMATION_SCHEMA views, 494	Word object model, key objects in, 443
refreshing, 419	WordQuote.accdb sample database, 437
and script files, 506–509	Workspace object, working with in DAO, 165
updateability of, in Access, 506	
undateable Views 419	

## **About the Author**

**Andrew Couch** has been working with Microsoft Access since 1992, developing, training, and consulting on Client-Server design projects. With his wealth of experience in Access and SQL products, he has been able to mentor software houses, blue chip companies, and independent developers. Alongside running his own consultancy, Andrew has been heavily involved in the developer community and jointly founded the UK Access User Group more than 13 years ago. He has also earned Access MVP status for the last 5 years.

Andrew's passion lies with VBA programming and extending the reach of VBA programmers into cloud computing and the .NET environment. He hopes that this book serves as an example of his dedication to this exceptional piece of technology and its application.

In addition to consulting and regularly speaking at community events, Andrew has developed the Migration Upsizing SQL Tool (MUST), which is a tool that allows users to easily convert Access Databases to SQL Server by using an Access-based application. Due to the success of MUST, which is used by over 150 companies, SQL Translation capabilities and WebForm code generators for .NET were added to the product range. More recently the MUST technologies have been extended further to deliver automated services for converting Access database to a web legal format for publishing to SharePoint.





